SEMOOKII®, AN MPMC BRAND







Portable Power Stations Residential Energy Storage Solutions Lithium Battery Packs











SEMOOKII BESS CO., LTD.

- +86 15000854420
- sales@semookii.com
- No. 2399 Fazhan Ave., Haimen Port New Area, Jiangsu 226156, China
- www.semookii.com www.semookii.com.au www.semookii.co.jp

Semookii® - 2023 © All rights reserved



RESIDENTIAL ENERGY STORAGE SOLUTIONS

LiFePO4 | DC/AC/Hybrid Coupled | 3~30kWh





SEMOOKII® is powered by highly skilled technical experts who have rich experience in lithium battery energy storage systems for over 25 years. We design, engineer and manufacture state-of-the-art integrated/distributed energy solutions by optimizing solar power, wind turbines, diesel power, hydrogen fuel cells, lithium-ion batteries and energy storage systems. Our solutions cover a wide range of applications including residential BESS, commercial & industrial BESS, portable power stations and LiFePO4 battery packs of low-speed electric vehicles, utility electric vehicles, AGVs, electric boats and drones etc.

Owned by its parent company MPMC POWERTECH CORP. (Security Code 832266) is an international high-tech enterprise in Shanghai, a world-leading distributed hybrid energy solution provider. Through taking full advantages of its independent R&D, productive intellectual property, full-process manufacturing and global marketing & services. With products sold to more than 120 countries

& regions, MPMC has established holding subsidiaries and offices in the USA and China, and have representatives in UK, South Africa and UAE.

SEMOOKII® inherited rigorous quality control system and production management system from MPMC, and is dedicated to providing power independence and real energy freedom to homes and businesses anywhere in the world! Our solutions are customized to the needs of each market in USA, UK, Italy, Czech, Spain, Netherlands, Poland and Japan etc. Today, SEMOOKII powers thousands of homes and businesses around the world. We help customers store clean power, gain energy independence, hedge against climbing grid fees and contribute to the reduction of carbon emissions on our planet.

SEMOOKII®, AN MPMC BRAND



120 Countries

Products are exported to 120 countries



45 Types

Three categories of 45 types of



60+ Distrubutors

Over 60 global distrubutors



50 Specialists

50 solution experts focused on different applications



144 Patents

131 invention & utility model patents 5 appearance patents and 8 software copyrights

1


Are You Ready For Another Energy Price Spike

For the last decade, the power price has been surging. In Germany, the household electricity rates have increased by 27%, reaching €33.48 cents per kWh.

Meaning a household with consumption of 3,500kWh pays €1171.8 EUR in electricity expenses per year or €97.65 EUR per month. 20 years ago, it pays only around €700EUR per year.


In addition, continuously aging power generation infrastructure and extreme climate events forecast a rising impact on daily load curve and grid failure.

Growing daily load curve leads to higher electricity bills. Unplanned power outages leave you without lights, refrigeration, air-conditioning, and access to the Internet.

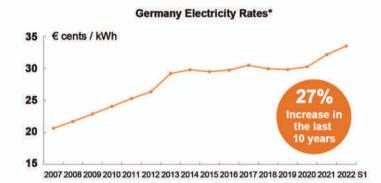

Country	Electricity Rates (€ cents / kWh)	Growth Ratio 2021 vs 2011
European Union	22.86	22.11%
Germany	32.135	27.04%
Belgium	28.48	33.86%
Ireland	27.645	38.67%
Spain	25.695	26.29%
Sweden	23.59	14.07%
Italy	23.095	13.99%
Austria	22.505	13.92%
United States	13.84	18.8%
China	8.09	3.7%

MAKE THE BEST OF ROOFTOP SOLAR SYSTEM

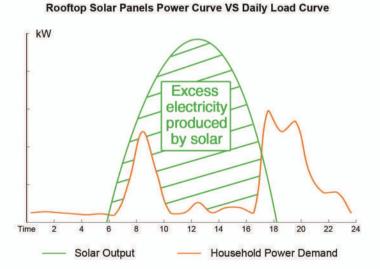

In 2020, over 10% of residents installed rooftop solar panels to generate electricity. When solar panels produce more energy than what can be consumed, the surplus will be exported to the power grid, which means you need to purchase power from your supplier at night, even during peak hours.

With Semookii residential energy storage systems, you can optimize the energy generated by rooftop solar panels for your private consumption.





LiFePO4 BESS 3 ~ 30kWh



SEMOOKII HBC® Residential Energy Storage Solutions

Only ONE out of ten residents who have installed rooftop solar systems has introduced energy storage systems to their homes, according to BDEW, Bundesverband der Energie- und Wasserwirtschaft.

Against the steep rise in household electricity bills, Semookii HBC RESS makes a convincing case for the complementary nature between solar power and energy storage systems.

By storing the excess electricity produced by solar panels, homeowners will increase solar self-consumption and load-shifting, lower electricity expenses by about 70%, and it's carbon-free!

It includes self-developed LiFePO4 batteries with high-density cells and an EMS-integrated inverter. External PV power is recommended and AC generator is optional.





Max. 1100°C Fireproof Insulation

Incorporates high-temperature insulation materials ensuring fire resistance.



Modular Design, Easy Installation

Modular design simplifies the assembly process and reduces skilled labor and installation costs.



EV Charging & Battery Health Monitoring

Charge electric vehicles and check the health of EV batteries at the same time.



DC/AC Coupled

Perfectly fits in both PV+battery installation and adding to existing rooftop solar system.



Hybrid Energy Sources


Compatible with Solar panels, gensets and the utility grid.



Backup Power


Ensure power resilience and provide uninterruptible power within 4ms during power outages.

Flexible Mounting For Diverse Installation Requirements

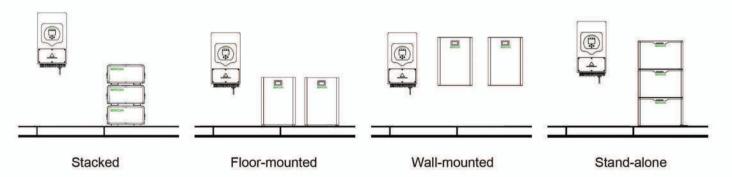


How Does Semookii HBC® RESS Power Your Home

DC Coupled Solution

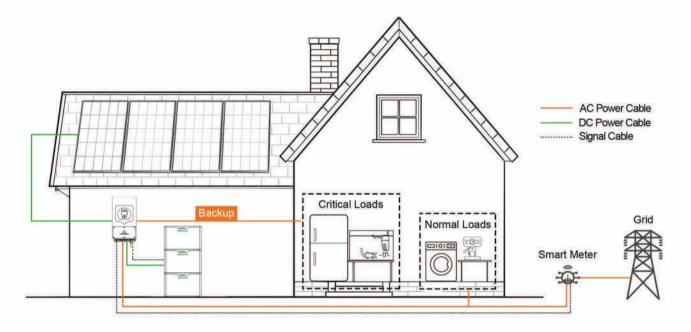

AC / Hybrid Coupled Solution

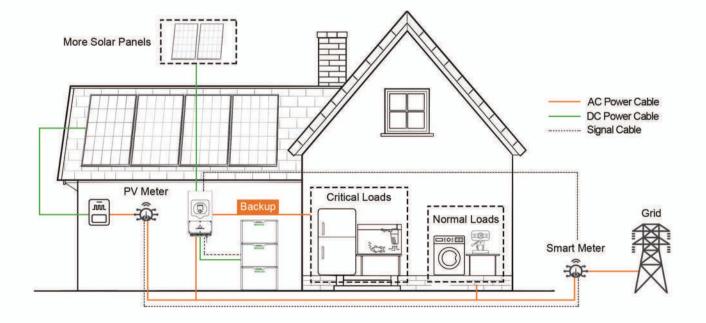

5



Explosion-proof LFP Module

In general, Lithium iron phosphate batteries do not explode or ignite. But they are not absolute and can be dangerous in certain extreme cases.

Semookii LiFePO4 battery modules are designed and manufactured in-house with built-in BMS, branded cells and high-temperature resistant materials to ensure product safety, complying with IEC 62619 and UN 38.3 certified.



INDOOR & OUTDOOR



Built-in BMS

- 1. Short-circuit protection: 400A
- 2. Protocol: CAN, RS485
- 3. Great equalization for long cyclelife

- 4. 3 levels of alarm
- 5. SOC Estimation Accuracy ≤5%
- 6. Real-time monitoring of ambient temperature and the temperature and voltage of each cell.



Semookii HBC RESS is the first home battery storage product incorporating heat shields. The High-Temperature materials offer a state-of-the-art solution Max. 1100°C fireproof, high-temperature stability, low thermal conductivity, low heat storage, thermal shock resistance, and good dielectric streng.



Max. 1100°C Thermal Insulation Melting Point: 1800°C

Temperature	600°C	800°C	1000°C
Thermal Conductivity (mean)	0.08W/mK	0.11W/mK	0.17W/mK


Lithium Iron Phosphate Battery Cell

- 1. Aluminium alloy casing guarantees strong plasticity, shock resistance and stable chemical properties.
- 2. High C-rate associated with low heat generation.
- 3. A built-in breather tube and a safety valve within the cylindrical cell provide dual safety protection.
- 4. The shape of cylindrical cells is more conducive to heat dissipation and temperature uniformity of the battery pack.



Modular Design Reduces Operating Costs

Semookii HBC RESS features a module design that allows customers to expand storage system capacity as the power needs evolve.

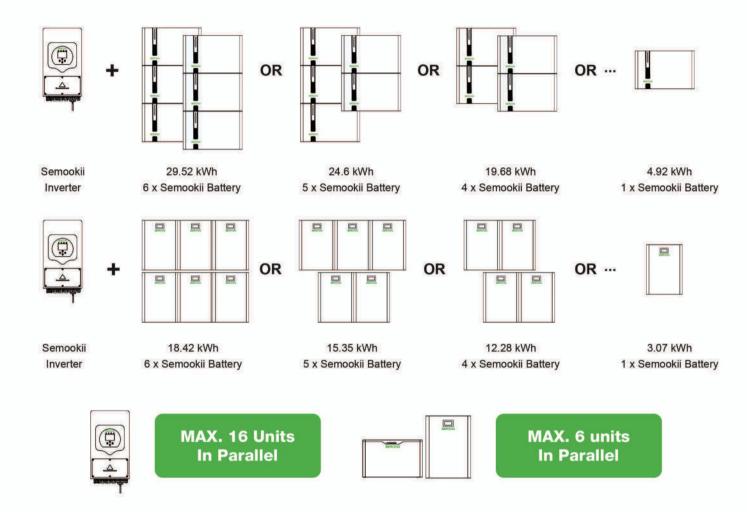

Customizable Options For Bigger Markets

Semookii offers a variety of series of up-market residential battery energy storage systems and customized solutions for customers all around the world, helping to reduce carbon footprint and realize energy independence.





SEMOOKII® RESS & EV Charging



Charge your EV for FREE



Charge At Home | All Vehicle Types | EV Battery Health Monitoring

Communication With Home Power Station | Energy Storage | Drive With Clean Energy

Technical Specification

Model	MIV-3AS	MIV-5AS	MIV-10A	
Rated Voltage*	230 V	230 V	400/230 V	
Rated Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	
Phase	Single-Phase	Single-Phase	Three-Phase	
Max. PV Input Power	3900 W	6500 W	13000 W	
Max. PV Input Voltage	500 V	500 V	800 V	
Number of MPPT / Strings per MPPT	1/1	2/1+1	2/2+1	
MPPT Voltage Range	150 ~ 425 V	150 ~ 425 V	200 ~ 650 V	
Start Up DC Voltage	125 V	125 V	160 V	
Max. PV Input Current	13 A	13 + 13 A	26 + 13 A	
Max. PV Short-circuit Current	17 A	17 + 17 A	34 + 17 A	
		120 A		
Max. Charging/Discharging Current Dimension (W x H x D)	70 A 330 × 433 × 248 mm	330 × 580 × 232 mm	210 A 422 × 702 × 281 mm	
	WHOMASTON - PROMOBALLE - VERTICATION AND LOCAL ACCURATION	Space and the space of the spac		
Weight	11.4 kg	20.5 kg	33.6 kg	
Ingress Rating	IP65	IP65	IP65	
Safety / EMC	IEC62109-1/-2, EN61000-6-1/-2/-3/-4 EN50549, AS4777.2, VDE0126, IEC61727, VDEN4105, G99, NBT32004, CEI0-21,			
Grid Regulation		NRS097, NBR16149/16150, RD1699, TOR Erzeuger Typ A, OVE-Richtlinie R25		
Warranty	5 Years	5 Years	5 Years	
Model Reted Voltaget	MIV-3BS 230 V		MIV-5BS	
Rated Voltage*	50 / 60 Hz		230 V	
Rated Frequency			50 / 60 Hz	
Phase	Single-Phas	se S	Single-Phase	
Max. PV Input Power	4500 W		7500 W	
Max. PV Input Voltage		550 V 550 V		
Number of MPPT / Strings per MPPT	2/1+1	2/1+1		
MPPT Voltage Range	90 ~ 500 V	Section 1 Section 1 Section Section 1		
Start Up DC Voltage	100 V	e 19500 9		
Max. PV Input Current	18.5 + 18.5		18.5 + 18.5 A	
Max. PV Short-circuit Current	26 + 26 A	S 1	26 + 26 A	
Max. Charging/Discharging Current	80 A	Effection English	80 A	
Dimension (W x H x D)		513 x 370 x 192 mm 513 x 370 x 192 mm		
Weight	17 kg		17 kg	
Ingress Rating	IP65		IP65	
Safety / EMC		IEC62109-1/-2, EN61000-6-1/-2/-3/-4		
Grid Regulation	NRS97, G98/G99, EN50549-1, C10/C11, AS 4777.2, VDE-AR-N4105, VDE0126			
Warranty	E Voors	5 Years 5 Years		

Technical Specification

SWEET READ CONTROL THE CONTROL TO A STATE OF THE CONTROL THE CONTR		MANAGEMENT (A CONTRACTOR OF THE CONTRACTOR OF TH	NOTE THAT HE WAS A COLOR OF THE
Module Model	MF5160C	MF51100C	MF51100P
Cell Chemistry	LFP (LiFePO4)	LFP (LiFePO4)	LFP (LiFePO4)
Module Capacity	3.07 kWh	4.92 kWh	4.92 kWh
Module Nominal Voltage	51.2 V	51.2 V	51.2 V
Max. Modules in Parallel	6	6	6
Capacity Range @90% DOD	3.07 ~ 18.43 kWh	4.92 ~ 29.49 kWh	4.92 ~ 29.49 kWh
Usable Capacity Range	2.8 ~ 16.6 kWh	4.42 ~ 26.54 kWh	4.42 ~ 26.54 kWh
Max. Charging/Discharging Current	60 A (1C)	100 A (1C)	100 A (1C)
Cycle Life	6000	6000	10000
Dimension (W x H x D)	628 x 440 x 151 mm	628 x 440 x 216 mm	710 x 440 x 184 mm
Weight	40 kg	56 kg	55 kg
Operating Temperature Range	-10 °C ~ 50 °C	-10 °C ~ 50 °C	-10 °C ~ 50 °C
Ingress Rating	IP20	IP20	IP65
Transportation Certification	UN38.3	UN38.3	UN38.3
Safety	CE, IEC 62619 (Cell), IEC 62619 (Pack)	CE, IEC 62619 (Cell), IEC 62619 (Pack)	CE, IEC 62619 (Cell), IEC 62619 (Pack)
Warranty	2 Years	2 Years	5 Year Product Warranty 10 Year Performance Warran

Rated Input Voltage*	AC 220V or AC 380V	
Rated Output Voltage*	AC 220V or AC 380V	
Output Current	16A, 32A, 63A	
Interface	GB/T 20234.1-2015, IEC 62192-2 AC Type 2	
Dimension (W x H x D)	Wall-mounted 300 x 190 x 450mm	
	Stand-alone 400 x 200 x 1325mm	
Ingress Rating	IP54	
Communication	Ethernet; 4G (optional)	
Compliance Standards	GB/T 18487, GB/T 20234, GB/T 28569,	
	NB/T 33002, NB/T 33008, IEC/EN 61851	

^{*} Rated voltage can be configurated according to customer requirements.

13

^{**} The communication of Semookii® Inverters is Wi-Fi, 4G is optional.