

MODEL : GB-200

HYBRID POWER STATION



Design Standards

GB® is a new range of secure integrated hybrid power station. With diesel generator, Battery storage and Hybrid solar Inverter in one secure unit for option.

GB® is mainly developed for lower emission, Reduce the dependence on Main Power and decrease the consumption cost.

Benefits

- Integrated installation, convenient storage and transportation;
- High return on investment and quick return;
- Simple operation and easy maintenance;
- Power and Capacity can be expanded, meet different user needs;
- Seamless changeover between the power sources;

Warranty

- Battery Performance: 4000 cycles(80% DOD) or 2 years after manufacture;
- Generator: 18 months after manufacture or 1500 hours running time;



ISO9001:2015
Quality system certified



ISO14001
System certified



OHSAS18001
System certified





CE certified

General Specification

System Rated Output Power		200kVA	
Rated Power Factor		0.8 lagging	
Rated Output Voltage		380V@50Hz/60Hz,3ph. (400V & 415V available)	
Min.Battery Storage Capacity		400 kWh	1000kWh
Max.Battery Storage Capacity		400 kWh	1000kWh
Output	Terminals	Copper Busbar	
	Sockets	MAX. 4 Sockets available	
Expand Dimension(W*D*H)		20'GP	40'HC
Loading Dimension(W*D*H)		20'GP	40'HC
Net.Weight		9000kg	20000kg
Loading Capacity	20'GP	1 unit	N/A
	40'HC	2 units	1 unit
Discharge Temperature Range		-20°C~50°C	

GENERATOR
MAX. POWER: 160kW
With LOW CONSUMPTION



**HIGH STRENGTH
METAL FRAME**
**CONFIDENCE IN
FACING WIND & RAIN
& SNOW**



**INTELLIGENT PCS
with EMS**

**EASY
OPERATION ON
ONE SCREEN**

**Fits the practical
application & guaranteed
by high-quality
manufacturing
technology**



Generator Set


Prime Power	200kVA	
Engine to Ref.	CUMMINS / PERKINS / FPT	
Fuel Tank Capacity	800 L (Bunded)	1000 L (Bunded)

Energy Storage Battery

Cell Type	LFP(LiFePO4)
Pack Model	MF51280
Pack Capacity	14.336 kWh
Rack Voltage	716Vdc
Rated Cycle Life	≥4000 (80% DOD)

Hybrid Inverter System

Solar Input (Optional)	50kWp/100kWp/200kWp Allowed
AC Voltage Range	380~415Vac
Rated Output Power	200kVA(0.8leading~0.8lagging)

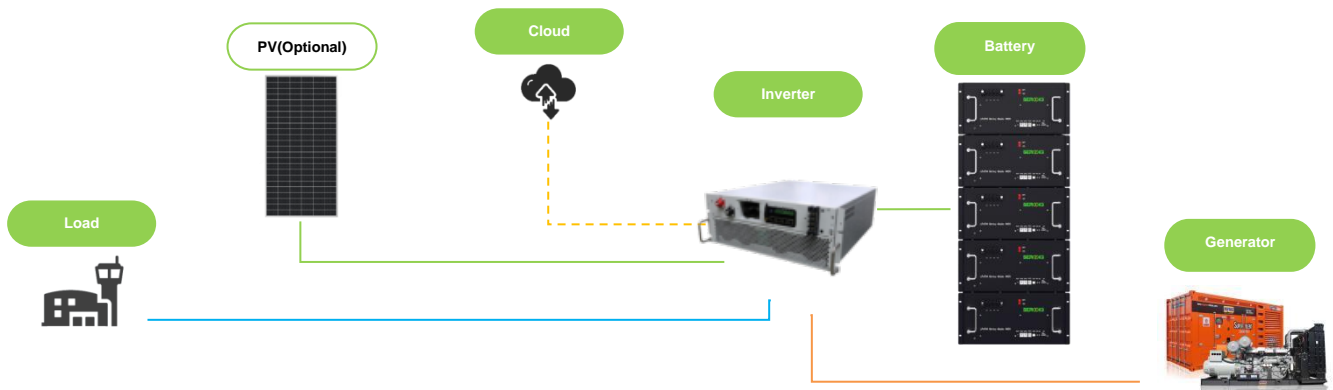

Power Priority	Highest	Secondary	Back Up
Functions	PV (Optional) Take load/charge	Battery Take load	Generator Take load/charge



MPMC USA



MPMC UAE



MPMC ZA



MPMC CN

MPMC POWERTECH CORP.

www.mpmc-china.com | www.mpmc-group.com
sales@mpmc-china.com |

Photographs are for illustrative purposes only and may not reflect final specification.

Follow us



<https://www.facebook.com/mpmcgroup>



<https://www.linkedin.com/company/mpmcpowertech/>



<https://www.youtube.com/user/MPMCGenerator>

All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.