


RSM□P(170M)系列有填料方型平板式快速熔断器 RSM□P (170M) Series Square Semiconductor Protection Fuse

▶ 外形及安装尺寸 Outline And Mounting Dimensions

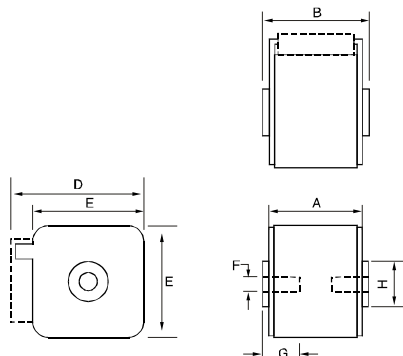


▶ 技术参数 Technical Data

额定电压 Rated Voltage: 690/700V 分断能力 Breaking Capacity: 200kA 功能等级 Function Level: aR/gR

序号 No.	型号 Type	同类产品型号 Competitor part number	额定电压 Rated Voltage (V)	电流等级 Class rating (A)	尺寸 Dimensions (mm)						
					A	B	D	E	F	G	H
144	RSM01P51KN	170M、URD、URG	690/700	40-630	50	51	59	40	M8	5	f17
145	RSM02P51KN	170M、URD、URG	690/700	200-900	50	51	69	50	M8	8	f20
146	RSM03P51KN	170M、URD、URG	690/700	400-1250	50	51	77	60	M10	10	f24
147	RSM05P51KN	170M、URD、URG	690/700	500-2000	50	51	92	75	M12	10	f30

RSM07P(170M)系列有填料方型平板式快速熔断器 RSM07P (170M) Series Square Semiconductor Protection Fuse

▶ 外形及安装尺寸 Outline And Mounting Dimensions

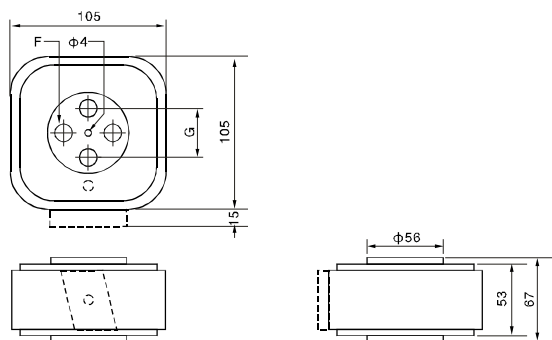

▶ 技术参数 Technical Data

额定电压 Rated Voltage: 690/700V 分断能力 Breaking Capacity: 100kA 功能等级 Function Level: aR/gR

序号 No.	型号 Type	同类产品型号 Competitor part number	额定电压 Rated Voltage (V)	电流等级 Class rating (A)	尺寸 Dimensions (mm)	
					F	G
148	RSM07P67A	170M、URD、URG	690/700	1000-4000	4×M10	33
149	RSM07P67AKN	170M、URD、URG	690/700	1000-4000	4×M10	33
150	RSM07P67B	170M、URD、URG	690/700	1000-4000	4×M10	38
151	RSM07P67BKN	170M、URD、URG	690/700	1000-4000	4×M10	38

时间-电流特性曲线见P-121~P-128页 Time - Current Curve Page No. P-121~P-128