


Attribute deta

- Wide input voltage range
- Low control current, $\leq 25\text{mA}$
- Fast switching speed
- low RF interference
- The product is compact
- shockproof, moisture-proof, corrosion-resistant

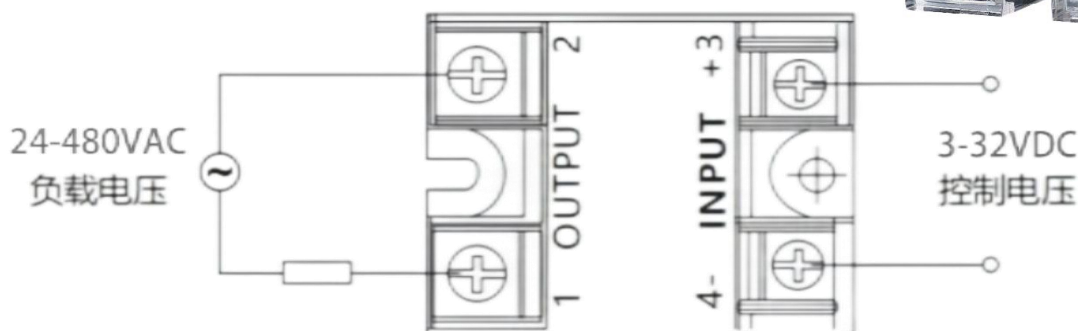

External dimensions

58mm*45mm*31mm

Installation dimensions

48mm

PARAMETER	VALUES		PARAMETER	VALUES	
Rating Current	125	A	Off state time	≤ 10	mS
Load voltage	24-480	VAC	Dielectric Strength	2500	VAC
Control voltage	3-32	VDC	Ambient temperature	-30~75	°C
Control current	5-13	mA	Installation method	Bolt fixation	
On state pressure drop	≤ 1.5	V	Work instructions	LED	
On state leakage current	≤ 2	mA	Insulation resistance	1000M/500VDC	