



XIAN HENG INTERNATIONAL

Product Power Construction and Maintenance Catalogue



To Make a World Famous Brand from China



One Stop Solution Provider

Xianheng International Science&Technology Co., Ltd.
Listed on the main board of Shanghai Stock Exchange, stock code 605056

Xianheng Technology Building, No. 101 Xinghuang Lane, Dongxin Street, Gongshu District,
Hangzhou, 310022, China.
Tel: +86-571-88322170
Fax: +86-571-88865359
E-mail: exp@xianhengguoji.com

Xianheng International Science&Technology Co., Ltd.



Headquarter

Industrial park

Showroom

Xianheng International

Enterprise Introduction

Xianheng International Science&Technology Co., Ltd. public listing on the main board of Shanghai Stock Exchange, is an MRO intensive supplier of tools, instruments with several factories of our own producing different kinds of products. It mainly serves the power industry, and also involves emergency, railway, urban rail transit, petroleum and petrochemical, etc.

Through fast development and professional capability, our factory Hangzhou Bete Equipment Manufacture Co., Ltd. (wholly owned subsidiary) is rated as National High-tech Enterprise, Zhejiang Excellent and Innovative Enterprise, and also passed ISO9001:2015 certification, CE certificate and over 70 Letters of Patent. Every link including product research and development, manufacture, debugging, and technical support follows strict and scientific management principles.

Continuous efforts contribute a lot to our good reputation and wide acceptance from the market. In recent years, we have established a long-term and win-win cooperation with customers from America, Europe, Southeast Asia, Africa and Middle East. Welcome to our company to create a good business relationship in near future.

"Market-oriented, quality-survival, innovation-oriented development, service as the purpose", we wholeheartedly provide you with quality products and intimate services! Warmly welcome friends at home and abroad to visit our company!



About Us

FULL

No.1 Quality electric construction tools in China

Trustworthy public listed company in Shanghai Stock Exchange

Life-time After-sales Service

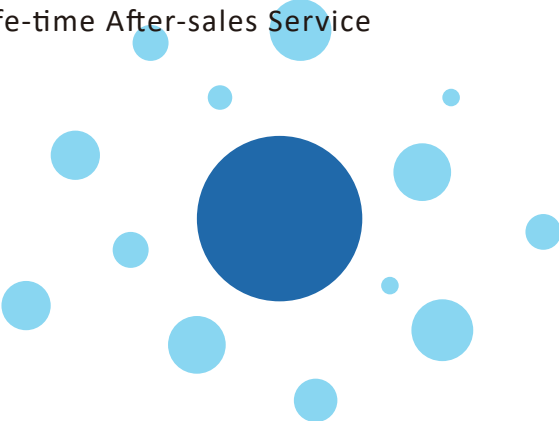

Hydraulic Crimping Tools

ECT-6022



Battery powered crimping tool

- ◆ Crimping Force: 6t
- ◆ Crimping: Max 300mm²

ECT-12042



Battery powered crimping tool

- ◆ Crimping Force: 12t
- ◆ Crimping: Max 400mm²

ECT-6030



Dieless battery powered crimping tool

- ◆ Crimping Force: 6t
- ◆ Crimping: Max 300mm²

ECT-15050



Battery powered crimping tool

- ◆ Crimping Force: 15t
- ◆ Crimping: Max 630mm²

ECT-60UNV



Multi-functional battery powered tool

- ◆ Force: 6t
- ◆ Crimping: Max 300mm²
- ◆ Cutting: Max 40mm Cu/Al/ACSR
- ◆ Punching: Max 3.5mm thick, Φ64mm

ECT-120UNV



Multi-functional battery powered tool

- ◆ Force: 12t
- ◆ Cutting: Max 44mm ACSR
- ◆ Crimping: Max 400mm²
- ◆ Punching: Max 6.5mm thick
- ◆ Nut splitting: Max 36mm nut

ECT-25020H



Battery powered crimping tool

- ◆ Force: 25t
- ◆ Crimping: Max 630mm²

EC-JKY



Hydraulic electric AMPACT tool

- ◆ Crimping Force: 6t
- ◆ Small/big head: 95/126mm

ECT-150



Battery powered mini crimping tool

- ◆ Crimping Force: 3.5t
- ◆ Crimping: Max Cu 150mm²

ECT-6022M



Battery powered mini crimping tool

- ◆ Crimping Force: 6t
- ◆ Crimping: Max Cu300mm²/Al240mm²

ECT-240



Battery powered mini crimping tool

- ◆ Crimping Force: 6t
- ◆ Crimping: Max Cu240mm²/Al185mm²

ECT-1510



Battery powered terminal crimping tool

- ◆ Crimping Force: 1.5t
- ◆ Crimping: Max 50mm²

EMP-2232



Battery powered pipe crimping tool

- ◆ Crimping: Max Thin-walled stainless steel DN28 thin-walled copper tube D35 aluminum plastic composite pipe DN40

EMP-3250



Battery powered pipe crimping tool

- ◆ Crimping: 12-54mm thin wall stainless steel pipe, copper pipe

XH-50X



Battery powered crimping tool

- ◆ Crimping range: 0.5-50mm²

HCT-185



Hand hydraulic crimping tool

- ◆ Crimping Force: 5t
- ◆ Crimping Capacity: Max 185mm²

HCT-6022



Hand hydraulic crimping tool

- ◆ Crimping Force: 6t
- ◆ Crimping Capacity: Max 300mm²

HCT-12042



Hand hydraulic crimping tool

- ◆ Crimping Force: 12t
- ◆ Crimping Capacity: Max 400mm²

HCT-6030



Wireless hand hydraulic crimping tool

- ◆ Crimping Force: 6t
- ◆ Crimping Capacity: Max 300mm²

JKY



Hydraulic manual AMPACT tool

- ◆ Crimping Force: 6t
- ◆ Small/big head: 95/126mm

EP-431



Hand hydraulic crimping tool

- ◆ Crimping Force: 12t
- ◆ Crimping Capacity: Max 300mm²

EP-510C



Hand hydraulic crimping tool

- ◆ Crimping Force: 13t
- ◆ Crimping Capacity: Max 400mm²

CW-1632



Hand pipe crimping tool

- ◆ Crimping Force: 4t

YQK-1632



Hand pipe crimping tool

- ◆ Crimping Force: 8t

BQK-70



Hand hydraulic crimping tool

- ◆ Crimping Force: 6t
- ◆ Crimping Capacity: Max 70mm²

BQK-120



Hand hydraulic crimping tool

- ◆ Crimping Force: 8t
- ◆ Crimping Capacity: Max 120mm²

BQK-240



Hand hydraulic crimping tool

- ◆ Crimping Force: 12t
- ◆ Crimping Capacity: Max 240mm²

BQK-300



Hand hydraulic crimping tool

- ◆ Crimping Force: 13t
- ◆ Crimping Capacity: Max 300mm²

PCS-22



Hydraulic crimping head

- ◆ Crimping Force: 6t
- ◆ Crimping: Max 300mm²

PCS-12042



Hydraulic crimping head

- ◆ Crimping Force: 12t
- ◆ Crimping: Max 400mm²

PCS-610



Hydraulic crimping head

- ◆ Crimping Force: 15t
- ◆ Crimping: Max 630mm²

PCS-25



Hydraulic crimping head

- ◆ Crimping Force: 25t
- ◆ Crimping: Max 630mm²

PCS-45



Hydraulic crimping head

- ◆ Crimping Force: 45t
- ◆ Crimping: Max 800mm²

PCS-60



Hydraulic crimping head

- ◆ Crimping Force: 60t
- ◆ Crimping: Cu/Al Max 60mm Steel Max 26mm

PCS-60A



Hydraulic crimping head

- ◆ Crimping Force: 60t
- ◆ Crimping: Cu/Al Max 60mm Steel Max 26mm

PCS-100



Double action hydraulic crimping head

- ◆ Crimping Force: 100t
- ◆ Crimping: Cu/Al Max 76mm Steel Max 36mm

PCS-200



Double action hydraulic crimping head

- ◆ Crimping Force: 200t
- ◆ Crimping: Cu/Al Max 100mm Steel Max 50mm

3.5t Dies



5t Dies



5.2t Dies



6t Hexagonal dies



12t Hexagonal dies



12t Indent dies



12t Clamp dies



12t H clip dies



12t Prerounding dies



12t Al dies



12t Cutting dies



15t Hexagonal dies



15t Clamp dies



15t Hexagonal dies



25t Hexagonal dies



45t Hexagonal dies



60t Hexagonal dies



100t Dies



200t Dies



UA22 Conversion dies



12t Conversion dies



EK135 Conversion dies




15t Conversion dies



25t Conversion dies



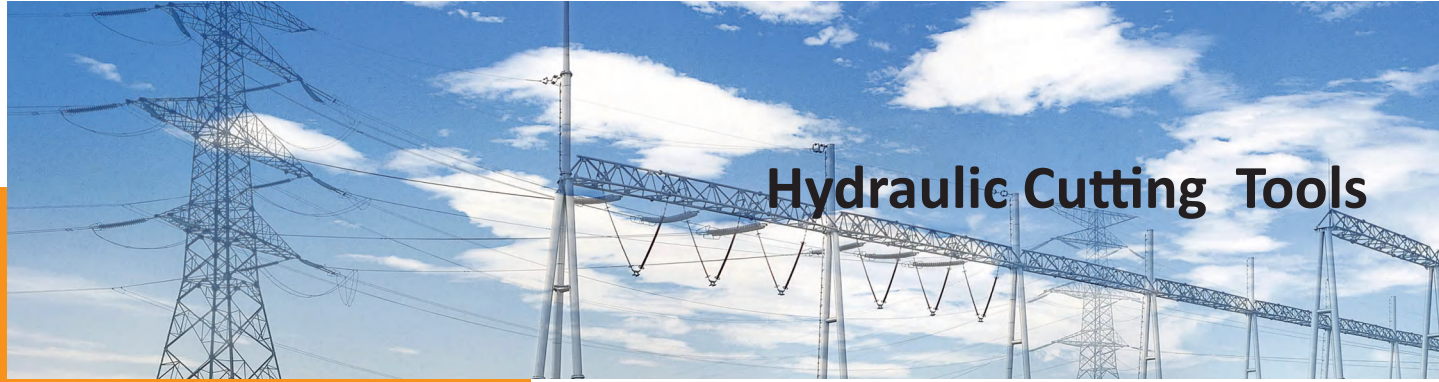

ECT-45



Battery powered cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ45mm Cu/Al/ACSR Max Φ12mm steel bar

ECT-50



Battery powered cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ50mm Cu/Al 10kV single-core cable 400mm²

ECT-55



Battery powered cutting tool

- ◆ Cutting Force: 12t
- ◆ Cutting: Max Φ55mm Cu/Al/ACSR Max Φ22mm steel bar

ECT-85



Battery powered cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ85mm Cu/Al Max (10kV)3x185mm² armored cable

ECT-105



Battery powered cutting tool

- ◆ Cutting Force: 12t
- ◆ Cutting: Max Φ105mm Cu/Al Max (10kV)3x300mm² armored cable

ECT-120C



Battery powered cutting tool

- ◆ Cutting Force: 20t
- ◆ Cutting: Max Φ105mm Cu/Al Max (10kV) 3x300mm² armored cable

RC-54



Battery powered ratchet cable cutter

- ◆ Cutting: Max Φ54mm Cu/Al

RC-54AC



Battery powered ratchet cable cutter

- ◆ Cutting: Max Φ54mm Cu/Al, 100mm² copper strand wire Max 240mm² Steel-core ACSR

ECT-32L



Battery powered mini cutting tool

- ◆ Cutting Force: 1.5t
- ◆ Cutting: Max Φ32mm single-core Cu/Al cable

ECT-30MC



Battery powered mini cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max 240mm² insulated conductor, 300mm² bare conductor, Φ32mm single-core Cu/Al cable

ECT-25



Battery powered mini cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ25mm Cu/Al/ACSR

HC-45



Hand hydraulic cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ45mm Cu/Al/ACSR Max Φ12mm steel bar

HC-45



Hand hydraulic cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ45mm Cu/Al/ACSR
Max Φ12mm steel bar

HC-50



Hand hydraulic cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ50mm Cu/Al
10kV single-core cable 400mm²

HC-55



Hand hydraulic cutting tool

- ◆ Cutting Force: 12t
- ◆ Cutting: Max Φ55mm Cu/Al/ACSR
Max Φ22mm steel bar

HC-85



Hand hydraulic cutting tool

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ85mm Cu/Al
Max (10kV)3x185mm² armored cable

PC-30C



Hydraulic cutting head

- ◆ Cutting Force: 4.5t
- ◆ Cutting: Max 300mm² single core cable

PC-45



Hydraulic cutting head

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ45mm Cu/Al/ACSR
Max Φ12mm steel bar

PC-50



Hydraulic cutting head

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ50mm Cu/Al

PC-55



Hydraulic cutting head

- ◆ Cutting Force: 12t
- ◆ Cutting: Max Φ55mm Cu/Al/ACSR
Max Φ22mm steel bar

PC-85



Hydraulic cutting head

- ◆ Cutting Force: 6t
- ◆ Cutting: Max Φ85mm Cu/Al
Max 3x185mm² armored cable

PC-105



Hydraulic cutting head

- ◆ Cutting Force: 12t
- ◆ Cutting: Max Φ105mm Cu/Al
Max 3x300mm² armored cable

PC-105C



Hydraulic cutting head

- ◆ Cutting Force: 20t
- ◆ Cutting: Max Φ105mm Cu/Al
Max 3x400mm² armored cable

PC-120C



Hydraulic cutting head

- ◆ Cutting Force: 20t
- ◆ Cutting: Max Φ120mm armored Cu/Al

PC-132



PC-132L



Hydraulic cutting head

- ◆ Cutting Force: 10t/15t
- ◆ Cutting: Max Φ132mm armored Cu/Al

PC-160B



Hydraulic cutting head

- ◆ Cutting Force: 18t
- ◆ Cutting: Max Φ160mm armored Cu/Al

PC-170



Hydraulic cutting head

- ◆ Cutting Force: 30t
- ◆ Cutting: Max Φ160mm armored Cu/Al

PC-170B



Hydraulic cutting head

- ◆ Cutting Force: 30t
- ◆ Cutting: Max Φ170mm armored Cu/Al

HICT-132-35kV



Insulated hydraulic cutting tool with hand & foot pump

- ◆ Cutting Force: 10t
- ◆ Cutting: Max Φ132mm armored Cu/Al

EICT-132-35kV



Insulated hydraulic cutting tool with electric pump

- ◆ Cutting Force: 10t
- ◆ Cutting: Max Φ132mm armored Cu/Al

ESS-120C-35kV



Wireless insulated hydraulic cutting tool with battery pump

- ◆ Cutting Force: 20t
- ◆ Cutting: Max Φ120mm armored Cu/Al

ESS-132-35kV



Wireless insulated hydraulic cutting tool with battery pump

- ◆ Cutting Force: 10t
- ◆ Cutting: Max Φ132mm armored Cu/Al

CCST-220



Cable spiking tool

- ◆ Puncturing Diameter: 135mm
- ◆ Puncturing Depth: 55mm

ESCT-220



Cable spiking tool with wireless remote control

- ◆ Puncturing Diameter: 160mm
- ◆ Puncturing Depth: 55mm

BC-150V



Busbar cutting tool

- ◆ Max Cutting Thickness: 12mm
- ◆ Max Cutting Width: 150mm

BC-200V



Busbar cutting tool

- ◆ Max Cutting Thickness: 12mm
- ◆ Max Cutting Width: 200mm

BC-200/16



Busbar cutting tool

- ◆ Max Cutting Thickness: 16mm
- ◆ Max Cutting Width: 200mm

SHAB-80B(blue)
SHAB-80C(black)



Busbar punching tool

- ◆ Max Thickness: Cu/Al 13mm,
Plain Steel10mm

SH-100D



Busbar punching tool

- ◆ Max Thickness: Cu/Al 20mm,
Plain Steel16mm

ESH-25



Battery powered punching tool

- ◆ Output Force: 12t
- ◆ Max Thickness: Angle steel 6mm
Cu/Al 6.5m

ECT-UA6P



Battery powered steel sheet punching tool

- ◆ Punching: Plain steel plate 3.5mm thick,
½-3"Stainless steel: 2.5mm thick, ½-3"

BH-10B



Sheet steel puncher

- ◆ Punching: Plain sheet steel 3.2mm
Stainless sheet steel 1.6mm
- ◆ Punching Range: 21.8-115.5mm

CGK-1



Mechanical punching tool

- ◆ Punching Thickness: ≤10mm


EH-20



Battery powered punching tool

- ◆ Punching Thickness: Max Cu/Al 8mm
Steel plate 6mm

LB-150A



Busbar bending tool

- ◆ Bending Thickness: 12mm
- ◆ Bending Width: 150mm

LB-200C



Busbar bending tool

- ◆ Bending Thickness: 12mm
- ◆ Bending Width: 200mm


LB-200/16



Busbar bending tool

- ◆ Bending Thickness: 16mm
- ◆ Bending Width: 200mm

OK-101



Mini busbar bending tool

- ◆ Max Bending Capacity: Cu/Al 40mm×8mm

OK-205A



Multifunctional busbar bending tool

- ◆ Horizontal Bending: Max 125mm×16mm Cu/Al
- ◆ Vertical Bending: Max 125mm×12mm Cu/Al

OK-2510-PC



Multifunctional busbar & pipe bending tool

- ◆ Horizontal Bending: Max 125mm×16mm Cu/Al
- ◆ Vertical Bending: Max 125mm×12mm Cu/Al
- ◆ Pipe Bending: 3"

PB-4



Hydraulic pipe bending tool

- ◆ Output Force: 20t
- ◆ Pipe Bending: 4"

OK Series



Multifunctional busbar processing machine

- ◆ Function: Cutting, Punching, Horizontal Bending, Vertical Bending, Pipe Bending

EPCB Series



Multifunctional busbar processing machine

- ◆ Function: Cutting, Punching, Horizontal Bending, Vertical Bending

ECT-MM36



Battery powered nut splitter

- ◆ Force: 10t
- ◆ Destruction Ability: M8-M24 nut

HC-MM36



Hand nut splitter

- ◆ Force: 10t
- ◆ Destruction Ability: M8-M24 nut

HSC-MM36



Hydraulic nut splitter

- ◆ Force: 12t
- ◆ Destruction Ability: M8-M24 nut

KSC Series



Mechanical nut splitter

- ◆ Hex Nut Range: 4-36mm

HSC Series



Hydraulic nut splitter

- ◆ Nut Range: M6-M33
- ◆ Hex Nut Range: 10-50mm

SAC-110



Hydraulic angle steel cutting tool

- ◆ Cutting Force: 45t
- ◆ Cutting Capacity: 110x110x10mm

Hydraulic Pumps

HP-700



Hydraulic hand pump

- ◆ Oil Delivery at High Pressure: 2.5cc/stroke
- ◆ Oil Delivery at Low Pressure: 11.5cc/stroke

HP-700A



Hydraulic hand pump

- ◆ Oil Delivery at High Pressure: 2.26cc/stroke
- ◆ Oil Delivery at Low Pressure: 12.26cc/stroke

HP-700D



Hydraulic hand pump

- ◆ Oil Delivery at High Pressure: 5.75cc/stroke
- ◆ Oil Delivery at Low Pressure: 125cc/stroke

FHP-700



Hydraulic foot and hand pump

- ◆ Oil Delivery at High Pressure: 2.26cc/stroke
- ◆ Oil Delivery at Low Pressure: 12.26cc/stroke

ECT-700



Battery powered hydraulic pump

- ◆ Reservoir Capacity: 200mL
- ◆ Voltage Power: 18.0V DC

REP-1



Hydraulic electric pump

- ◆ Oil Delivery at High Pressure: 0.7L/min
- ◆ Oil Delivery at Low Pressure: 6L/min
- ◆ Voltage power: AC220V/750W

REP-2



Hydraulic electric pump

- ◆ Oil Delivery at High Pressure: 0.32L/min
- ◆ Oil Delivery at Low Pressure: 2.6L/min
- ◆ Voltage power: AC220V/340W

REP-2D



Double action hydraulic electric pump

- ◆ Oil Delivery at High Pressure: 0.3L/min
- ◆ Oil Delivery at Low Pressure: 4L/min
- ◆ Voltage power: AC220V/370W

EBH-700



Chargeable battery pump

- ◆ Oil Delivery at High Pressure: 0.2L/min
- ◆ Oil Delivery at Low Pressure: 1.3L/min
- ◆ Voltage power: 18.0V DC

HPG-700



Double action gasoline engine pump

- ◆ Oil Delivery at High Pressure: 1.2L/min
- ◆ Oil Delivery at Low Pressure: 7.5L/min
- ◆ Reservoir Capacity: 10L

HPG-700MX



Remote control double action gasoline engine pump

- ◆ Oil Delivery at High Pressure: 1.2L/min
- ◆ Oil Delivery at Low Pressure: 7.5L/min
- ◆ Reservoir Capacity: 10L

ESG-700MX



Electric pump

- ◆ Oil Delivery at High Pressure: 1.2L/min
- ◆ Oil Delivery at Low Pressure: 7.5L/min
- ◆ Reservoir Capacity: 10L



Railway Tools

ECT-60DX

Battery hanging string crimping tool
◆ Force: 6t
◆ Stroke: 17mm

HCT-60DX

Hand hanging string crimping tool
◆ Force: 6t
◆ Stroke: 17mm

EZ45A2T

Battery contact wire cutter
◆ Applicable for Wire: 85, 110, 120, 150mm²
◆ Speed of Rotation: 3400rpm
◆ Saw Blade Diameter: 135mm

ECT-4

Battery contact wire cutter
◆ Trolley Cable: 85, 110, 120, 150mm²
◆ Carrier Cable: 35, 50, 70, 95, 120, 150mm²

ECT-4M

Battery contact wire cutter
◆ Trolley Cable: 85, 110, 120, 150mm²
◆ Carrier Cable: 35, 50, 70, 95, 120, 150mm²

HCT-4

Manual contact wire cutter
◆ Trolley Cable: 85, 110, 120, 150mm²
◆ Carrier Cable: 35, 50, 70, 95, 120, 150mm²

PCS-25XZ

Contact wire straightening tool
◆ Straightening Dies: 85, 110, 120, 150mm²

EXZ-150

Battery contact wire straightening tool
◆ Force: 10t
◆ Straightening Range: 85-150mm²

PXZ-150

Contact wire straightening head
◆ Force: 5t
◆ Straightening Range: 85-150mm²

PCS-25DL

Electric connection crimping head

TCS-5

Contact wire straightening tool
◆ Applicable: 85, 110, 120, 150mm²

BT-JW

Contact wire gripper

BW-12

Steel bar bending Tool
◆ Used for steel bar and ground wire bending



Hydraulic Torque Wrench Series

MXTA Series

Driving type hydraulic torque wrench
◆ Torque Range: 112-48666 N.m
◆ Bolt spec.: 14-120 M

LOW Series

Hollow hydraulic torque wrench
◆ Torque Range: 232-44593 N.m
◆ A/F: 19-175M

ET Series

Hollow hydraulic torque wrench working head

HTE Series

Multi-stage bolt stretcher for wind power
◆ Stretch force: 656-2196kN
◆ Stroke: 8-12mm

HEP-700

Special electric pump for torque wrench
◆ Oil Flow at Low Pressure: 7L/min
◆ Oil Flow at Medium Pressure: 1.6L/min
◆ Oil Flow at High Pressure: 0.8L/min

REH-200R

Special electric hydraulic pump for bolt stretcher
◆ Oil Delivery at Low Pressure: 2L/min
◆ Oil Flow at High Pressure: 0.4L/min
◆ Motoe power: 1.5kW

HSP Series

Three jaws hydraulic puller
◆ Force: 6-30t
◆ Stroke: 70-111mm

HSP Series

Two jaws hydraulic puller
◆ Force: 6-12t
◆ Stroke: 70-85mm

BT Series

Pulling sets
◆ Stretch range: 30-200mm

ESP Series

Separated three-jaw hydraulic puller
◆ Force: 6-30t
◆ Stroke: 70-111mm

ESP Series

Separated two-jaw hydraulic puller
◆ Force: 8-12t
◆ Stroke: 85mm

SWR-40

Hydraulic flange spreader
◆ Force: 14t
◆ Top Gap: 6mm
◆ Stretch Distance: 81mm

SWR-8

Hydraulic flange spreader
◆ Force: 8t
◆ Top Gap: 6mm
◆ Stretch Distance: 81mm

SWR-401

Hydraulic flange spreader
◆ Force: 15t
◆ Top Gap: 6mm
◆ Stretch Distance: 81mm



Cable Preparation Tools

ACSR-1250



Aluminum conductor cutter for ACSR
◆ Used to cut aluminum conductor of ACSR 1140 to 1250mm²

ACSR-87



Aluminum conductor cutter for ACSR
◆ Used to cut aluminum conductor of ACSR below 800mm²

CST640



Strippable semi-con stripper
◆ Stripping Range: Φ20-Φ41mm

CST531



Main insulation stripper
◆ Stripping Range: Φ15-Φ54mm

CST310




10kV Insulation chamfer tool
◆ Applied to XLPE dia. 18-32 mm insulation layer

CST335



35kV Insulation chamfer tool
◆ Applied to XLPE dia. 32-54 mm insulation layer

CST240



35kV Insulation chamfer tool
◆ Applied to XLPE cable diameter Φ15-60mm

CST235



Non-strippable semi-con stripper
◆ Stripping Range: Φ30-Φ54mm

CST622



Cable jacket stripper
◆ Stripping Range: Φ≥25mm

PG-110/220



PG series bellows stripping tool
◆ Stripping Range: Φ50-Φ160mm

CST320



10kV Cable sharpening set
◆ Cable Diameter from 18 mm to 32 mm

SH-50



Ring type stripper
◆ Stripping Range: Φ15-Φ50mm

CST20/40A



10kV Main insulation stripper
◆ Stripping Range: Φ20-Φ40mm

CST20/40B



Semi-con stripper
◆ Stripping Range: Φ20-Φ40mm

CST15/65A



35kV Main insulation stripper
◆ Stripping Range: Φ32-Φ65mm

CST15/65B



Semi-con stripper
◆ Stripping Range: Φ32-Φ65mm

CST300



Wire stripping plier
◆ Stripping Range: 70-300mm² (Φ15-Φ30mm)

CST35/95



110kV Main insulation and outer semi-con stripping tool
◆ Cable diameter from 35 mm to 90 mm

CST90/150



220kV Main insulation and outer semi-con stripping tool
◆ Cable diameter from 90 mm to 150 mm

CST126



High voltage cable stripper
◆ Stripping Range: Φ60-Φ128mm

FL-135



10-35kV Cable preparation set

FL-210



10kV Economical cable preparation set

FL-235



35kV Economical cable preparation set

SBX-30



Rotary cable stripper
◆ Stripping Range: 35-300mm²

CST16/32
CST18/35



Insulated conductor stripping knife
◆ Stripping Range: 10/20kV insulated wire of 50-300mm²

NP-400



Overhead insulation cable stripper
◆ Cable Diameter: 10-30mm

CS-130B



Cable straightening tool
◆ Output Force: 5t
◆ Cable Diameter: ≤Φ130mm

CS-160B



Cable straightening tool
◆ Output Force: 5t
◆ Cable Diameter: ≤Φ160mm

BTJM-3



Engine powered winch

◆ Pull Force: high gear 15kN
low gear 30kN


BTJM-5



Engine powered winch

◆ Pull Force: high gear 25kN
low gear 50kN

DS-180



Cable feeder

◆ Feeding Range: $\Phi 30\text{-}\Phi 180\text{mm}$
◆ Speed: 7m/min

DS-180A



Cable feeder

◆ Feeding Range: $\Phi 30\text{-}\Phi 180\text{mm}$
◆ Speed: 6m/min

CPEM-9031C



Electric cable polisher

◆ Grinding Strap Size: 30x533mm
◆ Grinding Speed: 200-1000m/min
◆ Motor Power: 200V/AC 550W

2TON



Power cable wire grip

◆ Applicable Range:
 $\Phi 4\text{-}\Phi 22\text{mm}(16\text{-}185\text{mm}^2)$

3TON



Power cable wire grip

◆ Applicable Range:
 $\Phi 16\text{-}\Phi 32\text{mm}(150\text{-}400\text{mm}^2)$

2TON-G



Wire grip for underground cable

◆ Applicable Range: $\Phi 5\text{-}\Phi 18\text{mm}$

3TON-G



Wire grip for underground cable

◆ Applicable Range: $\Phi 8\text{-}\Phi 24\text{mm}$

SKJL Series



Aluminum alloy insulated wire grip

◆ Applicable Range: $\Phi 10\text{-}\Phi 37\text{mm}$
◆ Rated Load: 10-30kN

SKL Series



Aluminum alloy wire grip

◆ Applicable Range: LGJ25-1520
◆ Rated Load: 7-100kN

SKLG Series



High strength optical cable grip for OPGW overhead line construction

◆ Applicable Range: $\Phi 8\text{-}\Phi 24\text{mm}$
◆ Rated Load: 25-60kN

SKDA Series



Ground wire clamp

◆ Applicable Range: $\Phi 11\text{-}\Phi 22\text{mm}$
◆ Rated Load: 30-70kN

SKDD-20



High strength steel alloy grounding wire grip for overhead line construction

◆ Rated Load: 20kN

SKST Series



Dual hinge grounding wire grip

◆ Rated Load: 10-30kN

SKG Series



Wire grip for anti-twisting steel wire rope

◆ Rated Load: 40-200kN


SKLBGJ Series



Aluminum alloy wire grip for Al-Clad steel stranded wire

◆ Rated Load: 30-60kN


SKDP-120



Multiple segments wire grip

◆ Applicable Range: $\Phi 30\text{-}\Phi 35\text{mm}$
◆ Rated Load: 120kN

SKG Series



Skg series round steel wire rope clamp

◆ Rated Load: 40-100kN

1000/1500/2000



Ratchet puller

◆ Traction Force: 1-2t
◆ working Length: 410-1870mm

P Series



Aluminum alloy chain lever hoist

◆ Working Capacity: 7.5-90kN
◆ Stretch Distance: 1800-2320mm

SXSL Series



Aluminum alloy dual-hook turnbuckle

◆ Rated Load: 10-50kN

SKSG Series



Steel dual-hook turnbuckle

◆ Rated Load: 10-100kN

SXTS Series



Telescope-feed dual-hook turnbuckle

◆ Rated Load: 10-50kN

SH Series



Large diameter cable roller

◆ Rated Load: 20-120kN

SHD Series



Cable roller

◆ Rated Load: 5-30kN
◆ Applicable Wire(ACSR): 25-500

SHG/SHGN Series



Cross arm-mounted dual purpose cable roller

◆ Rated Load: 5-20kN

SHCS-2



Cross arm-mounted three-purpose cable roller

◆ Rated Load: 20kN
◆ Applicable Wire(ACSR): ≤ 240

SHC/SHCN Series



Cross arm-mounted cable roller

◆ Rated Load: 5-20kN
◆ Applicable Wire(ACSR): 25-240

SHT/SHTN Series



Ground cable roller

◆ Rated Load: 10-20kN
◆ Applicable Steel Strands: 25-240

SDTG
SDTGN



Block stringing cable roller

◆ Rated Load: 30kN
◆ Wire Dia.: $\leq 34\text{mm}$



Tandem drums cable roller

- ◆ Rated Load: 25kN
- ◆ Applicable Wire(ACSR): 300-500



Small cable roller

- ◆ Rated Load: 5kN



Ground straight cable roller

- ◆ Rated Load: 5kN



High speed steering cable roller

- ◆ Rated Load: 50-300kN



Cable turning roller

- ◆ Rated Load: 10kN



D series cable entrance protection roller

- ◆ Max Cable Dia.: 80-150mm



C, C1 series cable entrance protection roller

- ◆ Max Cable Dia.: 80-150mm



Triple-drum cable roller, Pithead cable roller

- ◆ Rated Load: 10kN
- ◆ Max Cable Dia.: ≤100mm



B series cable entrance protection roller

- ◆ Max Cable Dia.: 80-150mm



Ground corner cable roller

- ◆ Rated Load: 10kN
- ◆ Max Cable Dia.: ≤Φ120mm



Skyward corner stringing pulley

- ◆ Rated Load: 5kN
- ◆ Applicable ACSR Conductor: 25-185mm²



Bunch conductor pulley

- ◆ Rated Load: 2kN



Grounding wire pulley

- ◆ Groove Dia.: Φ50mm
- ◆ Applicable Wire Type: Conductor/Grounding Wire
- ◆ Max Current: 100A



Wire pulley for pressuring conductor

- ◆ Rated Load: 10-80kN



Ending Pulley

- ◆ Rated Load: 30-80kN



Steel hoisting pulley with steel casting sheave

- ◆ Rated Load: 10-100kN
- ◆ Applicable Steel Rope Dia.: Φ7.7-15.5mm



Aluminum hoisting pulley

- ◆ Rated Load: 10-100kN
- ◆ Applicable Rope Dia.: ≤20mm



Both side opening hoisting pulley with dual wheels

- ◆ Rated Load: 20-100kN
- ◆ Applicable Rope Dia.: ≤Φ18.5mm



One draw two moving boards

- ◆ Rated Load: 80-250kN
- ◆ Applicable Stringing Block Sheave Width: 75-110mm



Ground drill

- ◆ Rated Tension: 10-50kN
- ◆ Max Depth: 1500mm



Conductor lifter

- ◆ Rated Load: 30-55kN



U-Type anti-bending fixed joint

- ◆ Rated Load: 10-320kN



Swivel joint

- ◆ Rated Load: 10-250kN



High strength shackle

- ◆ Rated Load: 10-300kN



High voltage cable pulling grip

- ◆ Diameter Range: 12-220mm




Closed cable pulling grip

- ◆ Diameter Range: 7-150mm



Unilateral cable pulling grip

- ◆ Diameter Range: 7-150mm

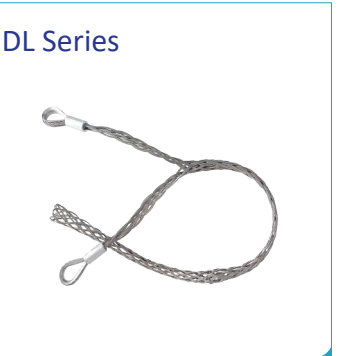

Double eyes cable pulling grip

- ◆ Diameter Range: 12-150mm



Single side pull wrap cable pulling grip

- ◆ Diameter Range: 12-150mm




Double sides pull wrap cable pulling grip

- ◆ Diameter Range: 12-150mm



Rotation cable pulling grip


- ◆ Diameter Range: 15-110mm

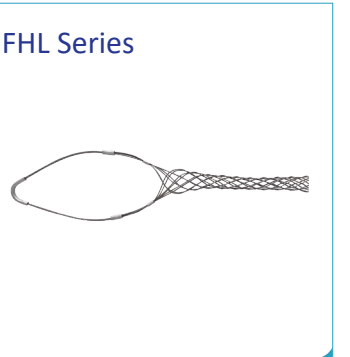

Feeder cable hoisting grip

- ◆ Diameter Range: 7-35mm

TL Series



Terminal cable pulling grip

◆ Diameter Range: 7.6-31.8mm



High voltage cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 10-110mm



Closed cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 10-110mm



Three in one closed cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 15-63mm



Three in one high voltage cable pulling grip with taper aluminium sleeve

◆ Diameter Range: 15-63mm

STF Series



Multiple fission conductor lifer

◆ Rated Load: 2x12-8x25 kN

SJYB Series



Splicing sleeve protector

◆ Applicable Conductor: ACSR240/55-ACSR1000/80

SXG Series



Steel wire rope hand wrenching tackle block

◆ Rated Load: 8-32kN

SZC Series



Conduits stand

◆ Conduits Diameter: Φ 11-14mm
◆ Length: 100-200m


YL Series



Anti-twisting braided steel rope


◆ Nominal Diameter: 9-32mm
◆ Breaking Force: 55-780kN

SRG Series



Steel rope reel stand

SRQ Series



Hydraulic puller dedicated steel rope reel stand

SBT-3A
SBT-5A



Adjustable hydraulic cable drum stand

◆ Rated Load: 3t/5t

SBT-5



Mechanical cable drum stand

◆ Rated Load: 5t

SBT-10



Mechanical cable drum stand

◆ Rated Load: 10t

SBT-20



Adjustable hydraulic cable drum stand

◆ Rated Load: 20t

Gardening Tools

JYGD-1
JYGD-2



Live work cleaning saw



Multifunctional set

EPS6010LI



Lithium battery powered pole trimmer saw

ECS6016LI



Lithium battery powered chain saw

EPT6020LI



Pole hedge trimmer

EBC6028LI



Hedge trimmer

EBC6026LI-2



Lawnmower

EBC6038LI-1



Lawnmower

BP-6040LI



Battery

CH6020LI



Charger

Covering up

AHIS-BLK series



Insulated blanket

AHIS-BLK series



Slit-type insulated blanket


AHIS-BLK-0 series



Low-voltage insulated blanket

◆ AC Proof Test Voltage: 5kV/1min
◆ AC Max Use Voltage: 1kV

AHIP-SC series



Insulated sleeves

AHIS-CDT-2-15-1



Conductor cover

◆ AC Proof Test Voltage: 30kV/3min
◆ AC Max Use Voltage: 26.5kV

AHIS-CDT-2-15-2
AHIS-CDT-2-30



Conductor cover

◆ AC Proof Test Voltage: 30kV/3min
◆ AC Max Use Voltage: 26.5kV

AHIS-CDT-2-6



Insulated cover for jumper wire

◆ AC Proof Test Voltage: 5kV/1min
◆ AC Max Use Voltage: 1kV

AHIS-CDT-0-1



Low-voltage soft conductor cover

◆ AC Proof Test Voltage: 5kV/1min
◆ AC Max Use Voltage: 1kV

AHIS-CDT-0-15



Low-voltage hard conductor cover

◆ AC Proof Test Voltage: 5kV/1min
◆ AC Max Use Voltage: 1kV

AHIS-IST-0-1



Low-voltage single-sided insulator cover

◆ Operating Voltage: ≤1kV

AHIS-IST-0-2



Low-voltage double-sided insulator cover

◆ Operating Voltage: ≤1kV

AHSS-BC-1



Blanket clip

AHAP-ST-8



Anti arc clothing

◆ Size: 170-185
◆ Arc Flash Rating: >8cal/cm²

AHAP-ST-27



Anti arc clothing

◆ Size: 170-185
◆ Arc Flash Rating: >27cal/cm²

AHAP-GN-27



Anti arc robe

◆ Size: 170-185
◆ Arc Flash Rating: >27cal/cm²

AHIP-HT-2



Insulated helmet

◆ AC Proof Test Voltage: 20kV/3min
◆ AC Max Use Voltage: 1.7kV

AHAP-HT-28



Anti arc helmet

◆ Protection Ability: 1000V
◆ Arc Flash Rating: >28cal/cm²

AHAP-HT-41



Full coverage anti arc helmet

◆ Protection Ability: 1000V
◆ Arc Flash Rating: >41cal/cm²

AHSS-PG-1



Anti-puncture gloves

AHSS-PG-1



Leather protective gloves

AHAP-GL-27



Anti arc gloves

◆ Size: free size
◆ Arc Flash Rating: 27cal/cm²

AHAP-SC-27



Anti arc shoe cover

◆ Size: free size
◆ Arc Flash Rating: 27cal/cm²

AHSS-GGD-1



Insulated glove gas-filled detector

AHSS-FHD-1



Insulated anti-slip mat



Latex insulation gloves



Insulation boots



Shielding suit



Insulation shoes
Leather conductive shoes

AHSE-ST-2



Intelligent insulated cable stripper

◆ Cable Outer Diameter: 14-32mm

AHSE-ST-3



Intelligent insulated cable stripper

◆ Cable Outer Diameter: 14-30mm

AHSE-HC-2



Intelligent remote control cutter

◆ AC Cutting Force: About 60kN
◆ Max Cutting Diameter: 32mm

AHSE-PIWC-2



Intelligent quick-mount clamp installation tool

AHSE-IW-2
AHSE-IW-3



Intelligent parallel groove clamp installation tool

◆ Torque: 250/165Nm

AHSE-IPGC-2



Wireless remote control battery powered wrench

◆ Max Torque: 160Nm

AHSE-CC-2



Lightweight remote-controlled clamp

◆ Max Clamping Force: >250N
◆ Cable Diameter: 8-35mm

AHSE-HP-2



Wireless remote control hot-line work crimper(10kV)

◆ Force: 6t

AHIR-ST-25-1



Insulated overhead cable stripper

◆ AC Proof Test Voltage: 45kV/1min
◆ AC Max Use Voltage: 10kV

AHIR-SG-27-2



Insulated dual-purpose lock hook operating rod

◆ AC Proof Test Voltage: 45kV/1min
◆ AC Max Use Voltage: 10kV

AHIR-JL-20-1
AHIR-JL-24-1



Insulated ratchet cutter

◆ AC Proof Test Voltage: 45kV/1min
◆ AC Max Use Voltage: 10kV

AHIR-EYQ-25-1



Insulated self-locking alligator clamp

◆ Length: 2.5m

AHIR-ZSQ-25-1



Insulated self-locking clamp

◆ Length: 2.5m

AHIR-PKQ-25-1



Insulated self-locking flat jaw pliers

◆ Length: 2.5m

AHIR-CL-30-1



Multi-section telescopic insulated measuring rod

◆ AC Proof Test Voltage: 45kV/1min
◆ AC Max Use Voltage: 10kV



Insulated hot stick

IR Series



Insulated triangle telescopic hot stick

◆ Extension Length: 3.8-12m

3.8-12m



Insulated triangle telescopic hot stick with double layer joint

◆ Extension Length: 3.8-12m

3.8-12m



Insulated triangle telescopic hot stick with measuring function

◆ Extension Length: 3.8-12m



Insulated triangle telescopic hot stick with positioning latch

◆ Extension Length: 3.8-12m


1.8-10m



Screw type insulated round telescopic hot stick

◆ Extension Length: 1.8-10m


1.8-12m



Button type insulated round telescopic hot stick

◆ Extension Length: 1.8-12m

SS Series



Insulated shotgun stick

◆ Extension Length: 1.8-4m



Insulated telescopic cargo scale

◆ Extension Length: 4.5-6m

IRHT Series
IRHD Series
IRH Series



Insulated rescue hook (Customization available)


◆ Length: 1-5m
◆ Voltage: 10-220kV

A80
A85
A90



Cable tying machine

BTJDS Series



Portable earthing equipment (Combination type)

◆ Voltage: 0.4-220kV

BTJDD Series



Portable earthing equipment (Single phase type)

◆ Voltage: 0.4-500kV

BTJDB Series



Portable earthing equipment (Tandem type)

◆ Voltage: 0.4-220kV



Personal security line

◆ Voltage: 0.4-10kV

ES9080



Non-contact high voltage detector

EAV Series
EC Series



Audible & visible voltage detector Full circuit electroscope

◆ Voltage: 0.4-500kV



AHSW-AES-15/300



Load break & pick-up tool
◆ Preventive Test Voltage: 42kV/1min

AHBCA-YY-15/300-3




Transparent insulated jumper group
◆ Max Operating Voltage: 15kV

AHSW-FLW series



Bypass switch

AHSW-FLW-0.4/200



Low-voltage single-phase bypass switch

AHBCA-YK-10/200



Bypass drop cable

AHBCA-KK-10/200



Bypass connection cable

AHBCA-TK-10/200-10
AHBCA-ZK-10/200-10



Ring main unit transition cable

AHBCN-LT-10/200



Bypass cable terminal head

AHBCN-TT-10/200



Bypass cable connector

AHPT-TXJT-10-1



Bypass cable current diversion clamp head

AHSS-PLHD-1



Bypass down-lead cable fixing crossarm

AHSS-FZS-2



Bypass cable anti-fall rope clamp

BTJYD Series



FRP insulated stool
◆ Steps: 1-4
◆ Height: 40-160cm

BTYGT Series



FRP insulated rod ladder
◆ Steps: 6-12
◆ Height: 2-5m

BTDT Series



FRP insulated single ladder
◆ Steps: 4-16
◆ Height: 1.5-5m

BTFRPL Series



FRP straight ladder
◆ Steps: 8-20

BTSST Series



FRP extension ladder
◆ Steps: 2x8- 2x20
◆ Height: 480-1200cm

BTPPTT Series



FRP platform ladder
◆ Steps: 3-6
◆ Height: 1440-2310mm

BTAST Series
BTADT Series




FRP step ladder
◆ Steps: 3-12
◆ Height: 90-360cm


BTGJT Series




FRP multipurpose ladder with big hinge
◆ Steps: 4x2 - 4x6




FRP tubular telescopic fence



FRP flake telescopic fence



FRP fixed fence



Stainless steel flake telescopic fence



Stainless steel arch telescopic fence



Stainless steel belt telescopic fence




Electric power identification network warning network



Bracket



Safety warning tape

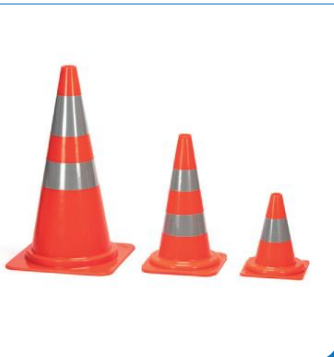

PVC road cone
◆ Height: 30-90cm



Safety harness



Safety harness



Safety harness




Safety harness



Safety harness



Safety harness

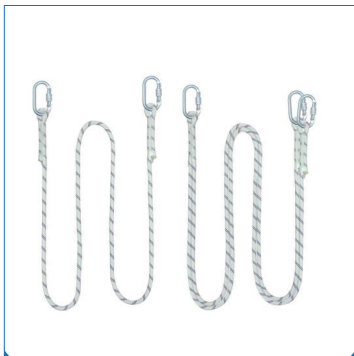

Rope O-hook



Pole strap



Rope large hook



Hook



Bird repeller



Stainless steel bird repeller



99LB101



48PCS Insulated tool set in suitcase

99LB105



68PCS Insulated tool set in suitcase

99LB106



116PCS Insulated tool set in trolley bag

99LB003



29PCS Insulated tool set

99LB004



18PCS Insulated tool set

99LB005



21PCS 1/2" Insulated socket set

99LB006



32PCS Insulated ratchet wrench set

92LB901



20PCS Insulated open end wrench set

99LB303




3PCS Insulated pliers set

92LB907



7PCS Insulated open end wrenches set



8PCS Insulated Screwdrivers set



CC-325
CC-520



Ratchet cable cutter

◆ Cutting Capacity: Max $\Phi 52\text{mm}$ Cu/Al

J38



Ratchet cable cutter

◆ Cutting Capacity: Max 300mm^2

LK-960



Ratchet cable cutter

◆ Cutting Capacity: Max 960mm^2

HS-765



Ratchet cable cutter

◆ Cutting Capacity: Max 400mm^2

LK-240



Ratchet cable cutter

◆ Cutting Capacity: Max 240mm^2

LK-760L



Ratchet cable cutter

◆ Cutting Capacity: Max 500mm^2

LK-380



Ratchet cable cutter

◆ Cutting Capacity: Max 380mm^2

J13



Manual ratchet cable cutter

◆ Cutting Capacity: Max 720mm^2 ACSR
Max 100mm^2 Galvanized steel strand

J25



Manual ratchet cable cutter

◆ Cutting Capacity: Max 800mm^2 ACSR
Max 240mm^2 Galvanized steel strand

J30



Manual ratchet cable cutter

◆ Cutting Capacity: Max 720mm^2 ACSR
Max 150mm^2 Galvanized steel strand

J40



Manual ratchet cable cutter

◆ Cutting Capacity: 400mm^2 ($\leq \Phi 38\text{mm}$)
armored Cu/Al

J50



Manual ratchet cable cutter

◆ Cutting Capacity: Max 1440mm^2 ACSR
Max 180mm^2 Galvanized steel strand

J52



Manual ratchet cable cutter

J75



Manual ratchet cable cutter

J100



Manual ratchet cable cutter

◆ Cutting Capacity: $3 \times 300\text{mm}^2$
($\leq \Phi 100\text{mm}$) armored Cu/Al

J130



Manual ratchet cable cutter

◆ Cutting Capacity: $4 \times 300\text{mm}^2$
($\leq \Phi 120\text{mm}$) armored Cu/Al

HT Series



Mechanical crimping tool

◆ Crimping Capacity: Max 150mm^2

T-J6



Pre-insulated terminal crimper

◆ Crimping Capacity: Max 6mm^2

TH-10



Insulated and non-insulated sleeve crimping tool

◆ Crimping Capacity: Max 10mm^2

T-S10L



Bare terminal crimping tool

◆ Crimping Capacity: Max 10mm^2

T-S6L



Non-preinsulated terminal crimper

◆ Crimping Capacity: Max 6mm^2

TC-6



Sleeve terminal crimping tool

◆ Crimping Capacity: Max 6mm^2

HSC8 Series



Mini-type self-adjustable crimping plier

◆ Crimping Capacity: Max 16mm^2

DR Series



Super strength-saving crimping plier

◆ Crimping Capacity: Max 16mm^2

FSB-054YJ



Super strength-saving mini-type crimping plier

◆ Crimping Capacity: Max 4mm^2

FSC-0510GF
FSA-056YJ



Super strength-saving crimping plier

◆ Crimping Capacity: Max 10mm^2

SN Series



Mini european style crimping plier

◆ Crimping Capacity: Max 2.5mm^2

HS Series



8" ratchet crimping plier (European style)

◆ Crimping Capacity: Max 16mm^2

HS Series



9" ratchet crimping plier (European style)

◆ Crimping Capacity: Max 25mm^2

AP Series



New generation of energy saving crimping pliers

◆ Crimping Capacity: Max 16mm^2

LAS Series



New generation of energy saving crimping pliers


◆ Crimping Capacity: Max 10mm^2

HS-1MA




Mini crimping pliers (for non-insulated terminals)


◆ Crimping Capacity: Max 2.5mm^2

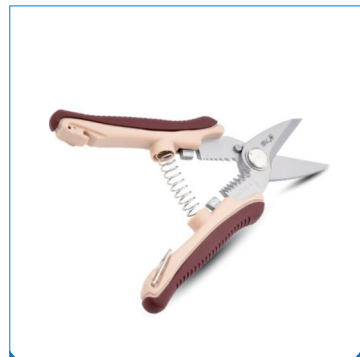

6" Multipurpose electrician's scissors
◆ AWG10-12-14-16-18-20-22

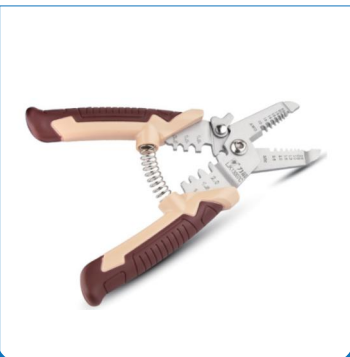

7" Multipurpose wire stripper
◆ AWG10-12-14-16-18-20-22

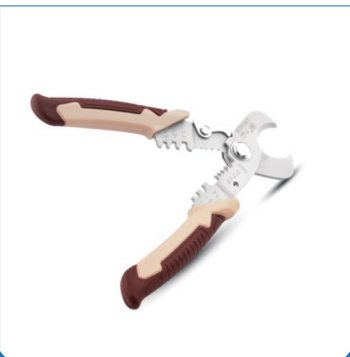


7" Multipurpose electrician's scissors
◆ AWG12-14-16-18



8" Multifunctional electrician's scissors
◆ AWG10-12-14-16-18-20-22



Manual crimping tool

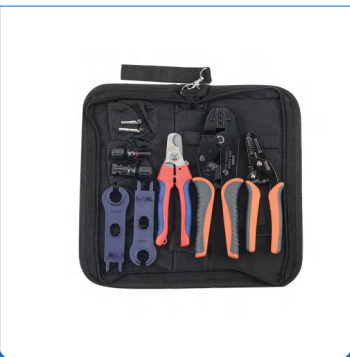

MC4 tools



MC4 tools



MC4 connectors




Cable puller (Fiberglass) with filling
◆ Length: 5-30m
◆ Diam: ϕ3-6mm



Cable puller (Polyester) twist
Cable puller with conduit twine



Fish tape electrical wire puller
◆ Length: 5-60m
◆ Diam: ϕ3-5mm

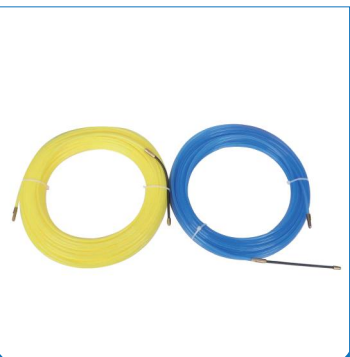

Cable puller (Nylon) solid
◆ Length: 5-30m
◆ Diam: ϕ3-4mm



Fishing tape



Cable glands
◆ Crimping Capacity: Max 240mm²



Pagoda drill
◆ Crimping Capacity: Max 240mm²



Pagoda drill
◆ Crimping Capacity: Max 300mm²




Stainless steel strapping band



Stainless steel strapping band



Stainless steel cable ties

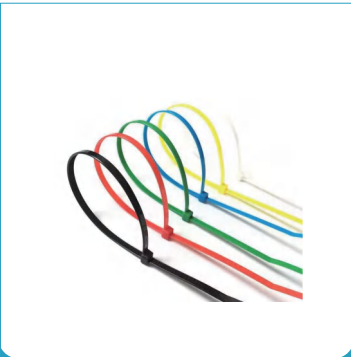

Self locking nylon cable ties



Stainless steel universal channel clamp



Stainless steel buckles



Stainless steel clip



Stainless steel banding tools



Stainless steel cable strap tensioning tool



Manual packing stainless steel banding tools



Stainless steel cable ties gun



Fastening tool for nylon cable tie



Fastening tool for nylon cable tie



Fastening tool for cable tie



Fastening tool for nylon cable tie



Fastening tool for nylon cable tie

