

opk SUBMARINE 9 W InSide



max. 2400mm



max. 1500mm



W ≥ 16mm



Möbel Systeme
Furniture systems

opk Submarine 9 W InSide




Technische Zeichnung

Technical drawing

Keine Dämpfung


No damping

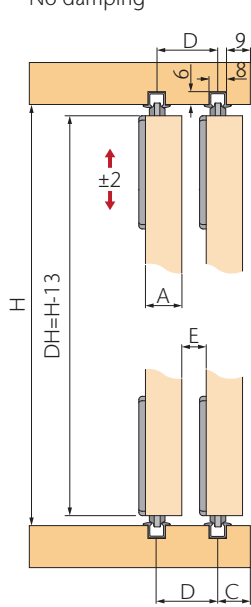

	A (16mm)	A (18mm)	A (19mm)
C	13mm	13mm	13mm
D	22mm	24mm	25mm
E	6mm	6mm	6mm

Beidseitige Dämpfung


Both sides damping

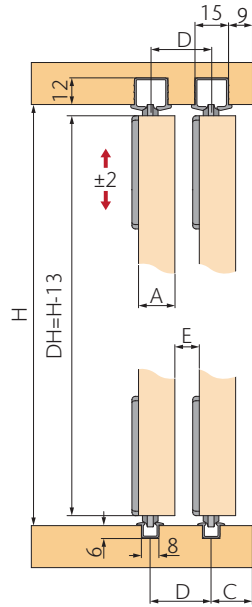

	A (16mm)	A (18mm)	A (19mm)
C	16.5mm	16.5mm	16.5mm
D	22mm	24mm	25mm
E	6mm	6mm	6mm

Beidseitige Dämpfung








Both sides damping

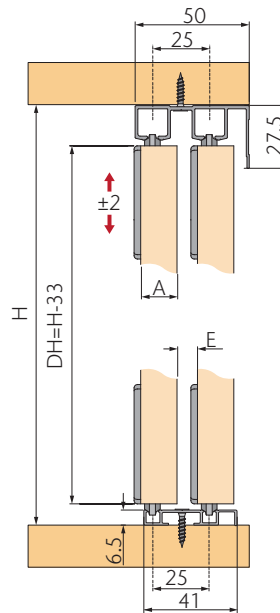

	A (16mm)	A (18mm)	A (19mm)
E	9mm	7mm	6mm

Beidseitige Dämpfung

Both sides damping

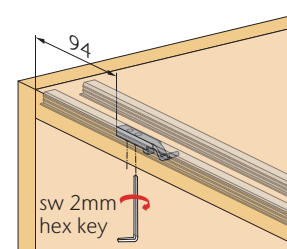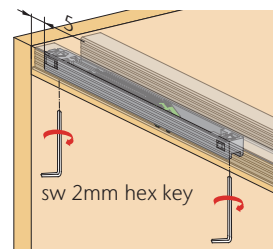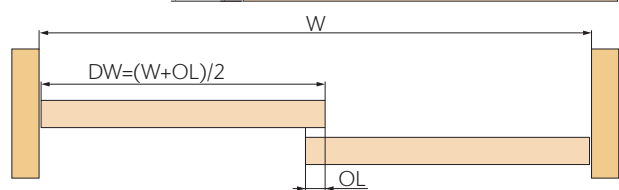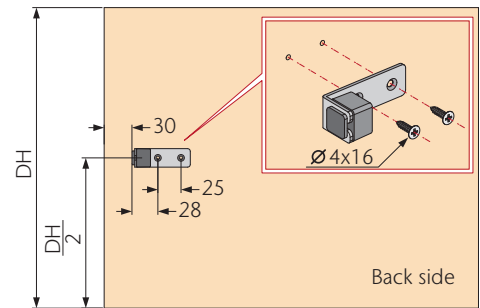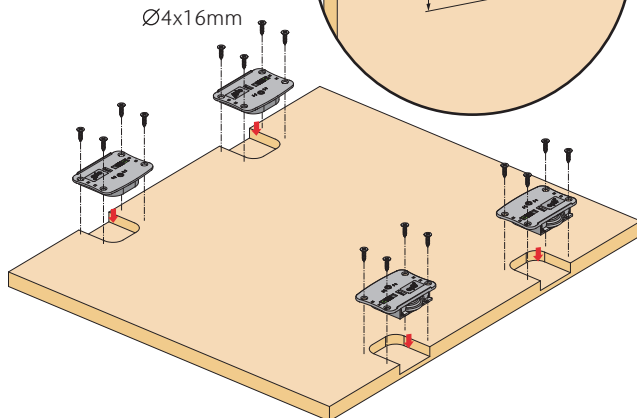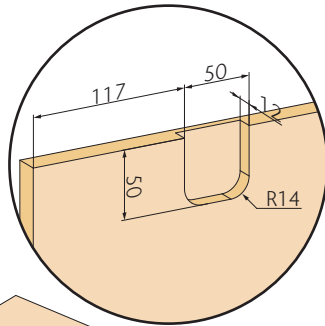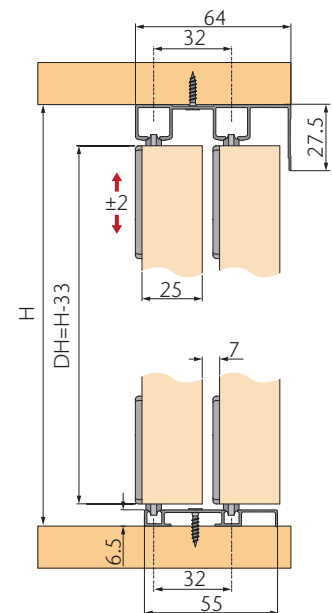

opk Submarine 9 W InSide



Art.-Nr./No.

		≤30	300~ 1500	≤2400	01-491-101-100
		≤15	500~ 1500	≤2400	01-491-102-115
		≤30			01-491-102-130

Konfiguration für 1 Tür

Configuration for 1 door












Laufwerk/Führung <i>Running/Guiding part</i>		4	4
Dämpfer <i>Damper</i>		0	2
Stopper <i>Stopper</i>		2	0
ST4.2x16 Senkkopfschraube mit Kreuzschlitz <i>ST4.2x16 Cross recess countersunk head self-drilling screw</i>		16	16
sw 2mm Innensechskant <i>sw 2mm hex key</i>		1	1

opk Submarine 9 W InSide



Schienen, Zubehör

Tracks, Accessories

Produktbeschreibung <i>Description</i>		Material <i>Material</i>	Farbe <i>Finish</i>	Länge <i>Length (mm)</i>	Art.-Nr./No.	
For variable door thickness	Führungsschiene <i>Guiding track</i> 	Aluminium eloxiert <i>Anodized aluminium</i>	Silber <i>Silver</i>	2500	01-497-250-125	
				3500	01-497-250-135	
	Laufschiene <i>Running track</i> 	Aluminium eloxiert <i>Anodized aluminium</i>	Silber <i>Silver</i>	2500	01-496-250-125	
				3500	01-496-250-135	
For 16-19mm door thickness	Führungsschiene, doppelt <i>Guiding track double</i>	Aluminium eloxiert <i>Anodized aluminium</i>	Silber <i>Silver</i>	2500	01-497-250-425	
				3500	01-497-250-435	
	Laufschiene, doppelt <i>Running track double</i>	Aluminium eloxiert <i>Anodized aluminium</i>	Silber <i>Silver</i>	2500	01-496-250-425	
				3500	01-496-250-435	
For 25mm door thickness	Führungsschiene, doppelt <i>Guiding track double</i>	Aluminium eloxiert <i>Anodized aluminium</i>	Silber <i>Silver</i>	2500	01-497-250-525	
				3500	01-497-250-535	
	Laufschiene, doppelt <i>Running track double</i>	Aluminium eloxiert <i>Anodized aluminium</i>	Silber <i>Silver</i>	2500	01-496-250-525	
				3500	01-496-250-535	
Türmitnehmer <i>Door follower</i>			Für zwei Türen <i>For two doors</i>	Titan <i>Titan</i>	pc	01-104-908-000