



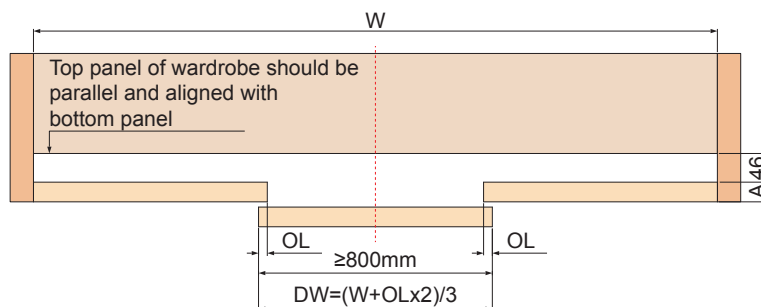

A	B	C
16	13	29
18	11	29
19	10	29
21	13	34
22	12	34
25	13	38
30	13	43

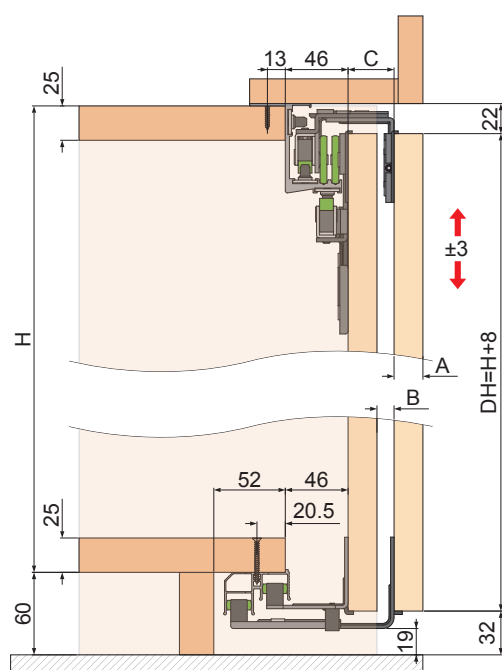

Technical drawing of a door assembly, showing the 'Inner door' and 'Outer door' with dimensions and a central locking mechanism.

Inner door dimensions:

- Top edge: 48 (left), 87 (right)
- Left edge: 12 (top), 32 (middle), 92 (bottom)
- Bottom edge: 53.5 (left), 28 (right)
- Bottom edge (total): 129.5 (left), 36 (right)





Outer door dimensions:

- Top edge: 48 (left), 105 (right)
- Left edge: 12 (top), 32 (middle)
- Bottom edge: 21 (left), 25 (right)
- Bottom edge (total): 129.5 (left), 36 (right)

Central Locking Mechanism:


- Outer diameter: $\varnothing 3$
- Inner diameter: ≥ 13

1 Install accessories on the door

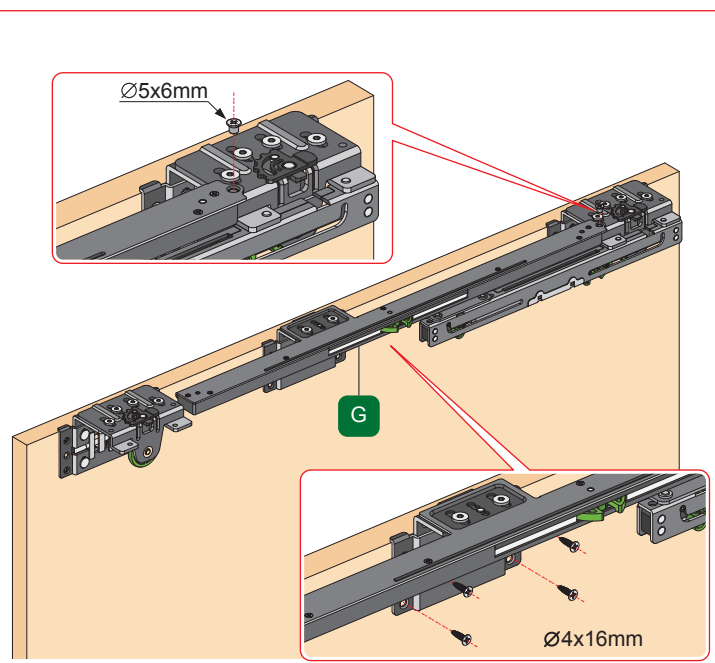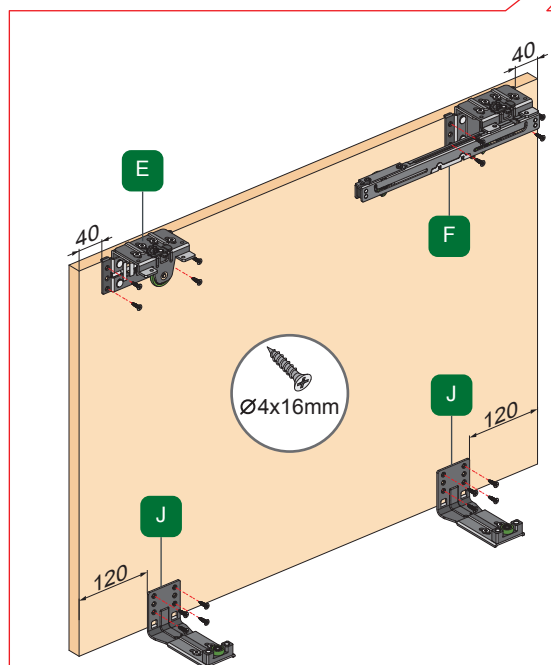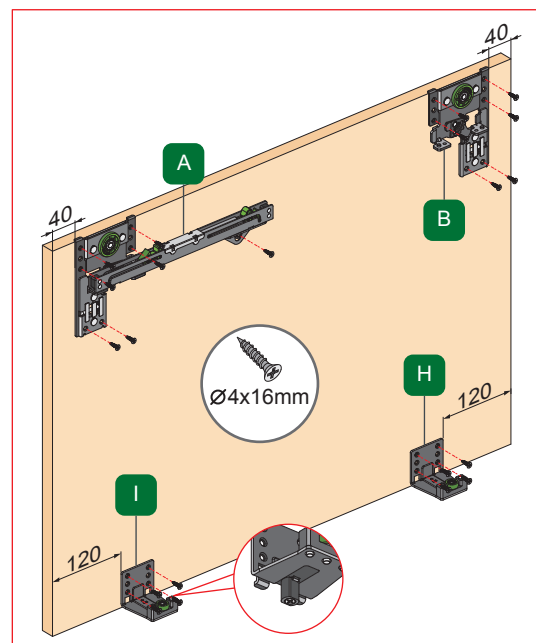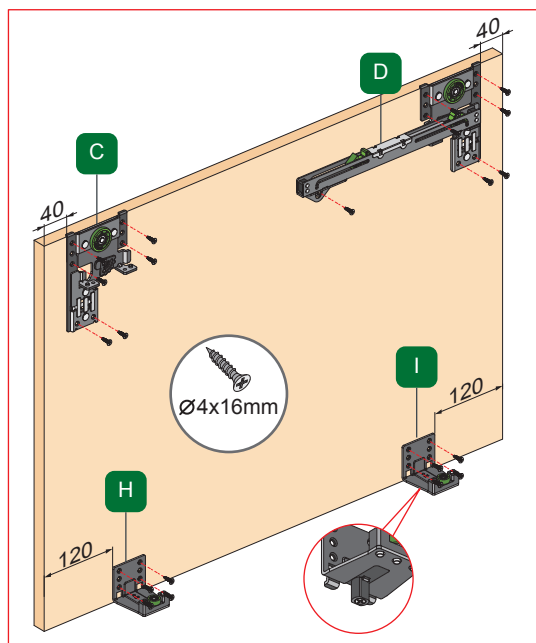


2 Install accessories and tracks



Top track length=W

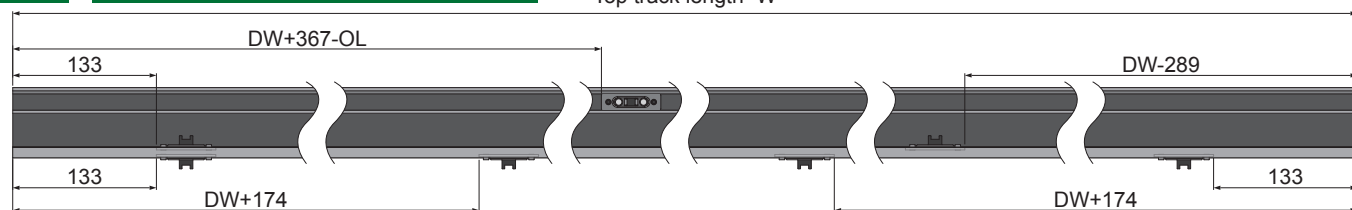




Install Stoppers

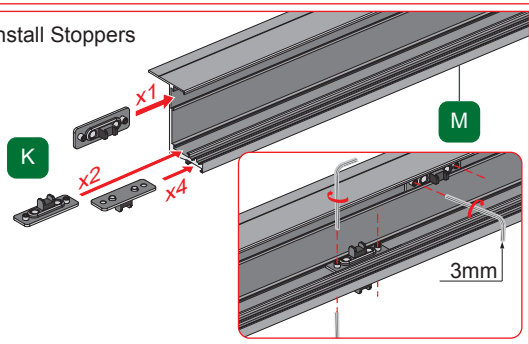

Install bottom dampers

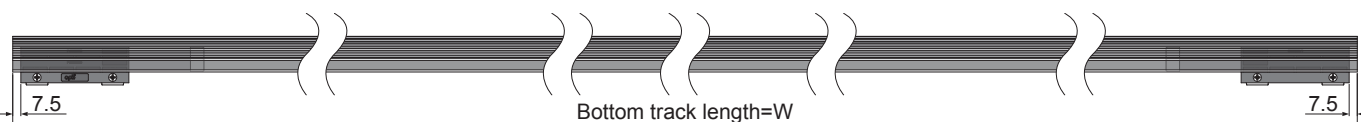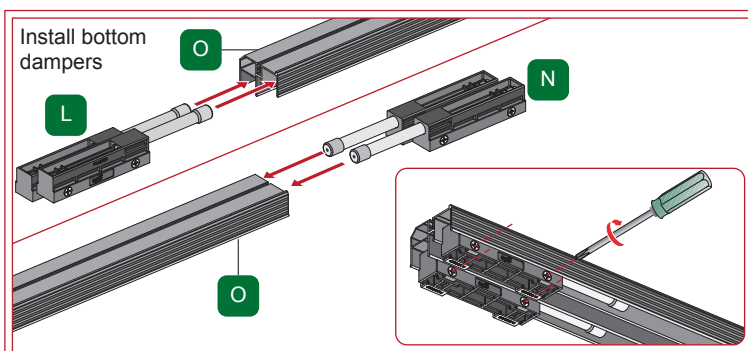


3 Install tracks

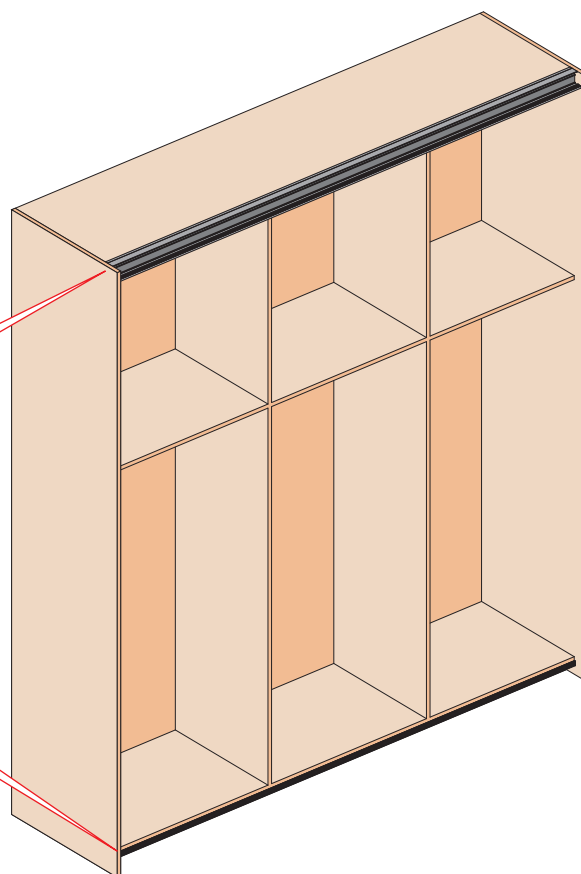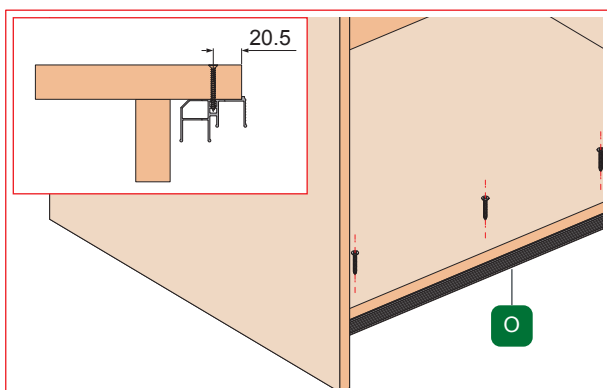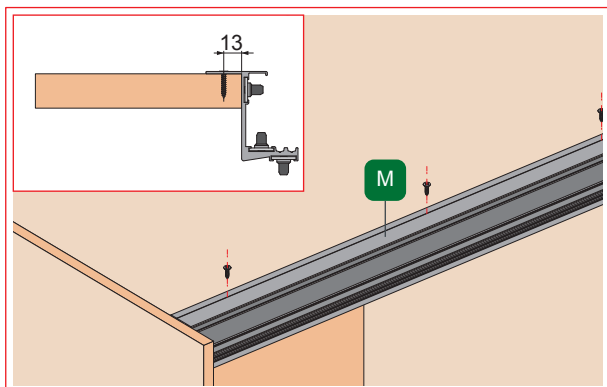


4 Adjust outer door accessories

Adjust the door thickness

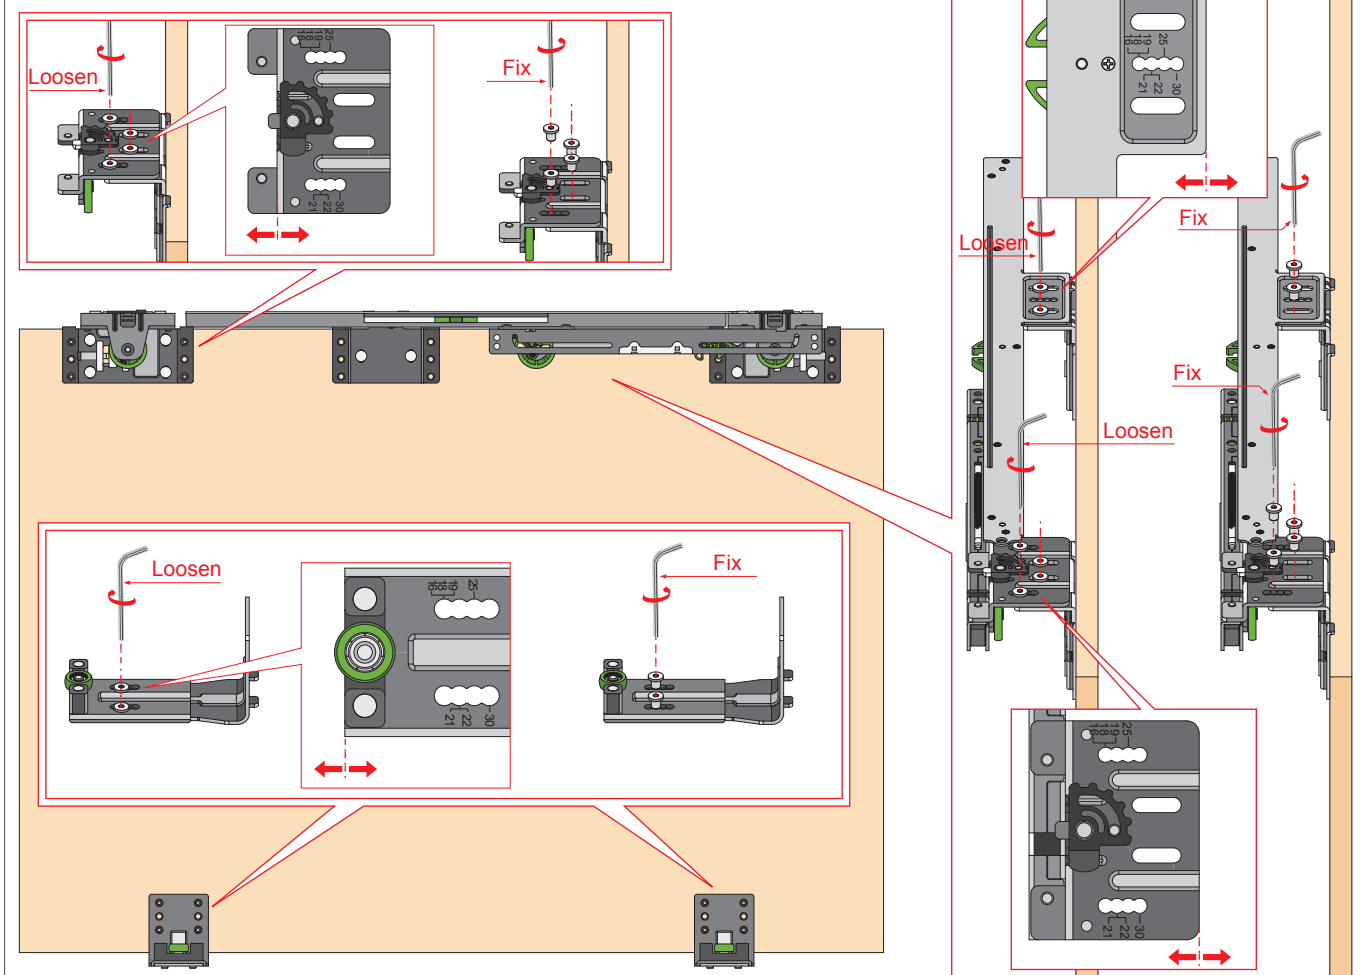


5 Install door

Install inner door

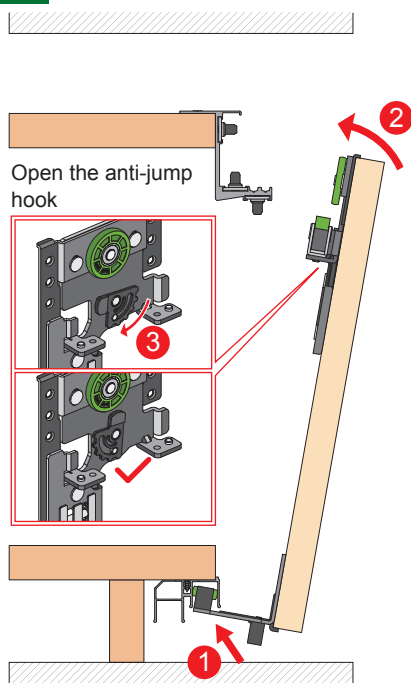

Install outer door

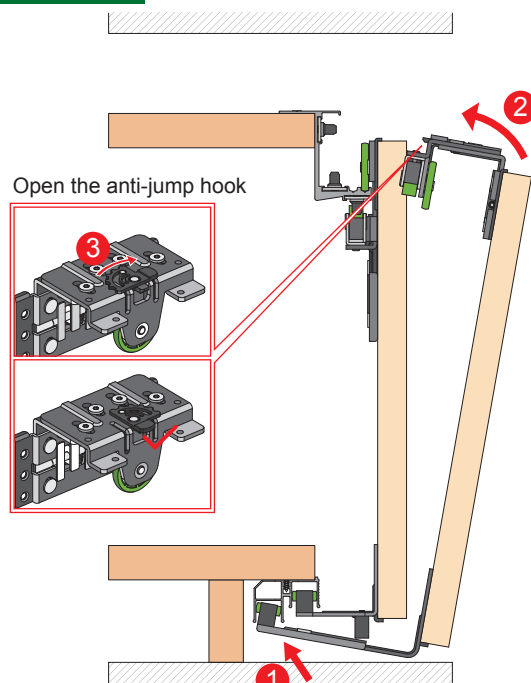

6 Adjust the door balance

