

opk Cruiser 5 Profile Deckenmontage

opk Cruiser 5 Profile Ceiling Mounting










Untenlaufend / Bottom Running

Aluminium glass door



Technische Zeichnung

Technical drawing

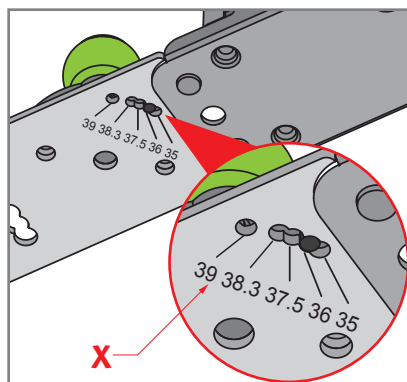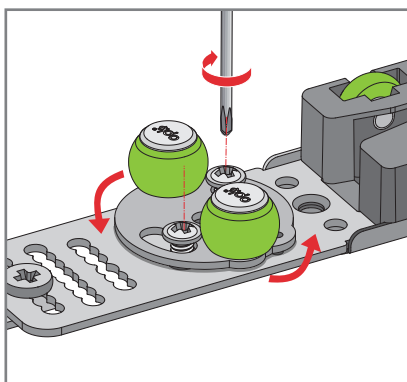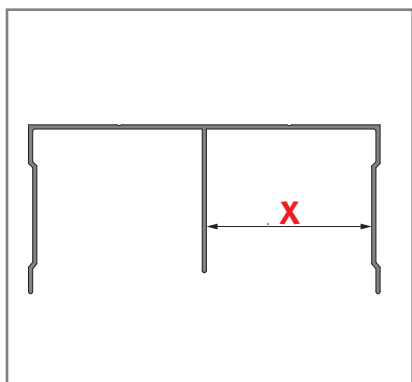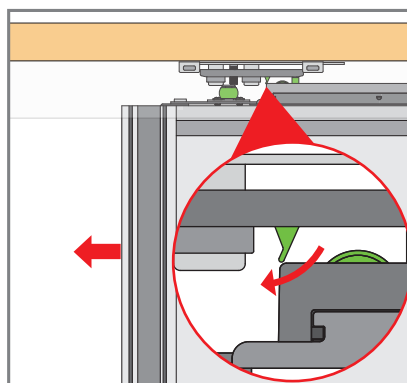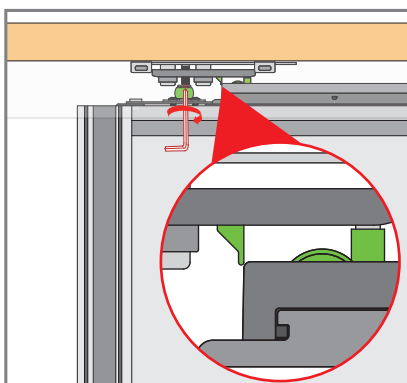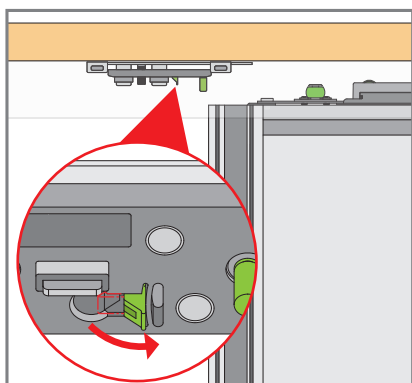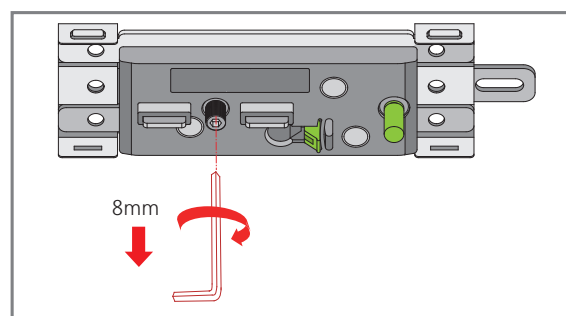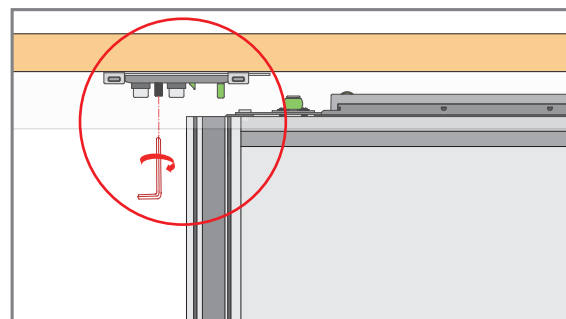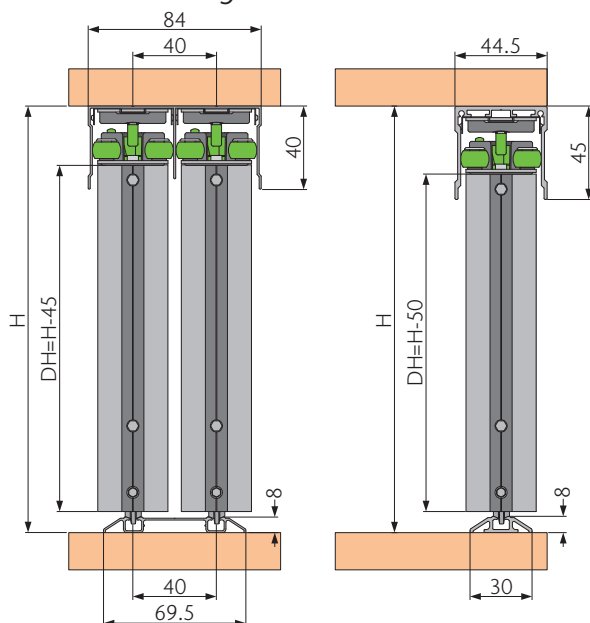

opk Cruiser 5 Profile Deckenmontage

opk Cruiser 5 Profile Ceiling Mounting



Untenlaufend / Bottom Running



Art.-Nr./No.

			≤50	300~1500	≤2800	02-051-301-150
			≤50	420~1500	≤2800	02-051-302-150
			≤50	780~1500	≤2800	02-051-303-150

Konfiguration für 1 Tür

Configuration for 1 door



Dämpfer Damper		0	1	2
Aktivator Activator		0	1	2
Führung Guiding part		2	1	0
Laufwerk Running part		2	2	2
Montageplatte Mounting plate		0	1	2
Flachkopfschraube GB/ST4.2x20 Panhead screw GB/ST4.2x20		0	2	4
Flachkopfschraube GB/ST4.2x9.5 Panhead screw GB/ST4.2x9.5		0	1	2
sw 2.5mm Innensechskant sw 2.5mm hex key		0	1	1

opk Cruiser 5 Profile Deckenmontage

opk Cruiser 5 Profile Ceiling Mounting



Untenlaufend / Bottom Running



Art.-Nr./No.

		≤50	300~1500	≤2800	2x 02-051-301-150
		≤50	420~1500	≤2800	2x 02-051-302-150
		≤50	780~1500	≤2800	2x 02-051-303-150

Konfiguration für 2 Türen

Configuration for 2 doors



Art.-Nr./No.		02-051-301-150 (x2)	02-051-302-150 (x2)	02-051-303-150 (x2)
Dämpfer Damper		0	2	4
Aktivator Activator		0	2	4
Führung Guiding part		4	2	0
Laufwerk Running part		4	4	4
Montageplatte Mounting plate		0	2	4
Flachkopfschraube GB/ST4.2x20 Panhead screw GB/ST4.2x20		0	4	8
Flachkopfschraube GB/ST4.2x9.5 Panhead screw GB/ST4.2x9.5		0	2	4
sw 2.5mm Innensechskant sw 2.5mm hex key		0	1	1

opk Cruiser 5 Profile Deckenmontage

opk Cruiser 5 Profile Ceiling Mounting



Untenlaufend / Bottom Running



Art.-Nr./No.

		≤50	300-1500	≤2800	3x 02-051-301-150
		≤50	480-1500	≤2800	2x 02-051-302-150 1x 02-051-312-351
		≤50	830-1500	≤2800	2x 02-051-303-150 1x 02-051-313-351

Konfiguration für 3 Türen

Configuration for 3 doors



Art.-Nr./No.		Keine Dämpfung No damping	Einseitige Dämpfung One side damping	Beidseitige Dämpfung Both sides damping		
		02-051-301-150 (x3)	02-051-302-150 (x2)	02-051-312-351 (x1)	02-051-303-150 (x2)	02-051-313-351 (x1)
Dämpfer Damper		0	2	0	4	1
Aktivator Activator		0	2	0	4	0
Führung Guiding part		6	2	2	0	0
Laufwerk Running part		6	4	2	4	2
Montageplatte Mounting plate		0	2	2	4	4
Zweiwege Dämpfer Two-way damper		0	0	1	0	1
Aktivator für Zweiwege Dämpfer Activator for two-way damper		0	0	1	0	1
Kollisionsschutzleiste Anti-collision bar		0	0	0	0	1
Flachkopfschraube GB/ST4.2x20 Panhead screw GB/ST4.2x20		0	4	2	8	2
Flachkopfschraube GB/ST4.2x9.5 Panhead screw GB/ST4.2x9.5		0	2	2	2	3
sw 2.5mm Innensechskant sw 2.5mm hex key		0	1	0	1	0