



## 装饰·工程 滑动系统

The all series solution provider of  
Commercial home furnishing roller

商业家居滑轮全系列解决方案提供商

# OPK产品专利

# OPK PRODUCT PATENT

金属外壳阻尼器

带阻尼器的壁柜门下滑动轮组合件  
一种可用蜗轮蜗杆进行升降调节的上吊挂滑轮组件

弹力暗铰链

可调节的壁柜门上导轮组件

滑动下班门、窗用吊夹板

可直接调节的壁柜门导轮组件

折叠移动门用可调高度的活页组件

能调节高度的推拉门用上、下滚动轮组件

带调节螺钉和U形弹片的铰链

壁柜门用方便调节的上运转轮

一种缓冲器

可调节的移动门用下滚动轮

多功能家具型材

缓冲器的拔动件

缓冲器的阻尼轮固定结构

新型缓冲器

一种阻尼器

带毛刷的上吊挂滑轮组件

家具门用的滑轮调节结构

用蜗轮蜗杆进行升降调节的上吊挂滑轮组件

带弹簧调节装置的平趟门用轨道滑动架

封闭式阻尼器

柜窗用带弹性夹座的滑动轮

柜窗用带直角连接件的上、下框座

吊趟门上吊挂滑轮用吊轮限位器

金属外壳阻尼器

挂趟门内、外门用下滑动凸轮组合装置

挂趟门用可调节内、外门页间距及门和门缝大小的可伸缩调节装置

带升降调节装置和减震装置的挂趟门内、外门上挂件

带阻尼器的推拉门防跳结构

挂趟门内、外门用下滑动凸轮组合装置

挂趟门用可调节内、外门页间距及门和门缝大小的可伸缩调节装置

带升降调节装置和减震装置的挂趟门内、外门上挂件

带阻尼器的推拉门防跳结构

吊挂门用带缓冲器的长座吊轮

在铝门上应用的防跳限位上轮

带弹力支架的平趟门下轨

推拉木门下滑动轮用盒形外夹套

带阻尼器的壁柜门下滑动轮组合件

铝趟门吊轮组件

"可协助挂起壁柜门用阻尼器拨动钩的拨动件"

在壁柜门页上、下横上装配的滑动轮组合件

上吊滑轮(带毛刷1001型)

绿色凹槽轮(有筋型)

绿色凹槽轮(无筋型)

绿色圆柱轮

绿色V型轮

绿色圆凸轮(鼓形)

绿色圆凸轮(带筋型)

包装套盒(带阻尼平趟门用)

包装盒(挂趟门系统外门配件用)

包装盒(带阻尼壁柜门上、下轮用)

包装盒(移门轮用)

橱窗玻璃门用(包装盒)

下轮架(轻轨1号)

衣柜调节支架脚

壁柜门双轮下轮(HX-2号)

壁柜轮(可换调节螺钉的位置)

竖框(品字形盒形本体)

metal shelled damper

sliding cabinet door bottom roller fittings with damper

"sliding & hanging roller fittings with adjusting worm gear"

hinge with spring

adjustable sliding cabinet door top roller fittings

aluminum sliding door hanging roller fittings

adjustable sliding cabinet door roller fittings

adjustable loose leaf fittings for folding door

adjustable top and bottom roller fittings for double acting door

hinge with adjustable screw and U-shaped spring chip

adjustable top roller for cabinet

damper

adjustable sliding door bottom roller

multifunction furniture profile

locating part on damper

fixed roller structure of damper

damper - new type

damper

top hanging roller fittings with brush

adjustable sliding furniture door roller structure

sliding & hanging roller fittings with adjusting worm gear

sliding frame for spring adjusted in-line sliding door track

close type damper

window and cabinet door roller with spring chip clamp mount

top and bottom frame mount with right-angled connector

stopper for hanging & sliding door roller

metal shelled damper

bottom convex roller fittings for inner and outer hanging sliding doors

retractable regulating device used to adjust inner and outer door panel gap and crack of hanging door

top fittings for inner & outer hanging door with up & down movement-regulating and shock-absorbing device

anti-jump structure for sliding door with damper

bottom convex roller fittings for inner and outer sliding doors

retractable regulating device used to adjust inner and outer door panel gap and crack of hanging door

top fittings for inner & outer hanging door with up & down movement-regulating and shock-absorbing device

anti-jump structure for sliding door with damper

hanging roller with damper for sliding & hanging door

top roller with anti-jump stopper for aluminum door

bottom track for sliding door with spring supporter

box-shaped clamp sleeve for sliding wood door bottom roller

bottom roller fittings for wardrobe door with damper

aluminum sliding door hanging roller fittings

locating part on wardrobe damper

sliding roller fittings for wardrobe door top and bottom frame

top hanging roller with brush NO.1001

green concave roller

green concave roller

green cylinder roller

green V-shaped roller

green round convex roller

green round convex roller

packing box for sliding door fittings

packing box for outer hanging door fittings

packing box for top and bottom wardrobe door roller with damper

packing box for sliding door

cabinet glass door

bottom roller rack (Light-rail roller 1)

adjustable wardrobe supporter holder

furniture door bottom roller (No. HX-2)

furniture roller (position for adjusting screw)

vertical frame (box-shaped profile)



# 专利维权,正在行动! Patent Right Protection

## 专利研发

作为国内五金滑轮行业的龙头企业，我们始终坚持以产品研发为导向，投入巨大的人力、财力、物力进行技术创新与产品升级，不断引入新结构、新材料、新技术，强调技术创新培育和成果转化，现已获得一百多项国家和国际专利。

## 资深法律团队维权

我司特委托资深法律团队常年从事专利维权活动，据查有部分厂商恶意抄袭我司产品，如缓冲壁柜轮、缓冲吊轮、08款明轮以及专利调节上轮、吊轮限位功能、上下可调合页等，扰乱市场秩序，严重侵犯我司权益，对我司后续产品的技术创新造成严重影响。目前已对高要金利、南海盐步、中山小榄等地共十余家侵权厂家提起维权诉讼，最低赔偿50万。

## 专利法

根据《中华人民共和国专利法》规定，任何单位或个人制造、销售、使用未经授权专利产品均属违法行为，可作为第一被告被起诉。望有关厂商严肃对待法律，停止生产、销售和使用侵权产品。否则，我公司将采取一切必要手段维护法律赋予的正当权益，追究侵权人责任。

## Patented R & D

As the industry's leading enterprise in China, we always adhere to the concept of product development orientation. With enormous human, financial and material resources invested for technical innovation and product upgrading, we constantly introduce new structures, new materials, new technologies, and always commit ourself to technical innovation and achievements transformation. Now we have observed more than 100 national and international patents.

## specially commissioned senior legal team for patent right safeguarding

Our specially commissioned senior team engages in patent-right protection activity all year round. According to the investigation, some manufacturers intended to copy our products, such as sliding soft-closing door roller, soft closing hanging roller, visible roller# 08, patented adjustable top roller, hanging roller with patented function and adjustable hinges, etc.. All these serious infringements of our rights disturb the market order, and cause serious impact to our technological innovation. Currently more than 10 manufacturers concerned in Kinley Gaoyao, Yanbu Nanhai, Xiaolan Zhongshan and other places were prosecuted and heavily fined because of infringements of our patented rights.

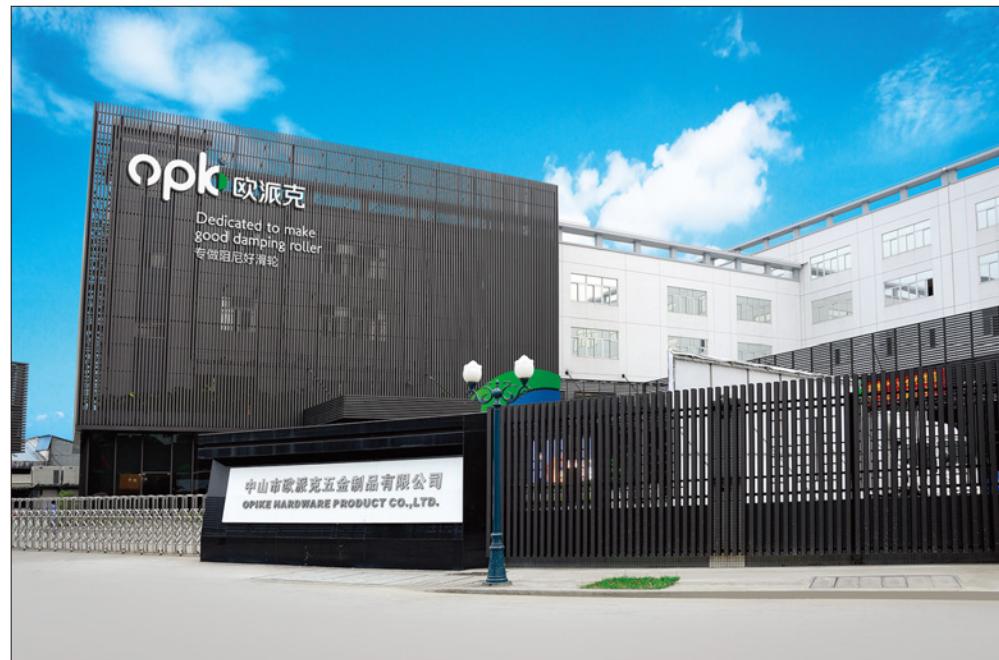
## Patent Law

In accordance with the Patent Law of the People's Republic of China, any unauthorized use, sale or manufacturing of patented products is illegal. Any unit or individual who violates the law may be prosecuted as first-mentioned defendant. We strongly request all manufacturers concerned to comply with the law, stop unauthorized production, sale and use of the patented product. Otherwise, we will take all necessary legal action to safeguard our legitimate rights and interests.



# 好滑轮·好静音

SUPERIOR ROLLERS SO QUIET



# 总公司简介 COMPANY PROFILE

中山市欧派克五金制品有限公司创建于1996年，总部位于中国著名五金之乡——中山市小榄镇。凭借良好的企业信誉、优质的产品质量和扎实的服务，欧派克不断发展壮大，现已成为拥有千余名员工、50000平米建筑厂房的规模化、技术型企业。欧派克与国内外众多知名企结成了良好的战略合作伙伴关系共生共荣，成为引领和推动行业发展的骨干之一，产品畅销国内外，在客户和消费者中享有良好的声誉。欧派克坚持专业、专注的发展理念，二十多年来始终致力于家居滑轮行业的发展，在该领域做专，做精，做强，已拥有国际、国内专利几百项，实现了生产规模化、产品系列化、管理现代化，奠定了在业内的核心领导地位，成为公认的中国家居阻尼滑轮专家。承载商业家居移动梦想，践行欧标滑轮阻尼世家！

作为滑轮领域、五金配件产品行业的龙头企业，欧派克始终明确以创新为企业发展的基石和根本动力，基于对行业本质的深刻理解和未来需求的仔细分析，公司成立了以专业的研发队伍为核心的opk品牌部并创办滑轮研究院，与华南理工大学、广东工业大学及其他研究机构展开深度合作，建立产学研合作基地，及研究生工作站。创建德国分公司融入欧美高端市场。主要开发、生产和销售opk品牌的全系家居阻尼滑轮，目前以家具阻尼滑轮系列、中空门窗阻尼滑轮系列、木门装饰工程阻尼滑轮系列、淋浴房阻尼滑轮系列以及重型门阻尼滑轮系列产品为核心，拥有专业化、多样化的全系阻尼滑轮产品。opk目前已推出多款智能型、自动化、感应式、电动系列家居滑轮，将产品集美化、保护、稳定、科技于一身，实现产品创新的可持续发展，竭尽所能为客户提供有竞争力的专业产品和独到的解决方案。

欧派克正以进取的姿态进入崭新的互联网+及智能制造发展阶段，我们将始终坚持诚实正直的经营理念，秉承严谨科学的工作态度，发扬工匠精神，不断提高阻尼滑轮科技化、时尚性、智能化、国际化标准，为用户创造更大价值，我们愿与海内外家居行业的伙伴们一起携手共进，共创美好未来！

欧派克，专做阻尼好滑轮，滑轮梦想家和践行者！

Zhonshan OPIKE Hardware Products Co., Ltd was founded in 1996 and headquartered in the well-known hardware products base—Xiaolan Town, Zhongshan City of China. With good reputation, high quality products and great service, OPK keeps on uninterrupted growth and development. And now it becomes a large-scaled, technology-oriented enterprise with fifty thousand square meters working plants and more than 1000 employees. Meanwhile, as one of the backbone of the industry, OPK signed strategic win-win cooperation with many domestic and international well-known enterprises, leads and promotes the development of the industry, sells high quality products at home and aboard, gains high reputation from customers and consumers. OPK adheres to the concept of being professional and concentrated. OPK is always dedicated to the development of household furniture sliding industry, and with professional technology and devoted attitude, OPK has achieved hundreds of patents, and realized large scale production, product seriation and management modernization. Now it is recognized as sliding expert and becomes leading company in this industry. OPK will carry your dreams of beautiful homes; will be the family of soft closing sliding system and implementers of European quality standard.

As the leader manufacturer of sliding hardware industry, Innovation is the cornerstone and the fundamental driving force of OPK. Based on deep understanding of the nature of the industry and a careful analysis of future needs, OPK established OPK Brand and Roller Institute, in which powerful R&D team acted as the core. What's more, OPK has deeper cooperation with South China University of Technology, Guangdong University of Technology and other Research Institutes. Set up Industry Academia Research and Graduate Workstation. Found Branch Company in Germany and integrated into Europe and America high-end marketing. OPK mainly develop, produce and sell all series of household furniture sliding industry. By now, the core products include furniture soft closing sliding system, hollow door soft closing sliding system, wooden door decoration engineering soft closing sliding system, Shower room soft closing sliding mechanism and heavy door soft closing sliding system. OPK products have the advantages of specialization, diversification with complete products range. Products of intelligent, automatic and electrical have been launched, integrated beauty, security, stability and technology. Realized the sustainable development of the innovative products and try all our best to provide competitive professional products and unique solutions.

OPK is entering a new stage of internet and intelligent manufacturing development. We will always adhere to the business philosophy of integrity and strict scientific attitude. OPK is constantly improving the satisfaction of the sliding damping roller including the fashion sense, intelligence and international standard, carry forward the spirit of craftsman, devote to make more value for the customer, and building the core competence of the new brand. We are willing to work with home and abroad partners together for a better future. OPK dedicated to make good sliding damping roller, dreamer and pioneer of sliding hardware.



# 好滑轮·好静音

SUPERIOR ROLLERS SO QUIET



# 欧洲公司简介 COMPANY PROFILE

欧派克欧洲公司是中山市欧派克五金制品有限公司的全资子公司,总部位于德国,主要从事高端家居滑轮产品系统的研发、生产与销售。

为实现公司“立足中国、定位全球”的发展战略,欧派克高瞻远瞩,系统布局,建厂德国,积极融入欧洲高端产业链。通过吸收欧洲先进的理念、技术、工艺、人才及产业标准,并同中国公司相辅相成,取长补短,从而实现产业升级,并获取创新发展的新动力!

欧洲公司以德国总部为中心,借助欧洲的优势资源,扎根欧洲,并以此为新的战略支点,占领家居滑轮领域至高点,从而实现公司全球发展战略。

未来,欧派克欧洲子公司继续秉承中国母公司专业专注的发展理念,并借助吸收德国的先进设计与制造工艺,致力于将家居滑轮产业做精做强,并为全球客户提供更优全系家居滑动门系统解决方案。

把产品做到极致,是我们的责任!

OPK Europe is a wholly-owned subsidiary of OPIKE Hardware Product Co., Ltd., which specializes in the R&D, production and sales of high-end household roller product systems.

In order to achieve the development strategy of “based in China, positioning the world”, OPK stands on a higher plane and is more farsighted, starts the business in Horb, Germany, and actively enters the high-end Europe market. By absorbing European advanced concepts, technology, talent and industry standards, OPK Europe and OPK China learn from each other to achieve industrial upgrading and gain the new power of development and innovation. With local resource advantages, OPK Europe plans to root deeply in Europe. With this strategy, OPK Europe would be able to stand out from the sliding roller industry and achieve the goal of global development strategy.

OPK Europe will follow the basic development strategy of OPK China, and with advanced technology and design from Europe, OPK dedicates to produce the best products, and therefore OPK concentrates on providing the best sliding roller system solutions to all customers.

Our responsibility is to provide the best products!



装饰·工程滑动系统  
DECORATION&ENGINEERING SLIDING SYSTEM

001-125



001-006

长征1号吊滑轮

SATELLITE 1 HANGING SLIDING ROLLER



007-008

长征2号吊滑轮

SATELLITE 2 HANGING SLIDING ROLLER



009-010

长征3号吊滑轮

SATELLITE 3 HANGING SLIDING ROLLER



071-080

长征10号吊滑轮

SATELLITE 10 HANGING SLIDING ROLLER



011-012

长征4号吊滑轮

SATELLITE 4 HANGING SLIDING ROLLER



081-086

长征11号

SATELLITE 11



013-024

长征5号吊滑轮

SATELLITE 5 HANGING SLIDING ROLLER



087-098

长征12号

SATELLITE 12



025-038

长征6号吊滑轮

SATELLITE 6 HANGING SLIDING ROLLER



099-110

长征15号

SATELLITE 15



039-050

长征8号吊滑轮

SATELLITE 8 HANGING SLIDING ROLLER



111-118

磁悬浮智能吊滑轮系统 E88系列

E-SPACE-E88 SERIES



051-070

长征9号连动门吊滑轮

SATELLITE 9

LINKAGE HANGING SLIDING ROLLER



119-125

东风号

NAVIGATOR

# 长征1号吊滑轮

## SATELLITE 1 HANGING SLIDING ROLLER

### 产品特点：

- 平衡轮结构专利设计，受力均匀、寿命长；
- 阻尼自动挂钩设计，脱钩自动复位功能；
- 采用精铸工艺，超强承重能力；
- 开口式挂板设计，安装快捷方便。

### 技术概要：

- 适用于：单扇和双扇木质推拉门
- 调节性能：门扇安装高度可调
- 门重：单扇门≤500kg

### Product Features:

- Patent design of balance roller structure, equal force, long service time.
- Damper hook automatical hanging design, Auto-reset while unlock.
- Adopt fine casting technology, super strong bearing capacity, maximum can reach 500 kgs.
- Open type hanging plate design, quick and easy installation.

### Technical Points:


- **Application:** Single and double wood sliding door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 500kg



## 长征1号无阻尼套装(适用于单扇门)

SATELLITE 1 WITHOUT DAMPING COMPLETE SET (Application to single door)

&lt;500kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤500	≥620	CN12214B

## 标准配置


## STANDARD CONFIGURATION

配件描述 Fitting Description			无阻尼标准配置(单扇门) Without Damping (Single Door)
上滑轮 Upper Roller		TG025A	2
挂板 Hanging Plate		TG026A	2
限位件 Stopper		TG027A	2
下定位轮 Under Guider Roller		TG028A	1
吊轨 Upper Track		XNA043	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA056	选择合适长度 Select Suitable Length
轨道连接套件 Track Connector		TN092A	按轨道长度(2个/米) According to the length of the track (2pcs/m)

≤300kg


## 长征1号带阻尼套装(适用于单扇门)

SATELLITE 1 WITH DAMPING COMPLETE SET (APPLICATION TO SINGLE DOOR)

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
带阻尼 With Damping		轻型 Light-duty	≤100	≥620	CN12214C
		重型 Heavy-duty	≤300	≥620	CN12214D




## 标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description				带阻尼标准配置(单扇门) With Damping (Single Door)
挡件上滑轮 Upper Roller With Stopper		TG033A	2	
挂板 Hanging Plate		TG026A	2	
反向加长缓冲器 Reverse Extension Buffer		轻型 Light-duty TD089A	2	
		重型 Heavy-duty TD089B		
下定位轮 Under Guider Roller		TG028A	1	
吊轨 Upper Track		XNA079	选择合适长度 Select Suitable Length	
下轨道 Under Track		XNA056	选择合适长度 Select Suitable Length	
轨道连接套件 Track Connector		TN092A	按轨道长度(2个/米) According to the length of the track (2pcs/m)	

## 长征1号轨道型材

## SATELLITE 1 RACK PROFILE







产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
<b>XNA043</b> 吊轨 Under Track		铝合金 Aluminium Alloy	2.77	香槟 Champagne	2000	XNA043AJ00200
					3000	XNA043AJ00300
					4000	XNA043AJ00400
					6000	XNA043AJ00600
<b>XNA079</b> 阻尼吊轨 Upper Track		铝合金 Aluminium Alloy	3.58	银白 Silver	2000	XNA079AT00200
					3000	XNA079AT00300
					4000	XNA079AT00400
					6000	XNA079AT00600
<b>XNA056</b> 下轨道 Under Track		铝合金 Aluminium Alloy	0.396	银白 Silver	2000	XNA056AT00200
					3000	XNA056AT00300
					4000	XNA056AT00400
					6000	XNA056AT00600
<b>TN092A</b> 轨道连接套件 Track Connector		锌合金 Kirsite	—	彩锌 Colored Zinc	—	TN092A

## 轨道型材订购说明:

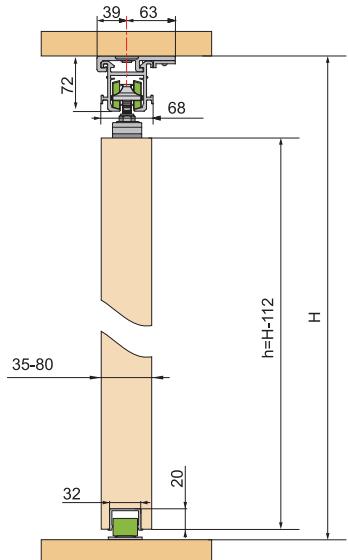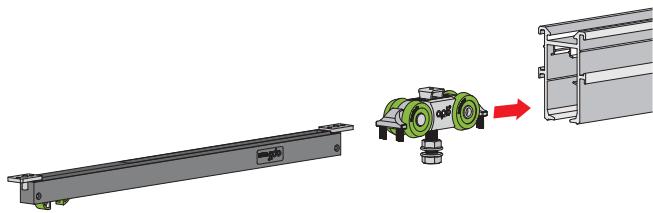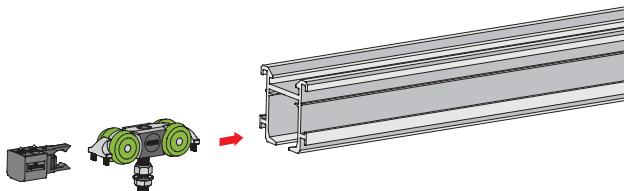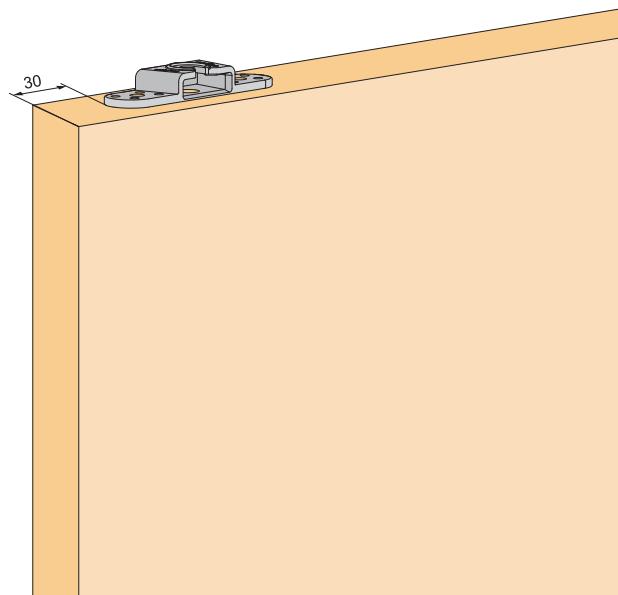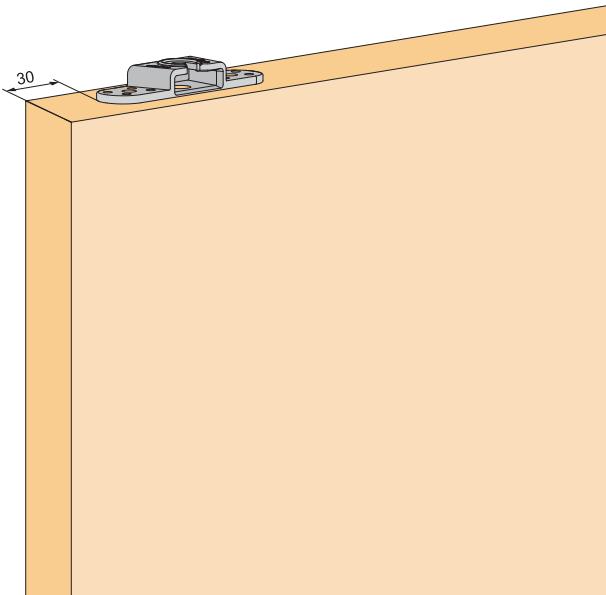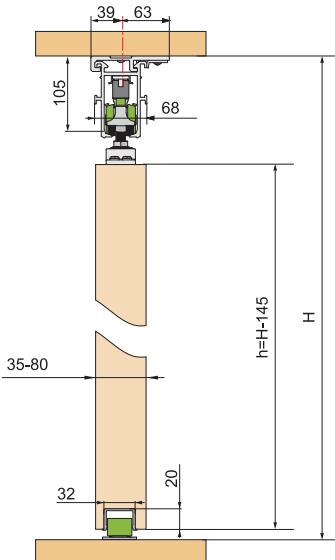- 1、下单时请注明轨道型号或详细描述轨道名称、长度以及数量，如“XNA043AJ00200×10支”或“长征1号无阻尼吊轨2米10支”；
- 2、请根据实际需要选择适合的轨道长度。


Track profiles ordering instructions:

1. When place an order, please indicate the track type or detailed track description-name, length and quantity, such as "XNA043AJ00200×10pcs" or "SATELLITE 1 without damping hanging track 2meter/pc 10pcs".
2. Select suitable length of track according to the actual need.


**长征1号安装参数****SATELLITE 1 INSTALLATION PARAMETERS****无阻尼**  
Without Damping**带阻尼**  
With Damping

## 长征1号安装参数
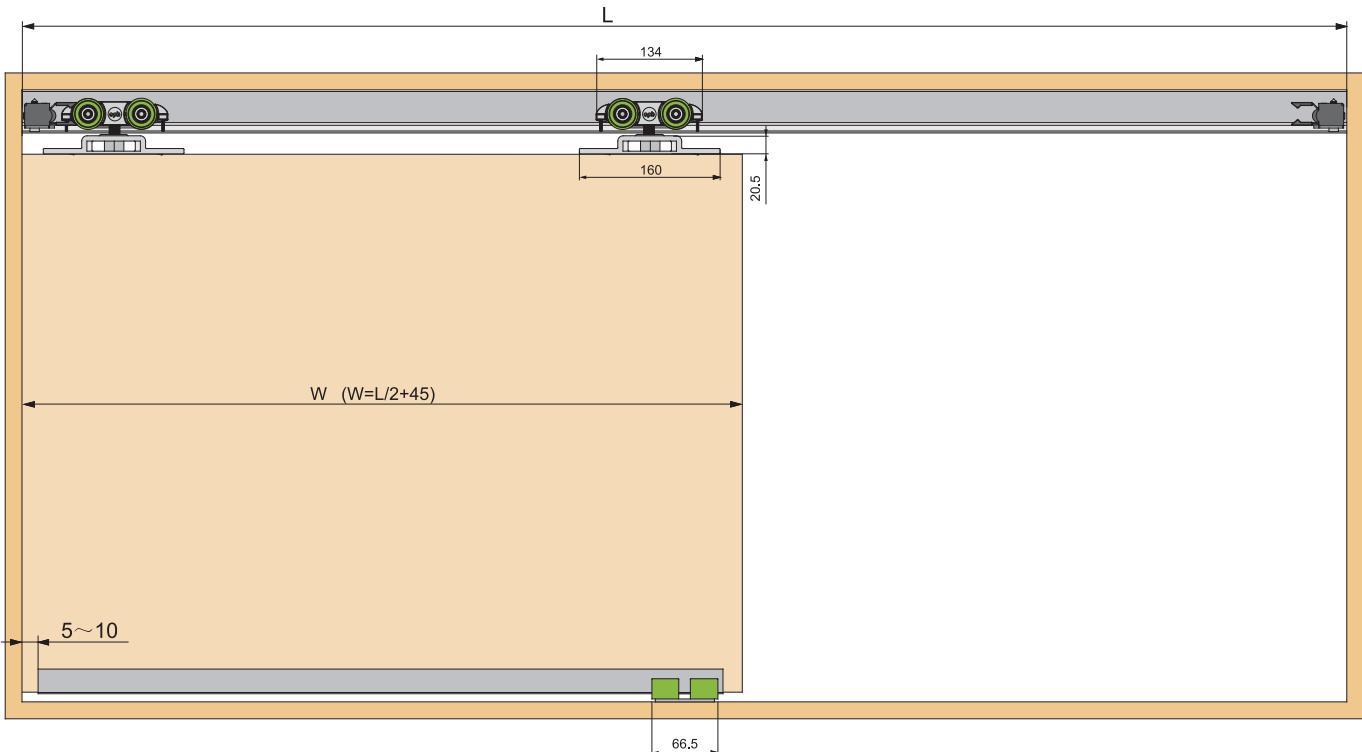
## SATELLITE 1 INSTALLATION PARAMETERS



无阻尼 Without Damping

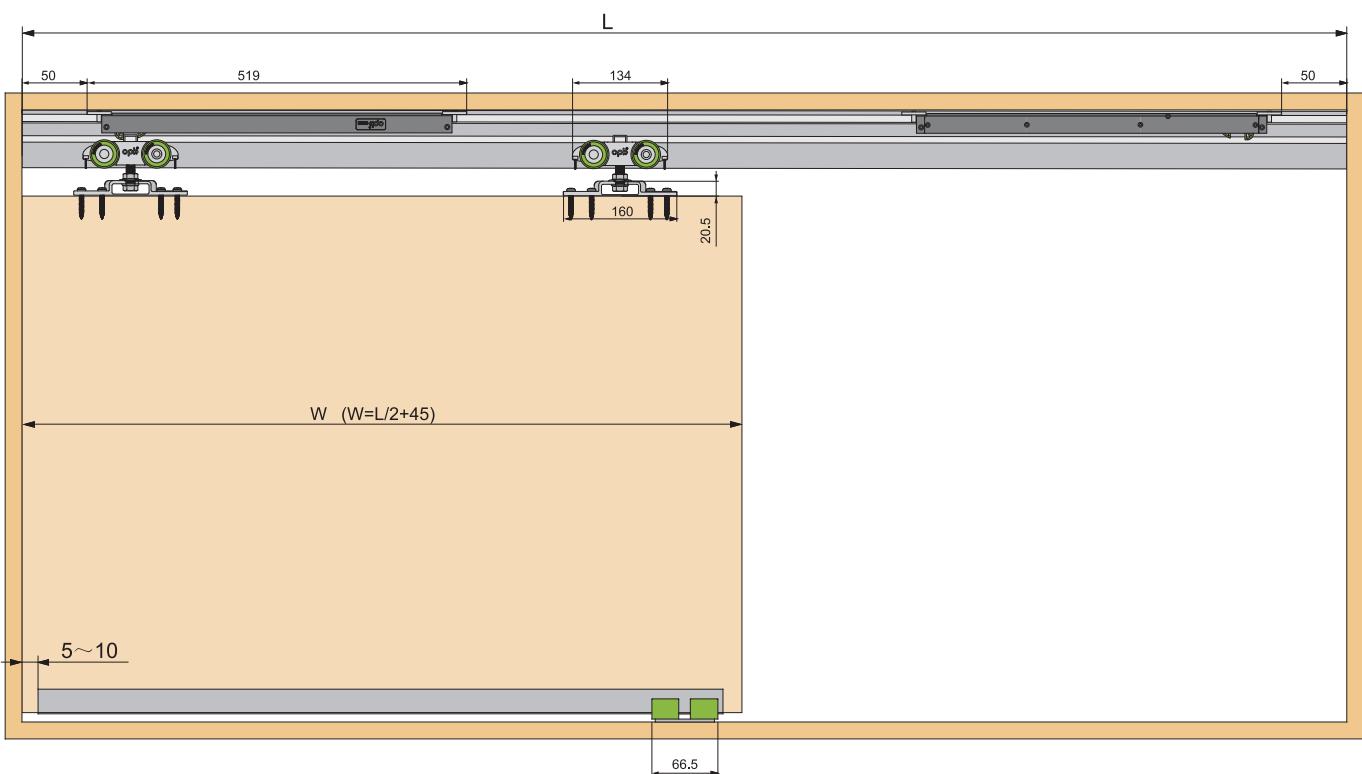

带阻尼 With Damping

# 长征2号吊滑轮(1#万向轮)

SATELLITE 2 HANGING SLIDING ROLLER

## 产品特点：

- 加强钢圈设计，承重能力强；
- 开口式挂板设计，安装快捷方便；
- 可单独使用，也可多扇折叠使用；
- 采用高精级滑轮，滑动平稳、顺畅、静音。

## 技术概要：

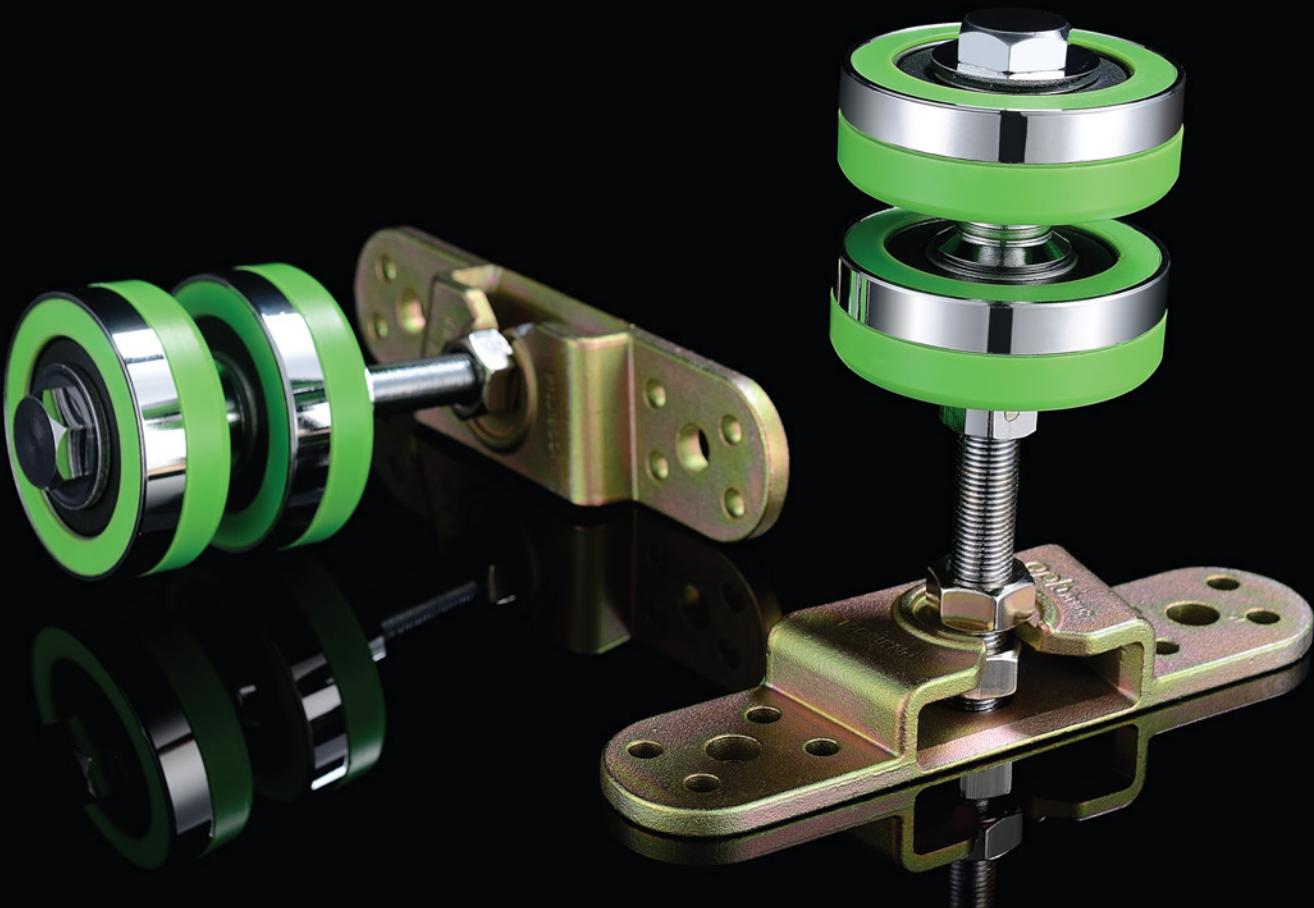
- 适用于：单扇和双扇木质推拉门
- 调节性能：门扇安装高度可调
- 门重：单扇门≤200kg

## Product Features:

- Reinforce steel ring design , strong loading capacity.
- Open type hanging plate design, quick and easy installation.
- Can be used alone, also can be used for folding door.
- High precision grade roller, stable, smooth and quiet sliding.

## Technical Points:

- **Application:** Single and double wood sliding door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 200kg



## 长征2号套装(适用于单扇门)

SATELLITE 2 COMPLETE SET (Application to single door)

≤200kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤200	≥300	CN12224A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				标准配置(单扇门) Standard Configuration (Single Door)
上滑轮组件 Upper Roller Assembly			CN12224A	2
770吊轨 Upper Track 770			XJA124	选择合适长度 Select Suitable Length

## 轨道型材

## RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
XJA124 770吊轨 Under Track 770		铝合金 Aluminium Alloy	4.35	银白 Silver	5500	XJA124AT00550

# 长征3号吊滑轮(2#万向轮)

## SATELLITE 3 HANGING SLIDING ROLLER

### 产品特点:

- 加强钢圈设计，承重能力强；
- 开口式挂板设计，安装快捷方便；
- 可单独使用，也可多扇折叠使用；
- 采用高精级滑轮，滑动平稳、顺畅、静音。

### 技术概要:

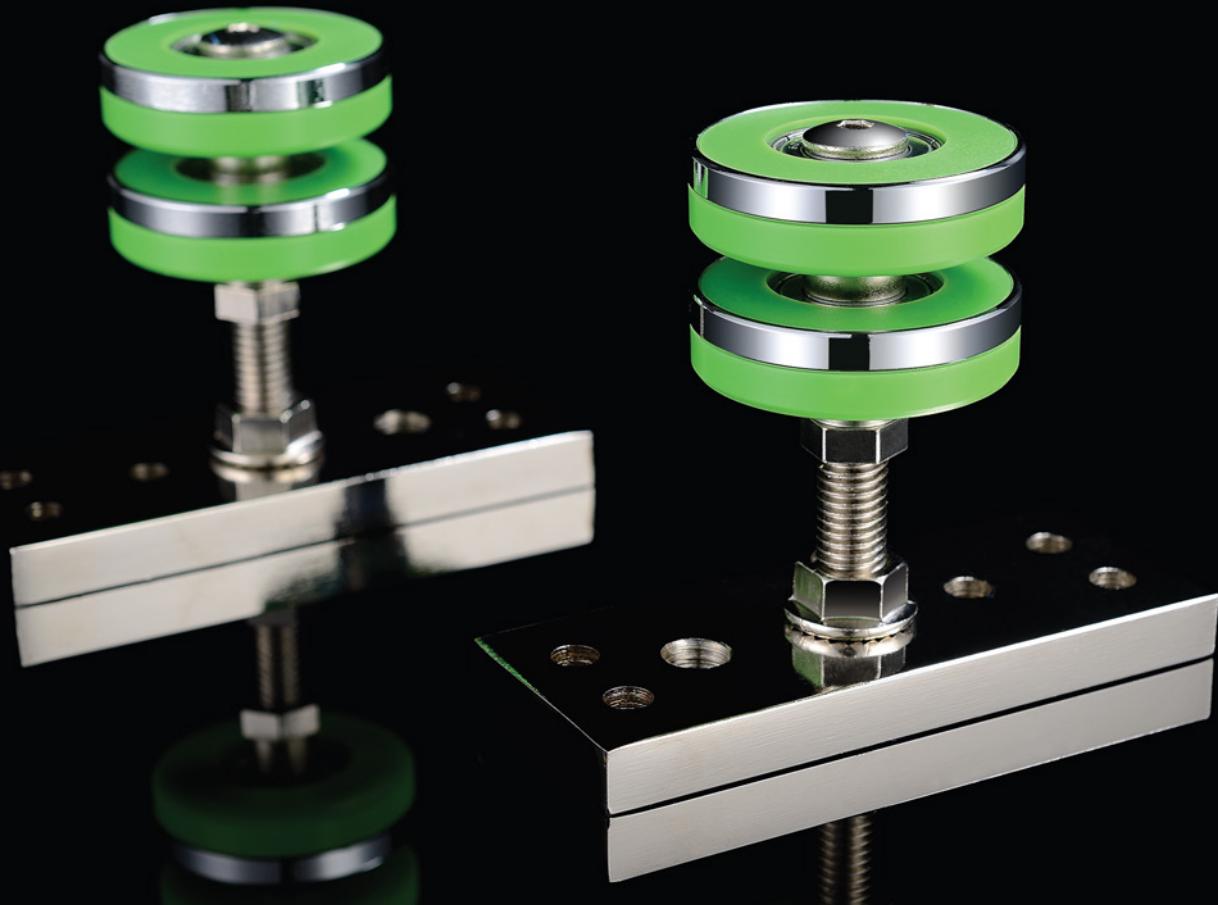
- **适用于：**单扇和双扇木质推拉门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤100kg

### Product Features:

- Reinforce steel ring design , strong loading capacity.
- Open type hanging plate design, quick and easy installation.
- Can be used alone, also can be used for folding door.
- High precision grade roller, stable, smooth and quiet sliding.

### Technical Points:

- **Application:** Single and double wood sliding door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 100kg





## 长征3号套装(适用于单扇门)

SATELLITE 3 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤100	≥300	CN12225A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration (Single Door)	
上滑轮组件 Upper Roller Assembly			CN12225A	2
769吊轨 Upper Track 769			XJA121	选择合适长度 Select Suitable Length

## 轨道型材

## RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
XJA121 769吊轨 Under Track 769		铝合金 Aluminium Alloy	1.788	银白 Silver	2000	XJA121AT00200
					3000	XJA121AT00300
					4000	XJA121AT00400
					6000	XJA121AT00600

# 长征4号吊滑轮(3#万向轮)

## SATELLITE 4 HANGING SLIDING ROLLER

### 产品特点:

- 加强钢圈设计，承重能力强；
- 开口式挂板设计，安装快捷方便；
- 可单独使用，也可多扇折叠使用；
- 采用高精级滑轮，滑动平稳、顺畅、静音。

### 技术概要:

- 适用于：单扇和双扇木质推拉门
- 调节性能：门扇安装高度可调
- 门重：单扇门≤70kg

### Product Features:

- Reinforce steel ring design , strong loading capacity.
- Open type hanging plate design, quick and easy installation.
- Can be used alone, also can be used for folding door.
- High precision grade roller, stable, smooth and quiet sliding.

### Technical Points:

- **Application:** Single and double wood sliding door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 70kg



## 长征4号套装(适用于单扇门)

SATELLITE 4 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤70	≥300	CN12226A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration (Single Door)	
上滑轮组件 Upper Roller Assembly			CN12226A	2
768吊轨 Upper Track 768			XJA120	选择合适长度 Select Suitable Length

## 轨道型材

## RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
XJA120 768吊轨 Under Track 768		铝合金 Aluminium Alloy	1.25	银白 Silver	2000	XJA120AT00200
					3000	XJA120AT00300
					4000	XJA120AT00400
					6000	XJA120AT00600



# 长征5号吊滑轮

## SATELLITE 5 HANGING SLIDING ROLLER

### 产品特点：

- 平衡轮结构设计，受力均匀，寿命长。
  - 滑动平稳、顺畅。
- 

### Product Features:

- Patent design of balance roller structure, equal force, long service time.
  - Smooth, stable sliding.
- 

### 技术概要：

- **适用于：**单扇和双扇木质推拉门、玻璃推拉门、铝边框门
  - **调节性能：**门扇安装高度可调
  - **门重：**单扇门≤60kg
- 

### Technical Points:

- **Application:** Single and double wood sliding door, glass sliding door, aluminum door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 60kg





## 长征5号木门1套装(适用于单扇门)

SATELLITE 5 WOOD DOOR 1 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤60	≥300	CG12201B

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration (Single Door)
上滑轮 Upper Roller		TG001A	2
限位件 Stopper		TN001J	2
7字挂盒-A "L" Hanging Plate A		TN110A	2
下定位 Under Roller		TN107A	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1



## 长征5号木门2套装(适用于单扇门)

SATELLITE 5 WOOD DOOR 2 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤60	≥300	CG12201A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration (Single Door)
上滑轮 Upper Roller		TG001A	2
限位件 Stopper		TN001J	2
升降挂盒-E Adjustable Hanging Plate E		TN031D	2
下定位 Under Roller		TN107A	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1



## 长征5号木门3套装(适用于单扇门)

SATELLITE 5 WOOD DOOR 3 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤60	≥300	CG12201C

## 标准配置

### STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration (Single Door)
上滑轮 Upper Roller		TG001A	2
限位件 Stopper		TN001J	2
U型吊体挂板 "U" Hanging Plate		TN060B	2
下定位 Under Roller		TN107A	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1



## 长征5号玻璃门4套装(适用于单扇门)

SATELLITE 5 GLASS DOOR 4 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤60	≥300	CG12283A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration (Single Door)
上滑轮 Upper Roller		TG001A	2
限位件 Stopper		TN001J	2
玻璃挂架4 Glass Clamp 4		TN343A	2
下定位 Under Roller		TN336A	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1

## 长征5号玻璃门5套装(适用于单扇门)

SATELLITE 5 GLASS DOOR 5 COMPLETE SET (Application to single door)



产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 Without Damping		≤60	≥300	CG12283B




## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration (Single Door)
上滑轮 Upper Roller		TG001A	2
限位件 Stopper		TN001J	2
玻璃挂架5 Glass Clamp 5		TN340A	2
下定位 Under Roller		TN336A	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1

## 长征5号轨道型材

## SATELLITE 5 RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
<b>XNA076</b> 上轨道 Under Track		铝合金 Aluminium Alloy	1.275	香槟 Champagne	2000	XNA076BT00200
					3000	XNA076BT00300
					4000	XNA076BT00400
					6000	XNA076BT00600
<b>XGA006</b> 装饰盖 (选配) Decorative Cover (Optional)		铝合金 Aluminium Alloy	0.48	香槟 Champagne	2000	XGA006BT00200
					3000	XGA006BT00300
					4000	XGA006BT00400
					6000	XGA006BT00600
<b>XNA003</b> 下轨道 (仅适用于木门) Under Track (Application to wood door)		铝合金 Aluminium Alloy	0.18	香槟 Champagne	2000	XNA003BJ00200
					3000	XNA003BJ00300
					4000	XNA003BJ00400
					6000	XNA003BJ00600

## 轨道型材订购说明：

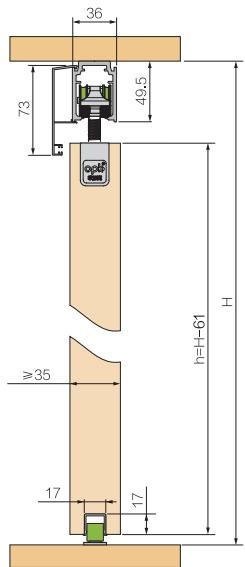
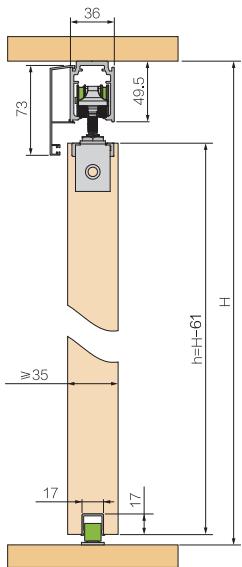
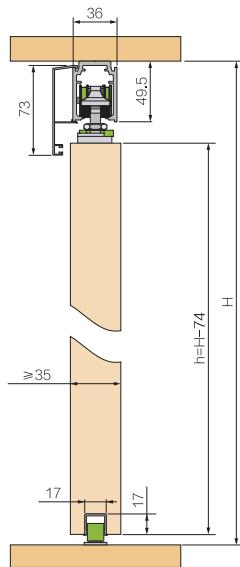
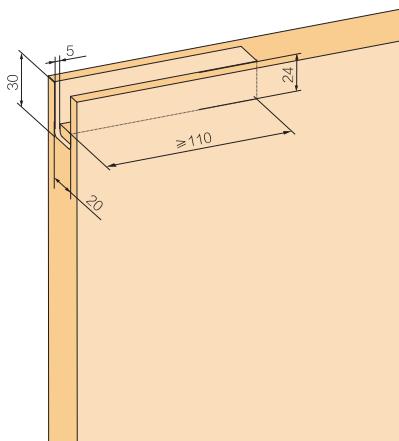
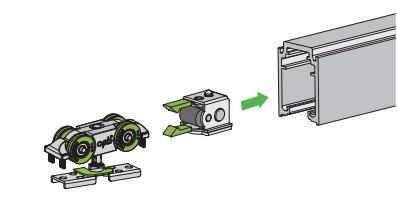
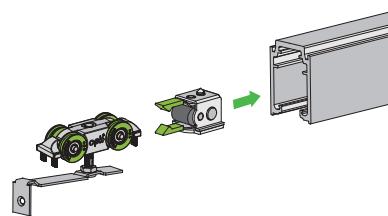
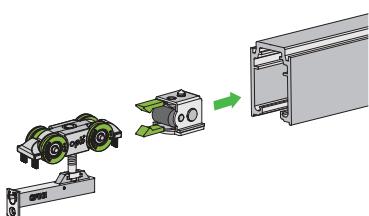
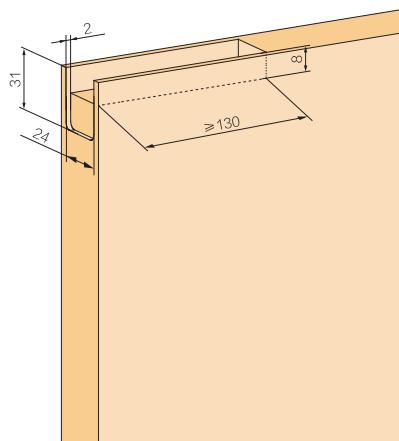
1. 下单时请注明轨道型号或详细描述轨道名称、长度以及数量，如“XNA076BT00200×10支”或“长征5号上轨道2米10支”；
2. 请根据实际需要选择适合的轨道长度。

Track profiles ordering instructions:

1. When place an order, please indicate the track type or detailed track description-name, length and quantity, such as “XNA076BT00200×10pcs” or “SATELLITE 5 upper track 2meter/pc 10pcs”.
2. Select suitable length of track according to the actual need.


## 长征5号木门安装参数

## SATELLITE 5 WOOD DOOR INSTALLATION PARAMETERS


木门1  
Wood Door 1木门2  
Wood Door 2木门3  
Wood Door 3门板开槽尺寸  
Door Panel Grooving Size门板开槽尺寸  
Door Panel Grooving Size

## 长征5号木门安装参数

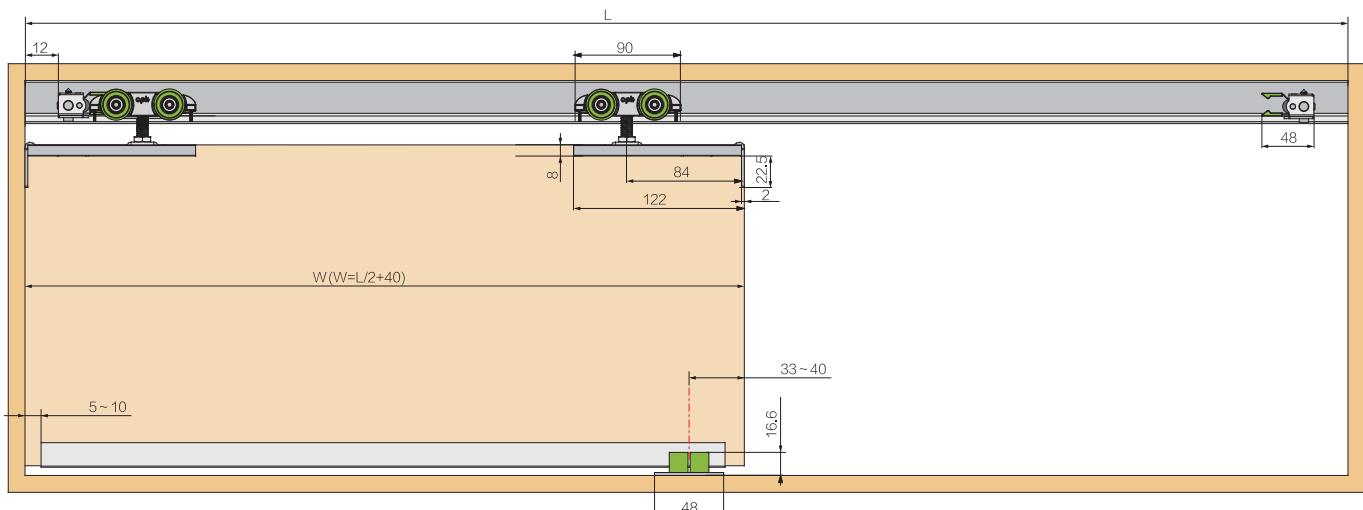
### SATELLITE 5 WOOD DOOR INSTALLATION PARAMETERS









木门1 Wood Door 1

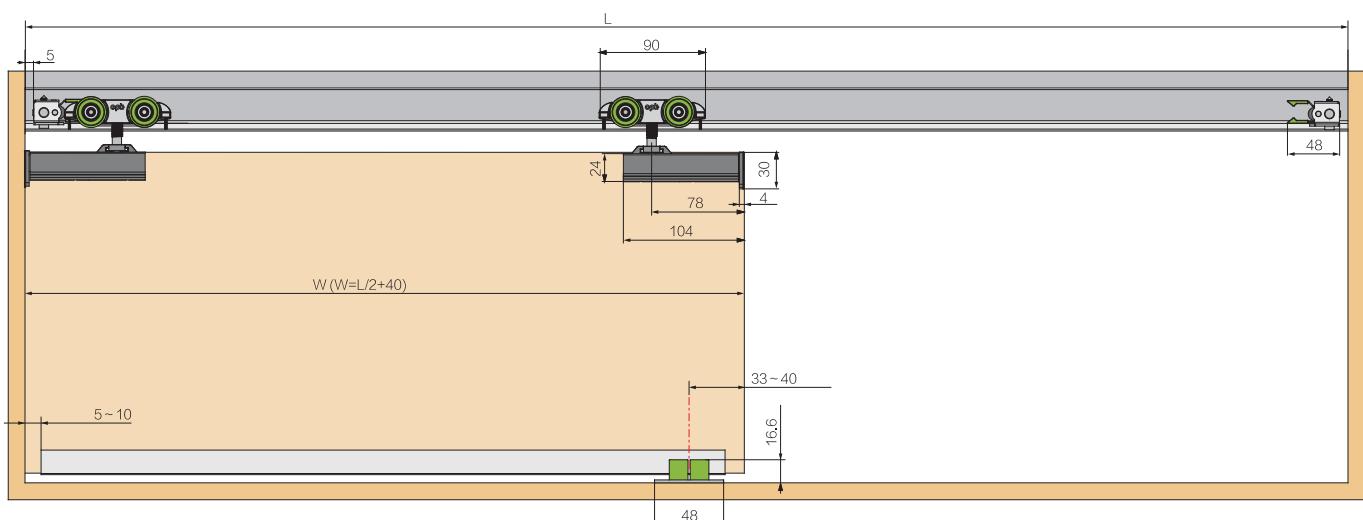

木门2 Wood Door 2

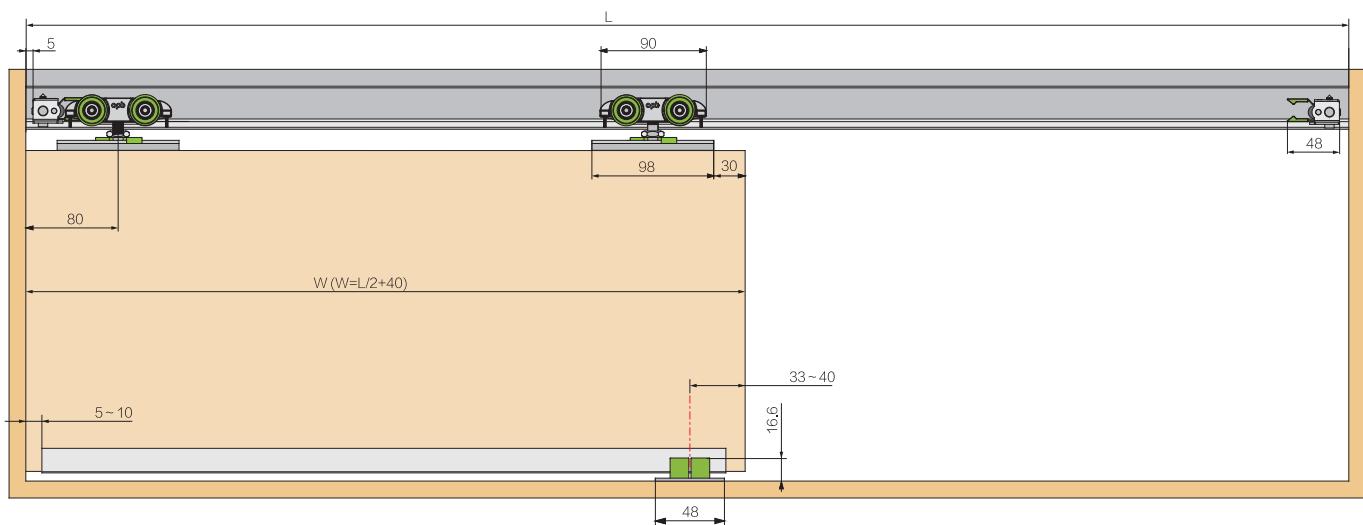


木门3 Wood Door 3

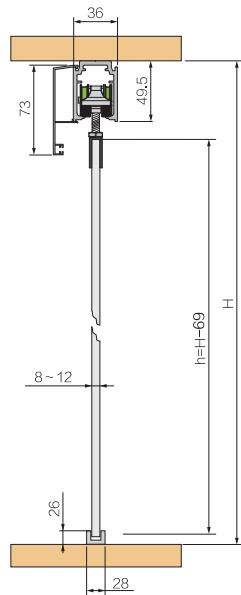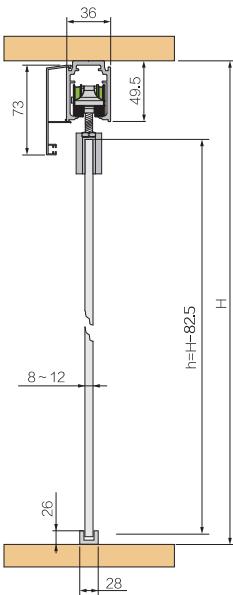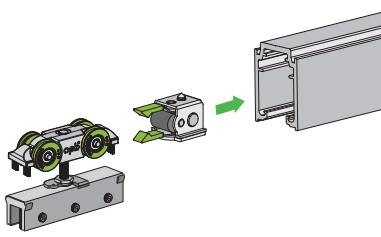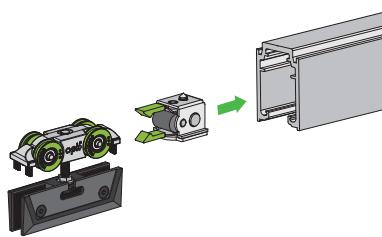
**长征5号玻璃门安装参数****SATELLITE 5 GLASS DOOR INSTALLATION PARAMETERS****玻璃门4**  
Glass Door 4**玻璃门5**  
Glass Door 5**玻璃开孔尺寸**  
Glass Hole Size**无需开孔**  
no need to hole

## 长征5号玻璃门安装参数
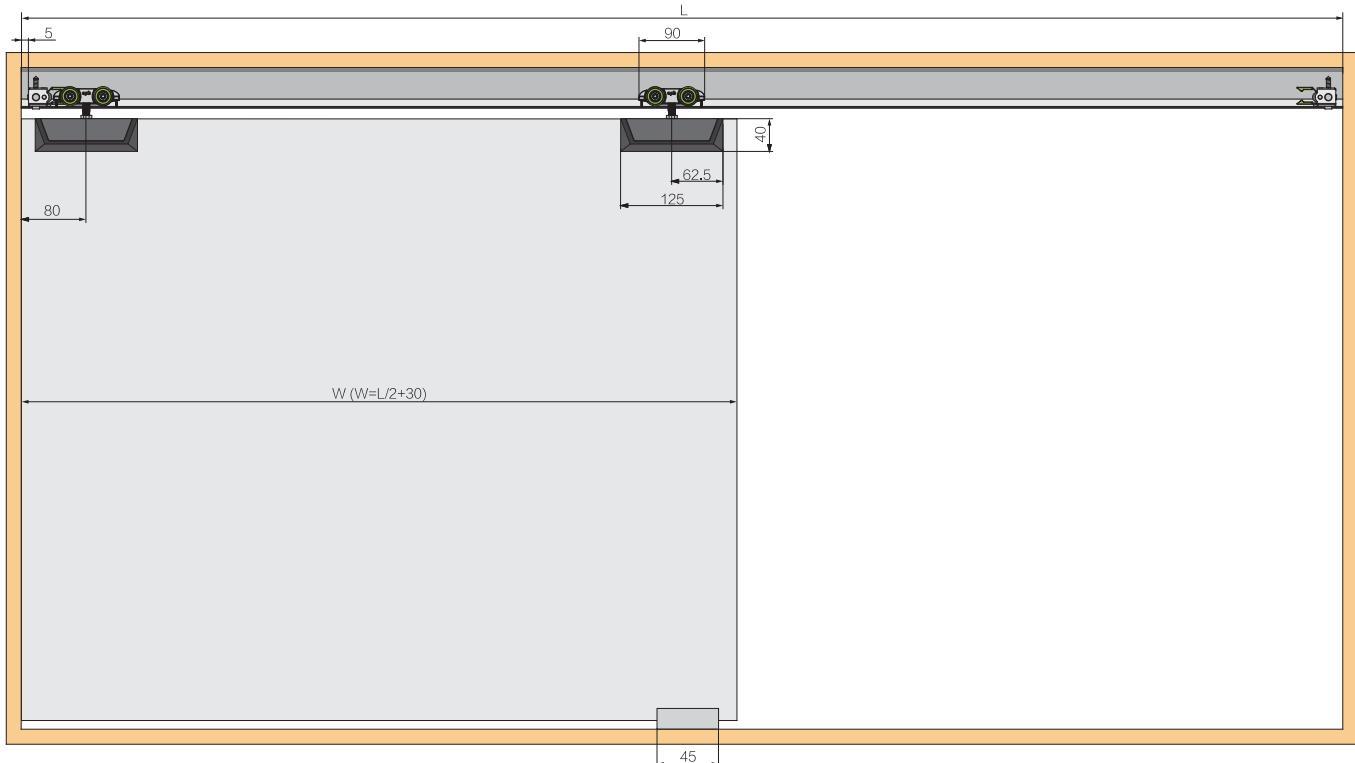
## SATELLITE 5 GLASS DOOR INSTALLATION PARAMETERS



玻璃门4 Glass Door 4

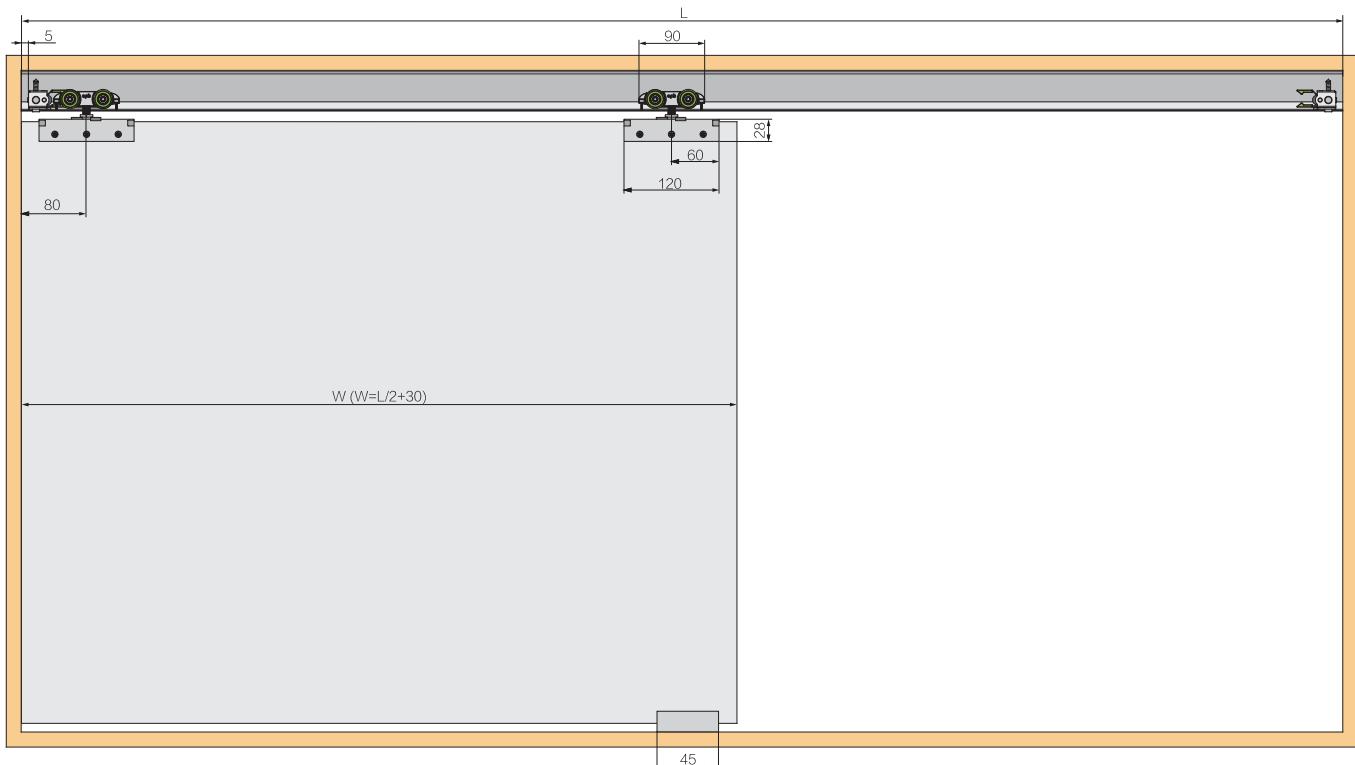

玻璃门5 Glass Door 5



# 长征6号吊滑轮

## SATELLITE 6 HANGING SLIDING ROLLER

### 产品特点：

- 双管阻尼专利设计，更强的缓冲效果；
- 自动挂钩设计，脱钩自动复位功能；
- 减震设计采用进口定制改性工程塑料，有效缓解门板跳动；
- 采用高精级滑轮，滑动平稳、顺畅、静音。

### Product Features:

- Patent design of double-tube damper, stronger damping effect
- Hook automatic hanging design, Auto-reset while unlock.
- Seismic mitigation design: Adopt imported customized modified engineering plastics, reduce door panel bounce efficiently.
- High precision grade roller, stable, smooth and quiet sliding.

### 技术概要：

- **适用于：**单扇和双扇木质推拉门、玻璃推拉门、铝边框门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤80kg

### Technical Points:

- **Application:** Single and double wood sliding door, glass sliding door, aluminum door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 80kg





## 长征6号木门1套装(适用于单扇门)

SATELLITE 6 WOOD DOOR 1 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤80	≥580	CG12242A
双阻尼 Double Damper		≤80	≥900	CG12247A

## 标准配置

### STANDARD CONFIGURATION

配件描述 Fitting Description			单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TG002A	1	2
上滑轮 Upper Roller		TG001A	1	—
阻尼限位件 Damper Stopper		TN048B	1	2
限位件 Stopper		TN001J	1	—
7字挂盒-B "L" Hanging Plate B		TN110B	2	2
下定位 Under Roller		TN107A	1	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1



## 长征6号木门2套装(适用于单扇门)

SATELLITE 6 WOOD DOOR 2 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤80	≥580	CG12241A
双阻尼 Double Damper		≤80	≥900	CG12202A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TG002A	1	2
上滑轮 Upper Roller		TG001A	1	—
阻尼限位件 Damper Stopper		TN048B	1	2
限位件 Stopper		TN001J	1	—
升降挂盒-E Adjustable Hanging Plate E		TN031B	2	2
下定位 Under Roller		TN107A	1	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1



## 长征6号木门3套装(适用于单扇门)

SATELLITE 6 WOOD DOOR 3 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤80	≥580	CG12243A
双阻尼 Double Damper		≤80	≥900	CG12248A

## 标准配置

### STANDARD CONFIGURATION

配件描述 Fitting Description			单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TG002A	1	2
上滑轮 Upper Roller		TG001A	1	—
阻尼限位件 Damper Stopper		TN048B	1	2
限位件 Stopper		TN001J	1	—
U型吊体挂板 "U" Hanging Plate		TN060A	2	2
下定位 Under Roller		TN107A	1	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1



## 长征6号玻璃门4套装(适用于单扇门)

SATELLITE 6 GLASS DOOR 4 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤80	≥580	CG12284A
双阻尼 Double Damper		≤80	≥900	CG12285A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description		单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TG002A	1
上滑轮 Upper Roller		TG001A	1
阻尼限位件 Damper Stopper		TN048B	1
限位件 Stopper		TN001J	1
玻璃挂架4 Glass Clamp 4		TN343B	2
下定位 Under Roller		TN336A	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1



## 长征6号玻璃门5套装(适用于单扇门)

SATELLITE 6 GLASS DOOR 5 COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤80	≥580	CG12284B
双阻尼 Double Damper		≤80	≥900	CG12285B

## 标准配置



## STANDARD CONFIGURATION

配件描述 Fitting Description		单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TG002A	1
上滑轮 Upper Roller		TG001A	1
阻尼限位件 Damper Stopper		TN048B	1
限位件 Stopper		TN001J	1
玻璃挂架5 Glass Clamp 5		TN340B	2
下定位 Under Roller		TN336A	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1

≤80kg




## 长征6号窄边框铝门套装 (适用于单扇门)

SATELLITE 6 SLIM ALUMINUM FRAME COMPLETE SET (Application to single door)




产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤80	≥580	CG12284C
双阻尼 Double Damper		≤80	≥900	CG12285C

## 标准配置






## STANDARD CONFIGURATION

配件描述 Fitting Description			单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TG002A	1	2
上滑轮 Upper Roller		TG001A	1	—
阻尼限位件 Damper Stopper		TN048B	1	2
限位件 Stopper		TN001J	1	—
窄边框升降挂盒 Adjustable Hanging Plate For Slim Aluminum Frame		TN427A	2	2
下定位 Under Roller		TN358A	1	1
上轨道 Upper Track		XNA076	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
上下横 Upper&bottom frame		XNA162	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
竖框 Vertical frame		XNA163	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
装饰盖 Decorative cover		XNA164	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1

## 长征6号轨道型材 SATELLITE 6 RACK PROFILE













产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
<b>XNA076</b> 上轨道 Under Track		铝合金 Aluminium Alloy	1.275	香槟 Champagne	2000	XNA076BT00200
					3000	XNA076BT00300
					4000	XNA076BT00400
					6000	XNA076BT00600
<b>XGA006</b> 装饰盖 (选配) Decorative Cover (Optional)		铝合金 Aluminium Alloy	0.48	香槟 Champagne	2000	XGA006BT00200
					3000	XGA006BT00300
					4000	XGA006BT00400
					6000	XGA006BT00600
<b>XNA003</b> 下轨道 (仅适用于木门) Under Track (Application to wood door)		铝合金 Aluminium Alloy	0.18	香槟 Champagne	2000	XNA003BJ00200
					3000	XNA003BJ00300
					4000	XNA003BJ00400
					6000	XNA003BJ00600

## 窄边框材料 NARROW BORDER MATERIAL




<b>XNA162</b> 上下横 Upper&bottom frame		<b>XNA163</b> 竖框 Vertical frame		<b>XNA164</b> 装饰盖 Decorative cover	
<b>XLC002BZ</b> 胶条 Adhesive tape		<b>PJC96050</b> 角码 Vertical frame		<b>TN547A</b> 拉手 Handle	

## 长征6号木门安装参数
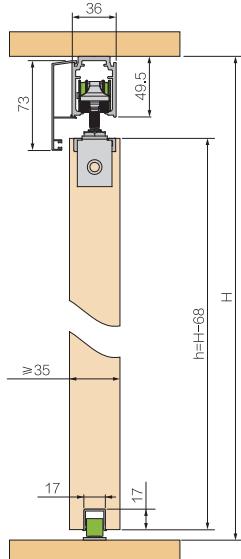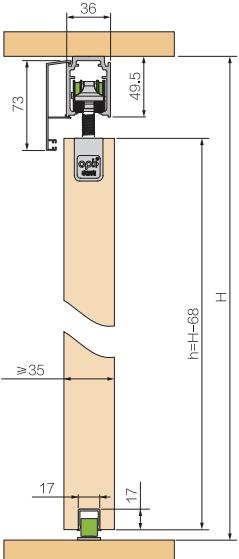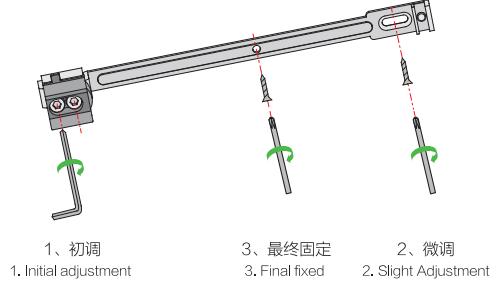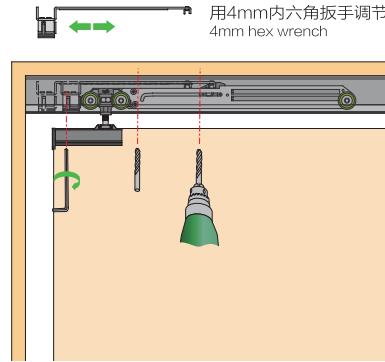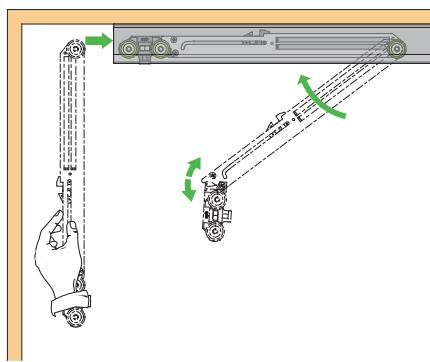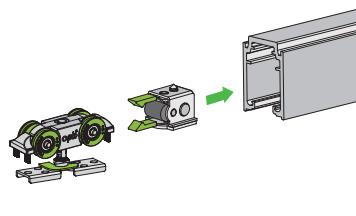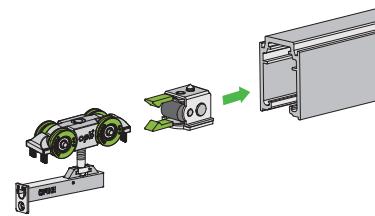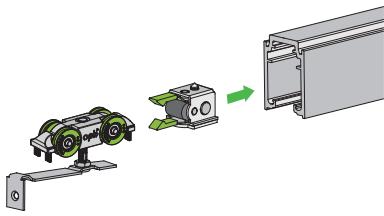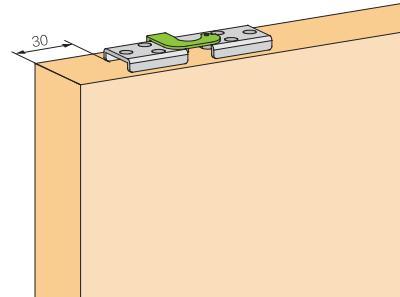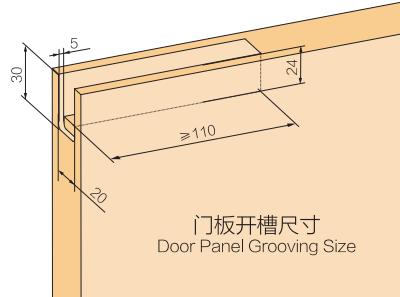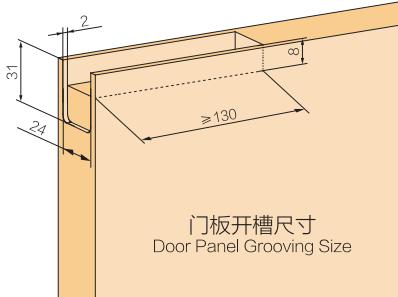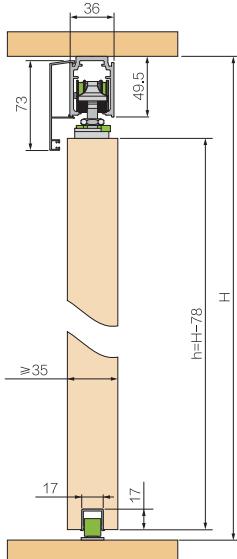
## SATELLITE 6 WOOD DOOR INSTALLATION PARAMETERS









木门1  
Wood Door 1木门2  
Wood Door 2木门3  
Wood Door 3

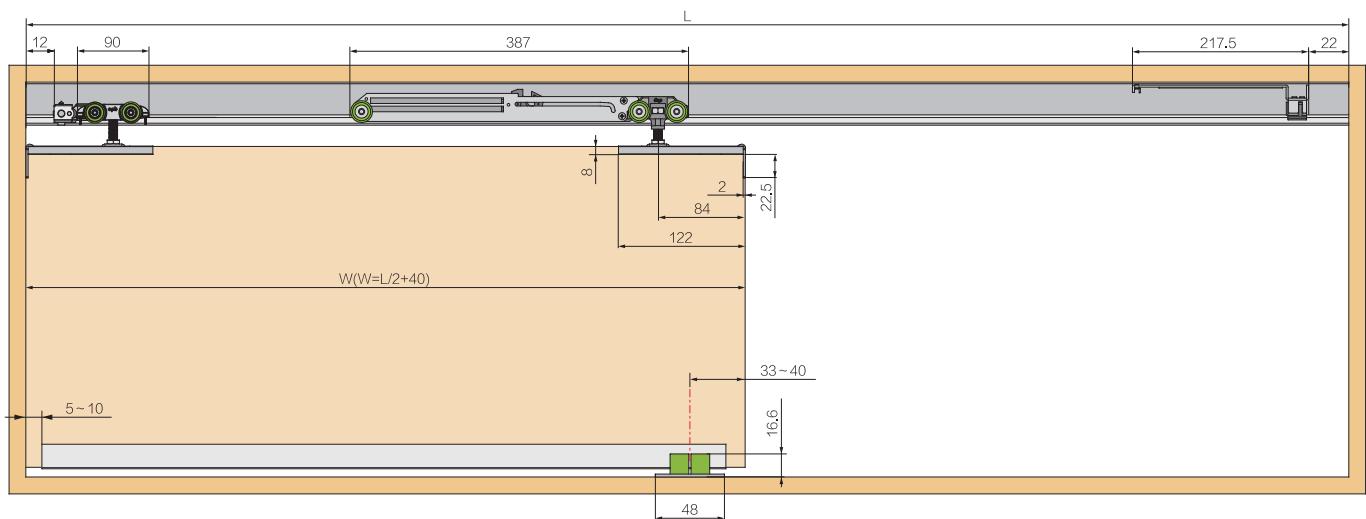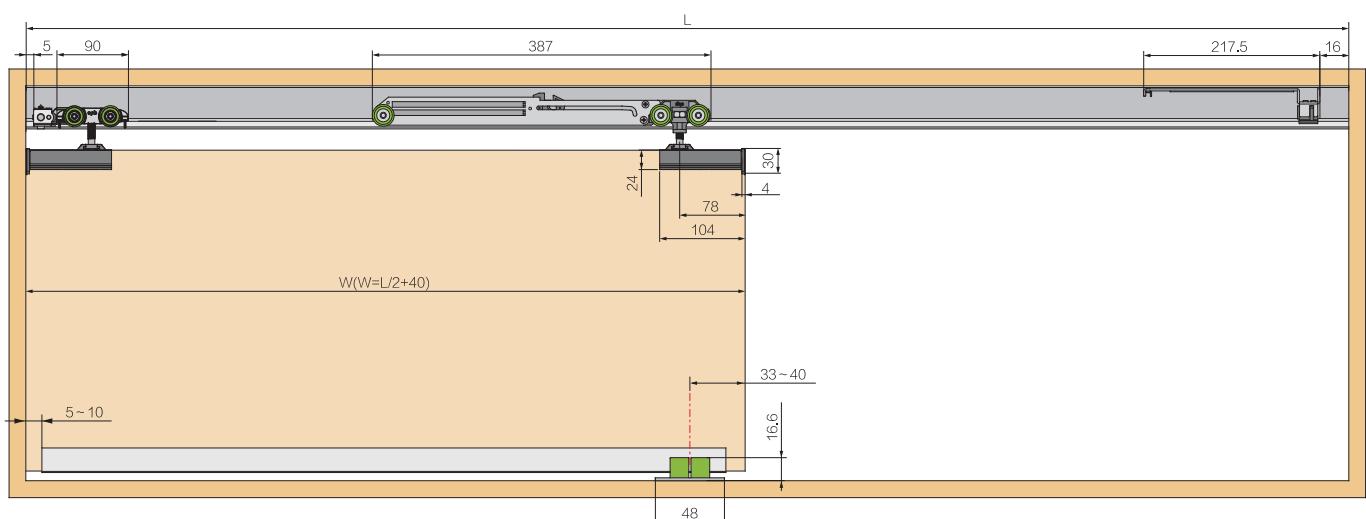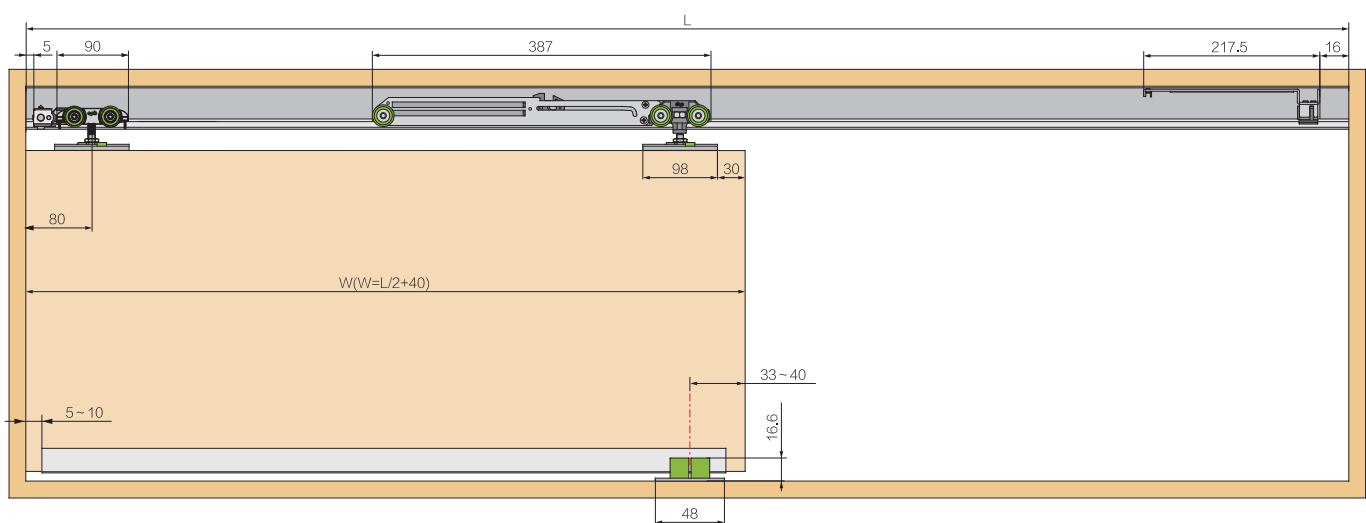待调节完成后，再按1、2、3顺序打孔固定阻尼限位件  
After adjustment ending, please make hole drilling in sequence from 1 to 3, then fix the damp stopper.



**长征6号木门安装参数****SATELLITE 6 WOOD DOOR INSTALLATION PARAMETERS****木门1 Wood Door 1****木门2 Wood Door 2****木门3 Wood Door 3**

## 长征6号玻璃门安装参数
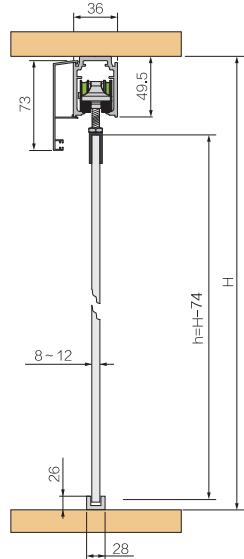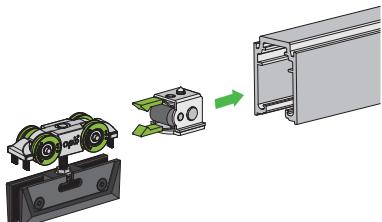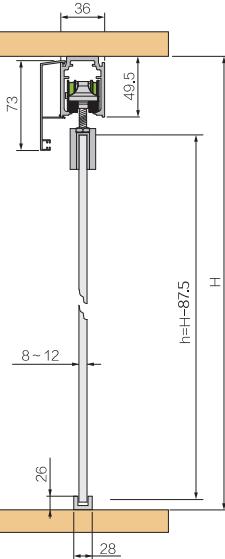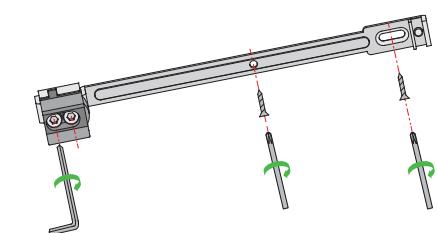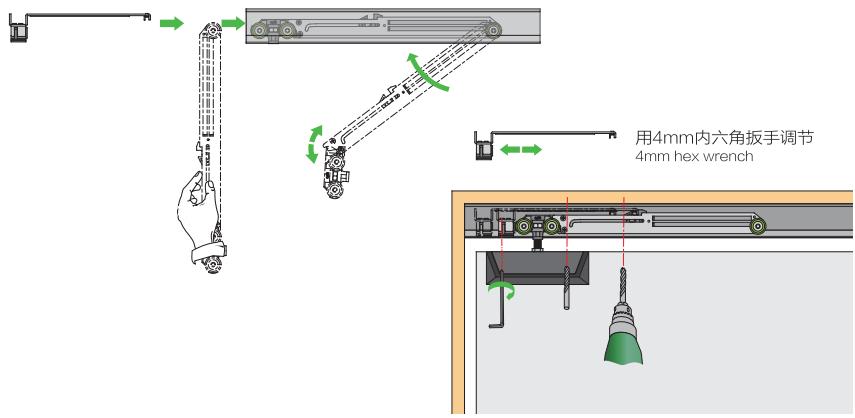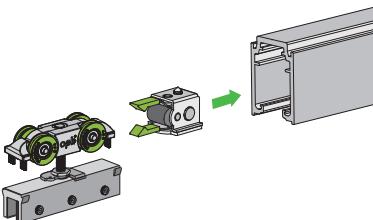
## SATELLITE 6 GLASS DOOR INSTALLATION PARAMETERS



玻璃门4  
Glass Door 4玻璃开孔尺寸  
Glass Hole Size玻璃门5  
Glass Door 5无需开孔  
no need to hole

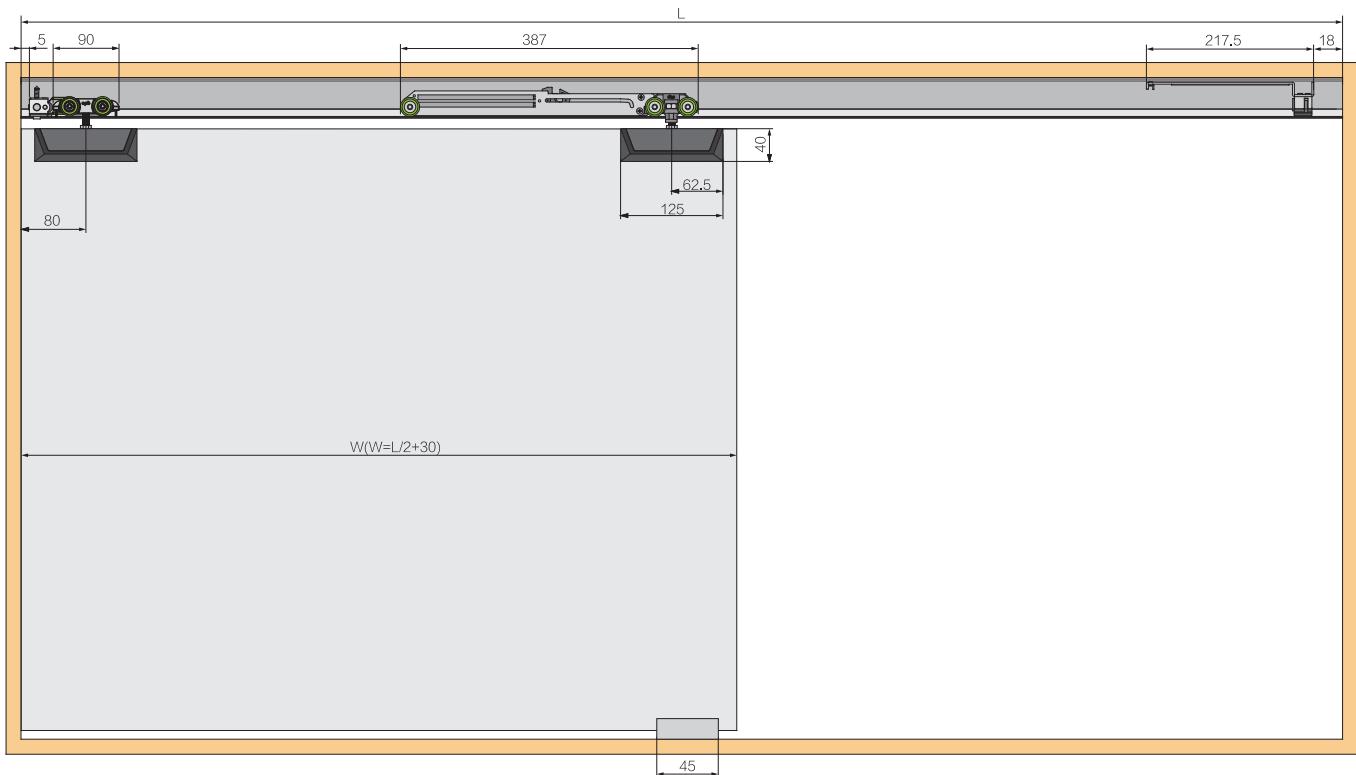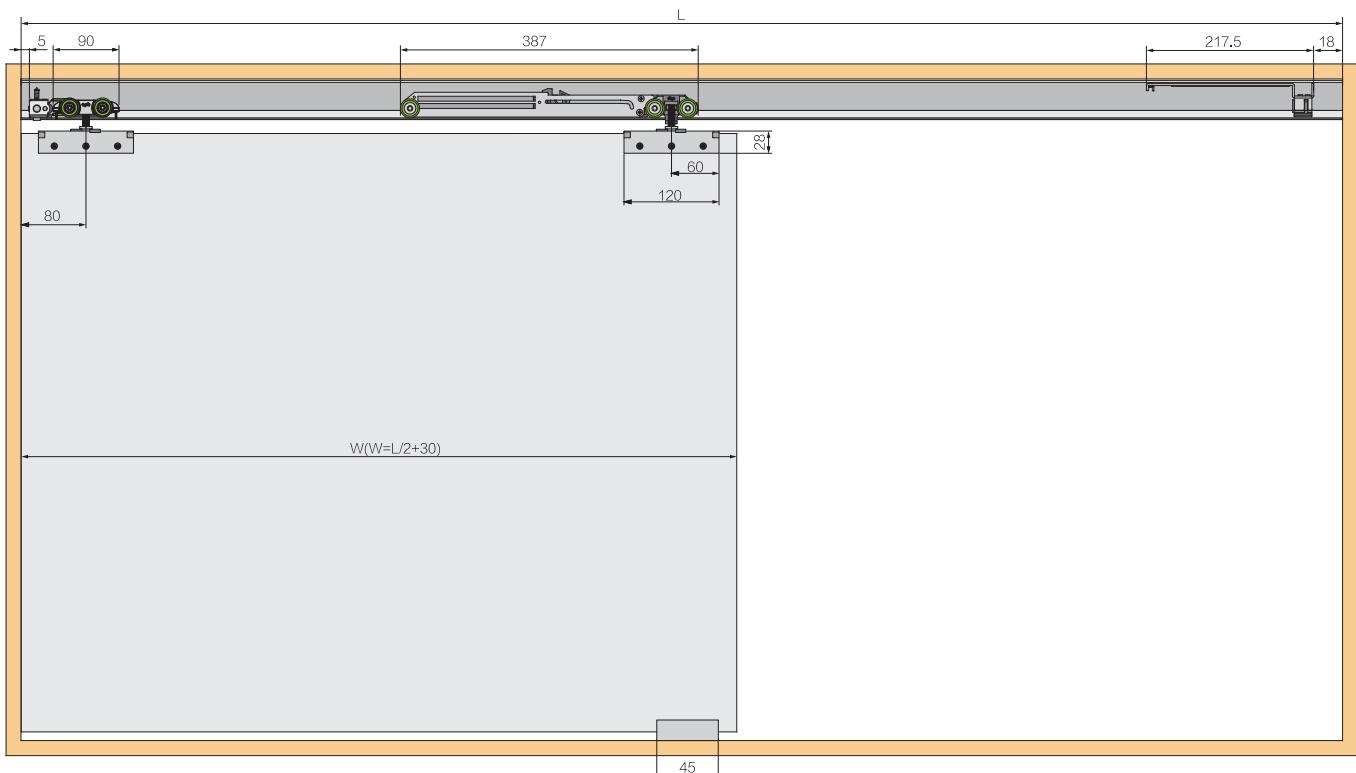待调节完成后, 再按1、2、3顺序打孔固定阻尼限位件  
After adjustment ending, please make hole drilling in sequence from 1 to 3, then fix the damp stopper.



**长征6号玻璃门安装参数****SATELLITE 6 GLASS DOOR INSTALLATION PARAMETERS****玻璃门4 Glass Door 4****玻璃门5 Glass Door 5**

## 长征6号窄边框铝门安装参数
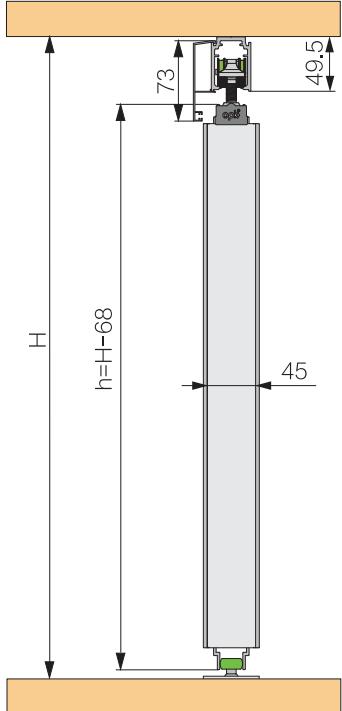
## SATELLITE 6 SLIM ALUMINUM FRAME INSTALLATION PARAMETERS



XNA162  
上下横  
Upper&bottom frame

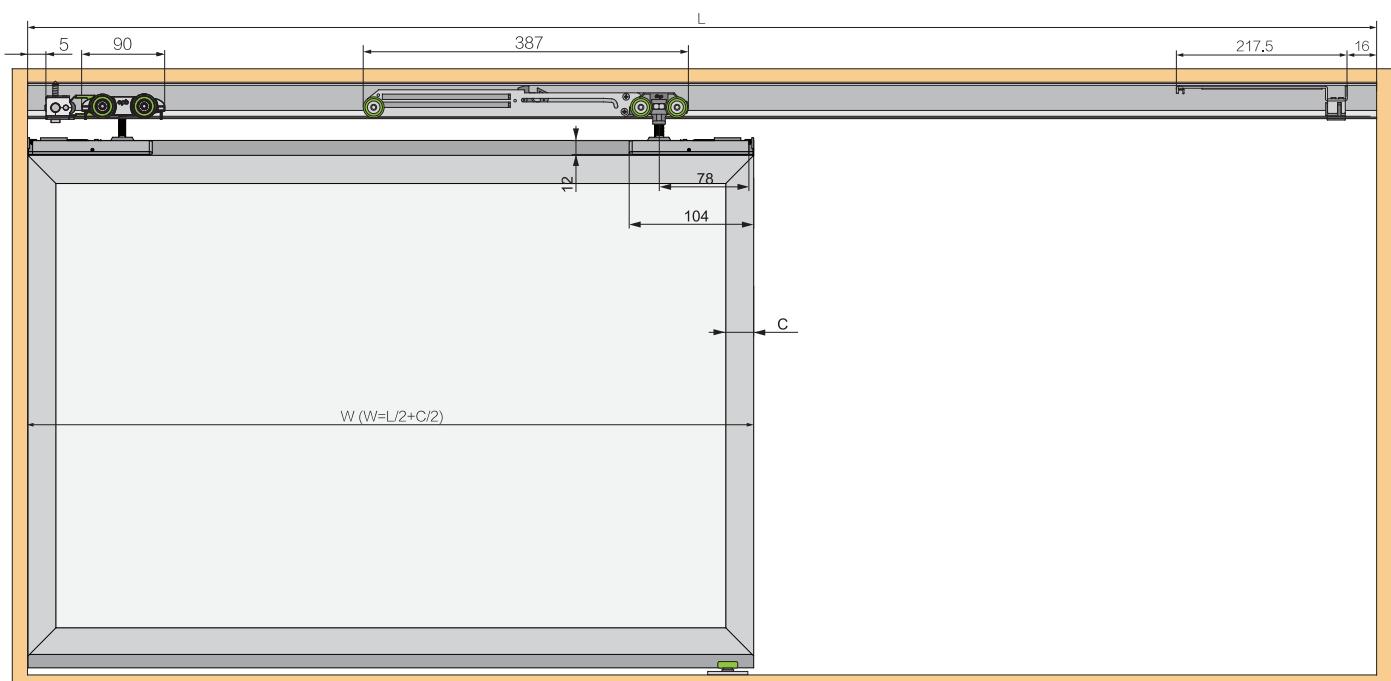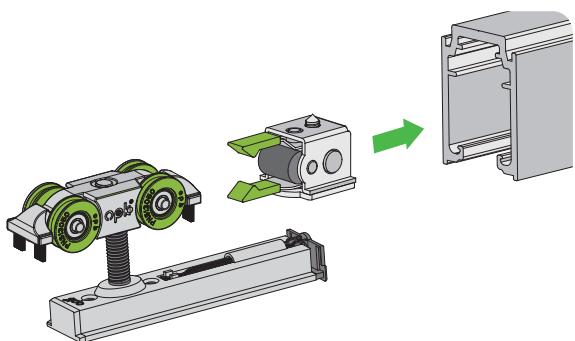

# 长征8号吊滑轮

## SATELLITE 8 HANGING SLIDING ROLLER

### 产品特点：

- 自动挂钩设计，脱钩自动复位功能；
- 减震设计，采用进口定制改性工程塑料，有效缓解门板跳动；
- 采用高精级滑轮，滑动平稳、顺畅、静音。

### 技术概要：

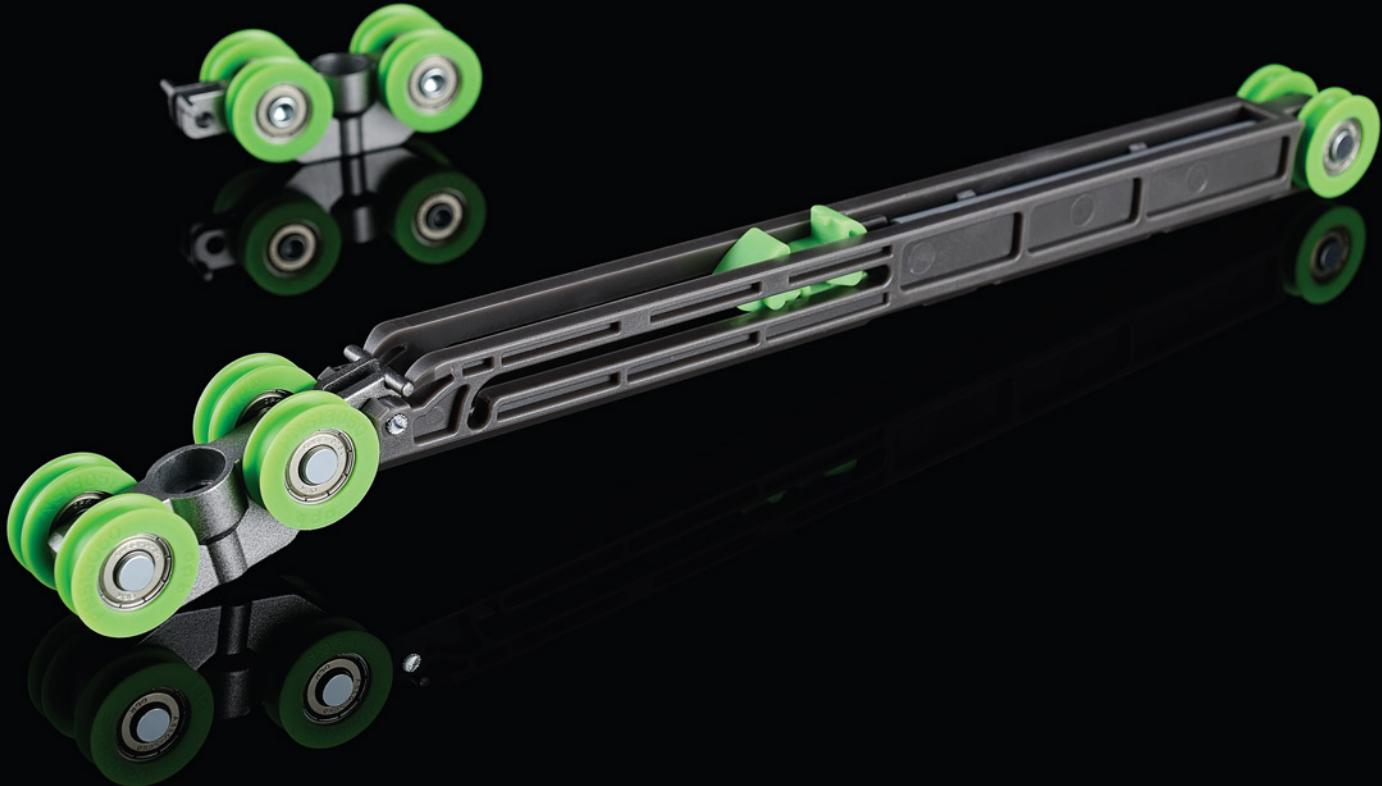
- 适用于：单扇和双扇木质推拉门、玻璃推拉门、铝边框门
- 调节性能：门扇安装高度可调
- 门重：单扇门≤70kg

### Product Features:

- Hook automatic hanging design, Auto-reset while unlock.
- Seismic mitigation design: Adopt imported customized modified engineering plastics, reduce door panel bounce efficiently.
- High precision grade roller, stable, smooth and quiet sliding.

### Technical Points:

- **Application:** Single and double wood sliding door, glass sliding door, aluminum door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 70kg



## 长征8号木门2套装(适用于单扇门)

SATELLITE 8 WOOD DOOR 2 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	≤70	≥520	CG12228A
		轻型 Light-duty	≤40	≥520	CG12228B
双阻尼 Double Damper		重型 Heavy-duty	≤70	≥790	CG12233A
		轻型 Light-duty	≤40	≥790	CG12233B

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TG006A	1	2
		轻型 Light-duty	TG006B		
上滑轮 Upper Roller		TG007A		1	—
阻尼限位件 Damper Stopper		TN171A		1	2
限位件 Stopper		TN074A		1	—
升降挂盒-E Adjustable Hanging Plate E		TN031D		2	2
下定位 Under Roller		TN107A		1	1
上轨道 Upper Track		XNA077		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	1

## 长征8号木门3套装(适用于单扇门)

SATELLITE 8 WOOD DOOR 3 COMPLETE SET (Application to single door)

轻型  
≤40kg重型  
≤70kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	≤70	≥520	CG12229A
		轻型 Light-duty	≤40	≥520	CG12229B
双阻尼 Double Damper		重型 Heavy-duty	≤70	≥790	CG12234A
		轻型 Light-duty	≤40	≥790	CG12234B

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TG006A	1	2
		轻型 Light-duty	TG006B		
上滑轮 Upper Roller		TG007A		1	—
阻尼限位件 Damper Stopper		TN171A		1	2
限位件 Stopper		TN074A		1	—
U型吊体挂板 "U" Hanging Plate		TN060C		2	2
下定位 Under Roller		TN107A		1	1
上轨道 Upper Track		XNA077		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	1

## 长征8号玻璃门4套装(适用于单扇门)

SATELLITE 8 GLASS DOOR 4 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	≤70	≥520	CG12273A
		轻型 Light-duty	≤40	≥520	CG12273B
双阻尼 Double Damper		重型 Heavy-duty	≤70	≥790	CG12275A
		轻型 Light-duty	≤40	≥790	CG12275B

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TG006A	1	2
		轻型 Light-duty	TG006B		
上滑轮 Upper Roller		TG007A		1	—
阻尼限位件 Damper Stopper		TN171A		1	2
限位件 Stopper		TN074A		1	—
玻璃挂架4 Glass Clamp 4		TN343A		2	2
下定位 Upper Roller		TN336A		1	1
上轨道 Under Track		XNA077		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	1

## 长征8号玻璃门5套装(适用于单扇门)

SATELLITE 8 GLASS DOOR 5 COMPLETE SET (Application to single door)

轻型  
≤40kg重型  
≤70kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	≤70	≥520	CG12274A
		轻型 Light-duty	≤40	≥520	CG12274B
双阻尼 Double Damper		重型 Heavy-duty	≤70	≥790	CG12276A
		轻型 Light-duty	≤40	≥790	CG12276B

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TG006A	1	2
		轻型 Light-duty	TG006B		
上滑轮 Upper Roller		TG007A		1	—
阻尼限位件 Damper Stopper		TN171A		1	2
限位件 Stopper		TN074A		1	—
玻璃挂架5 Glass Clamp 5		TN340A		2	2
下定位 Under Roller		TN336A		1	1
上轨道 Upper Track		XNA077		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	1

## 长征8号窄边框铝门套装 (适用于单扇门)

SATELLITE 8 SLIM ALUMINUM FRAME COMPLETE SET (Application to single door)




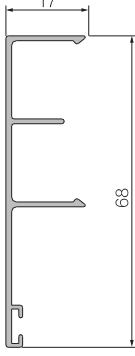

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	≤70	≥520	CG12302C
		轻型 Light-duty	≤40	≥520	CG12302A
双阻尼 Double Damper		重型 Heavy-duty	≤70	≥790	CG12303C
		轻型 Light-duty	≤40	≥790	CG12303A

## 标准配置







## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TG006A	1	2
		轻型 Light-duty	TG006B		
上滑轮 Upper Roller		TG007A		1	—
阻尼限位件 Damper Stopper		TN171A		1	2
限位件 Stopper		TN074A		1	—
窄边框升降挂盒 Adjustable Hanging Plate For Slim Aluminum Frame		TN427A		2	2
下定位 Under Roller		TN358A		1	1
上轨道 Upper Track		XNA077		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
上下横 Upper&bottom frame		XNA162		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
竖框 Vertical frame		XNA163		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
装饰盖 Decorative cover		XNA164		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	1

## 长征8号轨道型材 SATELLITE 8 RACK PROFILE







产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
<b>XNA077</b> 上轨道 Upper Track		铝合金 Aluminium Alloy	0.90	香槟 Champagne	2000	XNA077BV00200
					3000	XNA077BV00300
					4000	XNA077BV00400
					6000	XNA077BV00600
<b>XNA078</b> 装饰盖 (选配) Decorative Cover (Optional)		铝合金 Aluminium Alloy	0.36	香槟 Champagne	2000	XNA078BV00200
					3000	XNA078BV00300
					4000	XNA078BV00400
					6000	XNA078BV00600
<b>XNA003</b> 下轨道 (仅适用于木门) Under Track (Application to wood door)		铝合金 Aluminium Alloy	0.18	香槟 Champagne	2000	XNA003BJ00200
					3000	XNA003BJ00300
					4000	XNA003BJ00400
					6000	XNA003BJ00600



## 窄边框材料 NARROW BORDER MATERIAL

<b>XNA162</b> 上下横 Upper&bottom frame		<b>XNA163</b> 竖框 Vertical frame		<b>XNA164</b> 装饰盖 Decorative cover	
<b>XLC002BZ</b> 胶条 Adhesive tape		<b>PJC96050</b> 角码 Vertical frame		<b>TN547A</b> 拉手 Handle	

## 长征8号木门安装参数

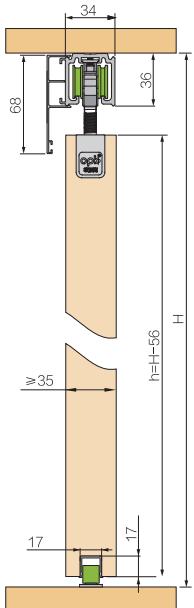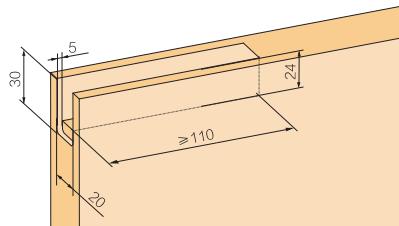
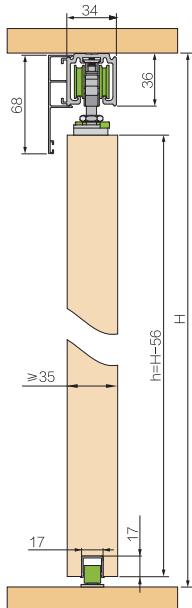
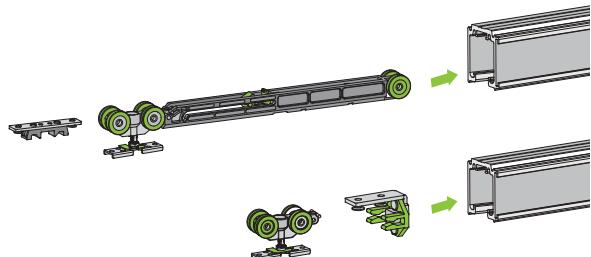
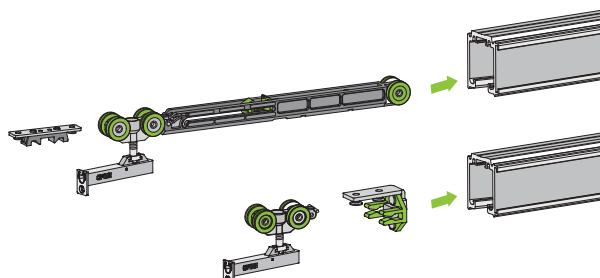
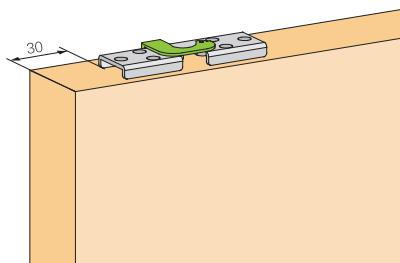
## SATELLITE 8 WOOD DOOR INSTALLATION PARAMETERS



木门1  
Wood Door 1木门2  
Wood Door 2门板开槽尺寸  
Door Panel Grooving Size

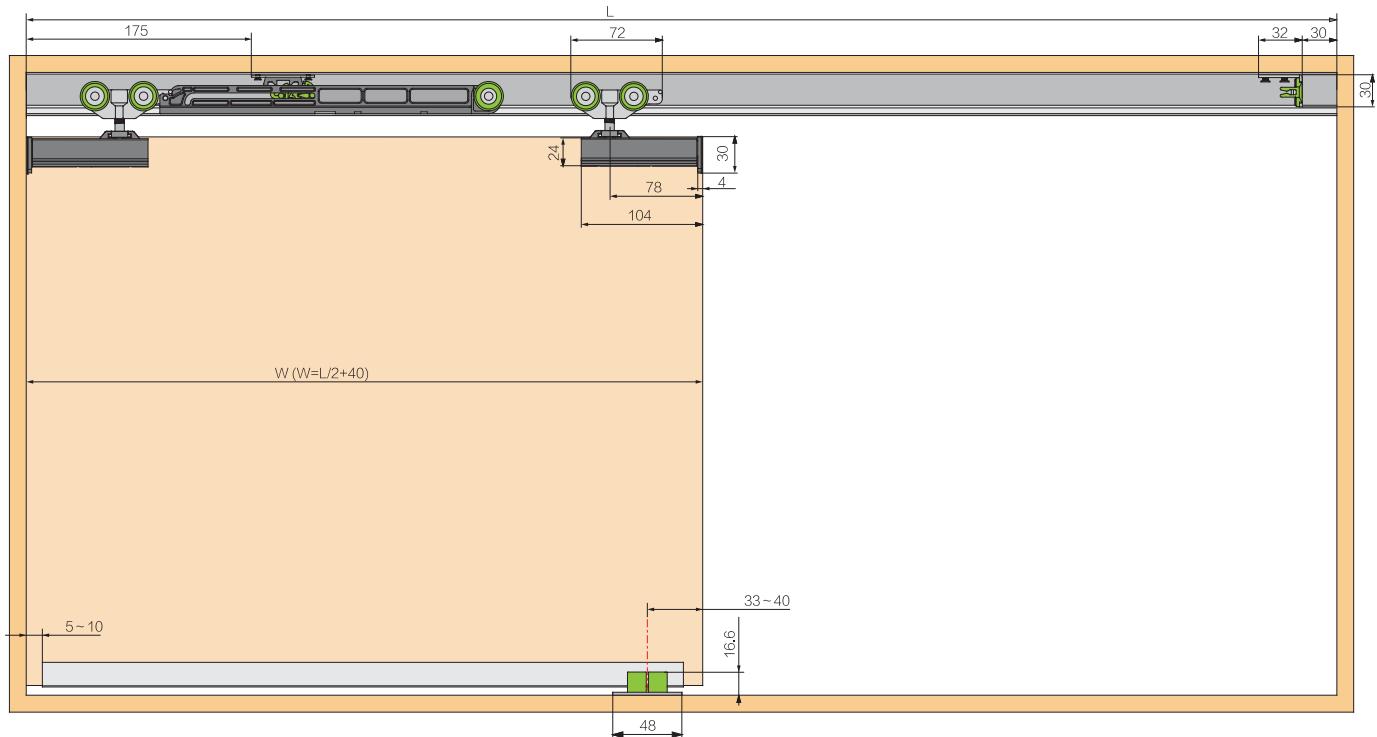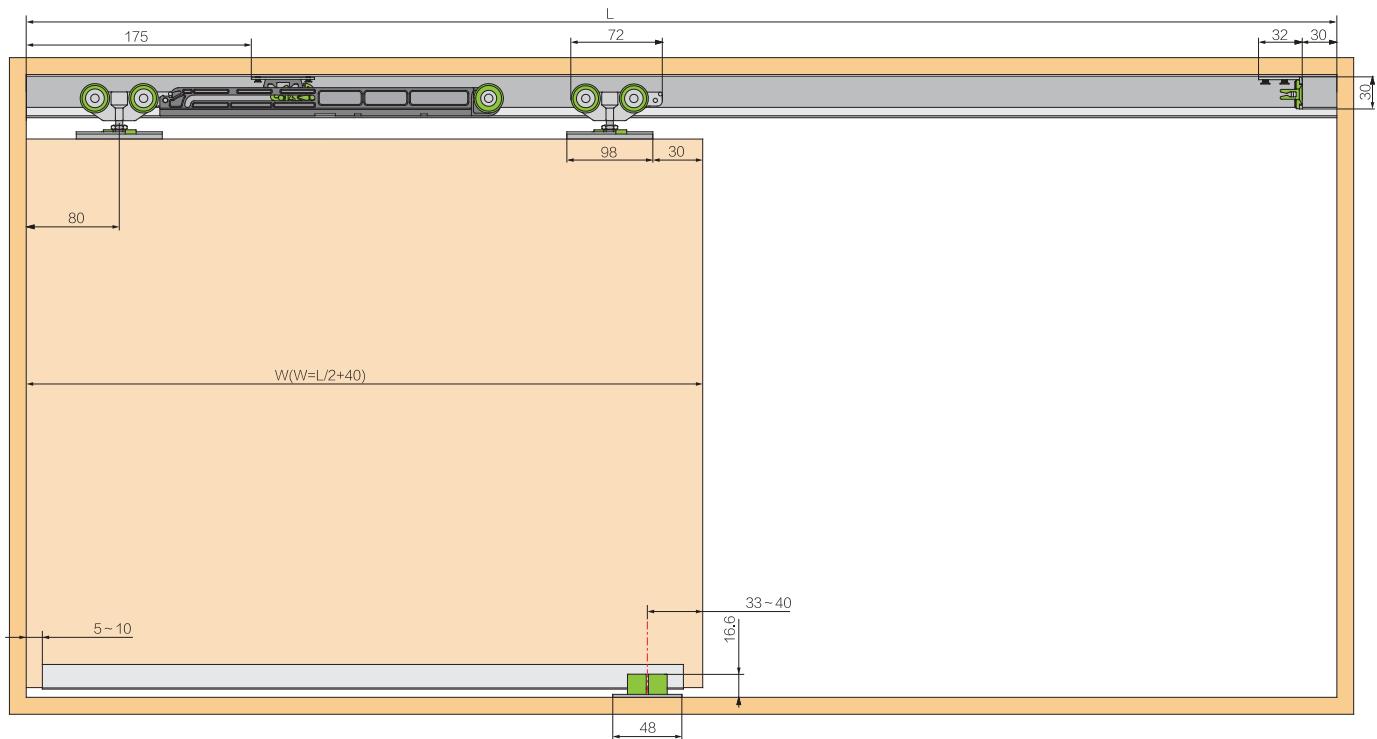**长征8号木门安装参数****SATELLITE 8 WOOD DOOR INSTALLATION PARAMETERS****木门2 Wood Door 2****木门3 Wood Door 3**

## 长征8号玻璃门安装参数

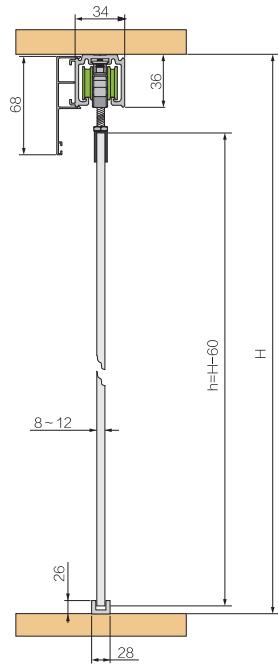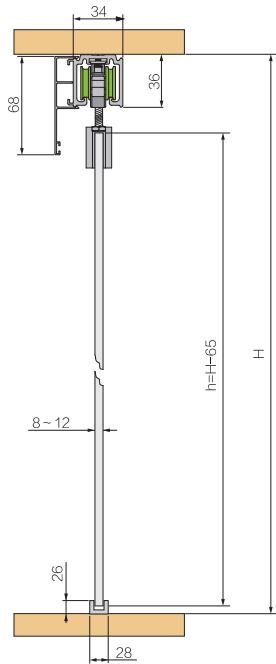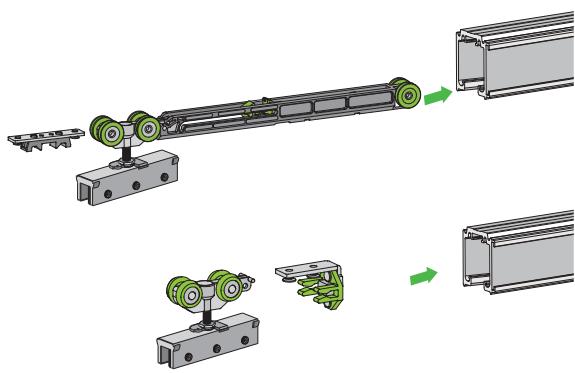
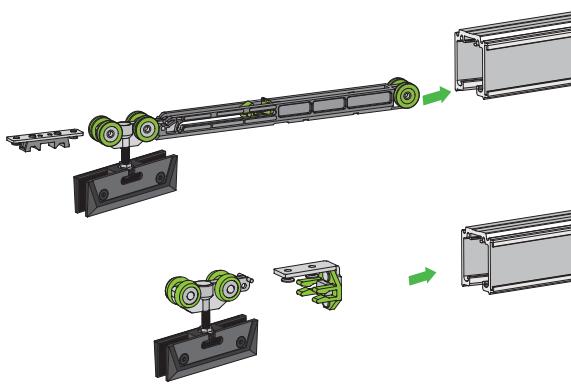
## SATELLITE 8 GLASS DOOR INSTALLATION PARAMETERS

玻璃门4  
Glass Door 4玻璃门5  
Glass Door 5玻璃开孔尺寸  
Glass Hole Size无需开孔  
no need to hole

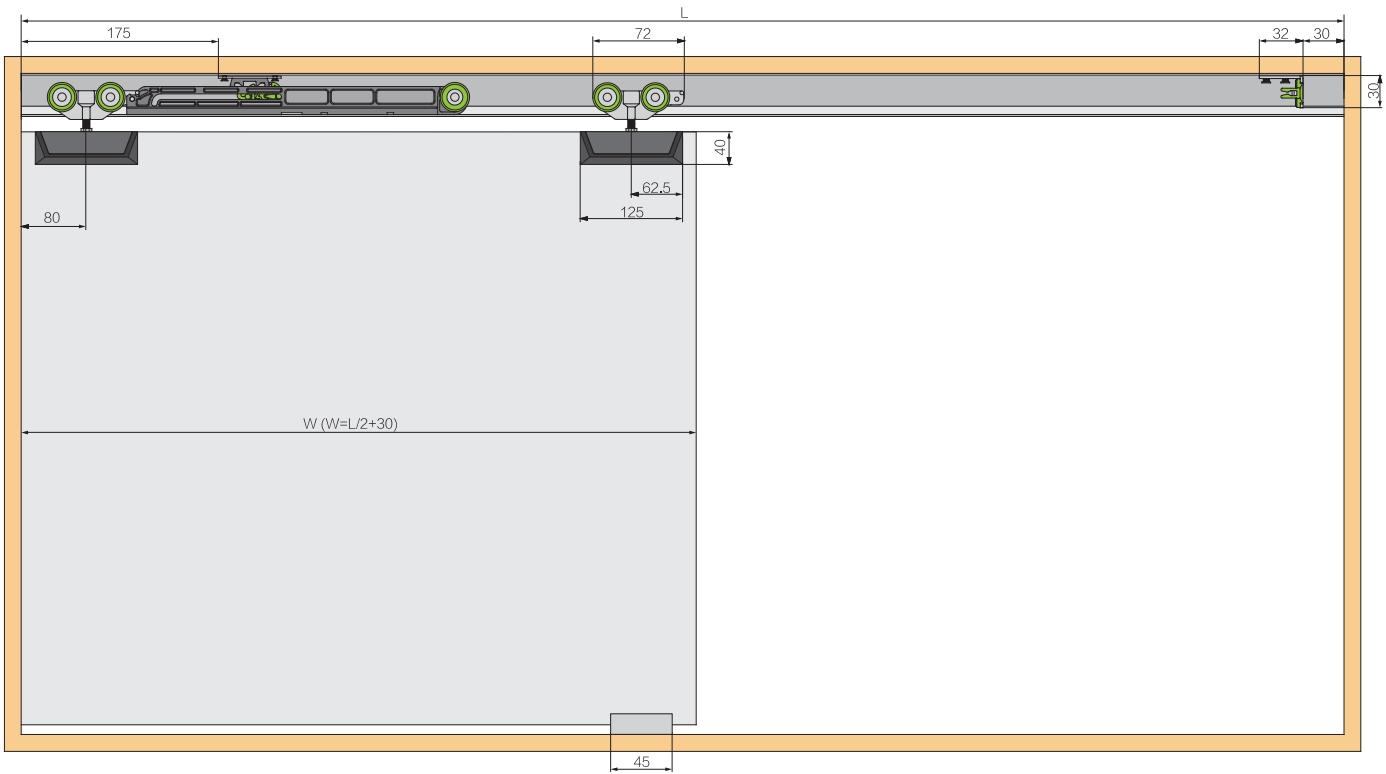
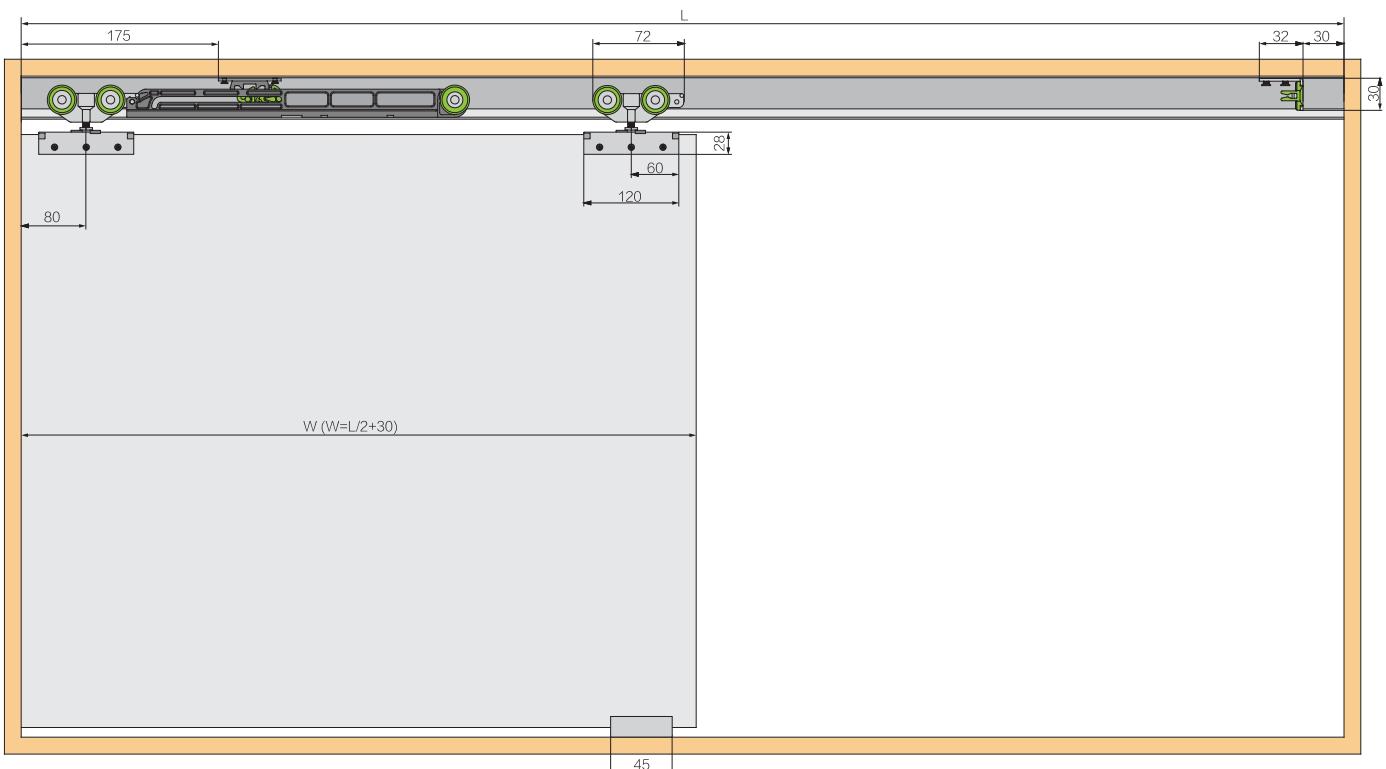
**长征8号玻璃门安装参数****SATELLITE 8 GLASS DOOR INSTALLATION PARAMETERS****玻璃门4 Glass Door 4****玻璃门5 Glass Door 5**

## 长征8号窄边框铝门安装参数
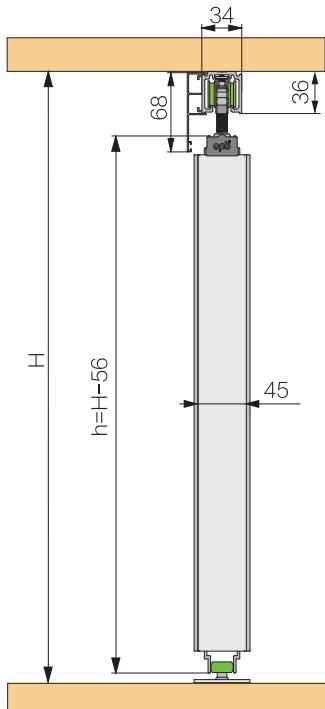
## SATELLITE 8 SLIM ALUMINUM FRAME INSTALLATION PARAMETERS



XNA162  
上下横  
Upper&bottom frame

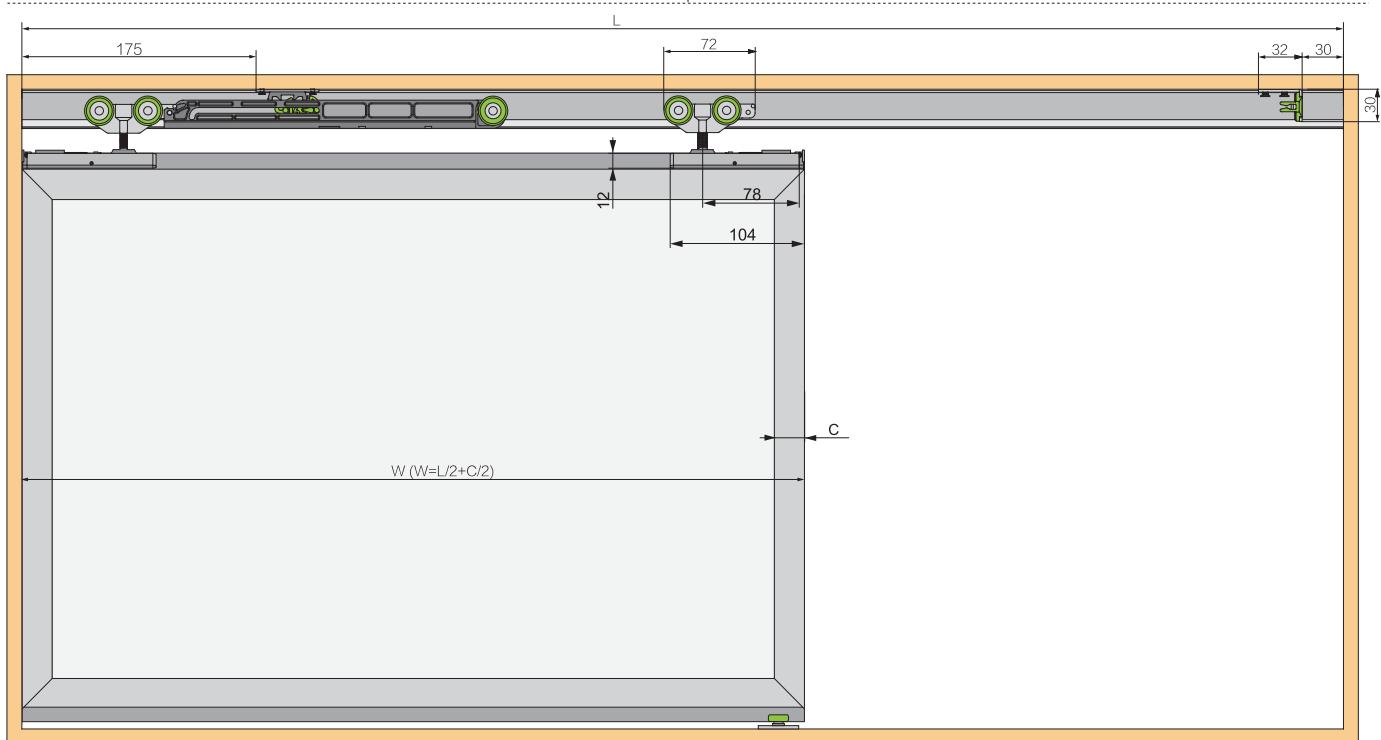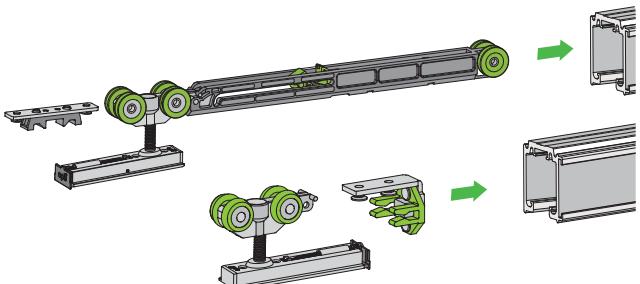

# 长征9号连动门吊滑轮

## SATELLITE 9 LINKAGE HANGING SLIDING ROLLER

### 产品特点：

- 多扇门连动设计，多用于做空间隔断；
- 自动挂钩设计，脱钩自动复位功能；
- 减震设计采用进口定制改性工程塑料,有效缓解门板跳动；
- 采用高精级滑轮，滑动平稳、顺畅、静音。

### 技术概要：

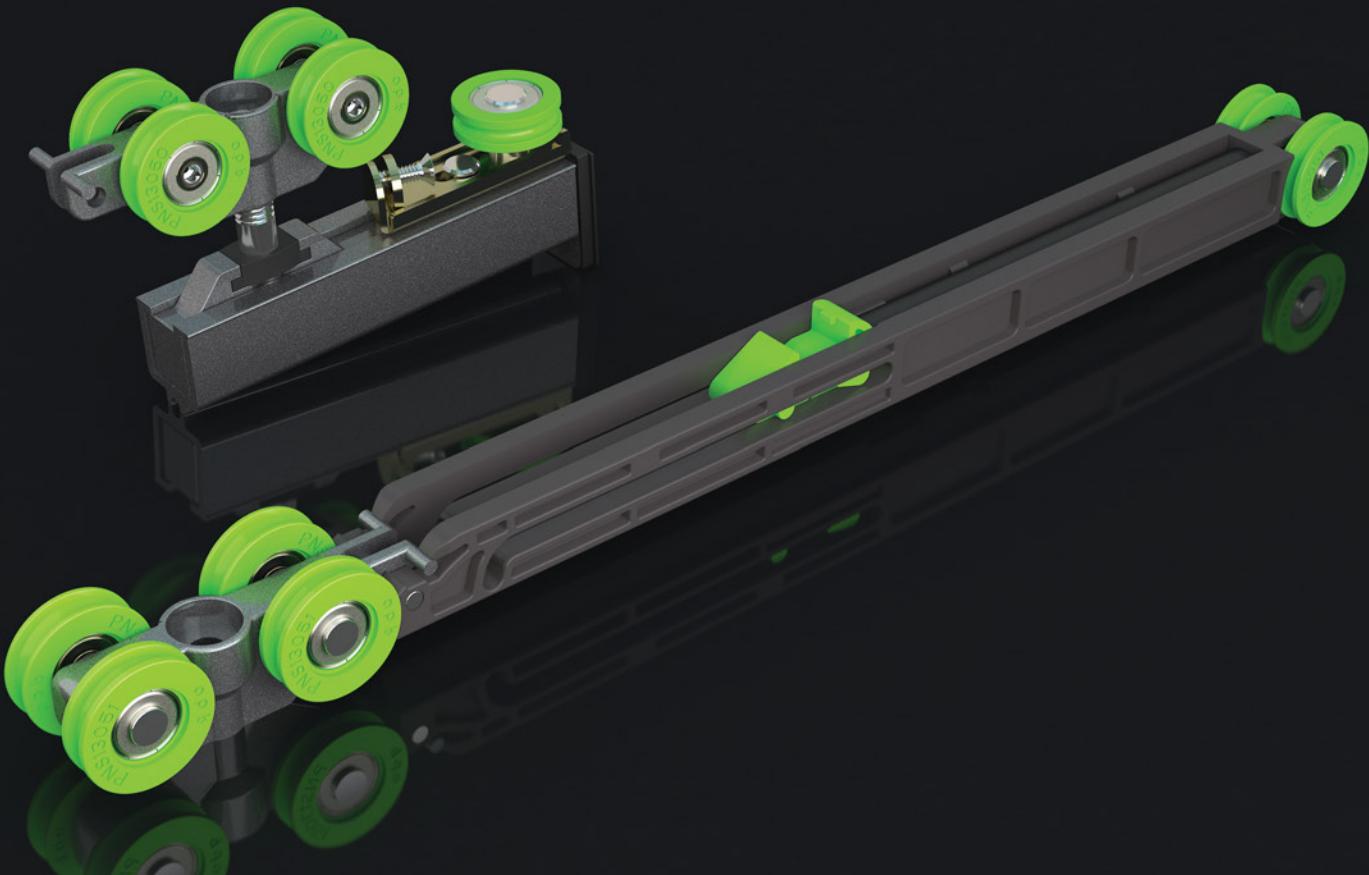
- **适用于：**多扇木质、玻璃、铝边框连动推拉门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤60kg

### Product Features:

- Multi-panel linkage design, usually used for space partition.
- Hook automatical hanging design, Auto-reset while unlock.
- Seismic mitigation design: Adopt imported customized modified engineering plastics, reduce door panel bounce efficiently.
- High precision grade roller, stable, smooth and quiet sliding.

### Technical Points:




- **Application:** Multiple wood / glass / aluminum linkage sliding door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 60kg



≤60kg




## 长征9号木门套装

## SATELLITE 9 WOOD DOOR COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/3+56mm Door Width = Doorway Width / 3 +56mm	CG12206C
3扇活动门+1扇固定门 3 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/4+56mm Door Width = Doorway Width / 4 +56mm	CG12206A
4扇活动门+1扇固定门 4 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/5+56mm Door Width = Doorway Width / 5 +56mm	CG12206B

## 长征9号木门标准配置

## SATELLITE 9 WOOD DOOR STANDARD CONFIGURATION

配件描述 Fitting Description		CG12206A (3+1)	CG12206B (4+1)	CG12206C (2+1)
阻尼上滑轮 Upper Roller With Damper		TG006A	2	2
阻尼限位件 Damper Stopper		TN171A	2	2
上滑轮 Upper Roller		TG007A	4	6
下滑轮 Under Roller		TN162A	1	1
升降挂盒1 Up-down Hanging Plate 1		TN170A	2	2
升降挂盒2 Up-down Hanging Plate 2		TN163A	4	6
连接下滑轮 Connected Bottom Roller		TN169A	2	3
固定门上定位 Fixed Door Up Guider		TN166A	2	2



## 长征9号木门标准配置




## SATELLITE 9 WOOD DOOR STANDARD CONFIGURATION

配件描述 Fitting Description			CG12206A (3+1)	CG12206B (4+1)	CG12206C (2+1)
固定门下定位 Fixed Door Bottom Guider		TN167A	2	2	2
钢丝连接器 Steel Wire Connector		TN165A	4	6	2
连接件 Connector		TN168A	3	5	1
钢丝固定件 Steel Wire Fixing Part		TN164A	1	1	1
钢丝 Steel Wire		5米(m)	—	—	1
		7米(m)	1	—	—
		10米(m)	—	1	—
上轨道 Upper Track		XNA077	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1	1

≤60kg

## 长征9号铝门套装(Q8/Q9)

SATELLITE 9 ALUMINUM DOOR COMPLETE SET (Q8/Q9)

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/3+56mm Door Width = Doorway Width / 3 +56mm	CG12207C
3扇活动门+1扇固定门 3 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/4+56mm Door Width = Doorway Width / 4 +56mm	CG12207A
4扇活动门+1扇固定门 4 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/5+56mm Door Width = Doorway Width / 5 +56mm	CG12207B

## 长征9号铝门标准配置(Q8/Q9)

SATELLITE 9 ALUMINUM DOOR STANDARD CONFIGURATION (Q8/Q9)

配件描述 Fitting Description		CG12207A (3+1)	CG12207B (4+1)	CG12207C (2+1)
阻尼上滑轮 Upper Roller With Damper		TG006A	2	2
阻尼限位件 Damper Stopper		TN171A	2	2
上滑轮 Upper Roller		TG007A	4	6
下滑轮 Under Roller		TN172A	1	1
升降挂盒1 Up-down Hanging Plate 1		TN174A	2	2
升降挂盒2 Up-down Hanging Plate 2		TN73A	4	6
连接下滑轮 Connected Bottom Roller		TN175A	2	3
固定门上定位 Fixed Door Up Guider		TN178A	2	2



## 长征9号铝门标准配置(Q8/Q9)

SATELLITE 9 ALUMINUM DOOR STANDARD CONFIGURATION (Q8/Q9)

配件描述 Fitting Description			CG12207A (3+1)	CG12207B (4+1)	CG12207C (2+1)
固定门下定位 Fixed Door Bottom Guider		TN177A	2	2	2
钢丝连接器 Steel Wire Connector		TN165A	4	6	2
连接件 Connector		TN176A	3	5	1
钢丝固定件 Steel Wire Fixing Part		TN164A	1	1	1
钢丝 Steel Wire		5米(m)	—	—	1
		7米(m)	1	—	—
		10米(m)	—	1	—
上轨道 Upper Track		XNA077	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1	1

≤60kg

## 长征9号玻璃门1套装

SATELLITE 9 GLASS DOOR 1 COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/3+56mm Door Width = Doorway Width / 3 +56mm	CG12208C
3扇活动门+1扇固定门 3 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/4+56mm Door Width = Doorway Width / 4 +56mm	CG12208A
4扇活动门+1扇固定门 4 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/5+56mm Door Width = Doorway Width / 5 +56mm	CG12208B

## 长征9号玻璃门1标准配置

SATELLITE 9 GLASS DOOR 1 STANDARD CONFIGURATION

配件描述 Fitting Description		CG12208A (3+1)	CG12208B (4+1)	CG12208C (2+1)
阻尼上滑轮 Upper Roller With Damper		TG006A	2	2
阻尼限位件 Damper Stopper		TN171A	2	2
上滑轮 Upper Roller		TG007A	4	6
下定位 Bottom Guider		TN180A	1	1
升降挂盒1 Up-down Hanging Plate 1		TN170A	2	2
升降挂盒2 Up-down Hanging Plate 2		TN182A	4	6
连接下定位 Connected Bottom Guider		TN181A	2	3
固定门上定位 Fixed Door Up Guider		TN185A	2	2



## 长征9号玻璃门1标准配置




## SATELLITE 9 GLASS DOOR 1 STANDARD CONFIGURATION

配件描述 Fitting Description		CG12208A (3+1)	CG12208B (4+1)	CG12208C (2+1)
固定门下定位 Fixed Door Bottom Guider		TN184A	2	2
钢丝连接器 Steel Wire Connector		TN165A	4	6
连接件 Connector		TN183A	3	5
钢丝固定件 Steel Wire Fixing Part		TN164A	1	1
玻璃夹1 Glass Clamp 1		TN186A	8	10
装饰盖 Decorative Cover		TN187A	8	10
钢丝 Steel Wire		5米(m)	—	—
		7米(m)	1	—
		10米(m)	—	1
上轨道 Upper Track		XNA077	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1

≤60kg

## 长征9号玻璃门2套装

SATELLITE 9 GLASS DOOR 2 COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/3+56mm Door Width = Doorway Width / 3 +56mm	CG12209C
3扇活动门+1扇固定门 3 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/4+56mm Door Width = Doorway Width / 4 +56mm	CG12209A
4扇活动门+1扇固定门 4 Movable Door + 1 Fixed Door		≤60	门宽=门洞宽/5+56mm Door Width = Doorway Width / 5 +56mm	CG12209B

## 长征9号玻璃门2标准配置

SATELLITE 9 GLASS DOOR 2 STANDARD CONFIGURATION

配件描述 Fitting Description		CG12209A (3+1)	CG12209B (4+1)	CG12209C (2+1)
阻尼上滑轮 Upper Roller With Damper		TG006A	2	2
阻尼限位件 Damper Stopper		TN171A	2	2
上滑轮 Upper Roller		TG007A	4	6
下定位 Bottom Guider		TN189A	1	1
升降挂盒1 Up-down Hanging Plate 1		TN170A	2	2
升降挂盒2 Up-down Hanging Plate 2		TN182A	4	6
连接下定位 Connected Bottom Guider		TN190A	2	3
固定门上定位 Fixed Door Up Guider		TN185A	2	2



## 长征9号玻璃门2标准配置

## SATELLITE 9 GLASS DOOR 2 STANDARD CONFIGURATION

配件描述 Fitting Description			CG12209A (3+1)	CG12209B (4+1)	CG12209C (2+1)
固定门下定位 Fixed Door Bottom Guider		TN191A	2	2	2
钢丝连接器 Steel Wire Connector		TN165A	4	6	2
连接件 Connector		TN183A	3	5	1
钢丝固定件 Steel Wire Fixing Part		TN164A	1	1	1
玻璃夹1 Glass Clamp 1		TN186A	8	10	6
玻璃夹2 Glass Clamp 2		TN192A	12	18	6
装饰盖 Decorative Cover		TN187A	16	22	8
下轨道固定件 Under Track Fixing Part		PNS25019AV69	6	8	4
钢丝 Steel Wire		5米(m)	—	—	1
		7米(m)	1	—	—
		10米(m)	—	1	—
上轨道 Upper Track		XNA077	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA050	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷(选配) Brusher (Optional)		TN337A	1	1	1

≤60kg

## 长征9号-G窄边框铝门套装

SATELLITE 9-G SLIM ALUMINUM FRAME COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door		≤60	W=L/3+2C/3	CN122227A
3扇活动门+1扇固定门 3 Movable Door + 1 Fixed Door		≤60	W=L/4+3C/4	CN122227B

## 长征9号-G窄边框门标准配置

SATELLITE 9-G SLIM ALUMINUM STANDARD CONFIGURATION

配件描述 Fitting Description		CN122227A (2+1)	CN122227B (3+1)
阻尼上滑轮 Upper Roller With Damper		TG006A	2
阻尼限位件 Damper Stopper		TN171A	2
上滑轮 Upper Roller		TG007A	2
下定位 Bottom Guider		TN548A	1
绕线轮(短) Reel (Short)		TN513A	1
绕线轮(长) Reel (Length)		TN512A	1
升降挂盒1 Up-down Hanging Plate 1		TN517A	1
升降挂盒2 Up-down Hanging Plate 2		TN357C	1
下定位 Bottom Guider		TN515A	2



## 长征9号-G窄边框铝门标准配置

## SATELLITE 9-G SLIM ALUMINUM FRAME CONFIGURATION

配件描述 Fitting Description			CN122227A (2+1)	CN122227B (3+1)
固定门上定位 Fixed Door Up Guider		TN518A	2	2
固定门下定位 Fixed Door Bottom Guider		TN518B	2	2
钢丝连接器 Steel Wire Connector		TN165A	2	4
钢丝固定件 Steel Wire Fixing Part		TN468A	1	1
钢丝 Steel Wire		5米(m)	1	—
		7米(m)	—	1
连接件 Connector		TN527A	—	2
上轨道 Upper Track		XNA077	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
上下横 Upper&bottom frame		XNA162	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
竖框 Vertical frame		XNA163	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
装饰盖 Decorative cover		XNA164	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1






## 窄边框材料

## NARROW BORDER MATERIAL

XNA162 上下横 Upper&bottom frame		XNA163 竖框 Vertical frame		XNA164 装饰盖 Decorative cover	
XLC002BZ 胶条 Adhesive tape		PJC96050 角码 Vertical frame		TN547A 拉手 Handle	

## 长征9号轨道型材

## SATELLITE 9 RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
<b>XNA077</b> 上轨道 Upper Track		铝合金 Aluminium Alloy	0.90	香槟 Champagne	2000	XNA077BV00200
					3000	XNA077BV00300
					4000	XNA077BV00400
					6000	XNA077BV00600
<b>XNA078</b> 装饰盖 (选配) Decorative Cover (Optional)		铝合金 Aluminium Alloy	0.36	香槟 Champagne	2000	XNA078BV00200
					3000	XNA078BV00300
					4000	XNA078BV00400
					6000	XNA078BV00600
<b>XNA049</b> 玻璃夹装饰盖(选配) Glass Clamp Decorative Cover		铝合金 Aluminium Alloy	0.29	铁灰 Iron Gray	2000	XNA049BE00200
					3000	XNA049BE00300
					4000	XNA049BE00400
					6000	XNA049BE00600
<b>XNA003</b> 下轨道 (仅适用于木门) Under Track (Application to wood door)		铝合金 Aluminium Alloy	0.18	香槟 Champagne	2000	XNA003BJ00200
					3000	XNA003BJ00300
					4000	XNA003BJ00400
					6000	XNA003BJ00600
<b>XNA050</b> 下轨道 (长征9号-D专用) Under Track (For SATELLITE 9-D)		铝合金 Aluminium Alloy	0.13	香槟 Champagne	2000	XNA050AJ00200
					3000	XNA050AJ00300
					4000	XNA050AJ00400
					6000	XNA050AJ00600

轨道型材订购说明：

- 1、下单时请注明轨道型号或详细描述轨道名称、长度以及数量，如“XNA077BV00200×10支”或“长征8号上轨道2米10支”；
- 2、请根据实际需要选择适合的轨道长度。

Track profiles ordering instructions:

1. When place an order, please indicate the track type or detailed track description-name, length and quantity, such as "XNA077BV00200×10pcs" or "SATELLITE 9 upper track 2meter/pc 10pcs".
2. Select suitable length of track according to the actual need.







## 长征9号木门安装参数
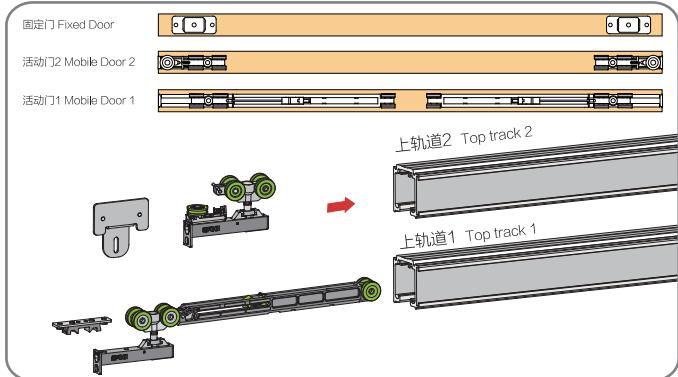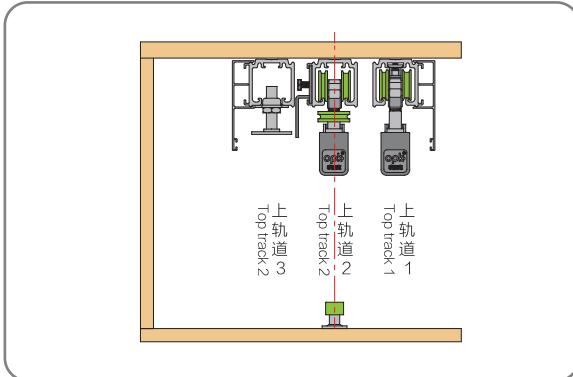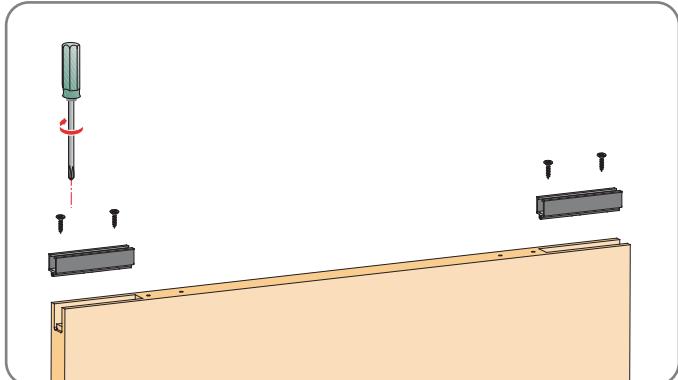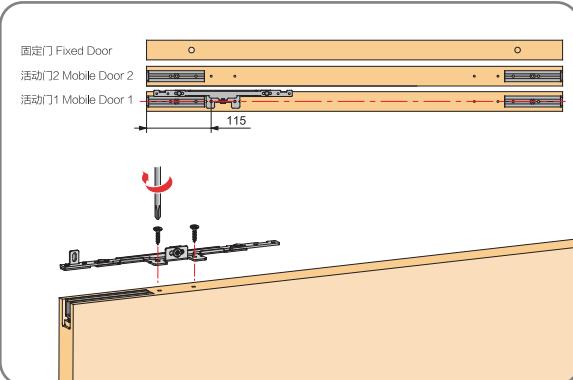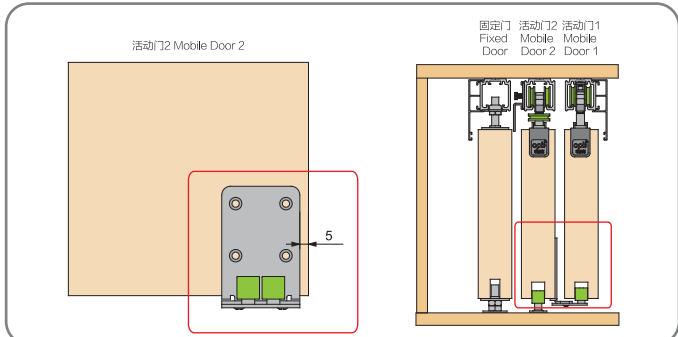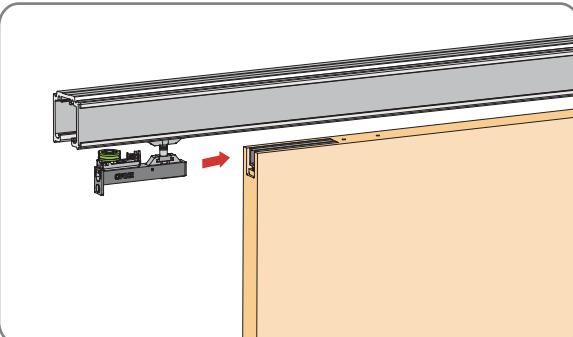
## SATELLITE 9 WOOD DOOR INSTALLATION PARAMETERS

以“2扇活动门+1扇固定门”为例，中间的活动门可根据需要增减  
“2 mobile door + 1 fixed door” as an example, the middle moved door can be increased or decreased according to your requirement.A




## 安装步骤(Installation steps):

1 安装上滑轮和限位件  
Install up roller and stopper2 安装上轨道和下滑轮  
Install top track and bottom roller3 安装挂盒  
Install up-down hanging plate4 安装连接件  
Install connector5 安装连接下滚轮  
Install connected bottom roller6 挂上门板  
Install door panel  
依次从里面往外面安装门板  
Install the door panels from inside to outside in turn


## 长征9号木门安装参数
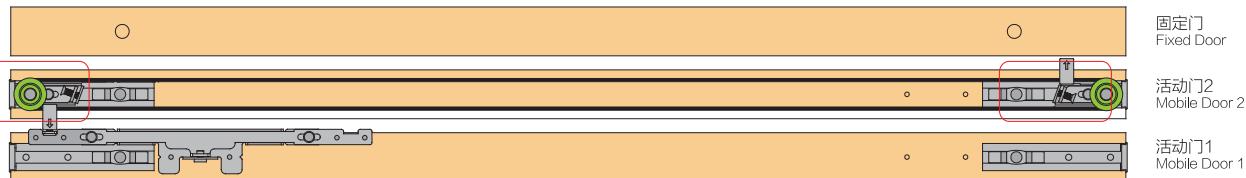
## SATELLITE 9 WOOD DOOR INSTALLATION PARAMETERS


7 绕钢丝  
Winding stainless wire



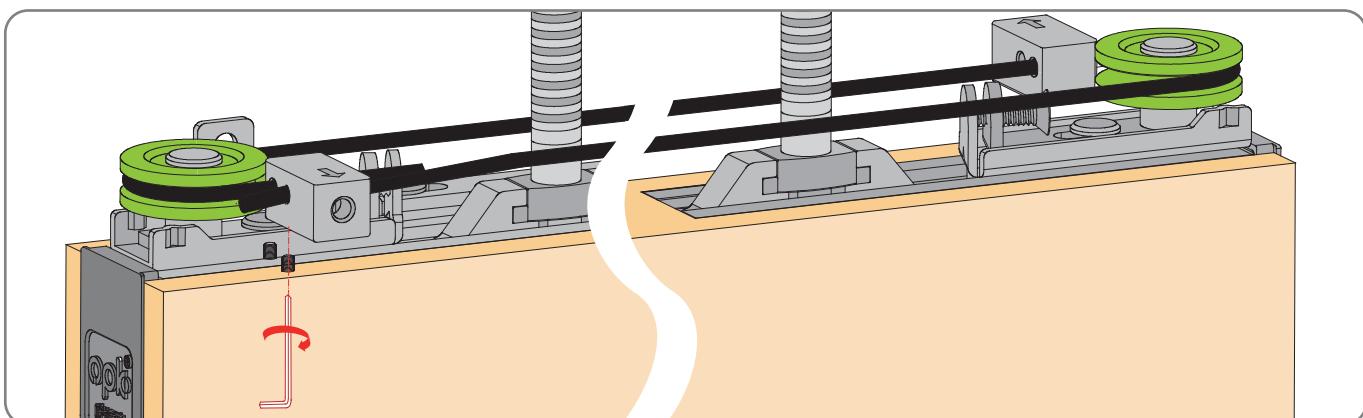钢丝连接器推到图示位置再固定钢丝  
Push the connector part to icon position, then fix the stainless wire




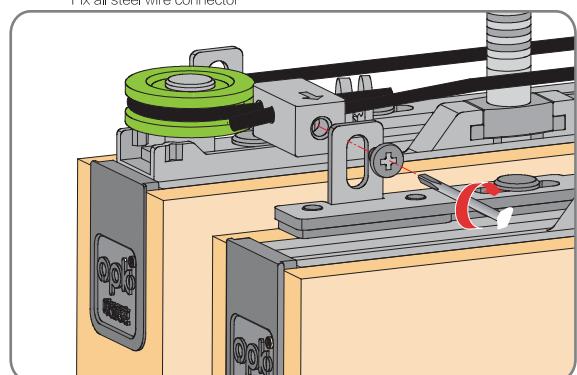8 固定全部的钢丝连接器  
Fix all steel wire connector




9 固定钢丝固定件  
Fix the steel wire fixing part

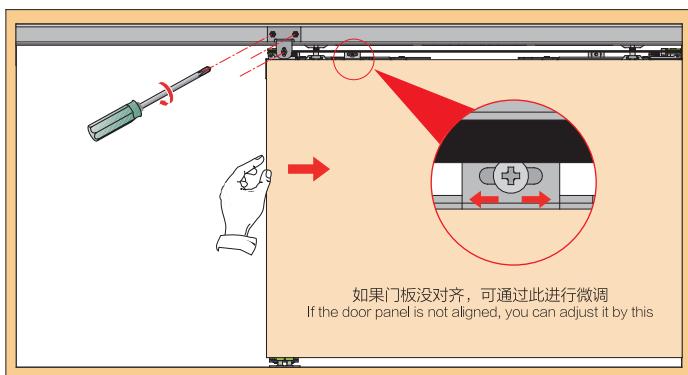
把全部门板推到底，固定轨道上的钢丝固定件  
Push door to the end, then fasten mounting parts on the track



10 安装固定门  
Install fixed door

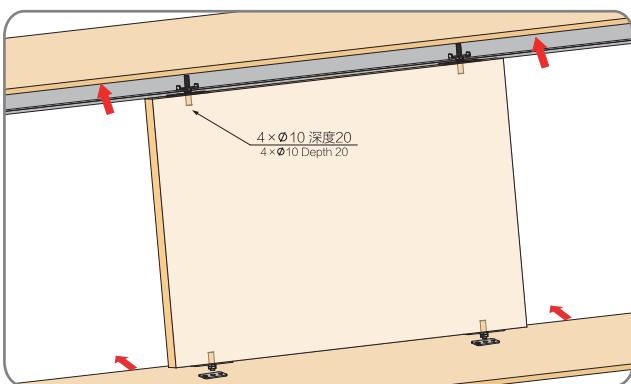

11 安装完毕  
Installation completed

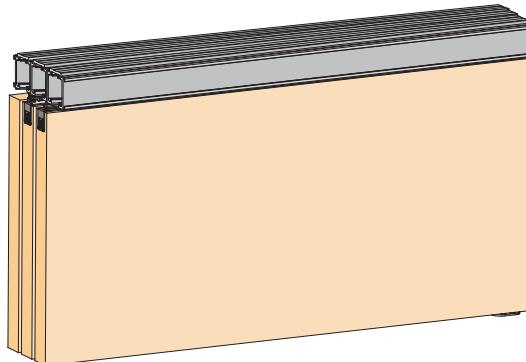

## 长征9号玻璃门1安装参数

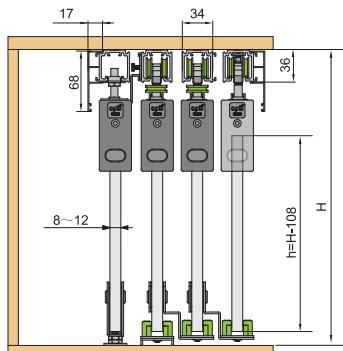
## SATELLITE 9 GLASS DOOR 1 INSTALLATION PARAMETERS

以“3扇活动门+1扇固定门”为例，中间的活动门可根据需要增减  
“3 mobile door + 1 fixed door” as an example, the middle moved door can be increased or decreased according to your requirement.




玻璃高h=门洞高H-108mm  
Glass Height(h)=  
Opening Height(H)-108mm

门宽=门洞宽/4+56mm  
Door Width =  
Opening Width / 4 +56mm




## 安装步骤(Installation steps):

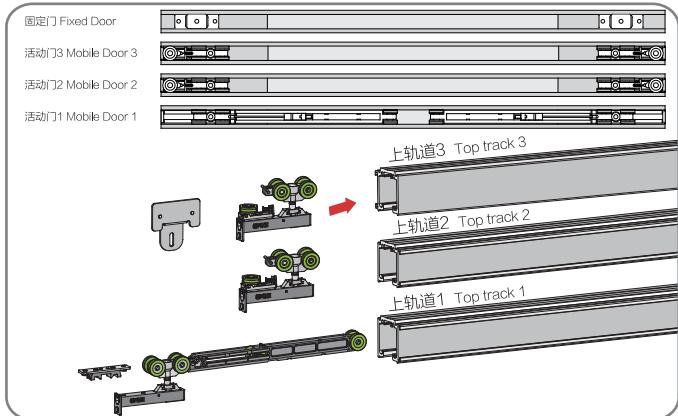
1 安装上滑轮和限位件  
Install up roller and stopper



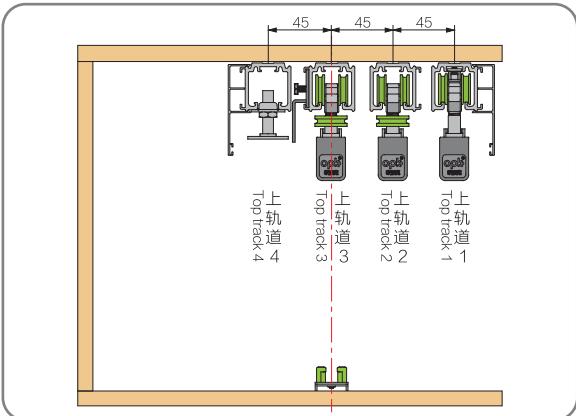
2 安装上轨道和下滑轮  
Install top track and bottom roller




3 安装挂盒  
Install up-down hanging plate

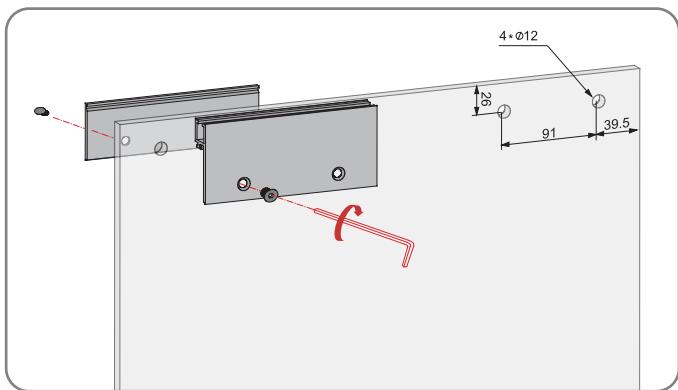

4 安装连接件  
Install connector

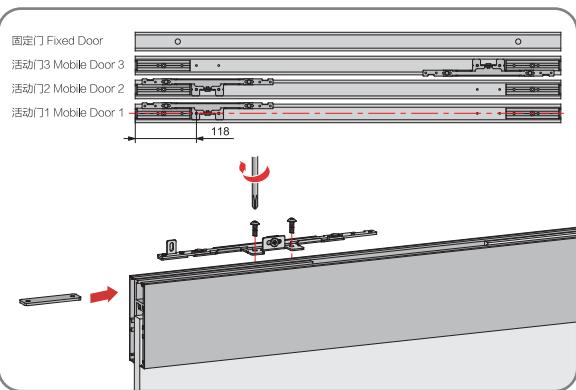


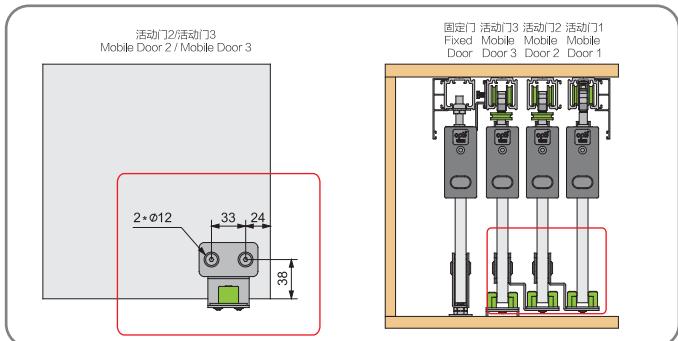5 安装连接下定位  
Install connected bottom guider



6 挂上门板  
Install door panel

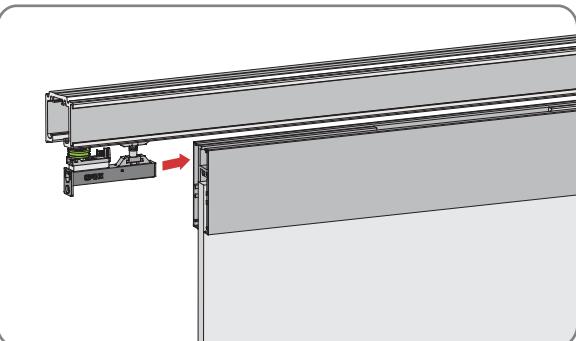依次从里面往外面安装门板  
Install the door panels from inside to outside in turn




## 长征9号玻璃门1安装参数

## SATELLITE 9 GLASS DOOR 1 INSTALLATION PARAMETERS


7 绕钢丝  
Winding stainless wire



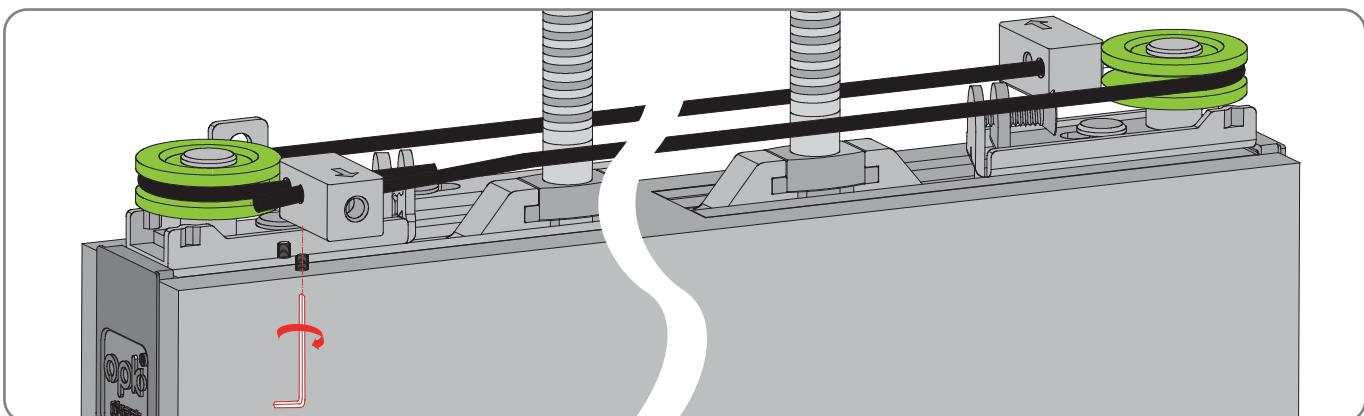钢丝连接器推到图示位置再固定钢丝  
Push the connector part to icon position, then fix the stainless wire




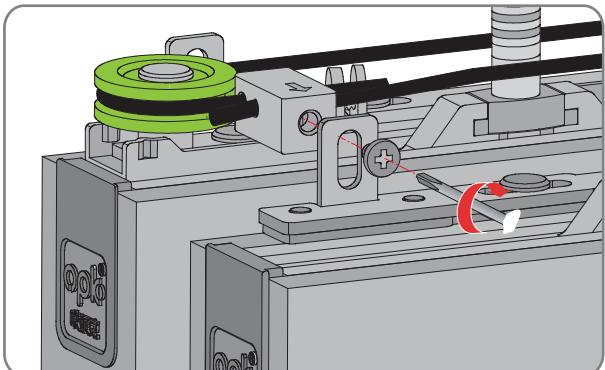8 固定全部的钢丝连接器  
Fix all steel wire connector




9 固定钢丝固定件  
Fix the steel wire fixing part

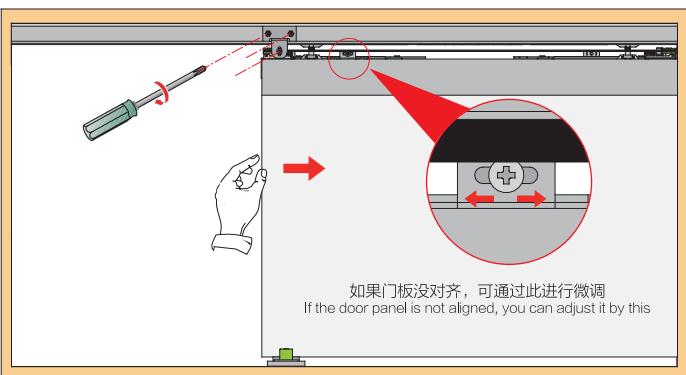
把全部门板推到底，固定轨道上的钢丝固定件  
Push door to the end, then fasten mounting parts on the track



10 安装固定门  
Install fixed door

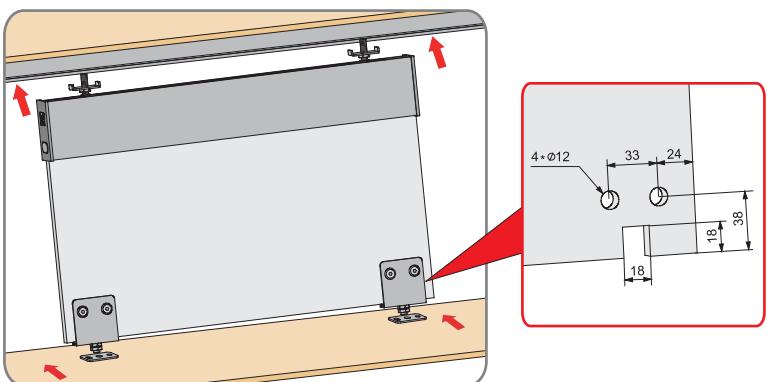

11 安装完毕  
Installation completed

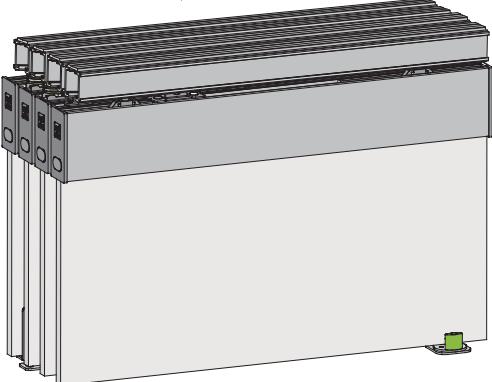

## 长征9号玻璃门2安装参数

## SATELLITE 9 GLASS DOOR 2 INSTALLATION PARAMETERS

以“4扇活动门+1扇固定门”为例，中间的活动门可根据需要增减

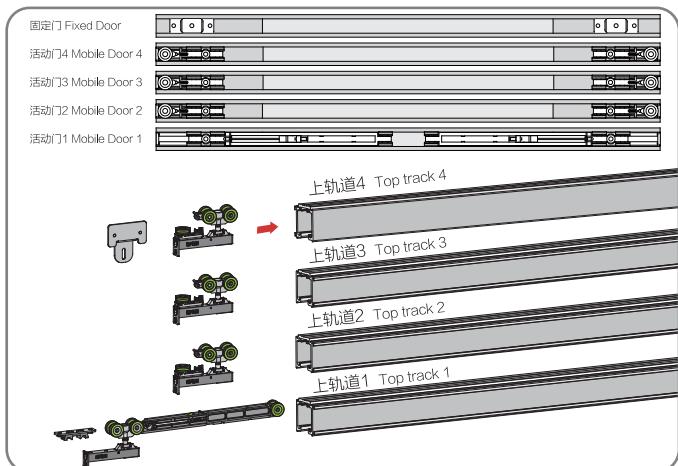
“4 mobile door + 1 fixed door” as an example, the middle moved door can be increased or decreased according to your requirement.



## 安装步骤(Installation steps):


## 1 安装上滑轮和限位件

Install up roller and stopper




## 3 安装挂盒

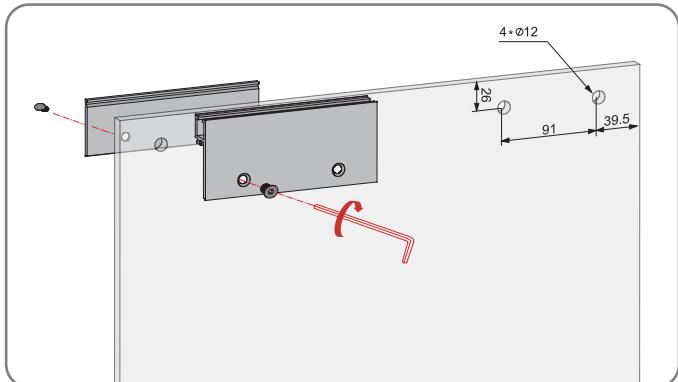Install up-down hanging plate




## 5 安装连接下定位

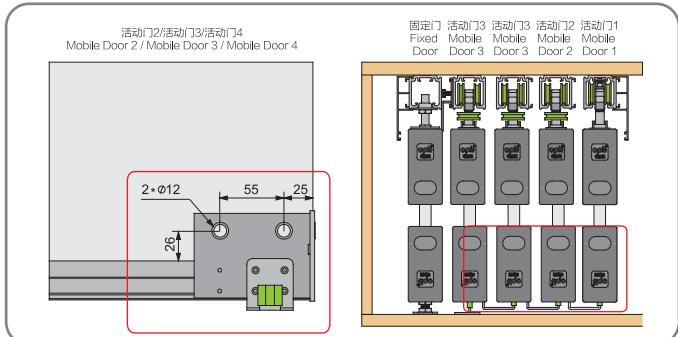Install connected bottom guider




## 2 安装上轨道和下滑轮

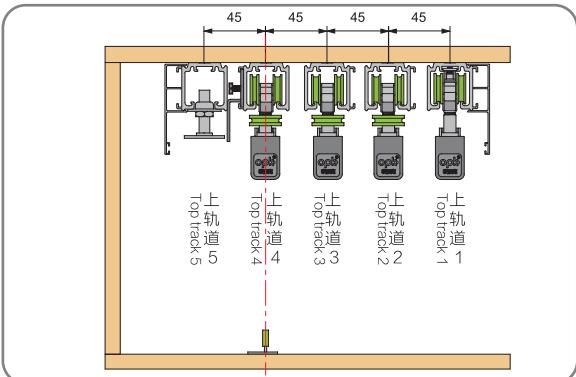Install top track and bottom roller




## 4 安装连接件

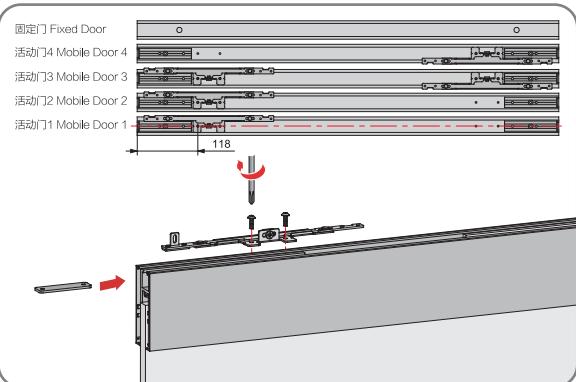Install connector



## 6 挂上门板

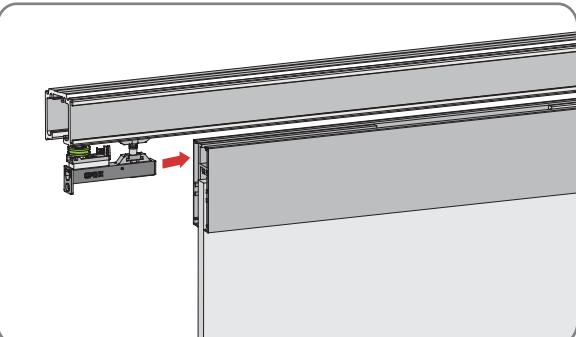Install door panel  
Install the door panels from inside to outside in turn




## 长征9号玻璃门2安装参数

## SATELLITE 9 GLASS DOOR 2 INSTALLATION PARAMETERS


7 绕钢丝  
Winding stainless wire



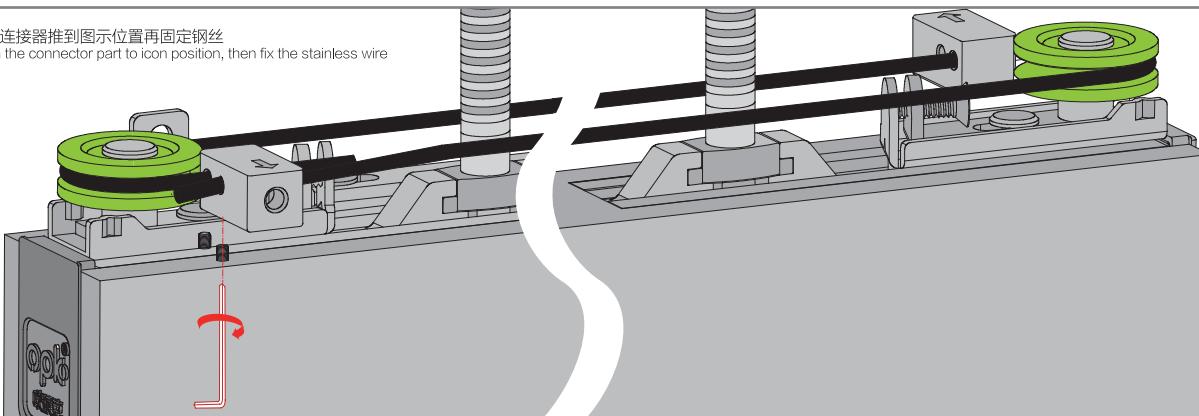钢丝连接器推到图示位置再固定钢丝  
Push the connector part to icon position, then fix the stainless wire




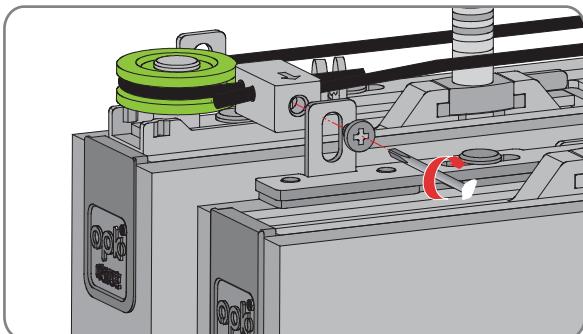8 固定全部的钢丝连接器  
Fix all steel wire connector




9 固定钢丝固定件  
Fix the steel wire fixing part

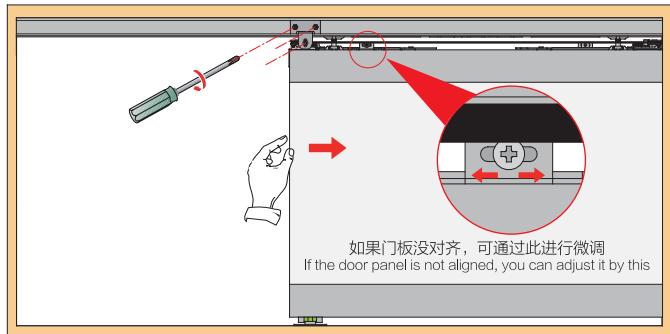
把全部门板推到底，固定轨道上的钢丝固定件  
Push door to the end,then fasten mounting parts on the track



10 安装固定门  
Install fixed door

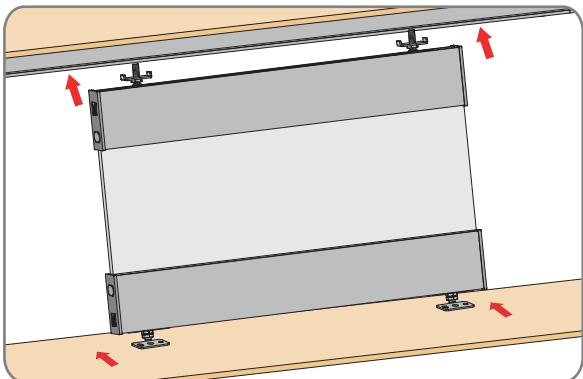



11 安装完毕  
Installation completed

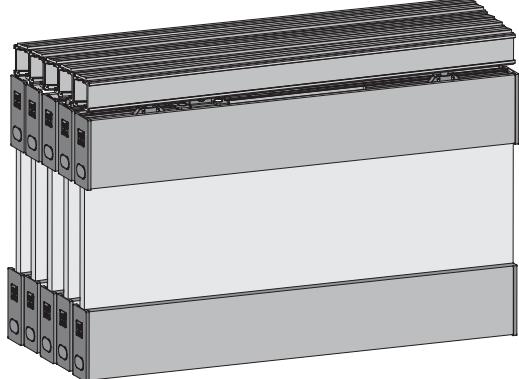


## 长征9号-G窄边框门安装参数

## SATELLITE 9-G SLIM ALUMINUM FRAME INSTALLATION PARAMETERS

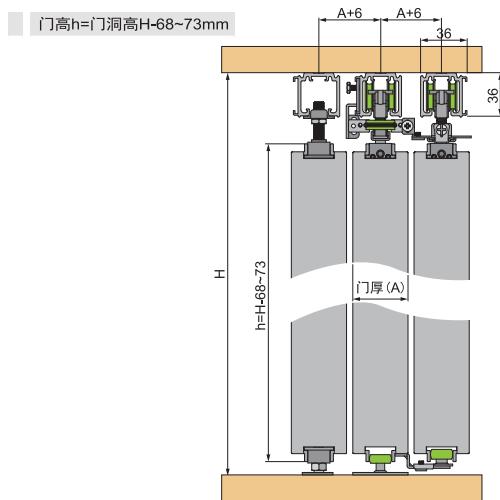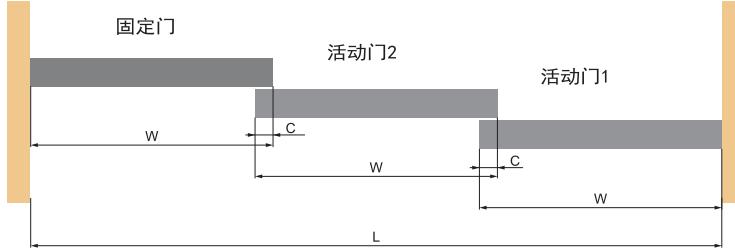
$$\text{门宽}(W) = \frac{\text{门洞宽}(L) + \text{重合位}(C) \times 2}{3}$$




1 安装升降挂盒

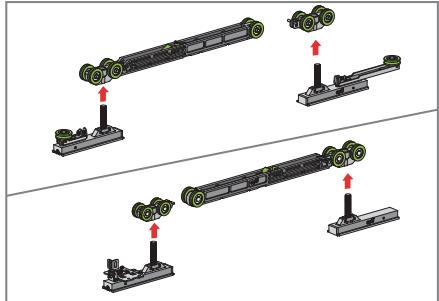

2 安装上滑轮和限位件

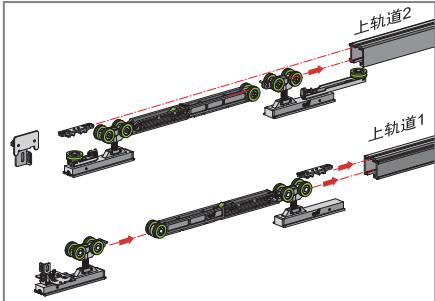


3 安装上轨道和下滑轮




4 门板配件安装

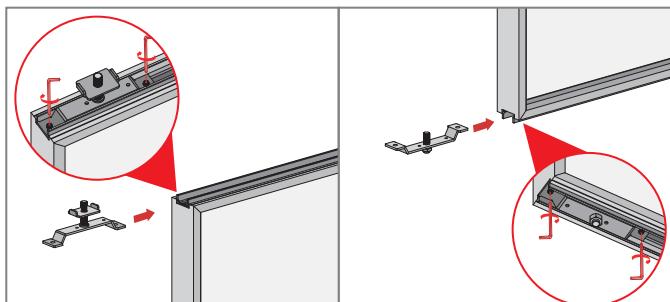
① 安装固定门配件




② 安装连接下滑轮至活动门2

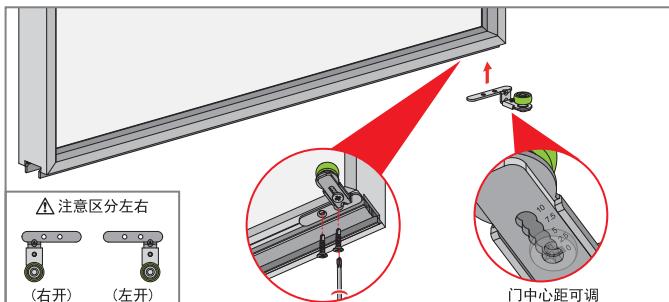

5 安装活动门2至上轨道2

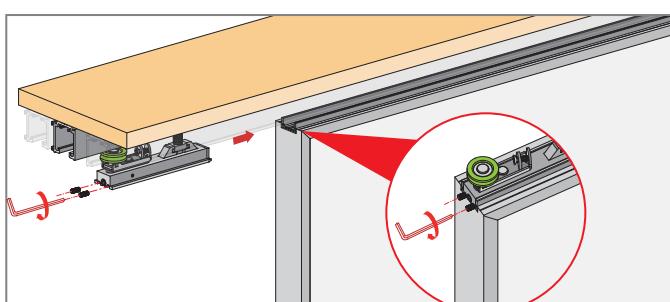

6 安装钢丝连接器并固定

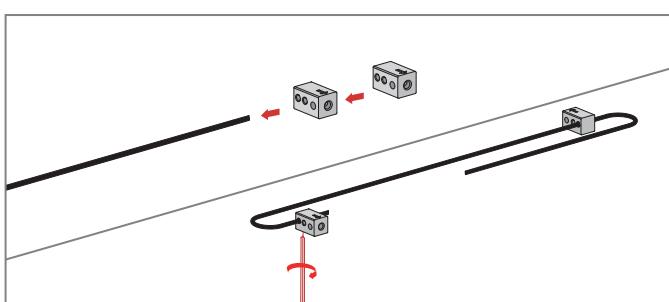

## 长征9号-G窄边框门安装参数

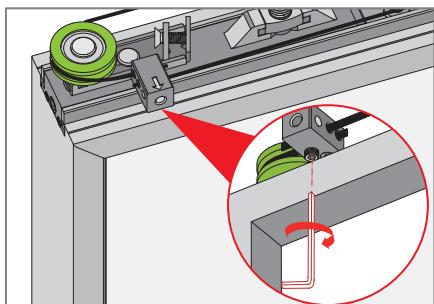
## SATELLITE 9-G SLIM ALUMINUM FRAME INSTALLATION PARAMETERS

7 绕钢丝


① 把钢丝连接器推到图示位置




② 拉紧钢丝并固定



③ 调节钢丝松紧并固定

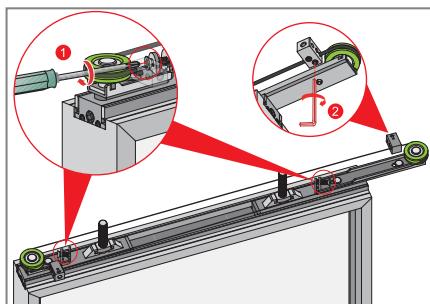


8 安装活动门1至上轨道1

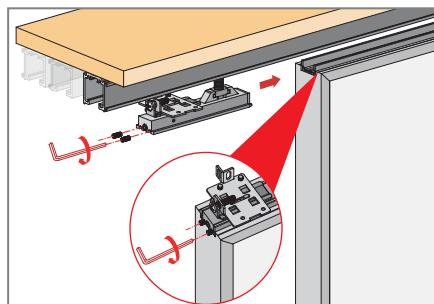


9 调节门板平衡

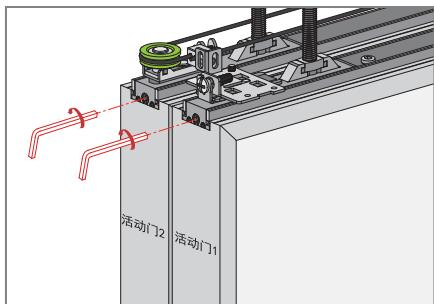通过内六角调节门板升降




10 固定钢丝连接件

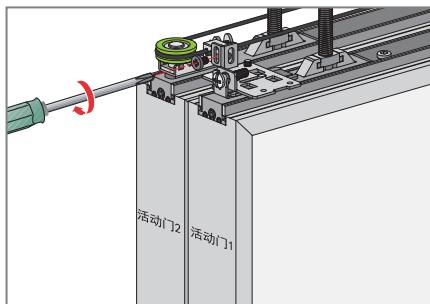


11 固定钢丝固定件

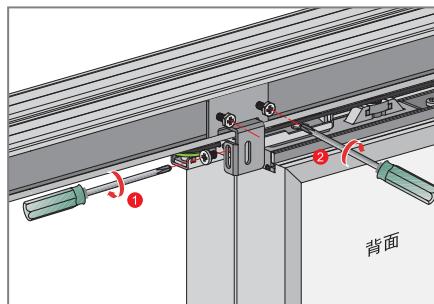
① 把全部门板推到底，固定轨道上的钢丝固定件




② 如果门板没对齐，可通过此螺丝进行微调

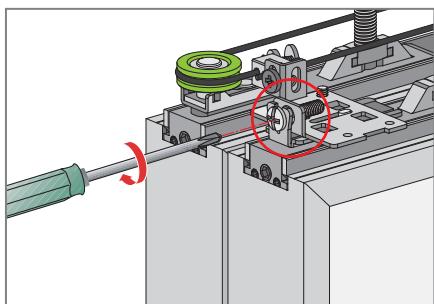

12 安装固定门

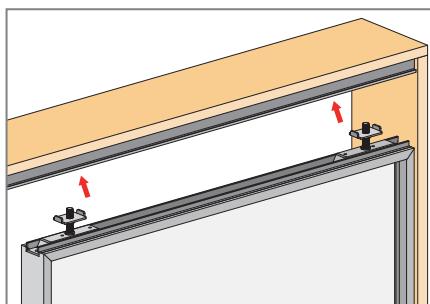

13 调节固定门平衡

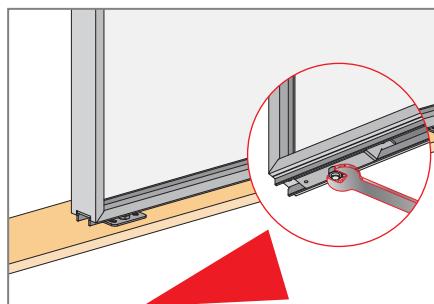

# 长征10号吊滑轮

## SATELLITE 10 HANGING SLIDING ROLLER

### 产品特点：

- 超大滑轮特殊设计，超顺滑，滑动平稳、顺畅、静音；
- 采用万向平衡轮结构设计,有效缓解门板跳动；
- 自动挂钩设计，脱钩自动复位功能；
- 易拆阻尼器结构，方便拆装、更换配件。

### 技术概要：

- **适用于：**单扇和双扇木质推拉门、玻璃推拉门、铝边框门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤80kg

### Product Features:

- Special design of huge roller, super smooth, loading capacity 80kg, stable, smooth and quiet sliding.
- Adopt universal balance roller structure design, reduce door panel bounce efficiently.
- Easy disassembly damper structure, convenient disassembly and assembly、replacement of parts.

### Technical Points:

- **Application:** Single and double wood sliding door, glass sliding door, aluminum door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 80kg



## 长征10号木门2套装(适用于单扇门)

SATELLITE 10 WOOD DOOR 2 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		通用型 Normal	40-70	≥360	CG12210A
		重型 Heavy-duty	70-80	≥360	CG12210B
		轻型 Light-duty	20-40	≥360	CG12210C
双阻尼 Double Damper		通用型 Normal	40-70	≥460	CG12211A
		重型 Heavy-duty	70-80	≥460	CG12211B
		轻型 Light-duty	20-40	≥460	CG12211C
无阻尼 Double Damping		—	≤80	≥360	CG12212A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼(单扇门) Single Damper	双阻尼(单扇门) Double Damper	无阻尼(单扇门) Without Damping
反向阻尼器 Reverse Damper		通用型 Normal	TD077A	1	2	—
		重型 Heavy-duty	TD077B			
		轻型 Light-duty	TD077C			
上滑轮 Upper Roller		TG015A		2	2	2
限位件 Stopper		TG019A		1	—	2
木门升降加长挂盒 Extension Height Adjustable Hanging Plate		TN222A		2	2	2
下定位 Under Roller		TN107A		1	1	1
上轨道 Upper Track		XGA007		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	1	1

## 长征10号木门3套装(适用于单扇门)

SATELLITE 10 WOOD DOOR 3 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		通用型 Normal	40-70	≥360	CG12252A
		重型 Heavy-duty	70-80	≥360	CG12252B
		轻型 Light-duty	20-40	≥360	CG12252C
双阻尼 Double Damper		通用型 Normal	40-70	≥460	CG12256A
		重型 Heavy-duty	70-80	≥460	CG12256B
		轻型 Light-duty	20-40	≥460	CG12256C
无阻尼 Double Damping		—	≤80	≥360	CG12212B

## 标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼(单扇门) Single Damper	双阻尼(单扇门) Double Damper	无阻尼(单扇门) Without Damping
反向阻尼器 Reverse Damper		通用型 Normal	TD077A	1	2	—
		重型 Heavy-duty	TD077B			
		轻型 Light-duty	TD077C			
上滑轮 Upper Roller		TG015A	2	2	2	2
限位件 Stopper		TG019A	1	—	—	2
U型吊体挂板 "U" Hanging Plate		TN060B	2	2	2	2
下定位 Under Roller		TN107A	1	1	1	1
上轨道 Upper Track		XGA007	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		XNA003	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1	1	1

## 长征10号玻璃门4套装(适用于单扇门)

SATELLITE 10 GLASS DOOR 4 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		通用型 Normal	40-70	≥360	CG12277A
		重型 Heavy-duty	70-80	≥360	CG12277B
		轻型 Light-duty	20-40	≥360	CG12277C
双阻尼 Double Damper		通用型 Normal	40-70	≥460	CG12278A
		重型 Heavy-duty	70-80	≥460	CG12278B
		轻型 Light-duty	20-40	≥460	CG12278C
无阻尼 Double Damping		—	≤80	≥360	CG12279A

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼(单扇门) Single Damper	双阻尼(单扇门) Double Damper	无阻尼(单扇门) Without Damping
反向阻尼器 Reverse Damper		通用型 Normal	TD077A	1	2	—
		重型 Heavy-duty	TD077B			
		轻型 Light-duty	TD077C			
上滑轮 Upper Roller		TG015A		2	2	2
限位件 Stopper		TG019A		1	—	2
玻璃挂架4 Glass Clamp 4		TN343A		2	2	2
下定位 Under Roller		TN336A		1	1	1
上轨道 Upper Track		XGA007		选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	1	1

## 长征10号玻璃门5套装(适用于单扇门)

SATELLITE 10 GLASS DOOR 5 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		通用型 Normal	40-70	≥360	CG12280A
		重型 Heavy-duty	70-80	≥360	CG12280B
		轻型 Light-duty	20-40	≥360	CG12280C
双阻尼 Double Damper		通用型 Normal	40-70	≥460	CG12281A
		重型 Heavy-duty	70-80	≥460	CG12281B
		轻型 Light-duty	20-40	≥460	CG12281C
无阻尼 Double Damping		—	≤80	≥360	CG12282A




## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼(单扇门) Single Damper	双阻尼(单扇门) Double Damper	无阻尼(单扇门) Without Damping
反向阻尼器 Reverse Damper		通用型 Normal	TD077A	1	2	—
		重型 Heavy-duty	TD077B			
		轻型 Light-duty	TD077C			
上滑轮 Upper Roller		TG015A	2	2	2	2
限位件 Stopper		TG019A	1	—	—	2
玻璃挂架5 Glass Clamp 5		TN340A	2	2	2	2
下定位 Under Roller		TN336A	1	1	1	1
上轨道 Upper Track		XGA007	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length	
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1	1	1

## 长征10号轨道型材

## SATELLITE 10 RACK PROFILE







产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
<b>XGA007</b> 上轨道 Upper Track		铝合金 Aluminium Alloy	0.90	香槟 Champagne	2000	XGA007BV00200
					3000	XGA007BV00300
					4000	XGA007BV00400
					6000	XGA007BV00600
<b>XGA008</b> 装饰盖 (选配) Decorative Cover (Optional)		铝合金 Aluminium Alloy	0.36	香槟 Champagne	2000	XGA008BV00200
					3000	XGA008BV00300
					4000	XGA008BV00400
					6000	XGA008BV00600
<b>XNA003</b> 下轨道 (仅适用于木门) Under Track (Application to wood door)		铝合金 Aluminium Alloy	0.18	香槟 Champagne	2000	XNA003BJ00200
					3000	XNA003BJ00300
					4000	XNA003BJ00400
					6000	XNA003BJ00600



## 轨道型材订购说明:

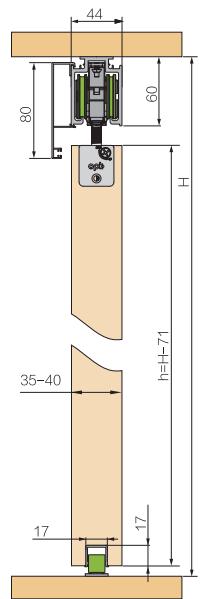
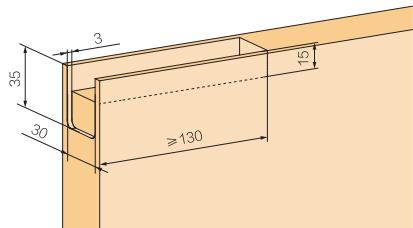
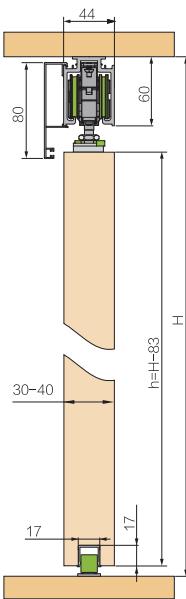
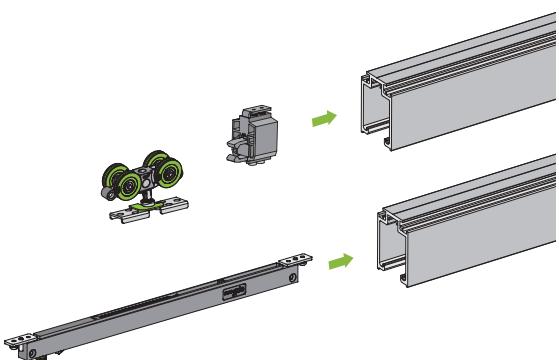
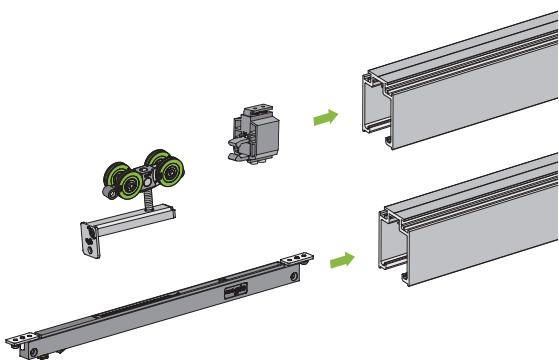
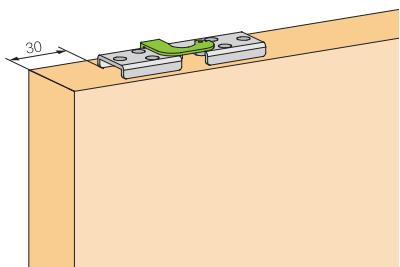
- 1、下单时请注明轨道型号或详细描述轨道名称、长度以及数量，如“XGA007BV00200×10支”或“长征10号上轨道2米10支”；
- 2、请根据实际需要选择适合的轨道长度。

Track profiles ordering instructions:

1. When place an order, please indicate the track type or detailed track description-name, length and quantity, such as “XGA007BV00200×10pcs” or “SATELLITE 10 upper track 2meter/pc 10pcs” .
2. Select suitable length of track according to the actual need.

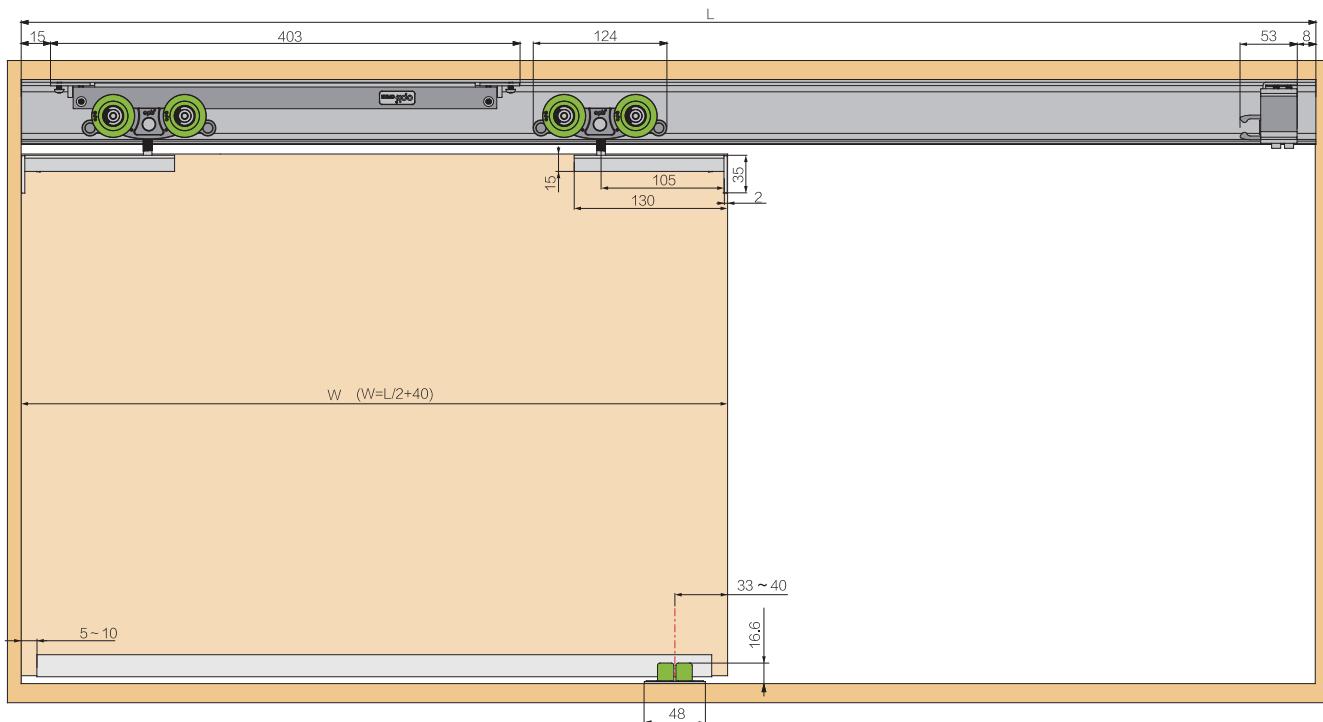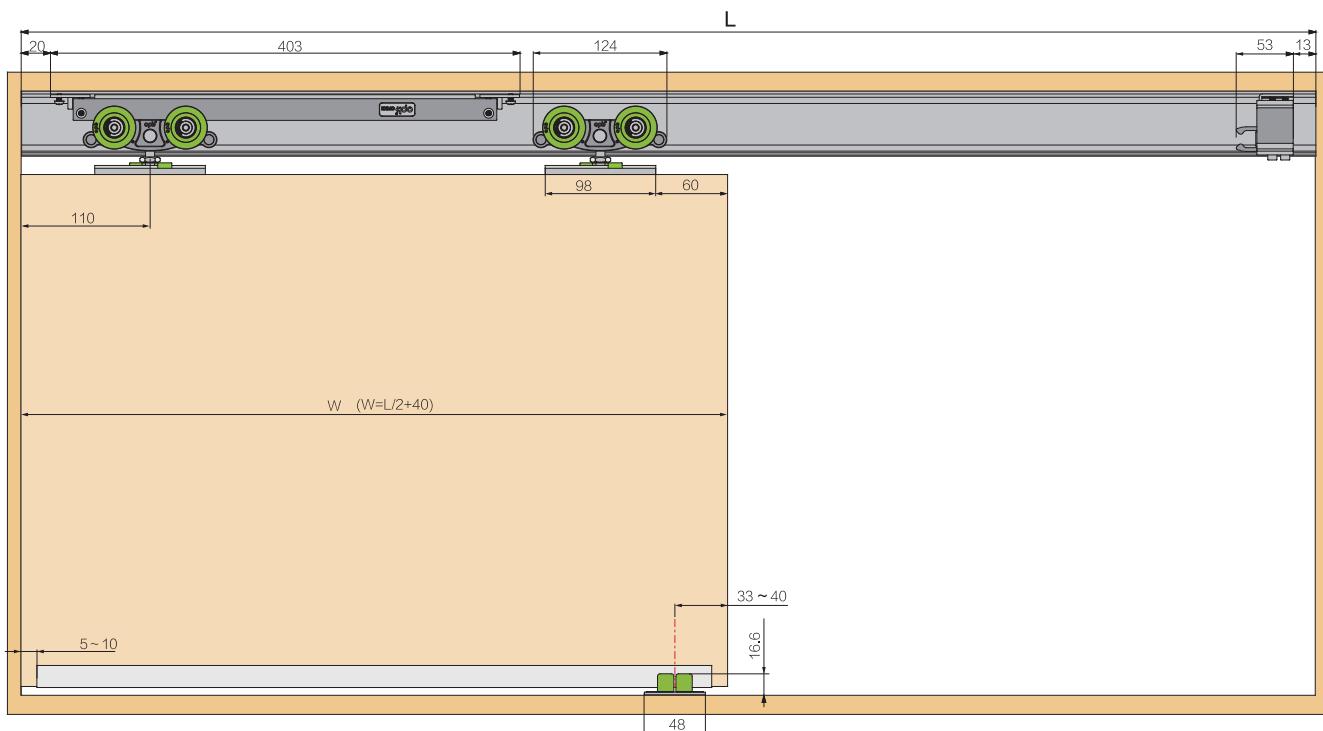
**长征10号木门安装参数****SATELLITE 10 WOOD DOOR INSTALLATION PARAMETERS****木门2**  
Wood Door 2**木门3**  
Wood Door 3**门板开槽尺寸**  
Door Panel Grooving Size

**长征10号木门安装参数****SATELLITE 10 WOOD DOOR INSTALLATION PARAMETERS****木门2 Wood Door 2****木门3 Wood Door 3**

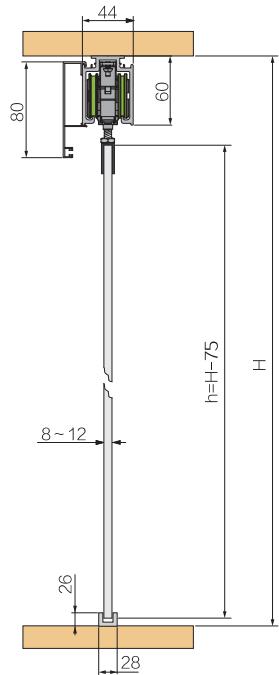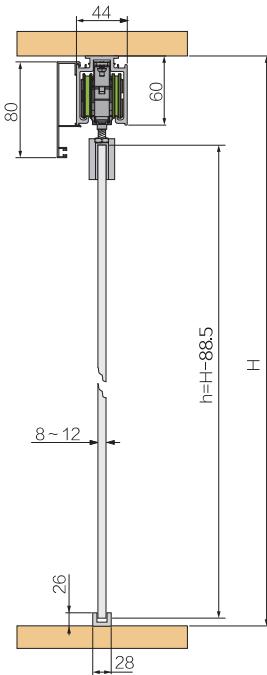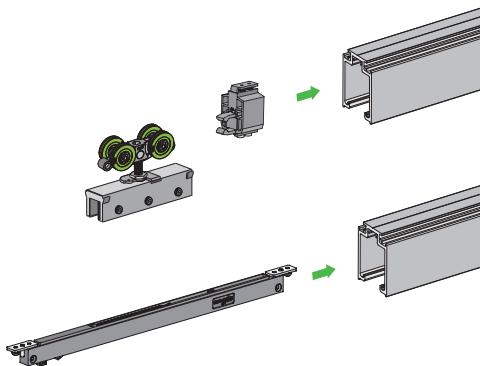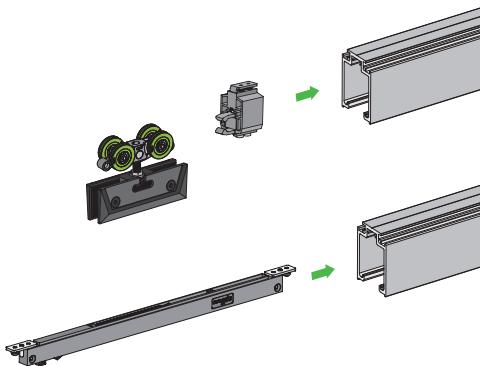
**长征10号玻璃门安装参数****SATELLITE 10 GLASS DOOR INSTALLATION PARAMETERS****玻璃门4  
Glass Door 4****玻璃门5  
Glass Door 5****玻璃开孔尺寸  
Glass Hole Size****无需开孔  
no need to hole**

## 长征10号玻璃门安装参数
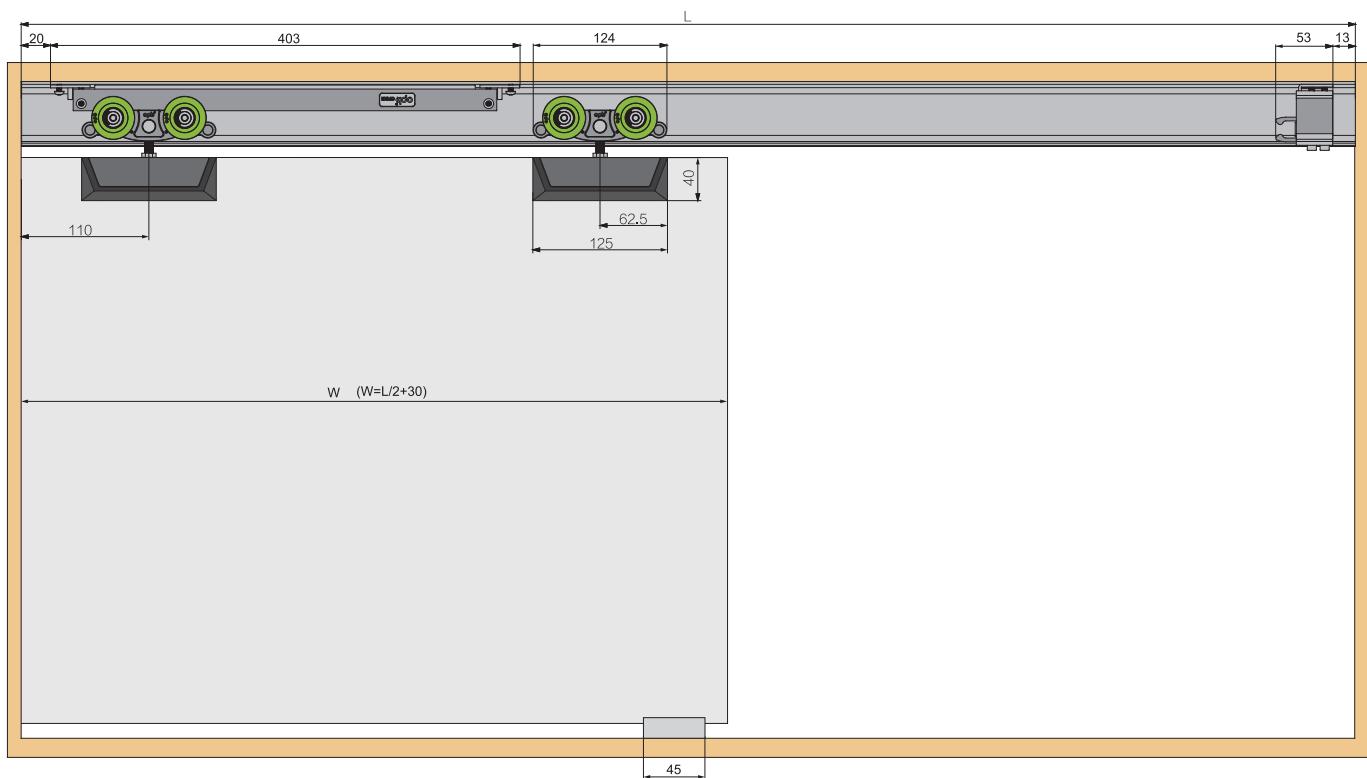
## SATELLITE 10 GLASS DOOR INSTALLATION PARAMETERS



玻璃门4 Glass Door 4

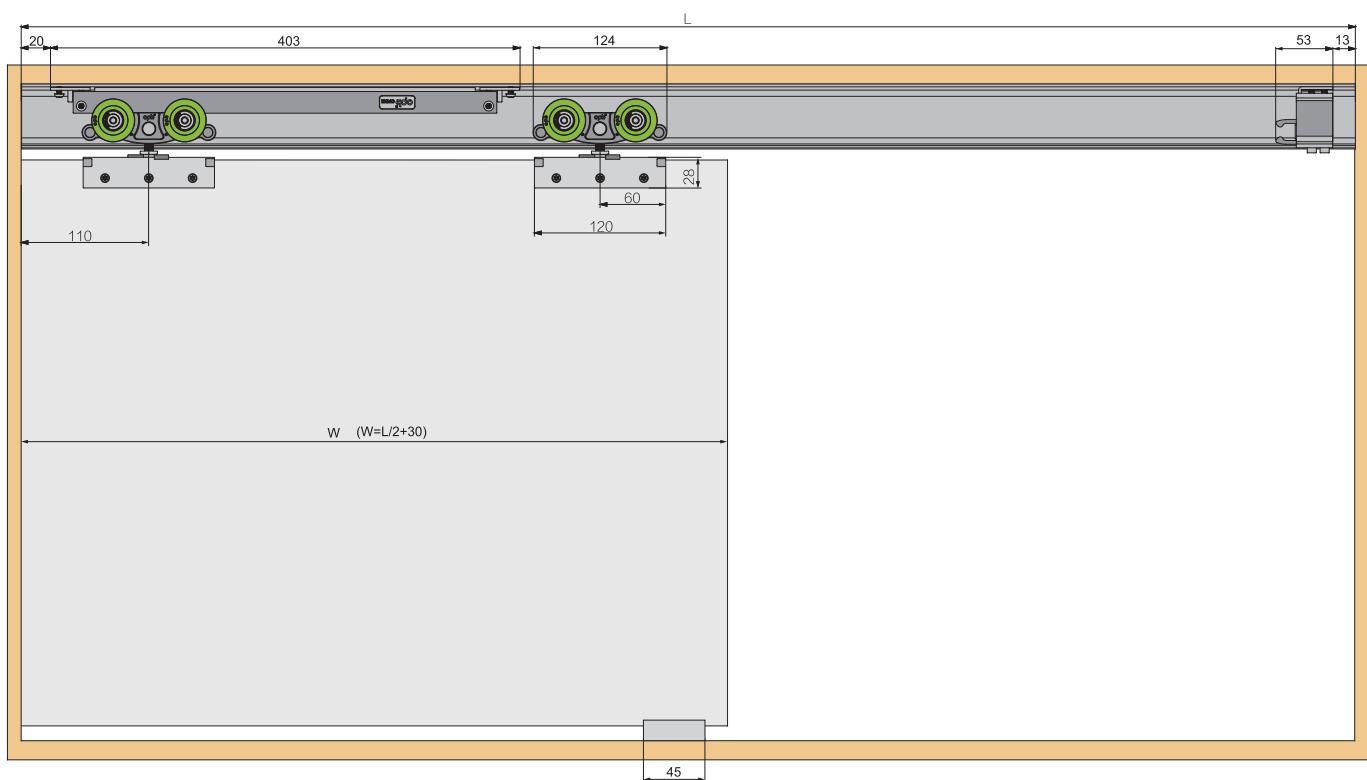

玻璃门5 Glass Door 5

# 长征11号

## SATELLITE 11

### 产品特点：

- **自动挂钩功能：**此款产品具有自动挂钩功能，产品安装后无须担心会出现脱钩现象；
- **阻尼器：**双层阻尼管装置，上下组合，形成封闭壳体，有利保护阻尼管，耐磨、耐用，滑动噪音小，使用寿命长，其结构简单合理，应用广泛；
- **防跳功能：**通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使用门板平稳滑行，延长产品的使用寿命；
- **安装方便：**此款产品属于中心限位阻尼，不分左右，安装时非常方便；
- **适用范围：**适合木门使用，安装调节方便。

### 技术概要：

- **适用于：**单扇和双扇木质推拉门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤50kg

### 此产品有两项专利技术

- 专利一：防跳装置  
 专利二：自动挂钩装置  
 专利三：挡件自动定位功能

### Product Features:

- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, More silence, long using life, novel appearance, simple and reasonable structure, wide application.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.
- **Application:** wooden door, easy installation and adjustment.

### Technical Points:

- **Application:** Single and double wood sliding door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 50kg

### Two Patent Technologies

- Patent I : Anti-jumping device  
 Patent II : Auto-hanging hook device  
 Patent III : Stopper automatic positioning function



## 长征11号木门1套装(适用于单扇门)

SATELLITE 11 WOOD DOOR 1 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		轻型 Light-duty	≤15	≥450	CG12215A
		通用型 Normal	≤30	≥450	CG12215B
		重型 Heavy-duty	≤50	≥450	CG12215C
双阻尼 Double Damper		轻型 Light-duty	≤15	≥680	CG12216A
		通用型 Normal	≤30	≥680	CG12216B
		重型 Heavy-duty	≤50	≥680	CG12216C

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		轻型 Light-duty	CJ11236A	1
		通用型 Normal	CJ11236B	
		重型 Heavy-duty	CJ11236C	
阻尼限位件 Damper Stopper		TJ020A	1	2
平板上轮39 Flat Top Roller		TJ002A	1	—
下轮 Under Roller		CJ212348A	2	2
上轨道 Upper Track		LTE047	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		LTE046	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
GB/ST4.2×20十字槽盘头自攻钉 GB/ST4.2×20 Cross Recess Pan Head Self-drilling Screw			4	4
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw			10	12
2.5毫米内六角扳手 2.5mm Allen Wrench			1	2

订购说明：下单时请注明套装型号或详细描述产品名称以及数量，如“CG12215A×20套”或“长征11号木门1单阻尼轻型20套”。

Ordering instructions: When place an order, please indicate the suit type or detailed product name and quantity, such as "CG12215A×20sets" or "SATELLITE 11 wood door 1 single damper light-duty 20 sets".

## 长征11号木门2套装(适用于单扇门)

SATELLITE 11 WOOD DOOR 2 COMPLETE SET (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		轻型 Light-duty	≤15	≥450	CG12215D
		通用型 Normal	≤30	≥450	CG12215E
		重型 Heavy-duty	≤50	≥450	CG12215F
双阻尼 Double Damper		轻型 Light-duty	≤15	≥680	CG12216D
		通用型 Normal	≤30	≥680	CG12216E
		重型 Heavy-duty	≤50	≥680	CG12216F

## 标准配置

## STANDARD CONFIGURATION



配件描述 Fitting Description			单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		轻型 Light-duty	CJ11236A	1
		通用型 Normal	CJ11236B	
		重型 Heavy-duty	CJ11236C	
阻尼限位件 Damper Stopper		TJ020A	1	2
平板上轮39 Flat Top Roller		TJ002A	1	—
下轮 Under Roller		CJ212349A	2	2
上轨道 Upper Track		LTE047	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
下轨道 Under Track		LTE046	选择合适长度 Select Suitable Length	选择合适长度 Select Suitable Length
GB/ST4.2×20十字槽盘头自攻钉 GB/ST4.2×20 Cross Recess Pan Head Self-drilling Screw		4	4	
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		10	12	
2.5毫米内六角扳手 2.5mm Allen Wrench		1	2	

订购说明：下单时请注明套装型号或详细描述产品名称以及数量，如“CG12215D×20套”或“长征11号木门2单阻尼轻型20套”。

Ordering instructions: When place an order, please indicate the suit type or detailed product name and quantity, such as "CG12215D×20sets" or "SATELLITE 11 wood door 2 single damper light-duty 20 sets".

## 长征11号轨道型材

## SATELLITE 11 RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
<b>LT E047</b> 上轨道 Upper Track		铝合金 Aluminium Alloy	0.6	银白 Silver	定制 Customized	—
					6000	LT E047
<b>LT E046</b> 下轨道 Under Track		铝合金 Aluminium Alloy	0.3	银白 Silver	定制 Customized	—
					6000	LT E046

## 轨道型材订购说明：

- 1、下单时请注明轨道型号或详细描述轨道名称、长度以及数量，如“LT E047 × 2 米 × 10 条”或“长征 11 号上轨道 10 条”；
- 2、以上轨道可按客户订制长度和数量下单，或整支按支数下单，请根据实际需要选择适合的轨道长度。

## Ordering instruction for rack profile:

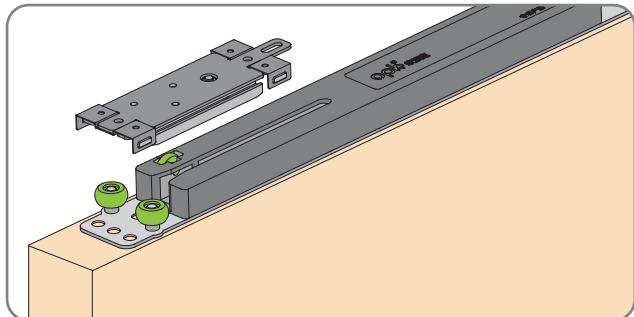
1. When place an order, please indicate the track type or detailed track description-name, length and quantity, such as “LT E047 × 2m × 10pcs” or “SATELLITE 11 upper track 2meter/pc 10pcs”.
2. The above track can be ordered according to customer length and quantity, or ordered per piece with full length, select suitable length of track according to the actual need.

## 长征11号安装参数


## SATELLITE 11 INSTALLATION PARAMETERS

## 1 产品技术特点(Product technical feayures)


- ① 门板防跳功能  
Door panel anti-jumping settings




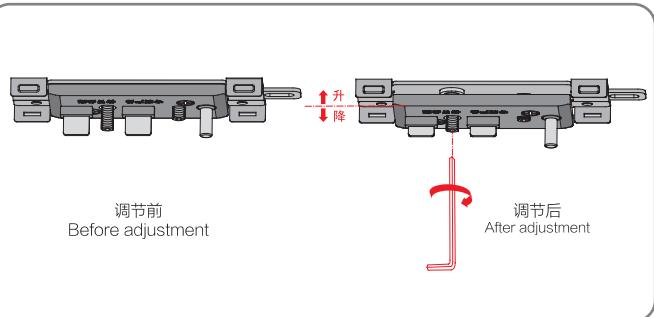
通过调节此螺丝，使阻尼拨动件升降，防止移门跳动  
Adjust toggle up and down by utilizing this screw





- ② 下轮多种选配方式  
Bottom roller installation options



A款  
A style

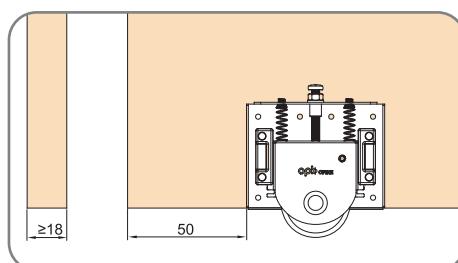


B款  
B style

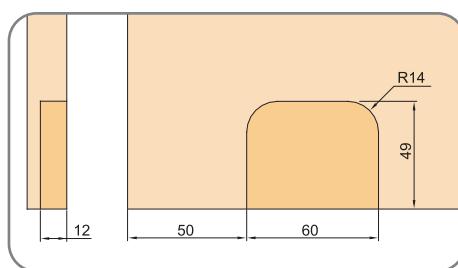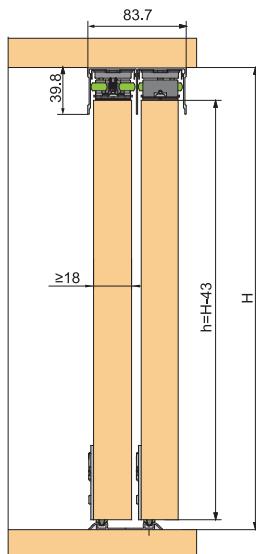2 柜体要求  
Cabinet requirements


门高h=门洞高H-43  
Door Height(h)=Doorway Height((H))-43mm

## 3 安装方法(Installation steps)

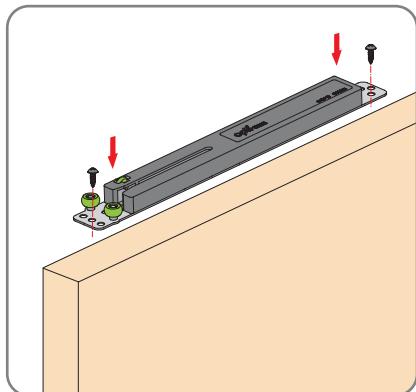
- ① 安装阻尼上轮  
Install damping top roller



- ② 安装平板上轮  
Install flat top roller

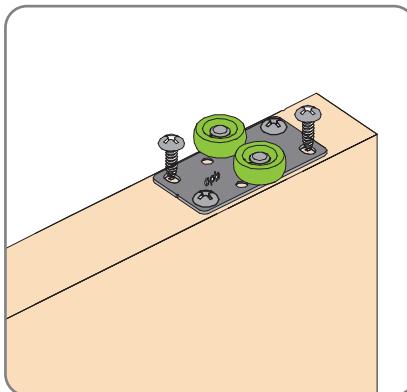








- ③ 安装下轮  
Install bottom roller

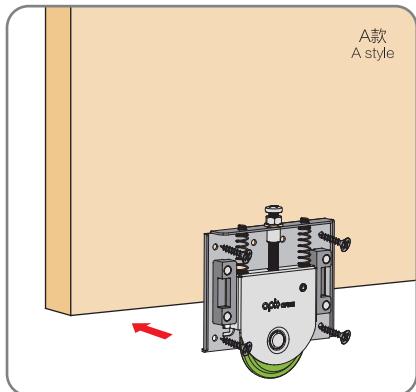

A款  
A style

## 长征11号安装参数
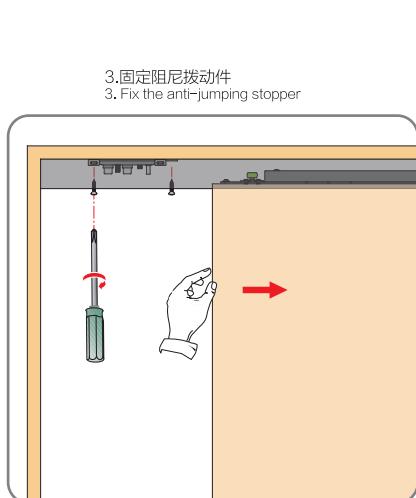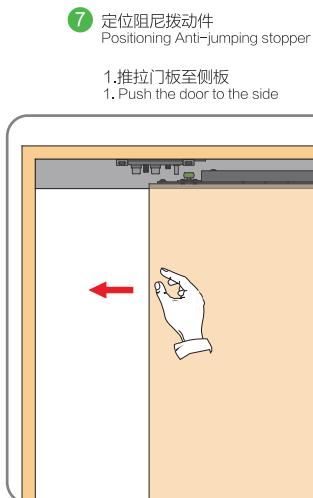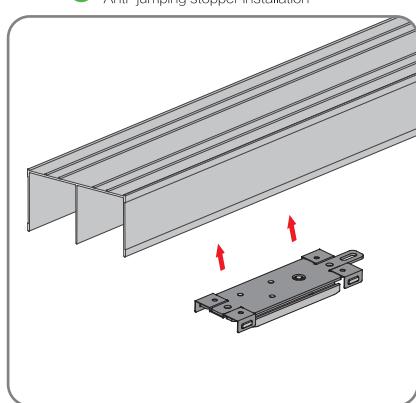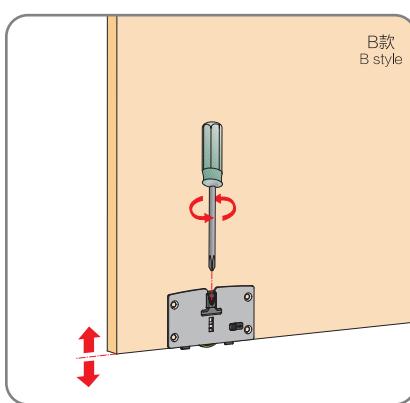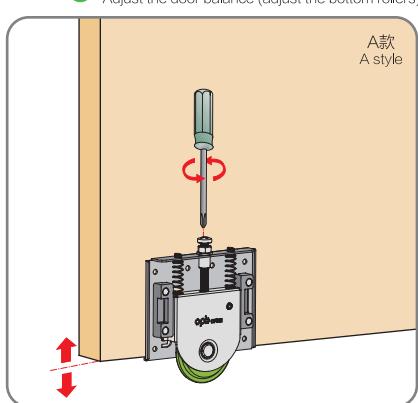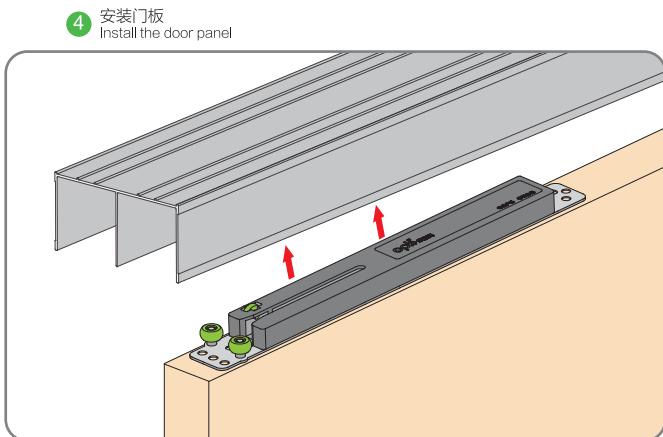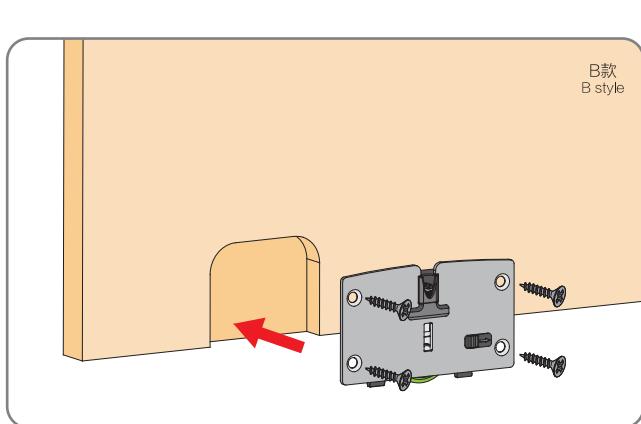
## SATELLITE 11 INSTALLATION PARAMETERS



# 长征12号

## SATELLITE 12

### 产品特点：

- **平趟门设计：**柜门错位滑动开启，关闭时两扇门在同一平面，整体美观、大气、浑然一体；
- **承重：**采用高强度加厚合金框架，通过增加滑轮数量，使单门最高承重量高达50KG；
- **双向阻尼装置：**根据不同柜门重量，可以自行调节柜门关闭的速度；
- **金属导向弯轨：**采用合金导向弯轨，有效的降低滑动摩擦力和噪音，提高门滑动及关闭复位时的顺畅度；
- **滑轮：**采用优质轴承，并配套使用进口改性尼龙制作的滑轮，经精加工后滑动更加顺畅、静音、大大延长了滑轮的使用寿命；
- **毛刷：**毛刷装置与滑轮同步运行，清扫轨道上的灰尘，保证运行平稳顺畅；
- **表面处理：**采用具有耐腐蚀性的工艺处理，适用于不同环境、气候条件下使用，外形美观大方；
- **智能系统：**加载智能电动系统装置，通过轻触、轻推、遥控，即能自动开启、关闭柜门，尽显智能、时尚、人性化。

### 技术概要：

- **适用于：**双扇木质、铝框平趟门
- **门重：**单扇门≤50kg
- **门厚：**18~50mm
- **门宽：**800~1500mm
- **门高：**600~2800mm

### 此产品有四项专利技术

- 专利一：阻尼调节技术
- 专利二：下轮调节装置
- 专利三：开启关闭双向阻尼装置
- 专利四：下轨弹力油滑轮推入式装置

### Product Features:

- **Fantastic design:** Overall surface is in the same level when door is closed, creating elegance, nobility and harmony.
- **Load-bearing:** High-strength alloys applied to fittings; Metal tracks and multi-roller combination; Max weight 50kg/door.
- **Two-way Damper Device:** Two-way Damper device for door opening and closing, the damping force can be adjusted according to the weight of the door during door closing.
- **Metal Oriented Curved Rail:** Alloy-oriented curved rails adopted for effectively reducing friction and noise, ensuring flexibility and smoothness during door sliding.
- **Sliding roller:** High-quality ball bearing and imported nylon material adopted; After processing, roller slides more smoothly and quietly, which greatly extends its usage life.
- **Brush:** Automatically clearing debris and dust in the rails, ensuring smooth sliding of roller, protecting them from damage, and prolonging the service life.
- **Finishing:** Special surface treatment ensured abrasive resistance feature; Beautiful and dignified appearance; Suitable for different environment and climate.
- **Intelligent system:** Just touch or nudge the intelligent-electric-system-loaded device, then door opens or closes, which brings intelligence, fashion and humanity

### Technical Points:

- **Application:** Double wood / aluminum in-line door
- **Door Weight:** Single door ≤50kg
- **Door Thickness:** 18~50mm
- **Door Width:** 800~1500mm
- **Door Height:** 600~2800mm

### Four Patent Technologies

- Patent I : Damper adjustable device
- Patent II : Bottom roller adjustable device
- Patent III : Open shutoff two-way damping device
- Patent IV: Elastic push and guide device for bottom roller





## 长征12号套装

SATELLITE 12 COMPLETE SET

阻尼平趟门套装型号 Manual Type Set Model	智能平趟门套装型号 Intelligent Type Set Model	规格(mm) Specification (mm)	柜体宽度(mm) Cabinet Width (mm)
CG12217A	CG12218A	1550	1600
CG12217B	CG12218B	1650	1700
CG12217C	CG12218C	1750	1800
CG12217D	CG12218D	1850	1900
CG12217E	CG12218E	1950	2000
CG12217F	CG12218F	2050	2100
CG12217G	CG12218G	2150	2200
CG12217H	CG12218H	2250	2300
CG12217J	CG12218J	2350	2400
CG12217K	CG12218K	2450	2500
CG12217L	CG12218L	2550	2600
CG12217M	CG12218M	2650	2700
CG12217N	CG12218N	2750	2800
CG12217P	CG12218P	2850	2900
CG12217Q	CG12218Q	2950	3000

## 订购说明:

- 1、有多种规格可供用户选择 ( 标准规格 );
- 2、所有规格的柜体侧板标准厚度为 25mm;
- 3、下单时请注明套装型号或详细描述产品名称以及数量，如“CG12218A × 3 套”或“长征 12 号智能平趟门 3 套，柜体宽度 1.6 米”。

## Ordering instruction:

1. Various specifications for your choose (Standard Type).
2. The side board standard thickness is 25mm for all specification of cabinet.
3. When place an order, please indicate the suit type or detailed product name and quantity, such as "CG12218A × 3sets" or "SATELLITE 12 intelligent type 3 sets, cabinet width is 1.6 meter".

## 电子技术参数说明:

额定电压: 220~240V 50~60Hz

额定功率: 30W

待机功率: 5W

开门速度: 0.17m/s

控制方式: 微电脑处理控制器

冲撞机能: 在受阻或冲撞条件下返回

停电时手动开闭力: 3KG

耗电说明: 正常使用下平均8天约耗1度电

## Electronic technical parameters:

Voltage Rating: 220V~240V 50Hz~60Hz

Power Rating: 30W

Standby Power: 5W

Door Opening Speed: 0.17m/s

Control Mode: Microcomputer Processing Controller

Bounce Function: Rebound in the conditions of damping or burning

Manual Power Needed When Power Off: 3kg

Power Consumption: On average, about 1 kWh of electricity consumption in 8 days

≤50kg

## 长征12号标准配置




## SATELLITE 12 STANDARD CONFIGURATION

配件描述 Fitting Description			阻尼平趟门 Manual Type	智能平趟门 Intelligent Type	
上轨 Upper Track		参考套装型号 Reference Set Model	1	1	
下轨 Bottom Track		参考套装型号 Reference Set Model	1	1	
二维调节器 2-D Regulator		TD002A	2	2	
二维调节器(左右随动) 2-D Regulator (Left-right Move)					
下轮固定座 Bottom Roller Fix Seat		—	2	2	
下滑轮 Bottom Roller					
安装说明书 Installation Instructions			1	1	
柜体技术参考图纸 Cabinet Technical Parameters			1	1	
DVD教学光盘 Installation DVD-ROM			1	1	
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw			36	48	
3毫米内六角扳手 3mm Allen Wrench			1	1	
6-8开口扳手 6-8 Open End Wrench			1	1	

## 长征12号智能电动系统配置(只适用于智能平趟门)

SATELLITE 12 INTELLIGENT SYSTEM CONFIGURATION (Only application to Intelligent Type)



≤50kg

配件描述 Fitting Description				智能平趟门 Intelligent Type	
智能电动系统 Intelligent System	智能控制盒 Intelligent Control Box		 365	TD021A	1
			 280	TD021B	1
	电源连接线 Power Cable			TD031A	1
	电源插头 Power Plug			PJQ53001ZZ99	1
	遥控器 钮扣电池型号 2032(3V) Remote Control Button cell type: 2032(3V)			TE061A	1
	蓝牙开关 钮扣电池型号 2032(3V) Bluetooth Switch Button cell type: 2032(3V)		 46 95 Ø34 12.2	TD019A	2
产品使用手册 User Manual					1

## 长征12号可选配件

SATELLITE Roller 12 Selectable Fittings



★ 选择此款二维调节器的，上轨道要多后退10mm  
For this 2-D regulator, 10mm more space back for the up track

配件描述 Fitting Description				阻尼平趟门 Manual Type	智能平趟门 Intelligent Type
新款二维调节器 New Type 2-D Regulator		 13.5 108.5 41	TD086A	2	2
新款二维调节器(左右随动) New Type 2-D Regulator (Left-right Move)		 ★ 此款适用于最大40mm的门厚 Max door thickness: 40mm	TD086B	2	2

## 长征12号安装参数
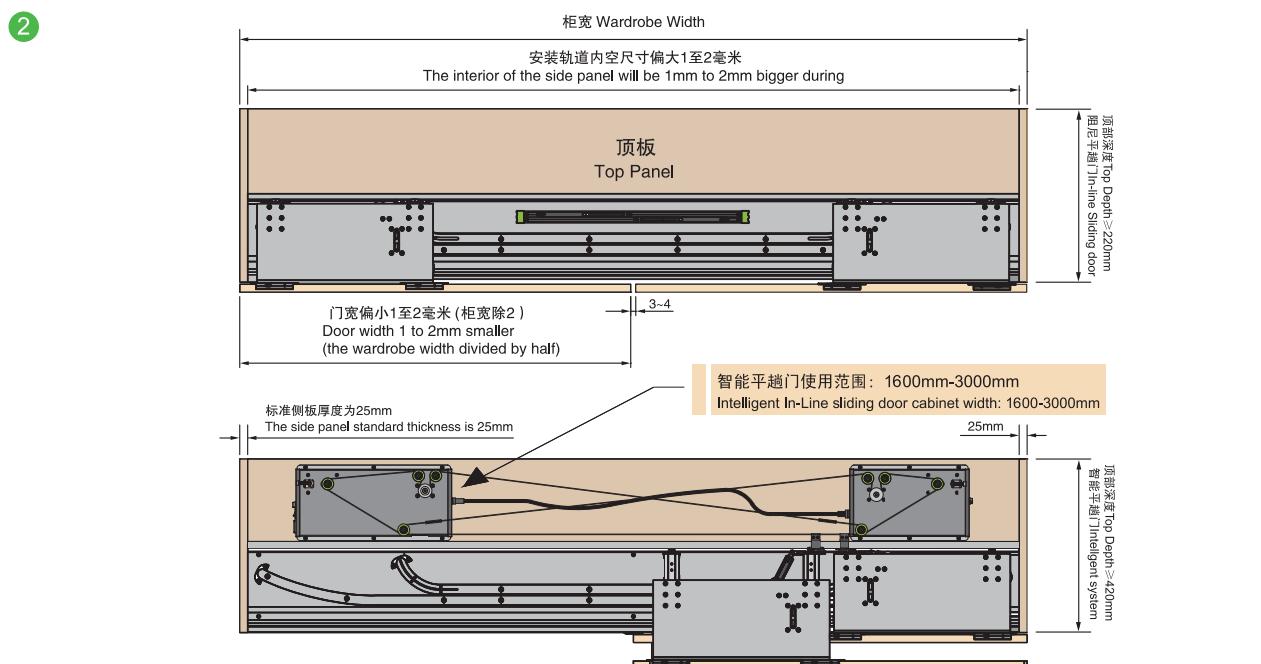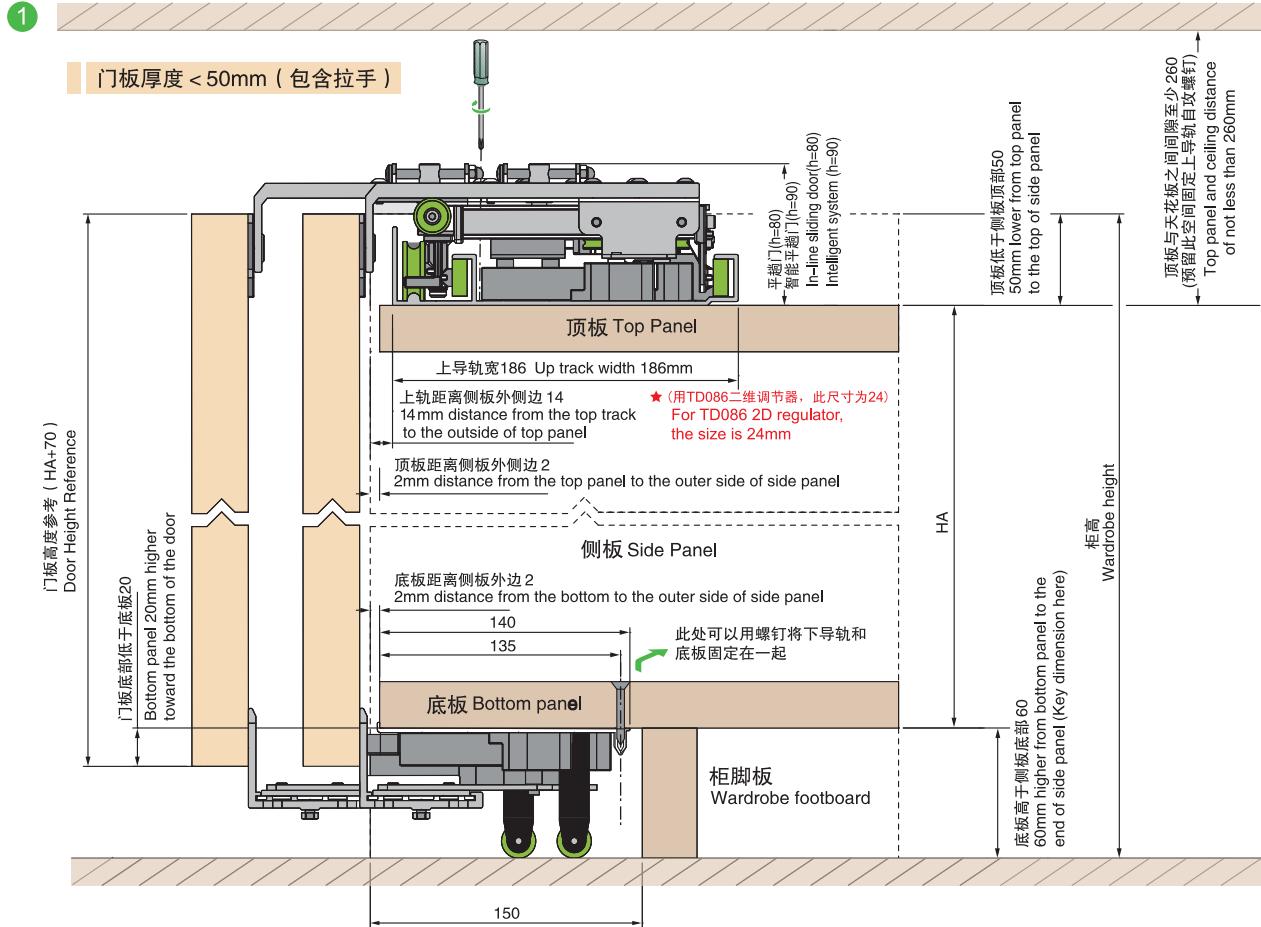
### SATELLITE 12 INSTALLATION PARAMETERS

#### 1 安装要求 Installation Requirements





## 长征12号安装参数

### SATELLITE 12 INSTALLATION PARAMETERS

#### 2 柜体要求 Cabinet Requirements

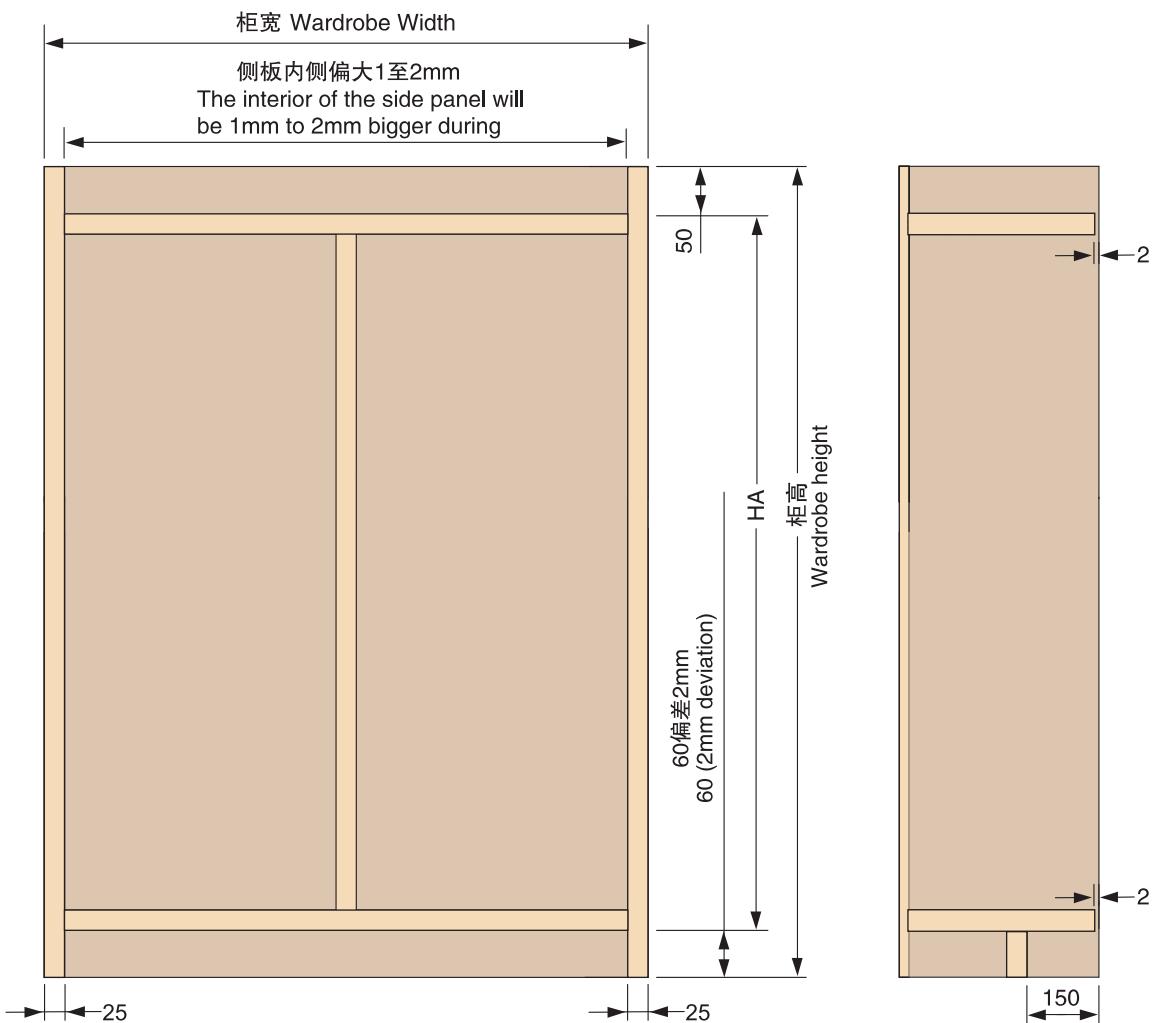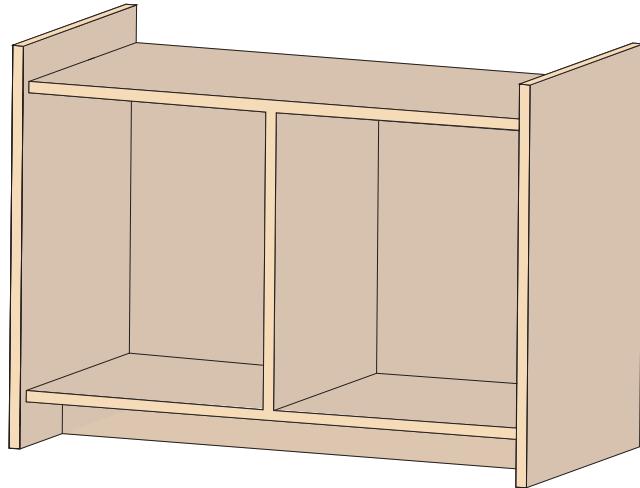
3D柜体图  
3D-Cabinet graph




## 长征12号安装参数 SATELLITE 12 INSTALLATION PARAMETERS

### 3 门板要求 Door Requirements
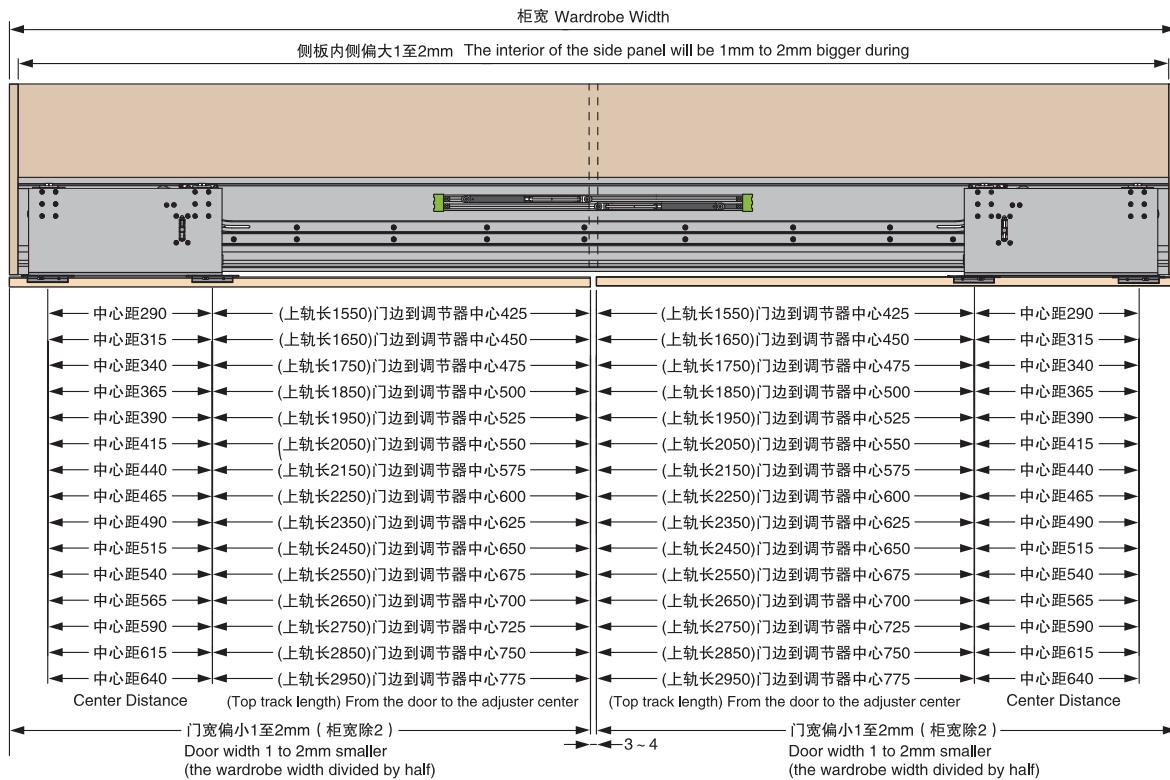
#### ① 门板加工参数-1 Door machining parameters






#### ② 门板加工参数-2 (适用于木门) Door machining parameters (Apply to wooden doors)

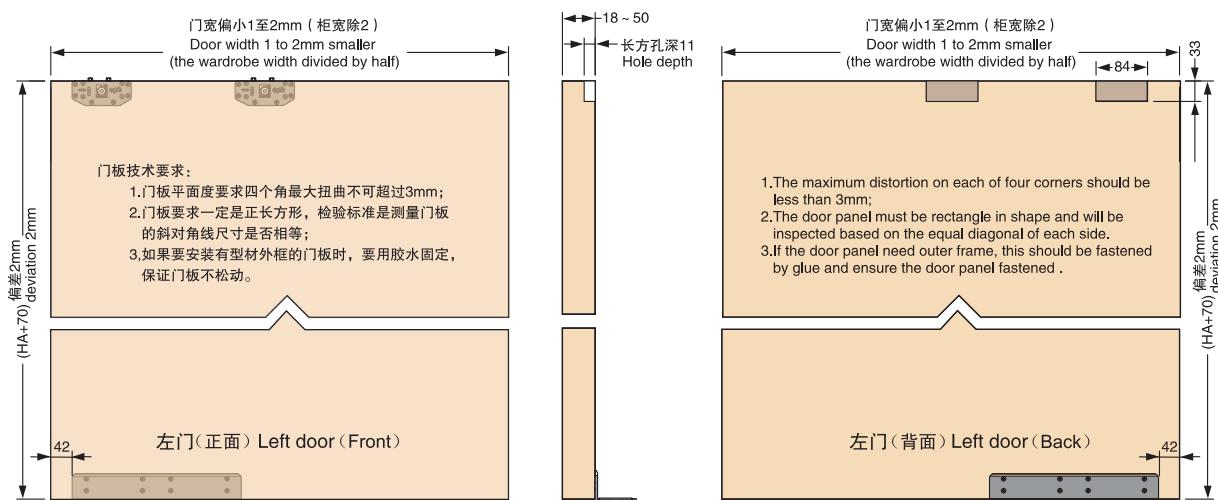








## 长征12号安装示意
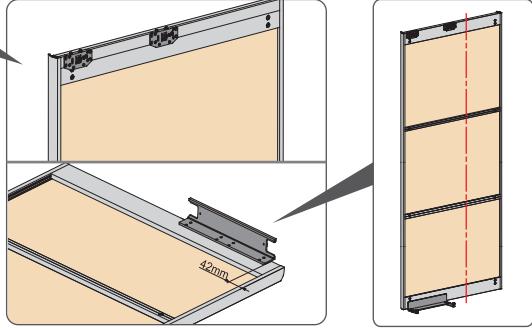
## SATELLITE 12 INSTALLATION INSTRUCTION

1 测量柜体水平、垂直  
Cabinet Measurement2 安装上、下轨道  
Install top track & bottom track3 安装门板配件  
Install door's accessorie




## 4 安装门板(Install door)

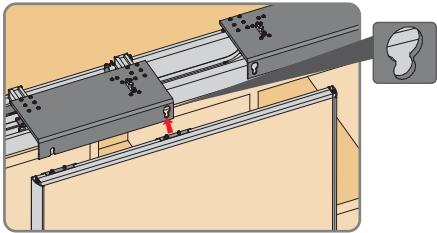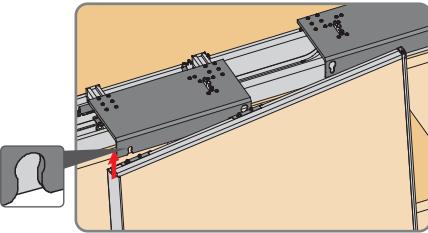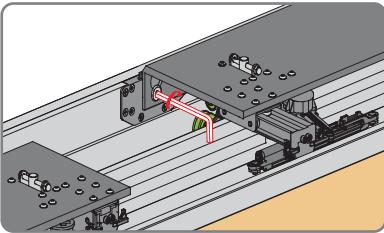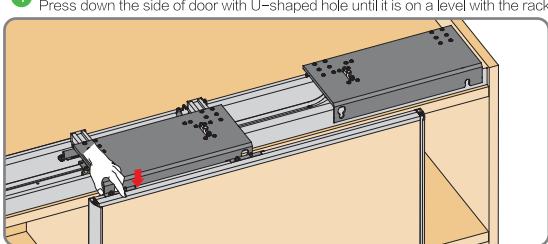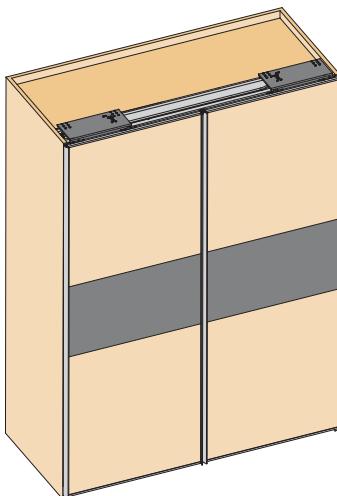① 先挂葫芦孔螺钉 Hang up bleed screw

2 倾斜门板再挂U型孔螺钉  
Tilt door panel, and then hang up U-shape-holed screw③ 用5mm内六角扳手将葫芦孔螺钉固定  
Fix bleed screw with 5mm hexagon ring spanner4 将U型孔端的门板向下压，直至与门板上挂架水平  
Press down the side of door with U-shaped hole until it is on a level with the rack6 用8mm外六角扳手调节门板平衡  
Adjust the door balance with 8mm outside-hexagonal spanner

“圆孔”调节门板左右 Door panel can be adjusted from left to right by this “round hole”	“长条孔”调节门板高低 Door panel height can be adjusted from this “slot hole”
左旋门板向左 turning left door going left	左旋门板降低 turning left door going down
右旋门板向右 turning right door going right	右旋门板升高 turning right door going up

## 5 安装下轮固定座(Install bottom fixing mount)

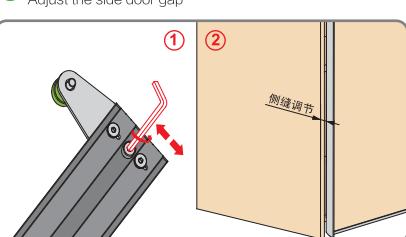2 调节门板侧边门缝  
Adjust the side door gap3 用8mm外六角扳手固定下轮固定座  
Fix bottom fixing mount with 8mm outside-hexagonal spanner所有短轮均在柜体外侧  
Leaving short plate outside用3mm内六角扳手调节  
3mm hex wrench此步骤必须在所有调节完成才能执行  
This step will be done after finishing all adjustments



## 长征12号安装示意

## SATELLITE 12 INSTALLATION INSTRUCTION








## 6 安装左、右控制盒

Install the right and left controlling box

- ① 将左、右控制盒的皮带调节螺钉往里调到最底  
Adjust the belt-adjusting-screw inward till the end



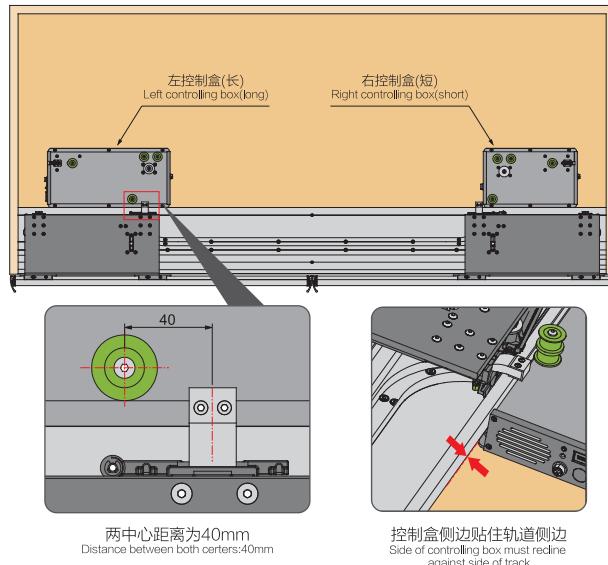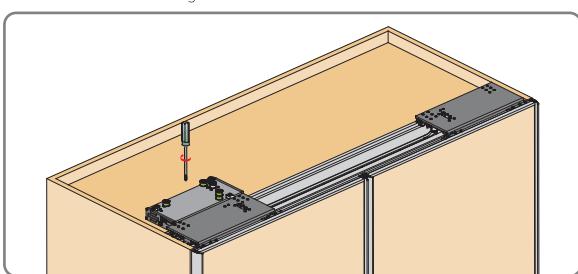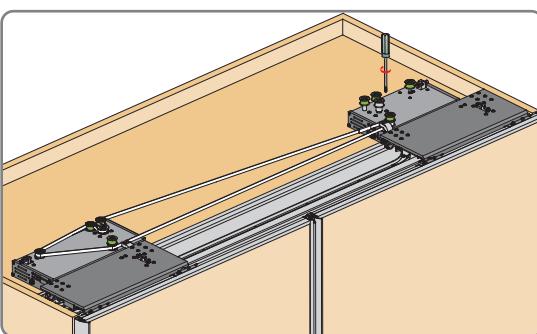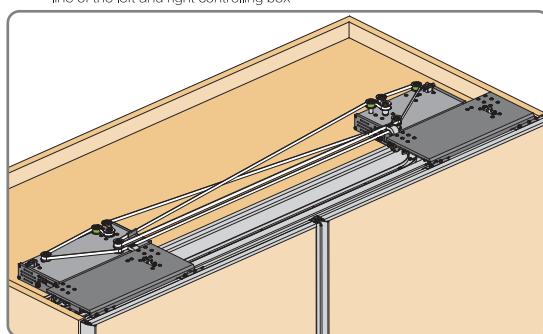


- ② 固定左控制盒  
Fix the left controlling box

7 绕传动带  
Hang up the transmission belt1 绕左门传动带,然后固定右控制盒  
Hang up left side door transmission belt,then fix right controlling box2 绕右门传动带,然后连接左、右控制盒电源连接线  
Hang up right side door transmission belt,then connect power line of the left and right controlling box8 调节传动带  
Adjust the transmission belt用5mm内六角扳手调节  
5mm hex wrench

将左、右控制盒的传动带调节螺钉往外调,将传动带拉紧即可  
Adjust the transmission belt-adjusting-screw outward, and then stretch and tighten the transmission belt.


9 安装蓝牙开关  
Install power switch of bluetooth device

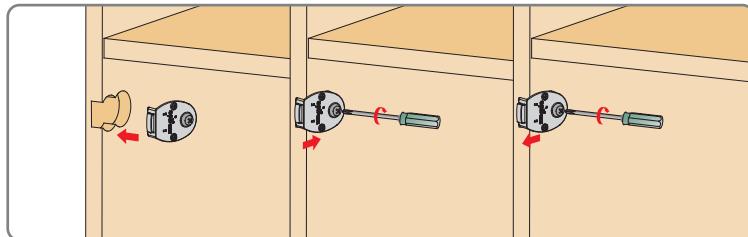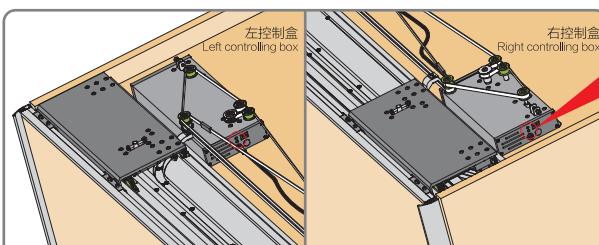采用十字螺丝刀可以对蓝牙开关按键进行前后调节  
Bluetooth switch key can be adjusted from front to back by the cross screwdriver.

10 启动左、右控制盒上的学习按键,分别对左门、右门进行一次学习  
Start up the button on left and right controlling box11 安装完毕  
Installation completed


## 长征12号H款门框型材

## SATELLITE 12 DOORFRAME PROFILE TYPE H

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	长度(mm) Length (mm)	型号 Model
A03-18拉手竖框 XJA118-00620		铝合金 Aluminium Alloy	0.45	定制 Customized	XJA118
				6000	

表面处理：氧化黑拉丝(BU) / 氧化银白拉丝(BX)

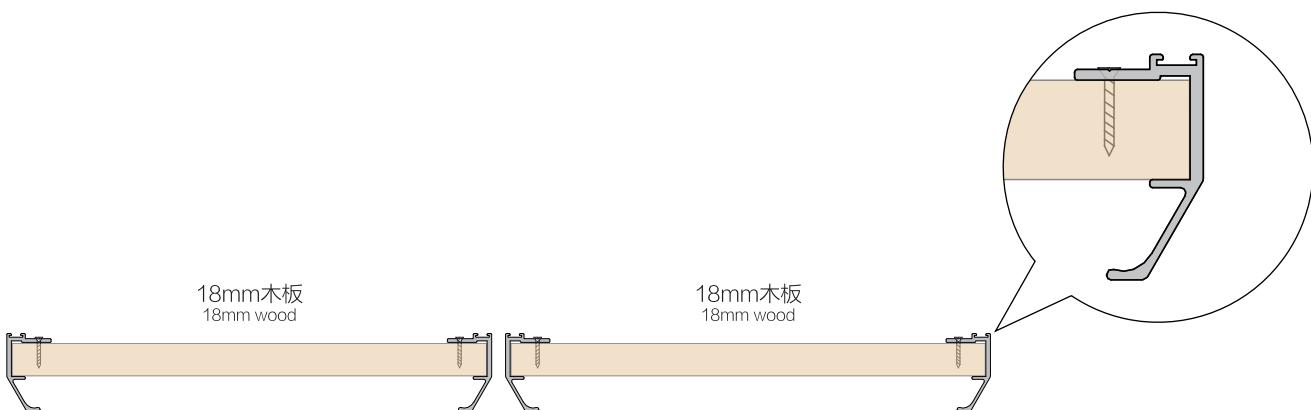Finished: Anodized brush black(BU) / Anodized brush sliver (BX)



## 轨道型材订购说明：

- 1、下单时请注明轨道型号或详细描述轨道名称、长度以及数量，如“XJA118 x 2米 x 10条”或“长征13号H款拉手竖框10条”；
- 2、以上轨道可按客户订制长度和数量下单，或整支按支数下单，请根据实际需要选择适合的轨道长度。

## Ordering instruction for track profile:

1. When placing an order, please indicate the track type or detailed track description—name, length and quantity, such as "XJA118 x 2m x 10pcs" or "SATELLITE 12 type H vertical frame with handle 2meter/pc 10pcs".
2. The above track can be ordered according to customer length and quantity, or ordered per piece with full length, select suitable length of track according to the actual need.



# 长征15号双向阻尼吊滑轮

SATELLITE 15 HANGING SLIDING ROLLER WITH OPPOSITE DAMPER

## 产品特点：

- 对向缓冲功能；
- 自动挂钩设计，脱钩自动复位功能；
- 减震设计，采用进口定制改性工程塑料，有效缓解门板跳动；
- 采用高精度滑轮，滑动平稳、顺畅、静音；
- 安装及拆卸便捷。

## 技术概要：

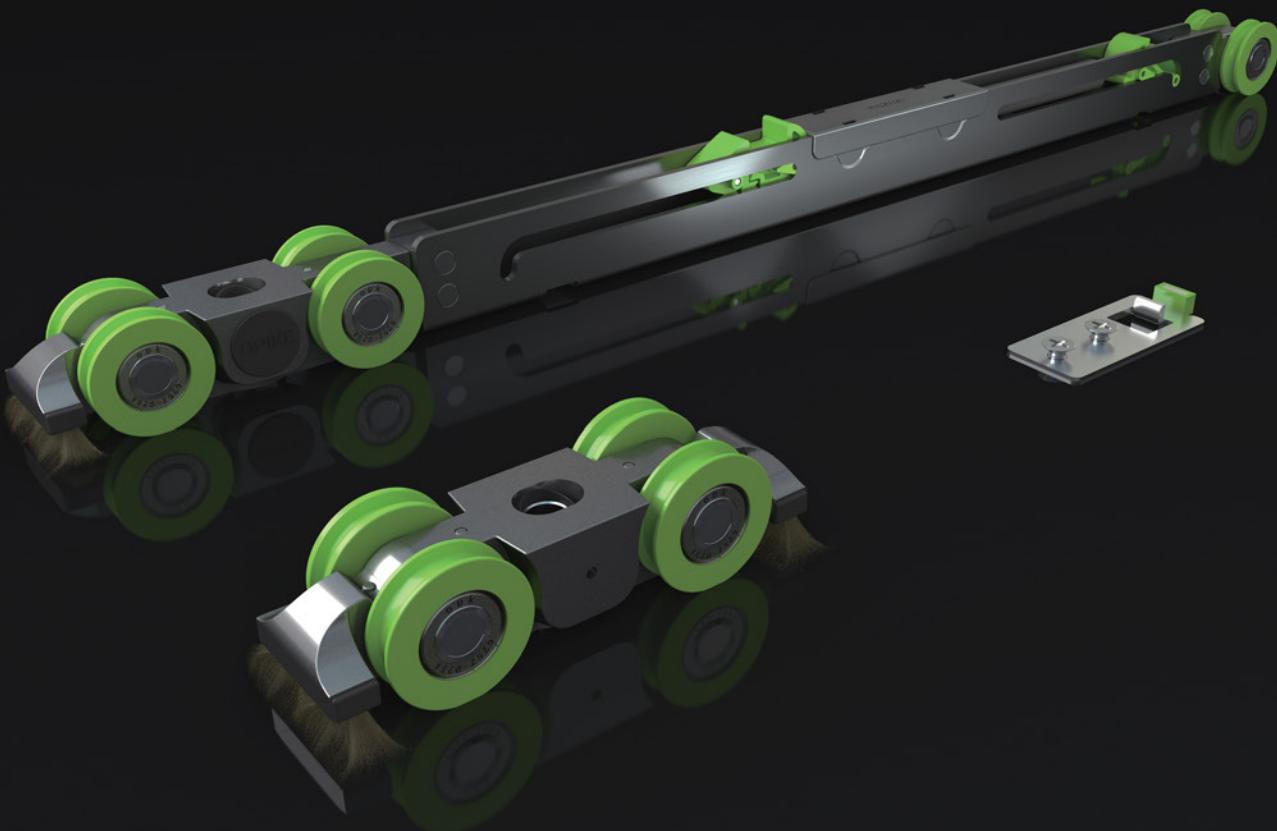
- **适用于：**单扇和双扇木质推拉门、玻璃推拉门、铝边框门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤120kg

## Product Features:

- Collision damping function.
- Hook automatical hanging design, Auto-reset while unlock.
- Seismic mitigation design: Adopt imported customized modified engineering plastics, reduce door panel bounce efficiently.
- High precision grade roller, stable, smooth and quiet sliding.
- Easy installation and removal.

## Technical Points:

- **Application:** Single and double wood sliding door, glass sliding door, aluminum door
- **Adjustment Performance:** Door panel installation height is adjustable
- **Door Weight:** Single Door ≤ 120kg



## 长征15号木门2套装(适用于单扇门)

SATELLITE 15 WOOD DOOR 2 COMPLETE SET (Application to single door)

轻型  
20-60kg通用型  
60-90kg重型  
90-120kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
双向阻尼 Opposite Damper		轻型 Light-duty	20-60	≥600	CG12223A
		通用型 Normal	60-90	≥600	CG12223B
		重型 Heavy-duty	90-120	≥600	CG12223C

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			轻型(单扇门) Light-duty	通用型(单扇门) Normal	重型(单扇门) Heavy-duty
对向阻尼器 Opposite Damper		轻型 Light-duty	CG12222A	1	—
		通用型 Normal	CG12222B	—	1
		重型 Heavy-duty	CG12222C	—	1
上滑轮 Upper Roller		TG021A		1	
限位件 Stopper		TG023A		2	
升降挂盒-G Adjustable Hanging Plate G		TN365A		2	
下定位 Under Roller		TN107A		1	
上轨道 Upper Track		XNA094		选择合适长度 Select Suitable Length	
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	

## 长征15号木门3套装(适用于单扇门)

SATELLITE 15 WOOD DOOR 3 COMPLETE SET (Application to single door)

轻型  
20-60kg通用型  
60-90kg重型  
90-120kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
双向阻尼 Opposite Damper		轻型 Light-duty	20-60	≥600	CG12224A
		通用型 Normal	60-90	≥600	CG12224B
		重型 Heavy-duty	90-120	≥600	CG12224C

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			轻型(单扇门) Light-duty	通用型(单扇门) Normal	重型(单扇门) Heavy-duty
对向阻尼器 Opposite Damper		轻型 Light-duty	CG12222A	1	—
		通用型 Normal	CG12222B	—	1
		重型 Heavy-duty	CG12222C	—	1
上滑轮 Upper Roller		TG021A		1	
限位件 Stopper		TG023A		2	
U型吊体挂板 "U" Hanging Plate		TN060C		2	
下定位 Under Roller		TN107A		1	
上轨道 Upper Track		XNA094		选择合适长度 Select Suitable Length	
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	

## 长征15号玻璃门4套装(适用于单扇门)

SATELLITE 15 GLASS DOOR 4 COMPLETE SET (Application to single door)

轻型  
20-60kg通用型  
60-90kg重型  
90-120kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
双向阻尼 Opposite Damper		轻型 Light-duty	20-60	≥600	CG12265A
		通用型 Normal	60-90	≥600	CG12265B
		重型 Heavy-duty	90-120	≥600	CG12265C

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			轻型(单扇门) Light-duty	通用型(单扇门) Normal	重型(单扇门) Heavy-duty
对向阻尼器 Opposite Damper		轻型 Light-duty	CG12222A	1	—
		通用型 Normal	CG12222B	—	1
		重型 Heavy-duty	CG12222C	—	1
上滑轮 Upper Roller		TG021A		1	
限位件 Stopper		TG023A		2	
玻璃挂架4 Glass Clamp 4		TN343A		2	
下定位 Under Roller		TN336A		1	
上轨道 Upper Track		XNA094		选择合适长度 Select Suitable Length	
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	

## 长征15号玻璃门5套装(适用于单扇门)

SATELLITE 15 GLASS DOOR 5 COMPLETE SET (Application to single door)

轻型  
20-60kg通用型  
60-90kg重型  
90-120kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
双向阻尼 Opposite Damper		轻型 Light-duty	20-60	≥600	CG12266A
		通用型 Normal	60-90	≥600	CG12266B
		重型 Heavy-duty	90-120	≥600	CG12266C

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			轻型(单扇门) Light-duty	通用型(单扇门) Normal	重型(单扇门) Heavy-duty
对向阻尼器 Opposite Damper		轻型 Light-duty	CG12222A	1	—
		通用型 Normal	CG12222B	—	1
		重型 Heavy-duty	CG12222C	—	1
上滑轮 Upper Roller		TG021A		1	
限位件 Stopper		TG023A		2	
玻璃挂架5 Glass Clamp 5		TN340A		2	
下定位 Under Roller		TN336A		1	
上轨道 Upper Track		XNA094		选择合适长度 Select Suitable Length	
轨道清理刷 (选配) Brusher (Optional)		TN337A		1	

## 长征15号窄边框铝门套装 (适用于单扇门)

SATELLITE 15 SLIM ALUMINUM FRAME (Application to single door)



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
双向阻尼 Opposite Damper		轻型 Light-duty	20-60	≥600	CG12301A
		通用型 Normal	60-90	≥600	CG12301B
		重型 Heavy-duty	90-120	≥600	CG12301C


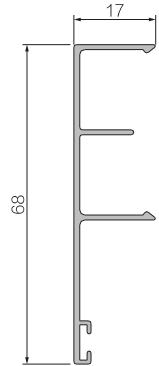

## 标准配置

## STANDARD CONFIGURATION

配件描述 Fitting Description			轻型(单扇门) Light-duty	通用型(单扇门) Normal	重型(单扇门) Heavy-duty
对向阻尼器 Opposite Damper		轻型 Light-duty	CG12222A	1	—
		通用型 Normal	CG12222B	—	1
		重型 Heavy-duty	CG12222C	—	1
上滑轮 Upper Roller		TG021A	1		
限位件 Stopper		TG023A	2		
窄边框升降挂盒 Adjustable Hanging Plate For Slim Aluminum Frame		TN427A	2		
下定位 Under Roller		TN358A	1		
上轨道 Upper Track		XNA094	选择合适长度 Select Suitable Length		
上下横 Upper&bottom frame		XNA162	选择合适长度 Select Suitable Length		
竖框 Vertical frame		XNA163	选择合适长度 Select Suitable Length		
装饰盖 Decorative cover		XNA164	选择合适长度 Select Suitable Length		
轨道清理刷 (选配) Brusher (Optional)		TN337A	1		







## 长征15号轨道型材

## SATELLITE 15 RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
XNA094 上轨道 Upper Track		铝合金 Aluminium Alloy	0.80	香槟 Champagne	2000	XNA094AJ00200
					3000	XNA094AJ00300
					4000	XNA094AJ00400
					6000	XNA094AJ00600
XNA078 装饰盖 (选配) Decorative Cover (Optional)		铝合金 Aluminium Alloy	0.36	香槟 Champagne	2000	XNA078BJ00200
					3000	XNA078BJ00300
					4000	XNA078BJ00400
					6000	XNA078BJ00600
XNA003 下轨道 (仅适用于木门) Under Track (Application to wood door)		铝合金 Aluminium Alloy	0.18	香槟 Champagne	2000	XNA003BJ00200
					3000	XNA003BJ00300
					4000	XNA003BJ00400
					6000	XNA003BJ00600

## 窄边框材料


## NARROW BORDER MATERIAL

XNA162 上下横 Upper&bottom frame		XNA163 竖框 Vertical frame		XNA164 装饰盖 Decorative cover	
XLC002BZ 胶条 Adhesive tape		PJC96050 角码 Vertical frame		TN547A 拉手 Handle	



## 长征15号木门安装参数

### SATELLITE 15 WOOD DOOR INSTALLATION PARAMETERS



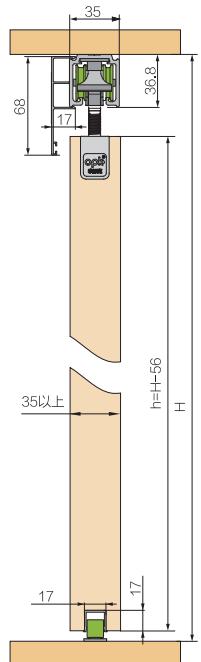
木门2  
Wood Door 2





木门3  
Wood Door 3

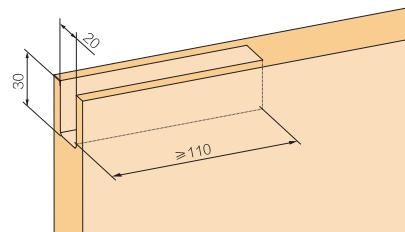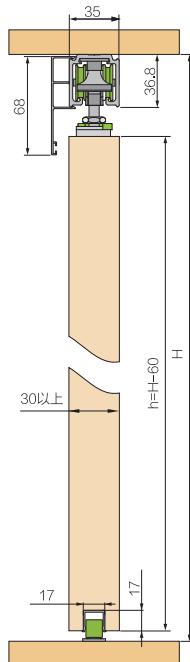

门板开槽尺寸  
Door Panel Grooving Size

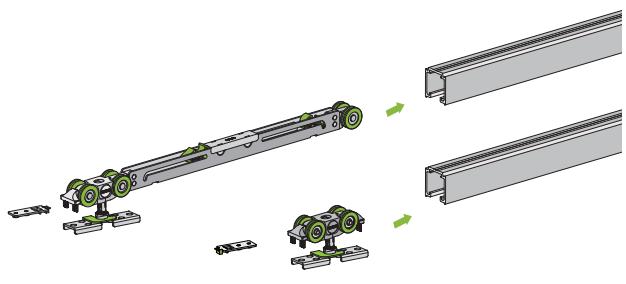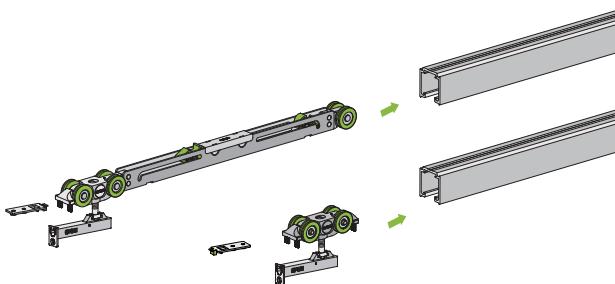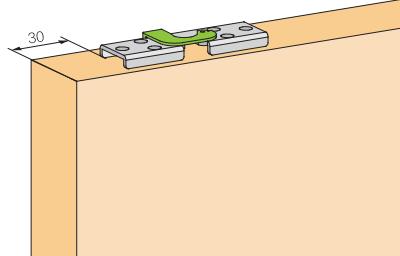


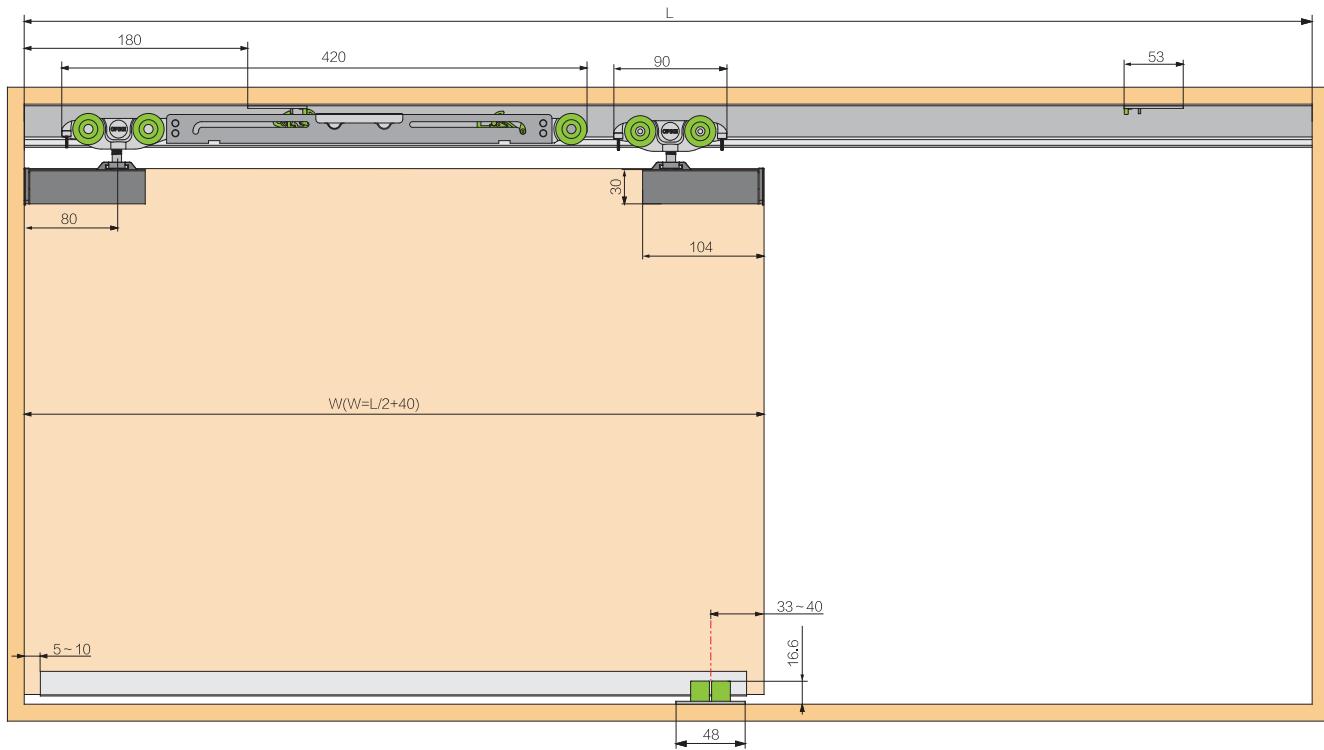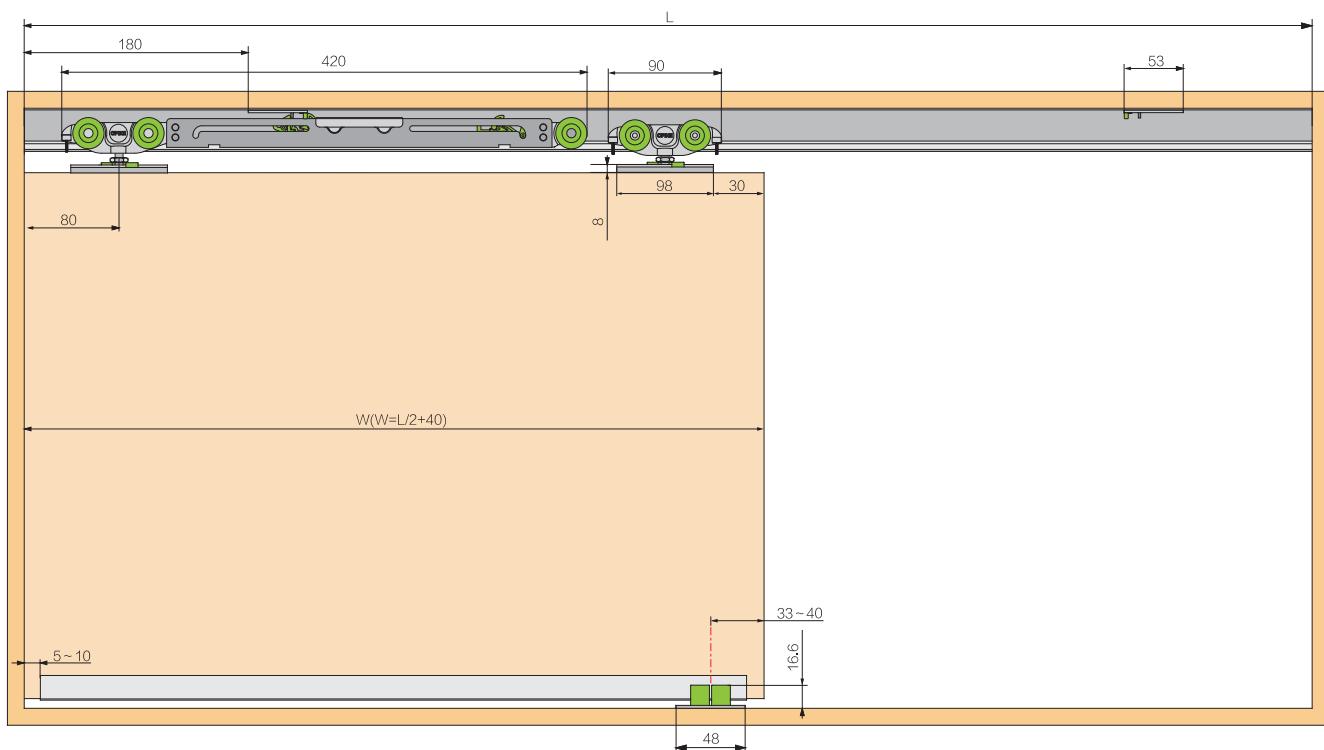**长征15号木门安装参数****SATELLITE 15 WOOD DOOR INSTALLATION PARAMETERS****木门2 Wood Door 2****木门3 Wood Door 3**



## 长征15号玻璃门安装参数

### SATELLITE 15 GLASS DOOR INSTALLATION PARAMETERS

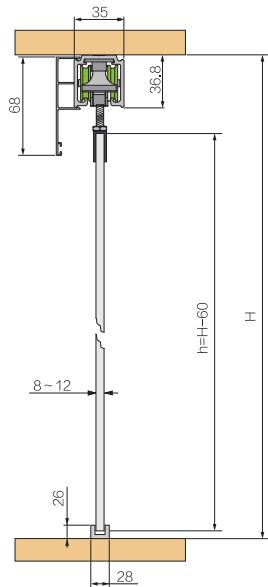
玻璃门4  
Glass Door 4





玻璃门5  
Glass Door 5


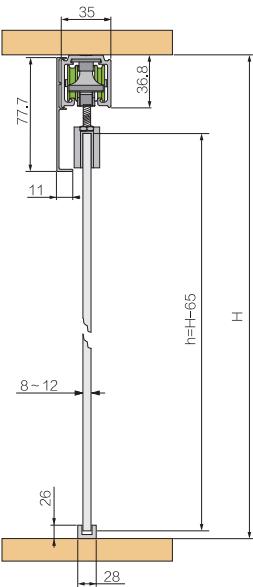




玻璃开孔尺寸  
Glass Hole Size





无需开孔  
no need to hole

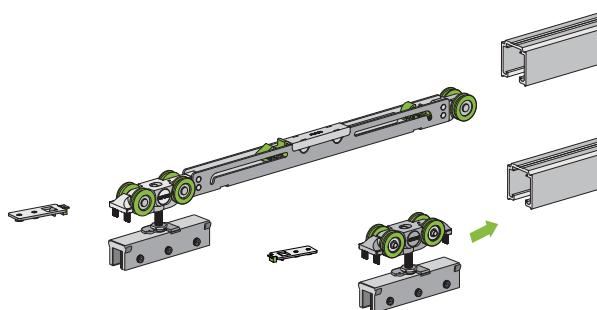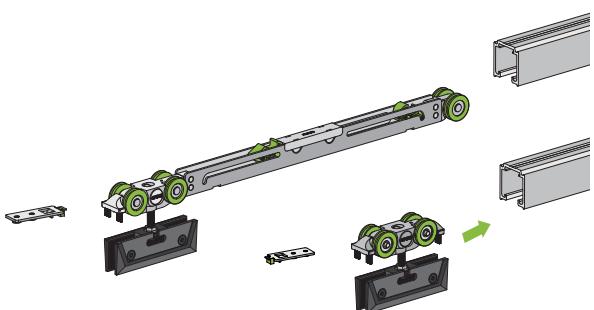

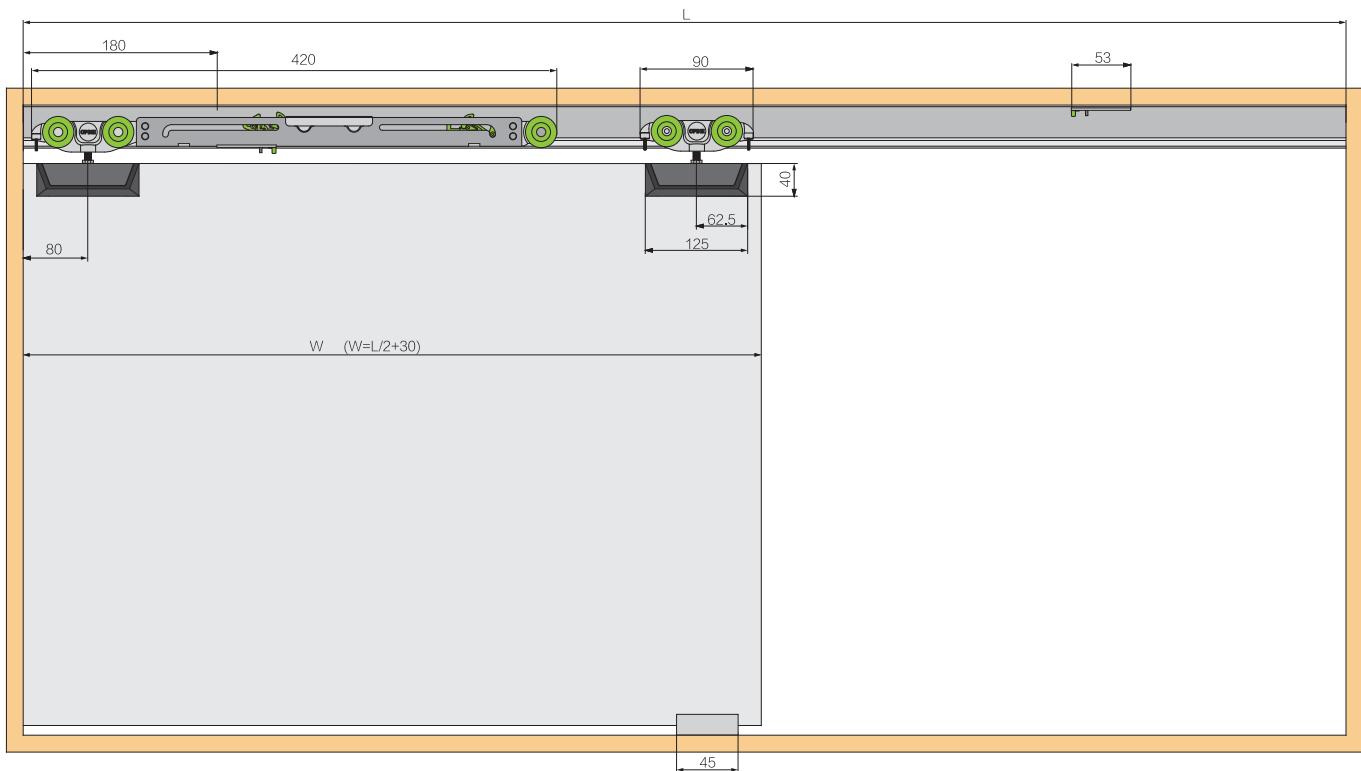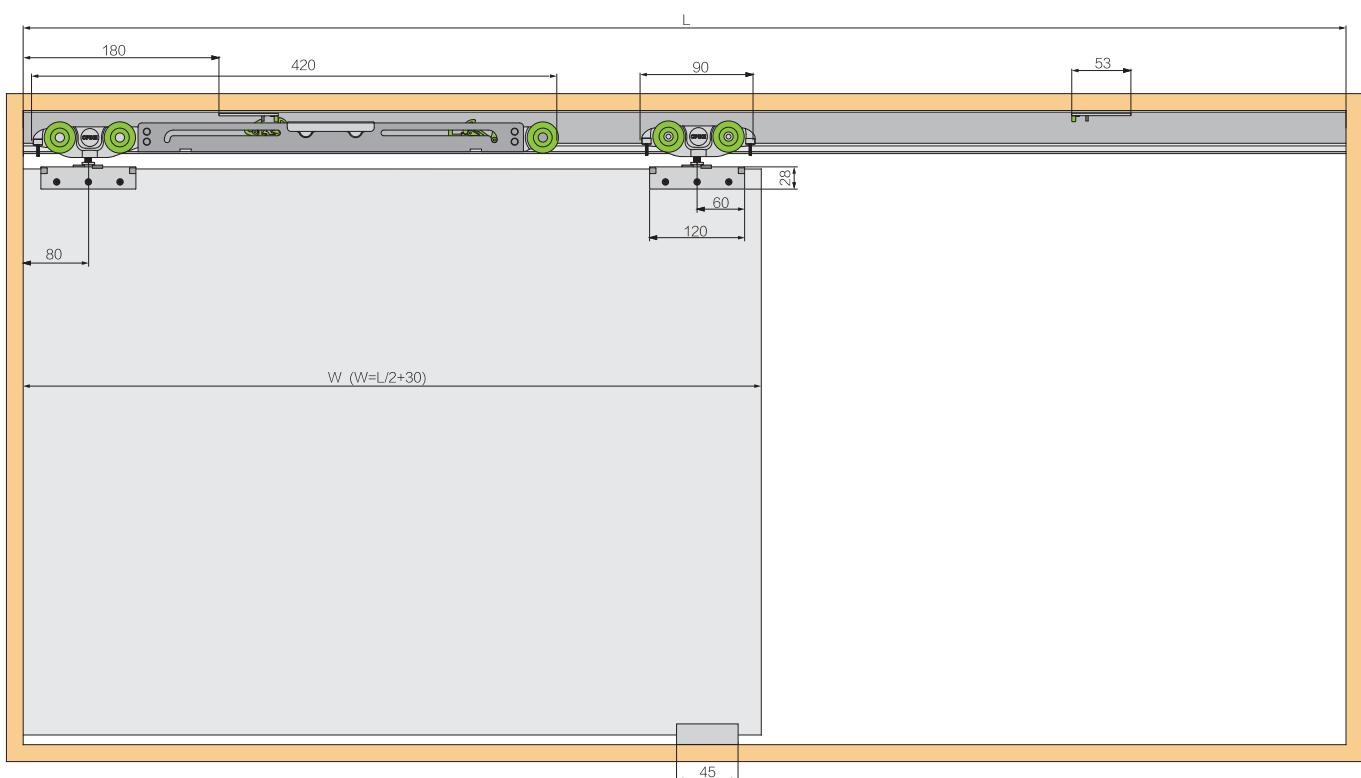**长征15号玻璃门安装参数****SATELLITE 15 GLASS DOOR INSTALLATION PARAMETERS****玻璃门4 Glass Door 4****玻璃门5 Glass Door 5**

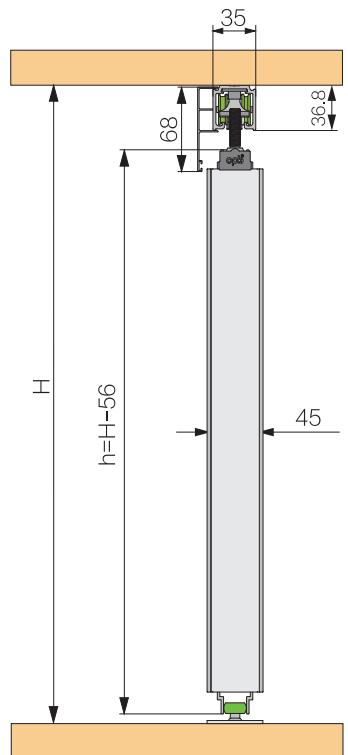**长征15号窄边框铝门安装参数****SATELLITE 15 SLIM ALUMINUM FRAME INSTALLATION PARAMETERS**

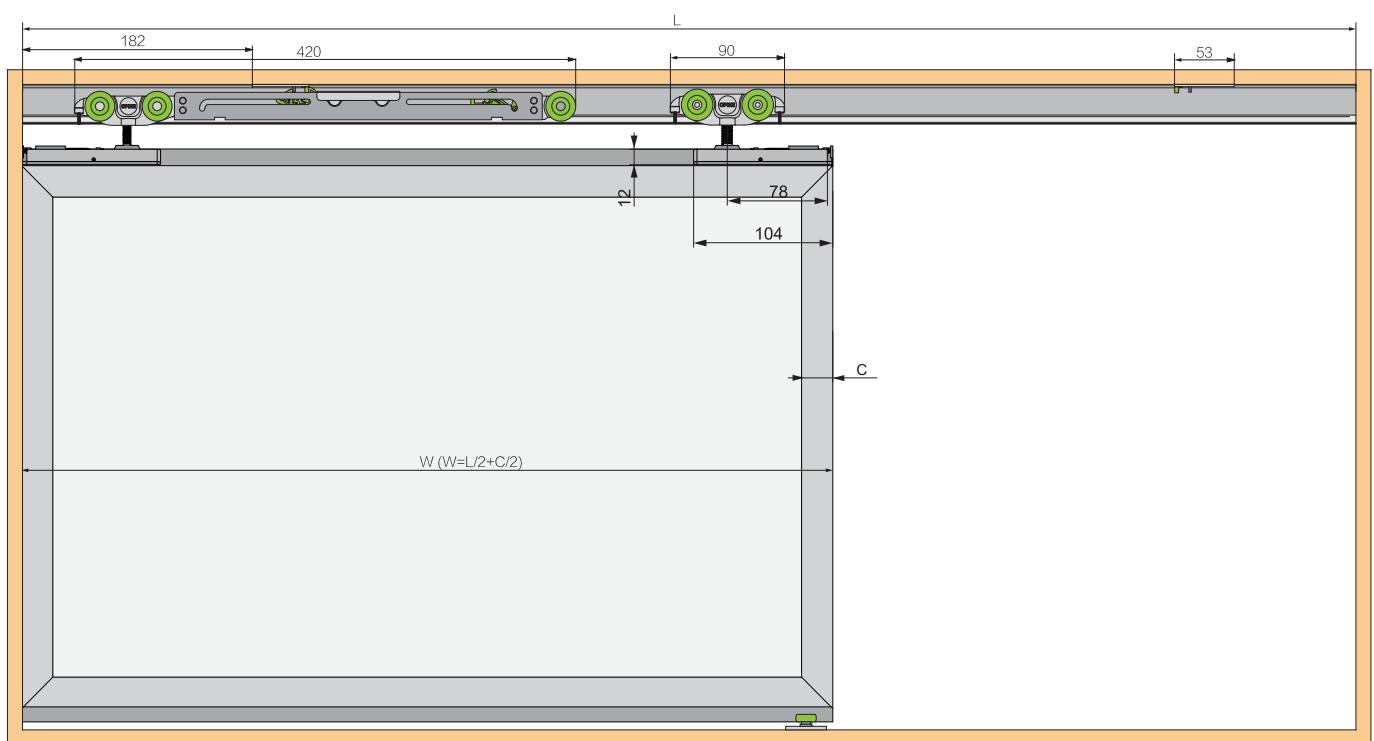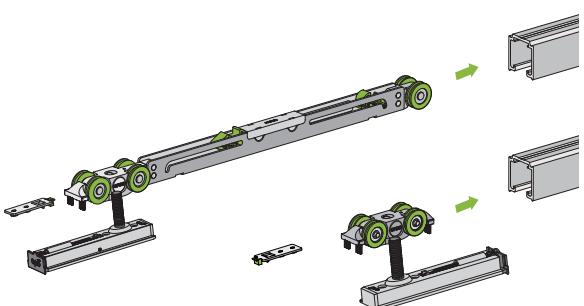XNA162  
上下横  
Upper&bottom frame



# 磁悬浮智能吊滑轮系统 E88系列

## E-SPACE-E88 SERIES

### 产品特点：

- 组合式结构专利设计；
- 无需定制，使用更方便；
- 磁力驱动，柔性接触，无硬摩擦，使用更安全；
- 无机械传动结构,无硬连接，滑动更加轻盈、柔畅；
- 减小轨道空间，精致设计，提高空间利用率；
- 停电情况下滑动依然轻柔。

### 技术概要：

- 额定电压：200~240V
- 额定功率：80W
- 待机功率：5W
- 开门速度：最低0.065M/S 最高0.26M/S
- 控制方式：微电脑处理控制器
- 冲撞机能：在受阻或冲撞条件下反弹
- 停电时手动开闭力：≤10N
- 门宽：≥750mm

### Product Features:

- Combined structure patent design.
- No need custom-made, more easier operation.
- Magnetic drive, soft touch no hard friction, more safety to use.
- No mechanical drive mechanism sliding more soft and smooth.
- Sliding still soft and smooth during the power failure.
- Exquisite design to save the rail space improve the space usage.

### Technical Points:


- **Voltage Rating:** 200~240V
- **Power Rating:** 80W
- **Standby Power:** 5W
- **Door Opening Speed:** Min: 0.065M/S , Max: 0.26M/S
- **Control Mode:** Microcomputer processing controller
- **Bounce Function:** Rebound in the conditions of damping or bumping
- **Manual Power Needed when Power Off:** ≤10N
- **Door width:** ≥750mm



## 磁悬浮智能吊滑轮系统 E88系列 (通用型)

E-SPACE-E88 SERIES (NORMAL)

≤120kg

产品描述 Product Description		型号 Model	规格(mm) Specification (mm)	单系统适应门洞(mm) Single mode door opening size(mm)	单系统(条) Single mode	对开系统适应门洞(mm) LInline mode door opening size(mm)	对开系统(条) LInline mode
磁悬浮吊滑轮轨道系 统 (顶装/顶槽装) E-SPACE (ceiling mounting / solt ceiling mounting)		E88-C2000 0100	2000	1400-2000	1	(1400-2000)x2	2
		E88-C2700 0100	2700	2000-2700		(2000-2700)x2	
		E88-C3400 0100	3400	2700-3400		(2700-3400)x2	
磁悬浮吊滑轮轨道 系统 (口袋门) E-SPACE (Pocket door)		E88-C2100 0300	2000	1400-2000	1	(1400-2000)x2	2
		E88-C2800 0300	2700	2000-2700		(2000-2700)x2	
		E88-C3500 0300	3400	2700-3400		(2700-3400)x2	
磁悬浮吊滑轮轨道 系统 (侧装) E-SPACE (wall mounting)		E88-C2000 0500	2000	1400-2000	1	(1400-2000)x2	2
		E88-C2700 0500	2700	2000-2700		(2000-2700)x2	
		E88-C3400 0500	3400	2700-3400		(2700-3400)x2	

## 选配

OPTIONAL

配件描述 Fitting Description				单系统(个) Single mode	对开系统(个) LInline mode
TN497A 木门挂盒组件 Hanging Box Components For Wooden Door	升降挂盒 Adjustable Hanging Plate	TN491A		2	4
	下定位 Under Roller	TN107A		1	2
	下轨道 Under Track	XNA003BJ00180		1	2

TN500A 窄边框挂盒组件 Narrow Frame Hanging Box Components	窄边框升降挂盒 Adjustable Hanging Plate For Slim Aluminum Frame	TN427A		2	4
	下定位 Under Roller	TN358A		1	2

TN498A 玻璃挂架组件(打孔) Glass Clamp Components (Need Drilling Of Glass)	玻璃挂架4 Glass Clamp 4	TN343A		2	4
	下定位 Under Roller	TN336A		1	2

TN499A 玻璃挂架组件(不打孔) Glass Clamp Components (No Drilling Of Glass)	玻璃挂架5 Glass Clamp 5	TN340A		2	4
	下定位 Under Roller	TN336A		1	2

## 选配

OPTIONAL

产品描述 Product Description		表面处理 Finished		规格(mm) Specification (mm)
XNA167 装饰盖 Decorative cover		黑色瓷泳 Black	氧化平光 碱微砂白 Anodized Silver	2000
				2700
				3400

## 选配

OPTIONAL

配件描述 Fitting Description			单系统(个) Single mode	对开系统(个) Linline mode
感应开关 Touchless switch		PNZ99154	1	1
门头感应器(侧装) Top sensor (wall mounting)		PNZ99156	1	1
门头感应器(顶装) Top sensor (ceiling mounting)		TJ113A	1	1
门头感应器(侧装) Top sensor (wall mounting)		TJ114A	1	1
情景感应器 (明装版) Situation sensor (surface edition)		TJ118A	1	1
情景感应器 (暗装版) Situation sensor (dark edition)		TJ118B	1	1
遥控器C型 Remote control type C		TE061A	1	1
轨道清理刷 (选配) Brusher (Optional)		TN337A	1	1

## ■ 磁悬浮智能吊滑轮系统安装参数（顶装）

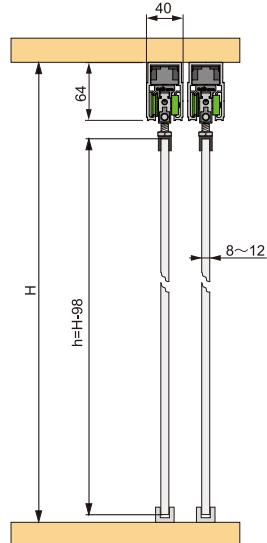
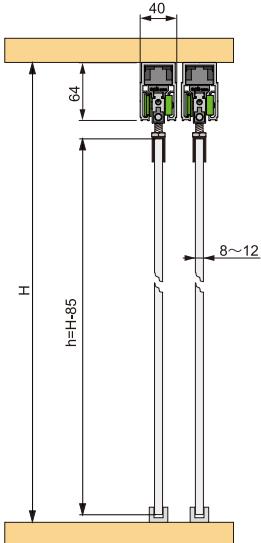
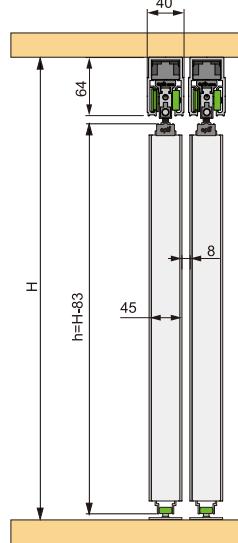
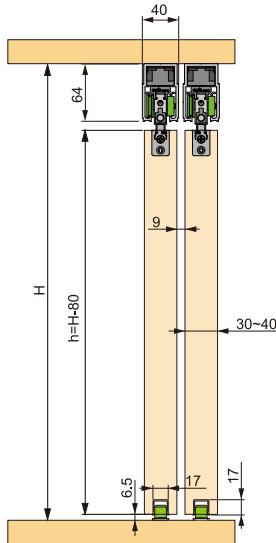
E-SPACE INSTALLATION PARAMETERS ( CEILING MOUNTING )

木门  
Wood Door

窄边框铝门  
Slim Aluminum Frame

玻璃门 4 (打孔)  
Glass Door 4

玻璃门 5 (不打孔)  
Glass Door 5



## ■ 磁悬浮智能滑轮系统安装参数（顶槽装）

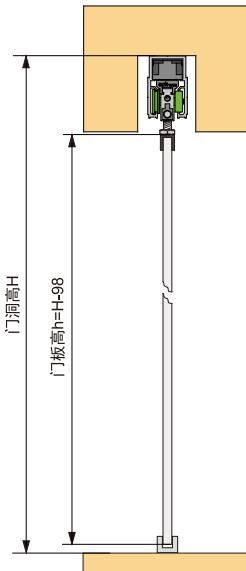
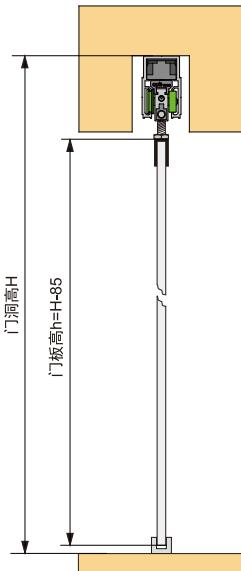
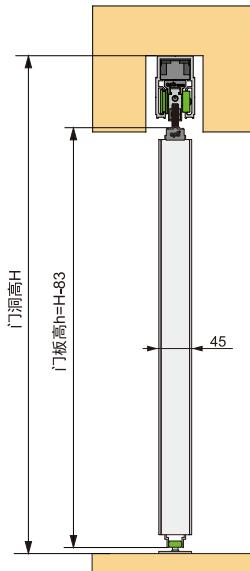
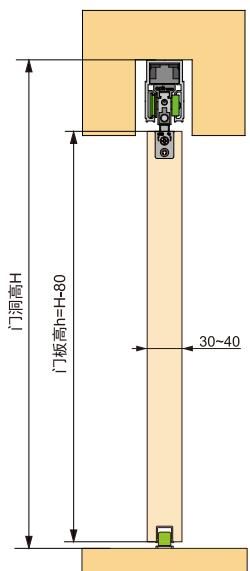
E-SPACE INSTALLATION PARAMETERS ( SOLT CEILING MOUNTING )

木门  
Wood Door

窄边框铝门  
Slim Aluminum Frame





玻璃门 4 (打孔)  
Glass Door 4

玻璃门 5 (不打孔)  
Glass Door 5




**磁悬浮智能吊滑轮系统安装参数（顶装/顶槽装）**

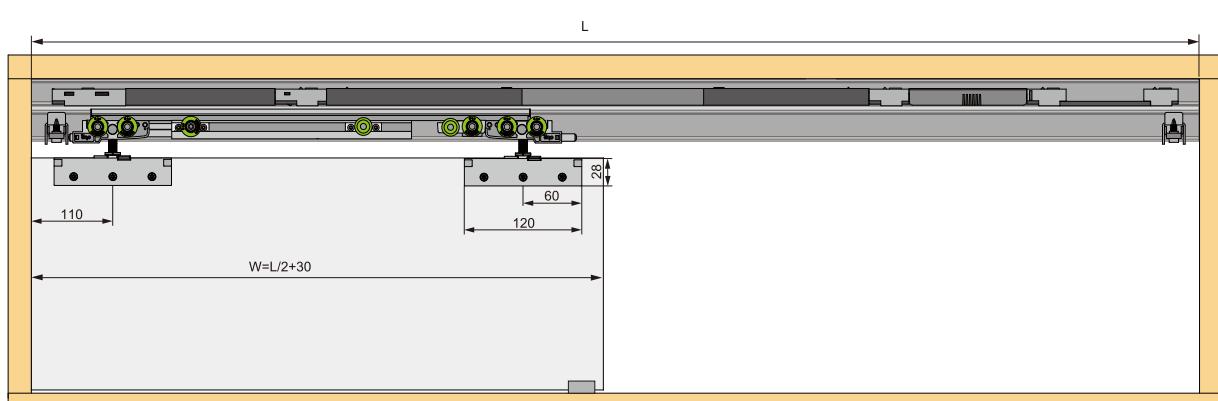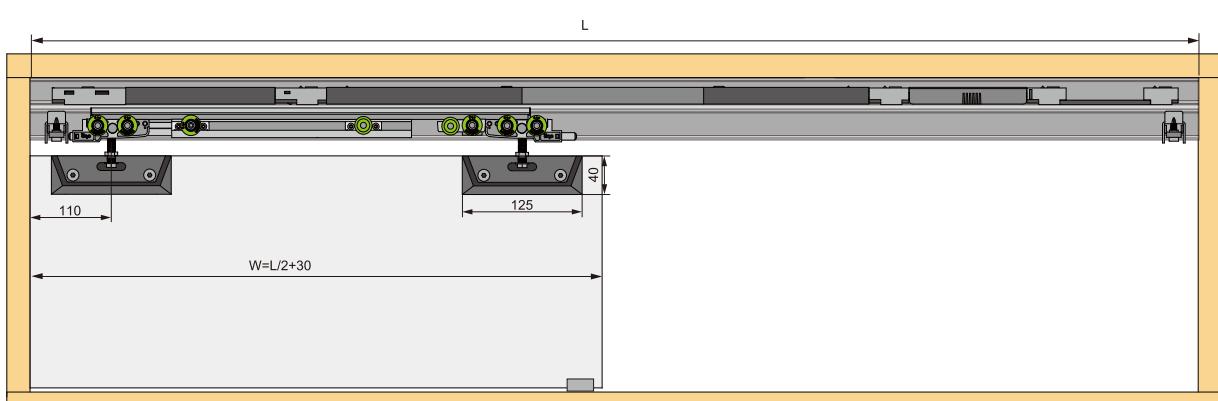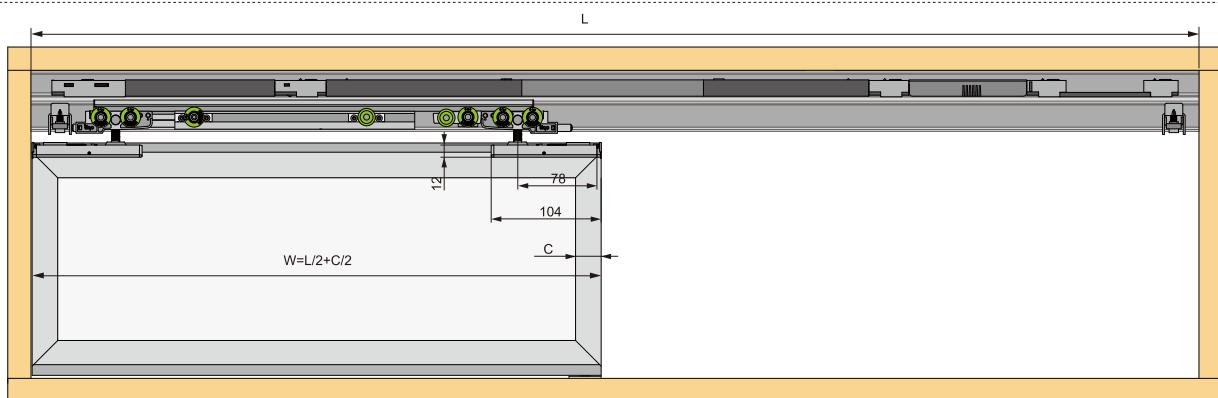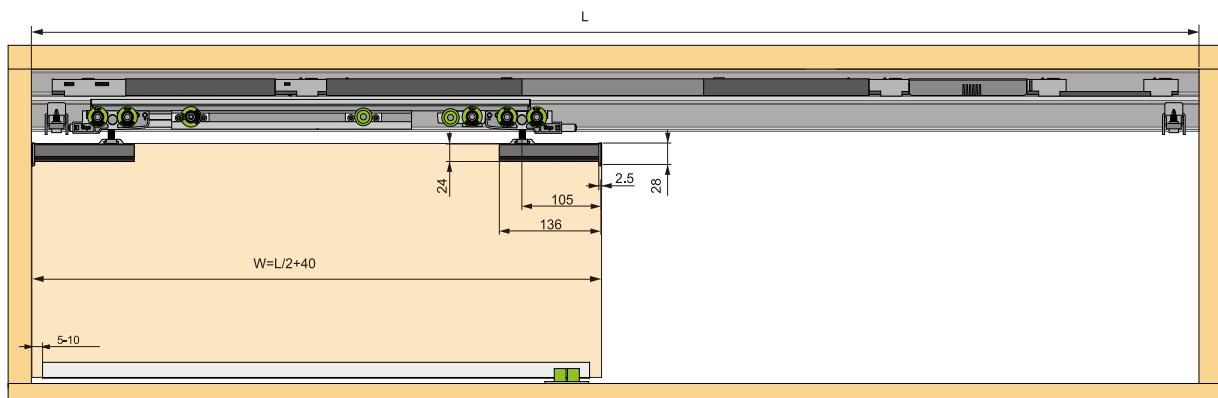
E-SPACE INSTALLATION PARAMETERS ( CEILING MOUNTING/ SOLT CEILING MOUNTING )






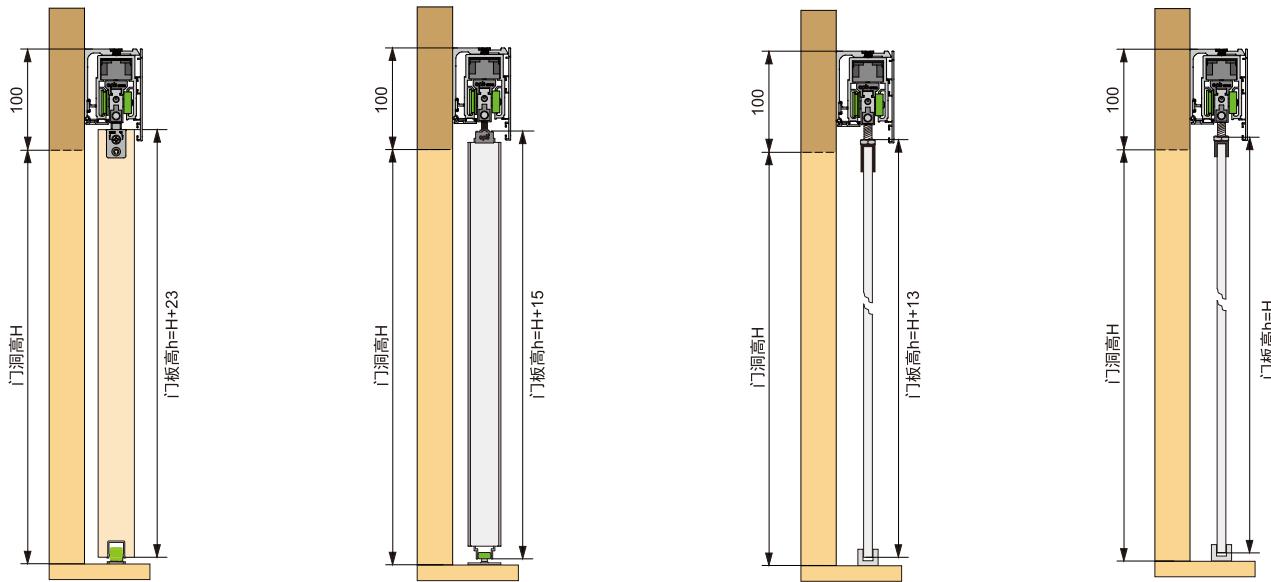
**磁悬浮智能滑轮系统安装参数（侧装）**  
E-SPACE INSTALLATION PARAMETERS ( WALL MOUNTING )

木门  
Wood Door窄边框铝门  
Slim Aluminum Frame玻璃门 4 (打孔)  
Glass Door 4玻璃门 5 (不打孔)  
Glass Door 5

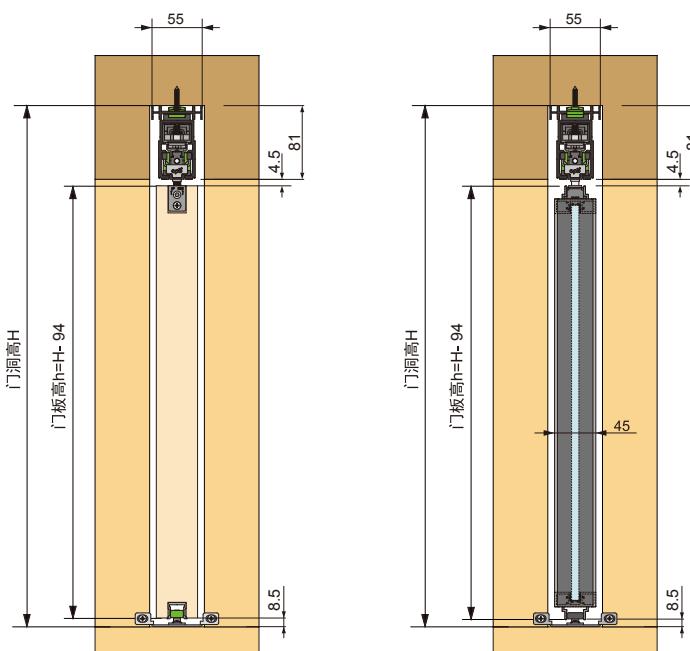**磁悬浮智能滑轮系统安装参数（口袋门）**  
E-SPACE INSTALLATION PARAMETERS (POCKET DOOR)


木门  
Wood Door窄边框铝门  
Slim Aluminum Frame

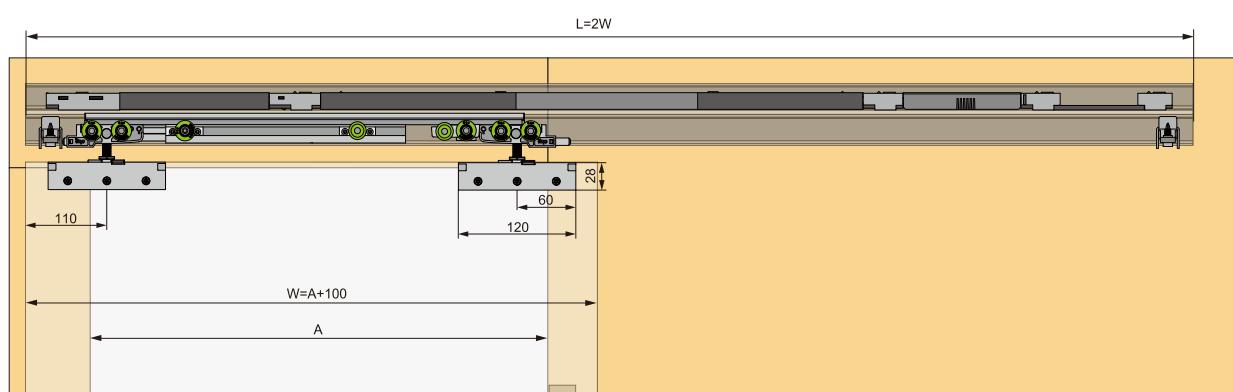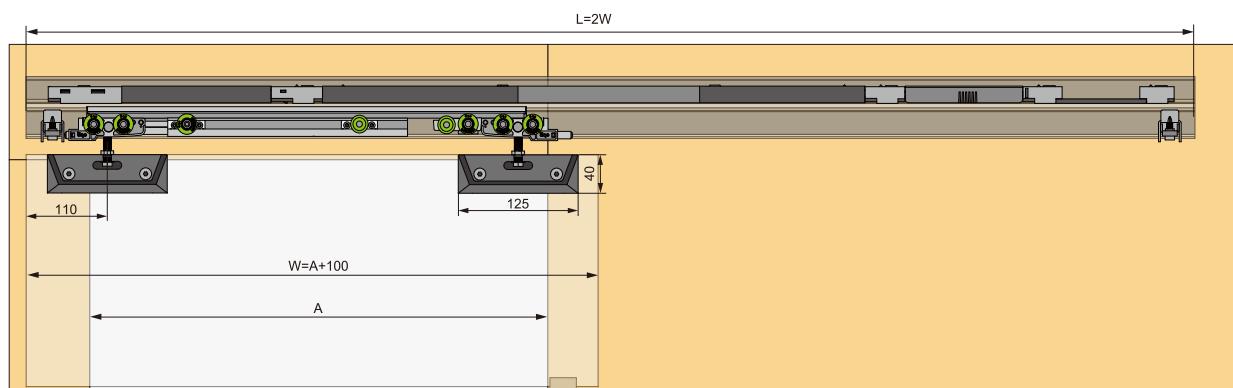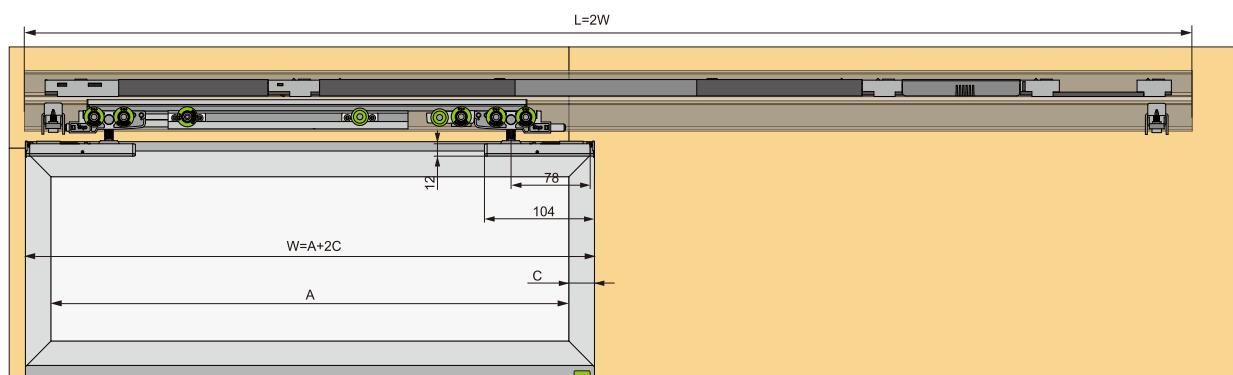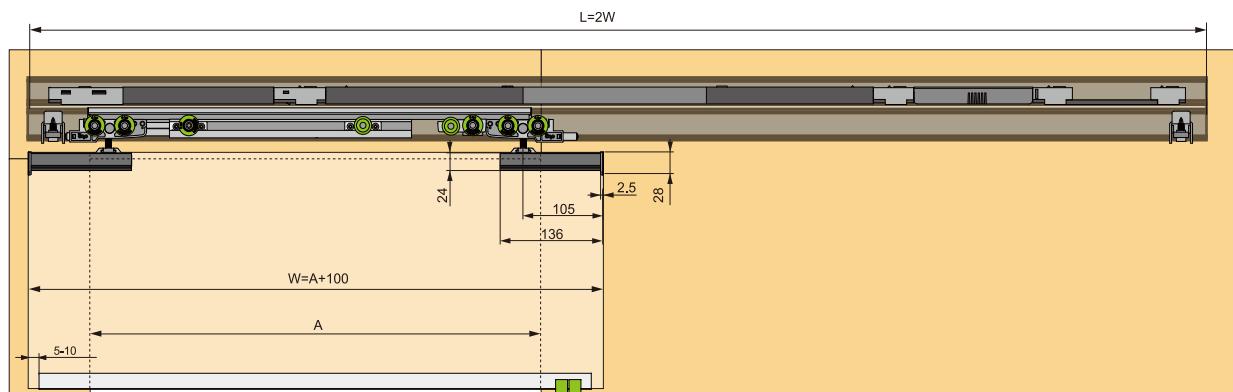■ 磁悬浮智能滑轮系统安装参数（侧装）  
E-SPACE INSTALLATION PARAMETERS ( WALL MOUNTING )




**磁悬浮智能滑轮系统安装参数 ( 口袋门 )**  
E-SPACE INSTALLATION PARAMETERS (POCKET DOOR)

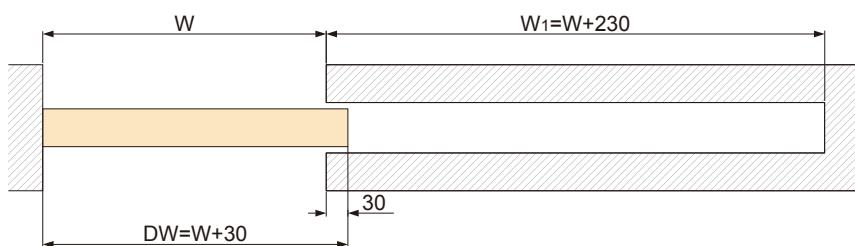木门  
Wood Door




轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2100mm	680~980mm	710~1010mm
2800mm	980~1330mm	1010~1360mm
3500mm	1330~1680mm	1360~1710mm

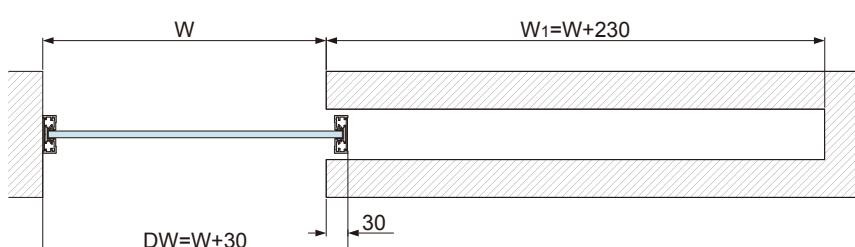窄边框铝门  
Slim Aluminum Frame



轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2100mm	680~980mm	710~1010mm
2800mm	980~1330mm	1010~1360mm
3500mm	1330~1680mm	1360~1710mm

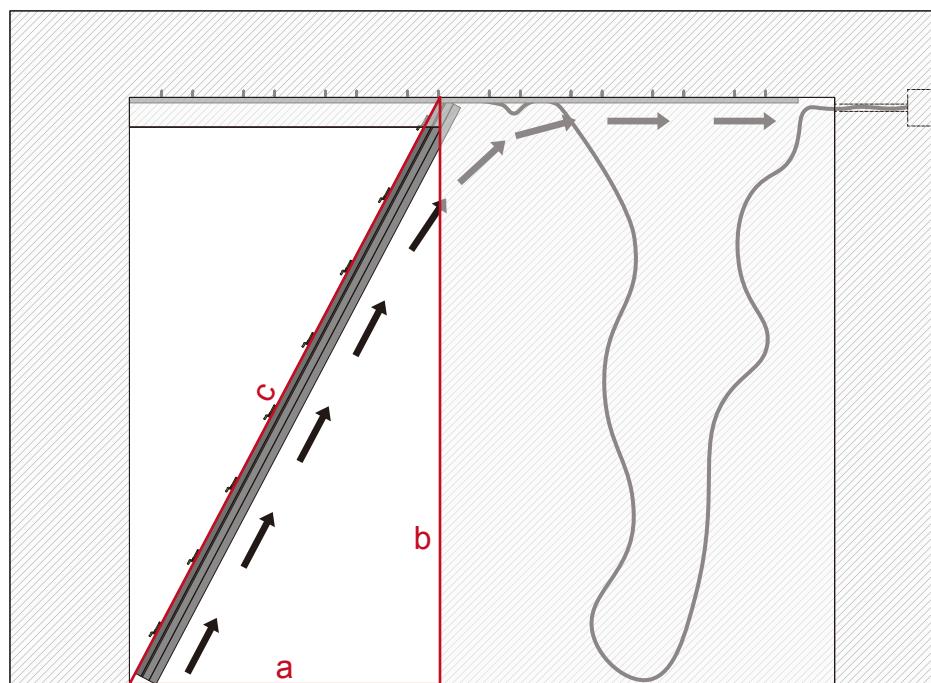

门洞要求:  $a^2+b^2 \geq c^2$   
(门洞对角线  $\geq$  轨道长度, 否则轨道不能放进口袋)

Door opening requirement:  $a^2+b^2 \geq c^2$   
(The diagonal size of door opening  $\geq$  track length, otherwise the track can't be put into the pocket)

# 东风号

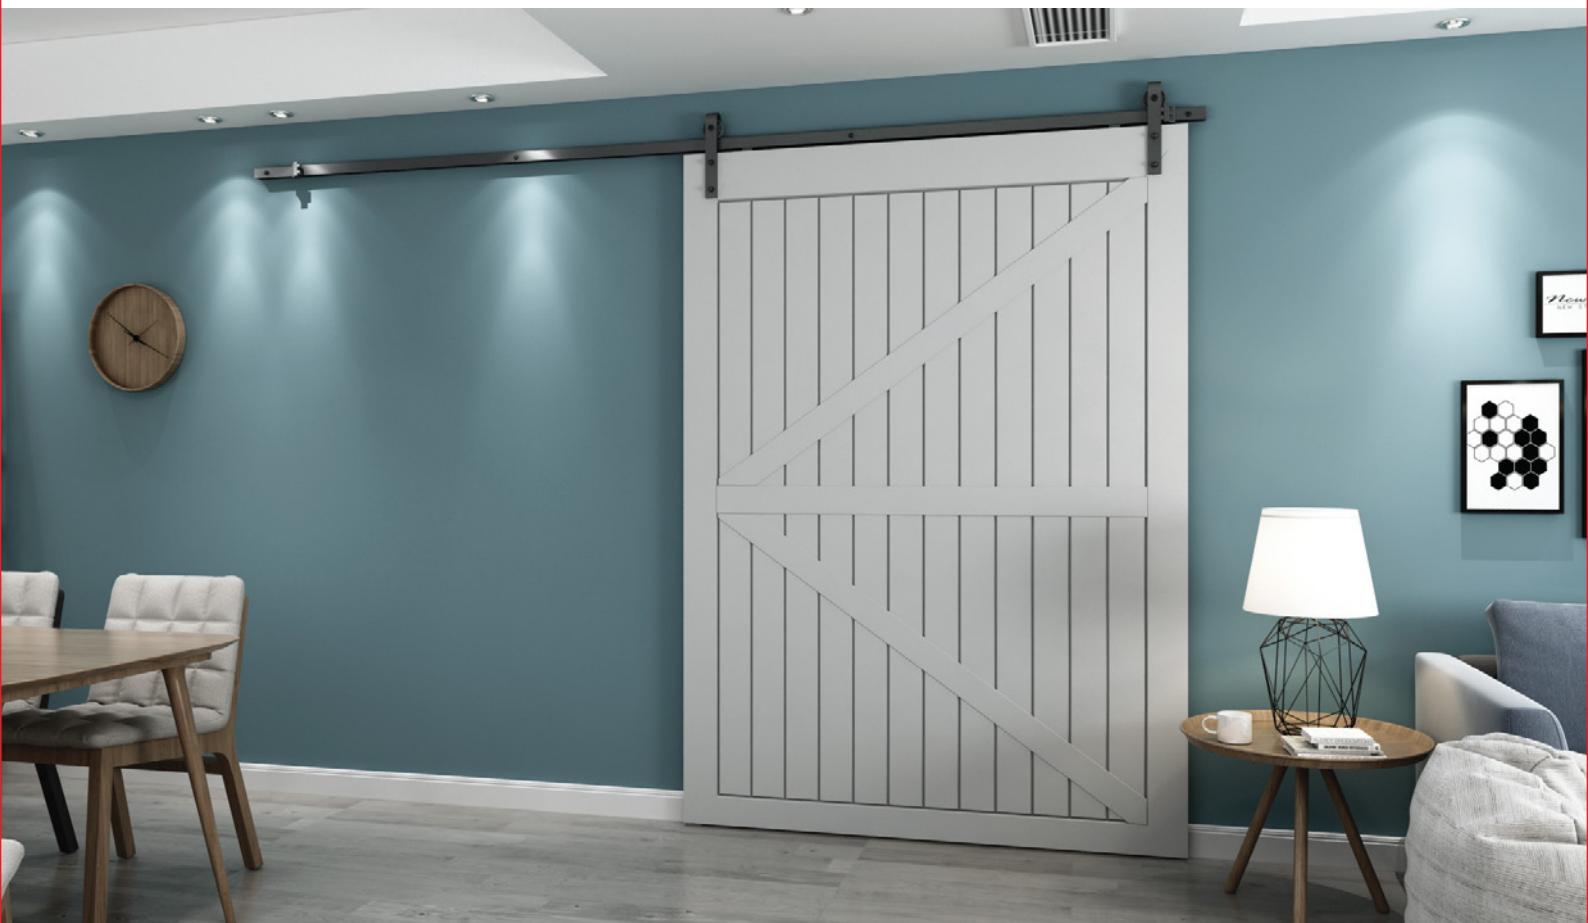
## NAVIGATOR

### 产品特点：

- 外观时尚大气，兼具隔断和装饰作用。
- 不占空间，拆卸简单，可重复利用，随拆随走。

### Product features:

- Fashionable and stylish appearance, having partition and decorative function.
- No space occupation, easy disassembly, reusable, remove and going at any time.



**东风3号双阻尼(无门套)套装(适用于单扇门)**  
NAVIGATOR 3 COMPLETE SET (Application to single door)


通用型  
40-70kg  
重型  
70-80kg

**CJ12233A** (通用型 Normal)

门厚 Door thickness: 35-45mm


**CJ12233B** (重型 Heavy-duty)

标配40mm门板配件 Designed for 40mm door panel

<b>TN407A</b> 阻尼吊滑轮组件 Hanging Damping rollers	 上滑轮 Top roller	<b>TN414A</b> 轨道连接组件 Track connector fittings	
<b>反向阻尼器</b> Reverse Damper	 X2		
	<b>TD111A</b> 通用型 Normal	<b>TD111B</b> 重型 Heavy-duty	
<b>TN107A</b> 下定位 Bottom guide	 X1		
<b>XZA001</b> 上轨道 Upper track		<b>XNA003</b> 下轨道 Under track	
<b>TN406B</b> 门扇配件 Door component			

**轨道开孔以及门扇的要求**

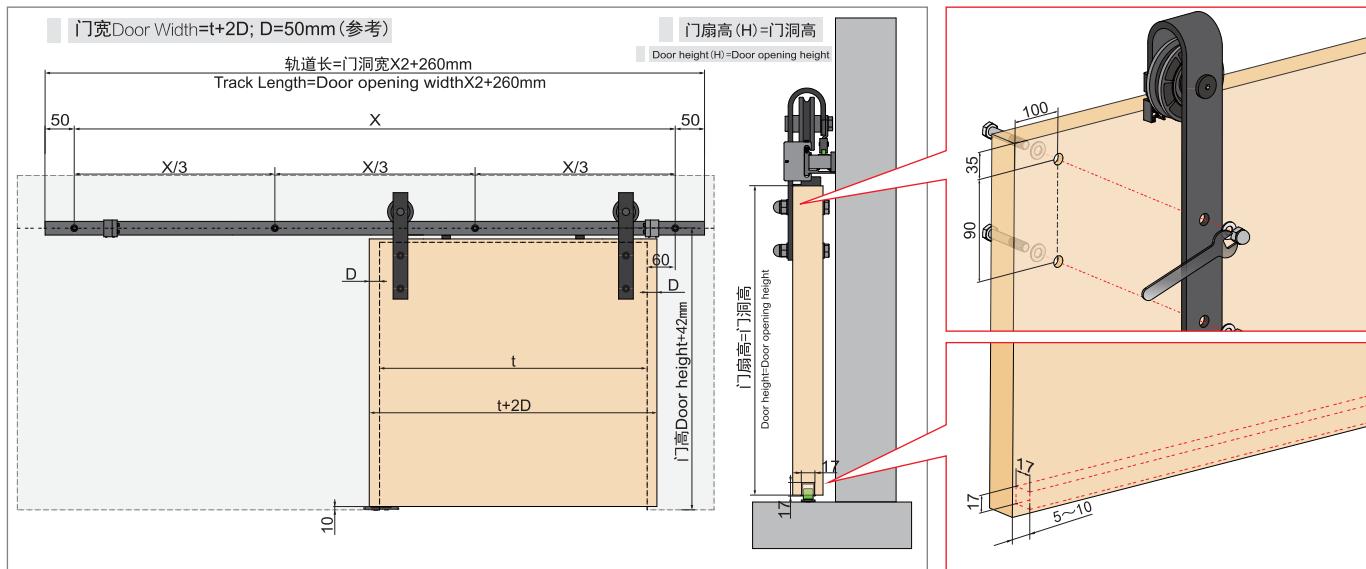Open the hole of track and the requirement of door panel



**东风3号双阻尼(有门套)套装(适用于单扇门)**  
NAVIGATOR 3 COMPLETE SET (Application to single door)

通用型  
40-70kg  
重型  
70-80kg

**CJ12233D** (通用型 Normal)

门厚 Door thickness: 35-45mm


**CJ12233E** (重型 Heavy-duty)

标配40mm门板配件 Designed for 40mm door panel

<b>TN407A</b> 阻尼吊滑轮组件 Hanging Damping rollers	 上滑轮 Top roller	<b>TN414B</b> 轨道连接组件 Track connector fittings	 h=52 X4 固定座 Fixing part ST8x110 X4 六角自攻钉 Hexagonal self-tapping screws 膨胀胶套 Expansion Anchor Pipe 平垫圈 Flat washer	
<b>反向阻尼器</b> Reverse Damper	 TD111A 通用型 Normal TD111B 重型 Heavy-duty	<b>TD111A</b> 通用型 Normal	<b>TD111B</b> 重型 Heavy-duty	
<b>TN107A</b> 下定位 Bottom guide	 X1	<b>TN406B</b> 门扇配件 Door component	 平垫圈 Flat washer 外六角螺钉 Hexagon screw 螺帽 Screw nut 防跳限位件 Anti-jump stopper	
<b>XZA001</b> 上轨道 Upper track	 41 39.5	 17 17		
<b>XNA003</b> 下轨道 Under track				
			<b>XNA003</b> 下轨道 Under track	

**轨道开孔以及门扇的要求**

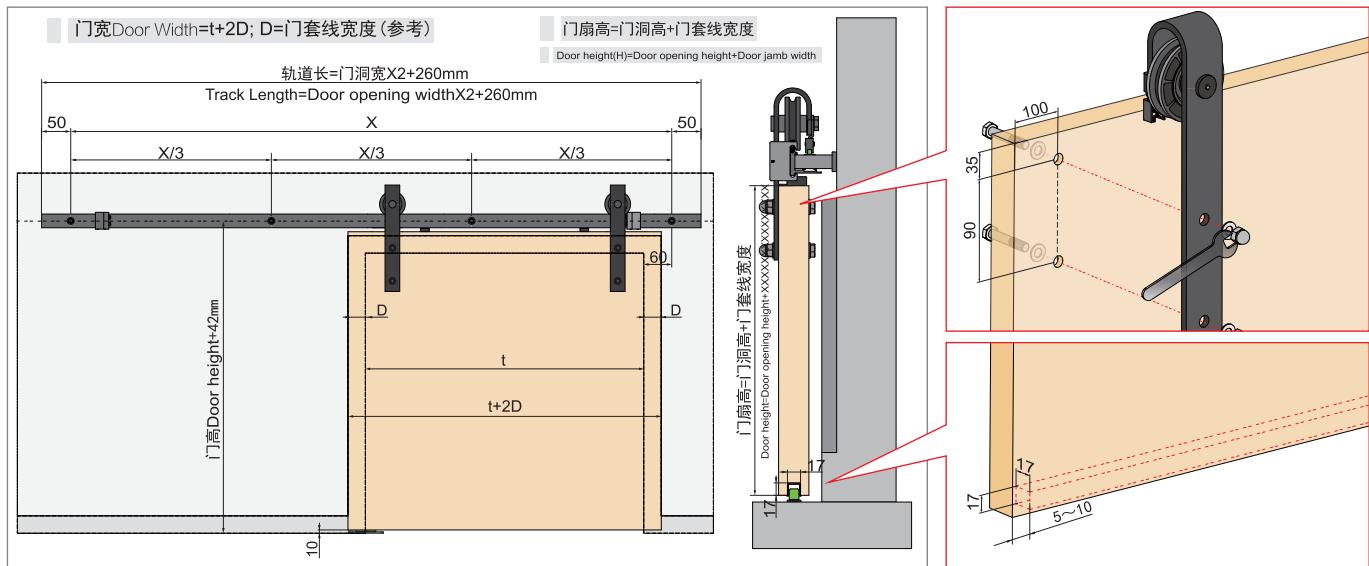Open the hole of track and the requirement of door panel



**东风4号双阻尼(无门套)套装(适用于单扇门)**  
NAVIGATOR 4 COMPLETE SET (Application to single door)


**通用型**  
40-70kg  
**重型**  
70-80kg

**CJ12234A** (通用型 Normal)

门厚 Door thickness: 35-45mm


**CJ12234B** (重型 Heavy-duty)

标配40mm门板配件 Designed for 40mm door panel

<b>TN409A</b> 阻尼吊滑轮组件 Hanging Damping rollers		X2	<b>TN414A</b> 轨道连接组件 Track connector fittings		X4		X4		X4		X4	
	上滑轮 Top roller				X1		X1		X1		X1	
反向阻尼器 Reverse Damper		X2	<b>TD111A</b> 通用型 Normal		X1	<b>TD111B</b> 重型 Heavy-duty		X1		X1		X1
<b>TN107A</b> 下定位 Bottom guide		X1	<b>TN408B</b> 门扇配件 Door component		X4		X2					
					X2		X2					
 XZA001 上轨道 Upper track	 XNA003 下轨道 Under track											

### 轨道开孔以及门扇的要求

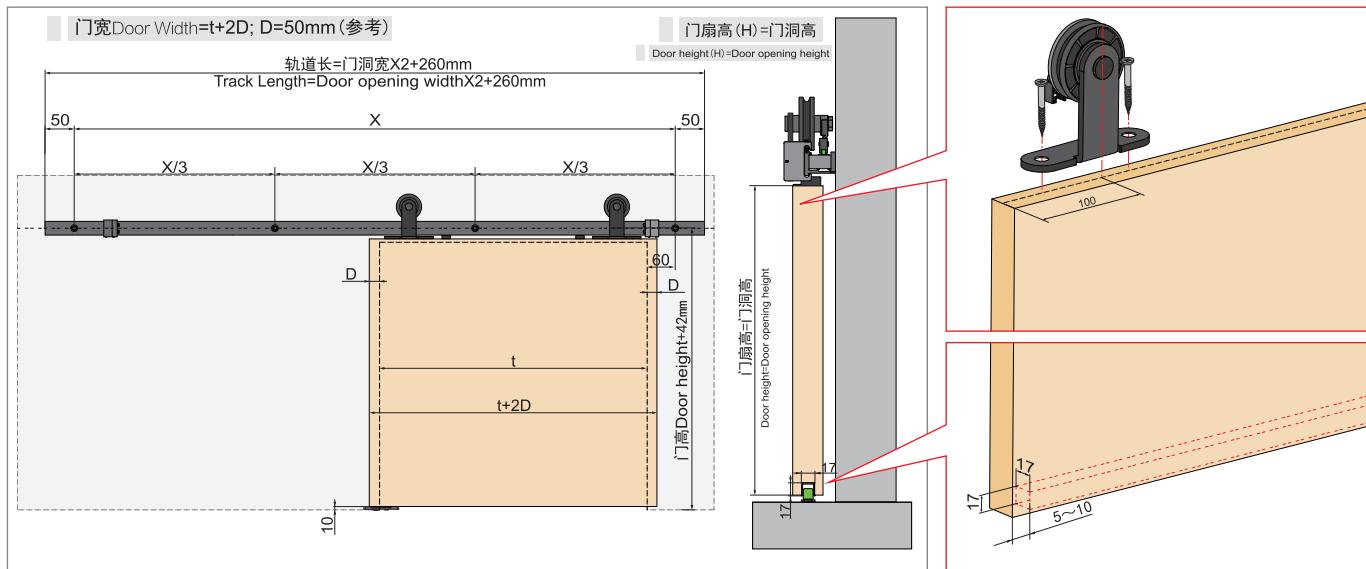Open the hole of track and the requirement of door panel



**东风4号双阻尼(有门套)套装(适用于单扇门)**  
NAVIGATOR 4 COMPLETE SET (Application to single door)


通用型  
40-70kg  
重型  
70-80kg

**CJ12234C** (通用型 Normal)

门厚 Door thickness: 35-45mm


**CJ12234D** (重型 Heavy-duty)

标配40mm门板配件 Designed for 40mm door panel

<b>TN409A</b> 阻尼吊滑轮组件 Hanging Damping rollers	 上滑轮 Top roller	X2	 h=52 X4 固定座 Fixing part	 ST8x110 X4 六角自攻钉 Hexagonal self-tapping screws	 X4 膨胀胶套 Expansion Anchor Pipe	 X4 平垫圈 Flat washer		
反向阻尼器 Reverse Damper	 X2	 TD111A 通用型 Normal	 TD111B 重型 Heavy-duty	 限位件 (左) Stopper (left)	 限位件 (右) Stopper (right)	 上轨端盖 (左) Track plug (left)		
<b>TN107A</b> 下定位 Bottom guide	 X1	 XZA001 上轨道 Upper track	 XNA003 下轨道 Under track	 TN408B 门扇配件 Door component	 X2 十字槽沉头自攻钉 Cross Recess Countersunk head self-drilling Screw	 X1 打孔模 XXXXXXXXX Allen Wrench		
			 X2 膨胀胶套 Expansion Anchor Pipe	 X2 防跳限位件 Anti-jump stopper				

**轨道开孔以及门扇的要求**

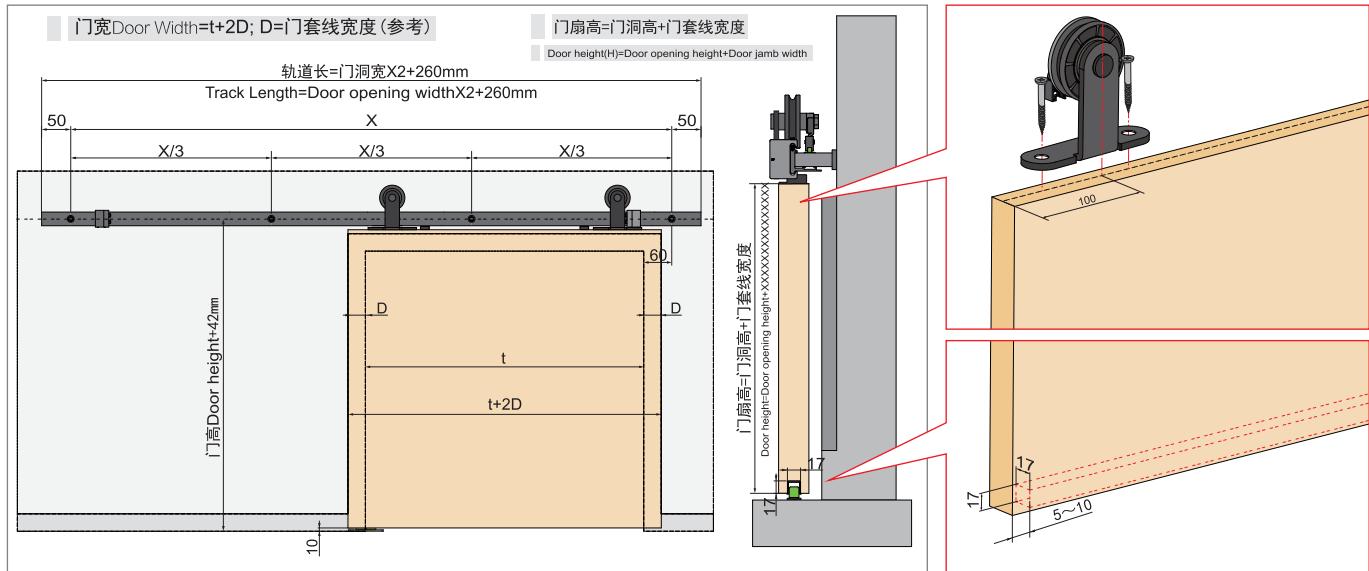Open the hole of track and the requirement of door panel



## 东风4号极窄双阻尼套装(适用于单扇门)

NAVIGATOR 4 MINIMALISM TYPE DOUBLE DAMPING SET (Application to single door)



CJ12245A (通用型 Normal)

CJ12245B (重型 Heavy-duty)

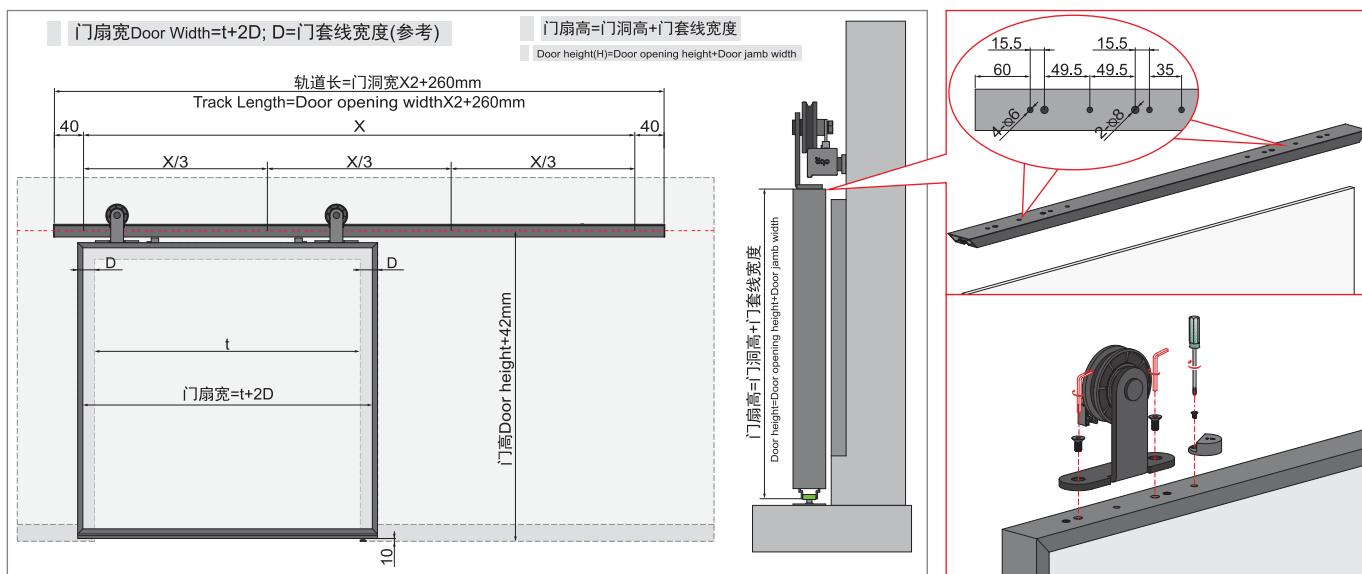
门厚 Door thickness: 35-45mm

标配40mm门板配件 Designed for 40mm door panel

TN409B 阻尼吊滑轮组件 Hanging Damping rollers			反向阻尼器 Reverse Damper		
		[X2]			
TN358A 下定位 Bottom guide		[X1]	XZA001 上轨道 Upper track		
TN397A 轨道连接组件 Track connector fittings					
TN408C 门扇配件 Door component					

## 轨道开孔以及门扇的要求

Open the hole of track and the requirement of door panel




## 东风4号极窄双阻尼套装(适用于单扇门)

NAVIGATOR 4 MINIMALISM TYPE DOUBLE DAMPING SET (Application to single door)



轨道开孔以及门扇的要求

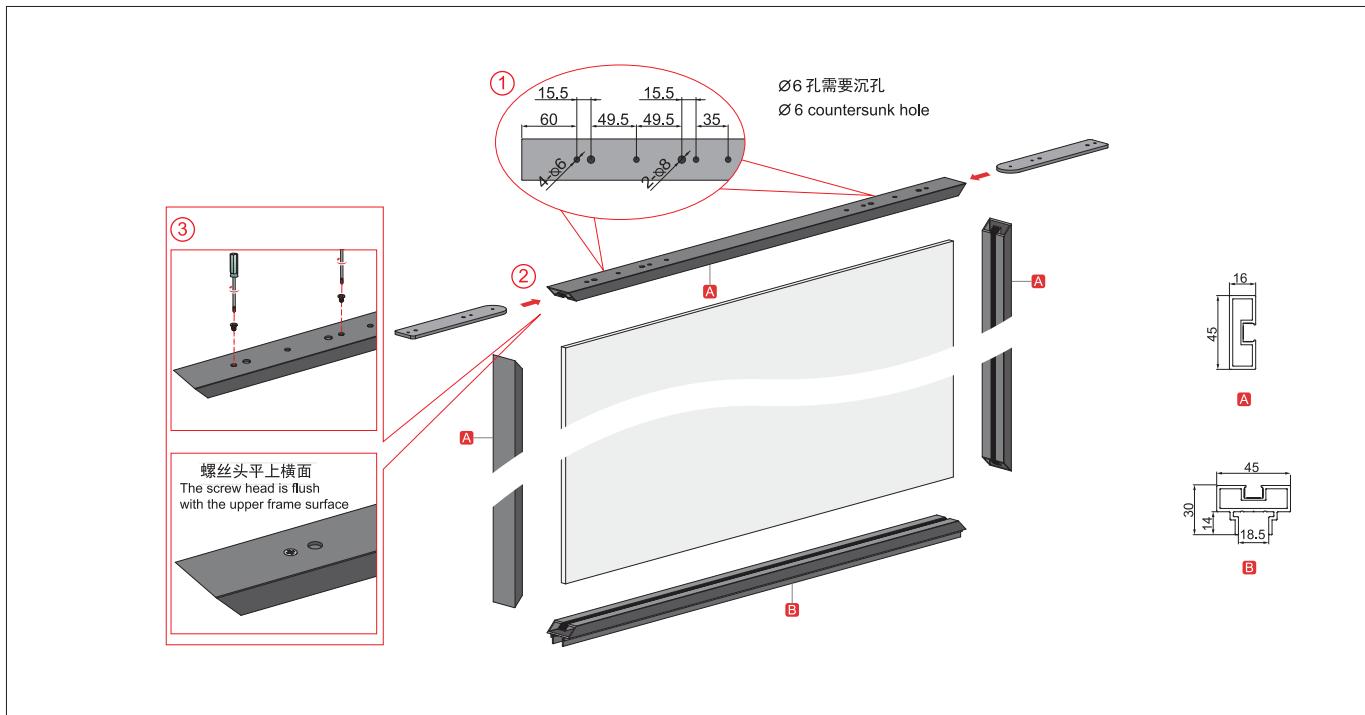Open the hole of track and the requirement of door panel







中山市欧派克五金制品有限公司  
OPIKE HARDWARE PRODUCTS CO., LTD.

地址: 广东省中山市小榄镇永宁螺沙瑞和路11号

电话: 400 804 9989

传真: 0760-2227 9177

ADD: NO.11, Ruihe Road, YongningLuosha, Xiaolan  
Town, Zhongshan City, GD., China.

TEL: 400 804 9989

FAX: 0760-2227 9177

[Http://www.opike.cc](http://www.opike.cc) E-mail: [sales@opk.cc](mailto:sales@opk.cc)

本资料产品款式、颜色及有关数据仅供参考，印刷时可能使资料内产品与实物有轻微差别，请以实物为准。

Image shown in this catalog is indicative only . If there is any inconsistency between the image and the actual product you receive , the actual product will govern.



欧派克公众号



欧派克网址