



家具滑动系统

The all series solution provider of
Commercial home furnishing roller
商业家居滑轮全系列解决方案提供商



专利维权,正在行动! Patent Right Protection

专利研发

作为国内五金滑轮行业的龙头企业，我们始终坚持以产品研发为导向，投入巨大的人力、财力、物力进行技术创新与产品升级，不断引入新结构、新材料、新技术，强调技术创新培育和成果转化，现已获得一百多项国家和国际专利。

资深法律团队维权

我司特委托资深法律团队常年从事专利维权活动，据查有部分厂商恶意抄袭我司产品，如缓冲壁柜轮、缓冲吊轮、08款明轮以及专利调节上轮、吊轮限位功能、上下可调合页等，扰乱市场秩序，严重侵犯我司权益，对我司后续产品的技术创新造成严重影响。目前已对高要金利、南海盐步、中山小榄等地共十余家侵权厂家提起维权诉讼，最低赔偿50万。

专利法

根据《中华人民共和国专利法》规定，任何单位或个人制造、销售、使用未经授权专利产品均属违法行为，可作为第一被告被起诉。望有关厂商严肃对待法律，停止生产、销售和使用侵权产品。否则，我公司将采取一切必要手段维护法律赋予的正当权益，追究侵权人责任。

Patented R & D

As the industry's leading enterprise in China, we always adhere to the concept of product development orientation. With enormous human, financial and material resources invested for technical innovation and product upgrading, we constantly introduce new structures, new materials, new technologies, and always commit ourself to technical innovation and achievements transformation. Now we have observed more than 100 national and international patents.

specially commissioned senior legal team for patent right safeguarding

Our specially commissioned senior team engages in patent-right protection activity all year round. According to the investigation, some manufacturers intended to copy our products, such as sliding soft-closing door roller, soft closing hanging roller, visible roller# 08, patented adjustable top roller, hanging roller with patented function and adjustable hinges, etc.. All these serious infringements of our rights disturb the market order, and cause serious impact to our technological innovation. Currently more than 10 manufacturers concerned in Kinley Gaoyao, Yanbu Nanhai, Xiaolan Zhongshan and other places were prosecuted and heavily fined because of infringements of our patented rights.



Patent Law

In accordance with the Patent Law of the People's Republic of China, any unauthorized use, sale or manufacturing of patented products is illegal. Any unit or individual who violates the law may be prosecuted as first-mentioned defendant. We strongly request all manufacturers concerned to comply with the law, stop unauthorized production, sale and use of the patented product. Otherwise, we will take all necessary legal action to safeguard our legitimate rights and interests.



好滑轮·好静音

SUPERIOR ROLLERS SO QUIET

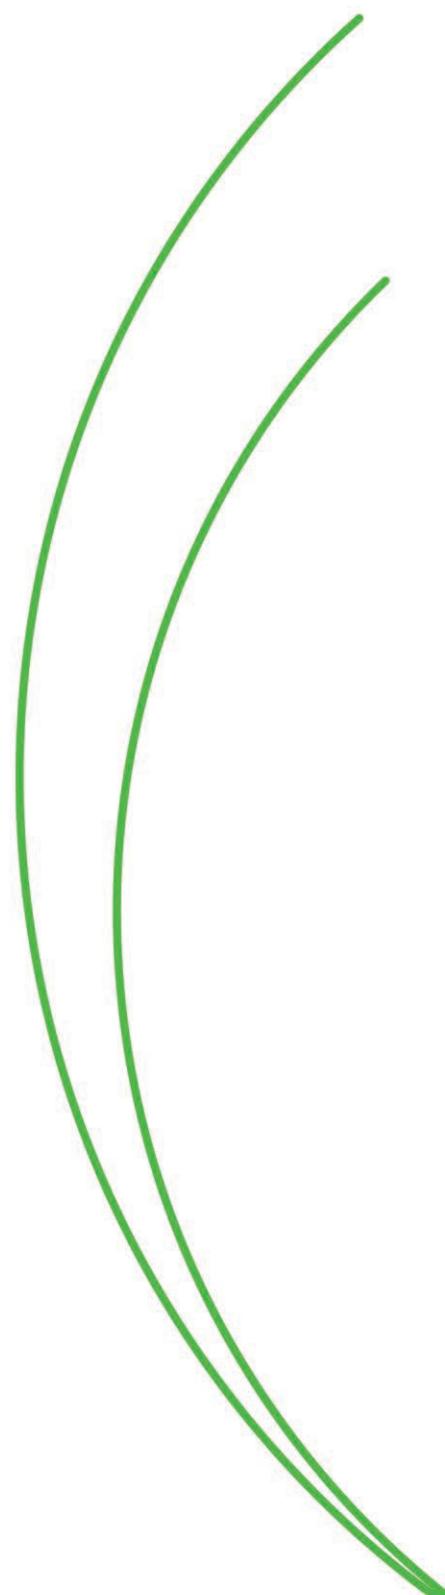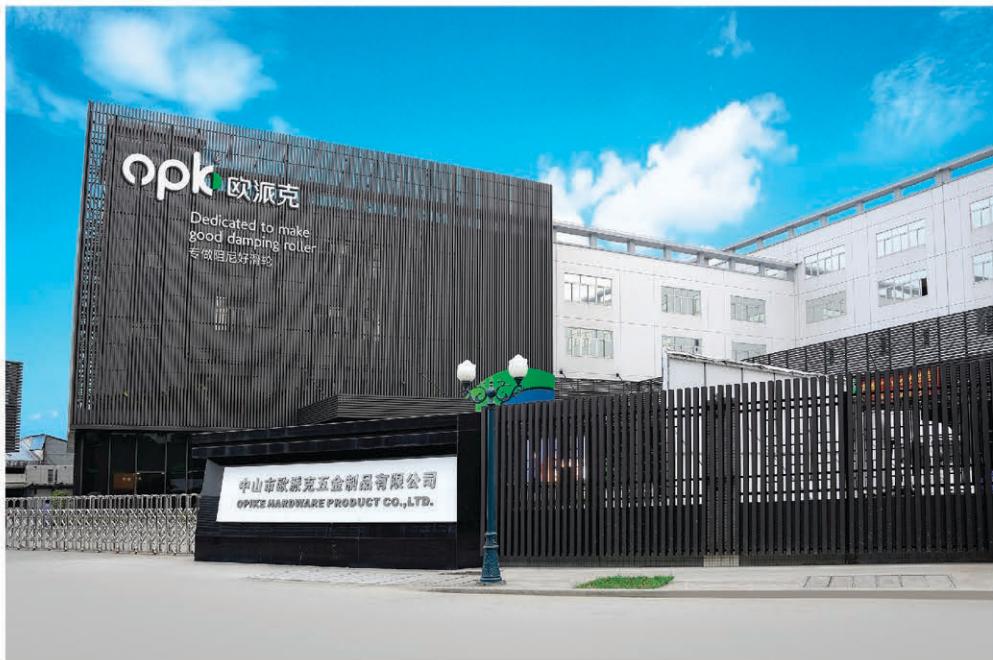

总公司简介 COMPANY PROFILE

中山市欧派克五金制品有限公司创建于1996年，总部位于中国著名五金之乡——中山市小榄镇。凭借良好的企业信誉、优质的产品质量和扎实的服务，欧派克不断发展壮大，现已成为拥有千余名员工、50000平米建筑厂房的规模化、技术型企业。欧派克与国内外众多知名结成了良好的战略合作伙伴关系共生共荣，成为引领和推动行业发展的骨干之一，产品畅销国内外，在客户和消费者中享有良好的声誉。欧派克坚持专业、专注的发展理念，二十多年来始终致力于家居滑轮行业的发展，在该领域做专，做精，做细，做强，已拥有国际、国内专利几百项，实现了生产规模化、产品系列化、管理现代化，奠定了在业内的核心领导地位，成为公认的中国家居阻尼滑轮专家。承载商业家居移动梦想，践行欧标滑轮阻尼世家！

作为滑轮领域、五金配件产品行业的龙头企业，欧派克始终明确以创新为企业发展的基石和根本动力，基于对行业本质的深刻理解和未来需求的仔细分析，公司成立了以专业的研发队伍为核心的opk品牌部并创办滑轮研究院，与华南理工大学、广东工业大学及其他研究机构展开深度合作，建立产学研合作基地，及研究生工作站。创建德国分公司融入欧美高端市场。主要开发、生产和销售opk品牌的全系家居阻尼滑轮，目前以家具阻尼滑轮系列、中空门窗阻尼滑轮系列、木门装饰工程阻尼滑轮系列、淋浴房阻尼滑轮系列以及重型门阻尼滑轮系列产品为核心，拥有专业化、多样化的全系阻尼滑轮产品。opk目前已推出多款智能型、自动化、感应式、电动系列家居滑轮，将产品集美化、保护、稳定、科技于一身，实现产品创新的可持续发展，竭尽所能为客户提供有竞争力的专业产品和独到的解决方案。

欧派克正以进取的姿态进入崭新的互联网+及智能制造发展阶段，我们将始终坚持诚实正直的经营理念，秉承严谨科学的工作态度，发扬工匠精神，不断提高阻尼滑轮科技化、时尚性、智能化、国际化标准，为用户创造更大价值，我们愿与海内外家居行业的伙伴们一起携手共进，共创美好未来！

欧派克，专做阻尼好滑轮，滑轮梦想家和践行者！

Zhongshan OPIKE Hardware Products Co., Ltd was founded in 1996 and headquartered in the well-known hardware products base—Xiaolan Town, Zhongshan City of China. With good reputation, high quality products and great service, OPK keeps on uninterrupted growth and development. And now it becomes a large-scaled, technology-oriented enterprise with fifty thousand square meters working plants and more than 1000 employees. Meanwhile, as one of the backbone of the industry, OPK signed strategic win-win cooperation with many domestic and international well-known enterprises, leads and promotes the development of the industry, sells high quality products at home and aboard, gains high reputation from customers and consumers. OPK adheres to the concept of being professional and concentrated. OPK is always dedicated to the development of household furniture sliding industry, and with professional technology and devoted attitude, OPK has achieved hundreds of patents, and realized large scale production, product seriation and management modernization. Now it is recognized as sliding expert and becomes leading company in this industry. OPK will carry your dreams of beautiful homes; will be the family of soft closing sliding system and implementers of European quality standard.


As the leader manufacturer of sliding hardware industry, Innovation is the cornerstone and the fundamental driving force of OPK. Based on deep understanding of the nature of the industry and a careful analysis of future needs, OPK established OPK Brand and Roller Institute, in which powerful R&D team acted as the core. What's more, OPK has deeper cooperation with South China University of Technology, Guangdong University of Technology and other Research Institutes. Set up Industry Academia Research and Graduate Workstation. Found Branch Company in Germany and integrated into Europe and America high-end marketing. OPK mainly develop, produce and sell all series of household furniture sliding industry. By now, the core products include furniture soft closing sliding system, hollow door soft closing sliding system, wooden door decoration engineering soft closing sliding system, Shower room soft closing sliding mechanism and heavy door soft closing sliding system. OPK products have the advantages of specialization, diversification with complete products range. Products of intelligent, automatic and electrical have been launched, integrated beauty, security, stability and technology. Realized the sustainable development of the innovative products and try all our best to provide competitive professional products and unique solutions.

OPK is entering a new stage of internet and intelligent manufacturing development. We will always adhere to the business philosophy of integrity and strict scientific attitude. OPK is constantly improving the satisfaction of the sliding damping roller including the fashion sense, intelligence and international standard, carry forward the spirit of craftsman, devote to make more value for the customer, and building the core competence of the new brand. We are willing to work with home and abroad partners together for a better future. OPK dedicated to make good sliding damping roller, dreamer and pioneer of sliding hardware.



好滑轮·好静音

SUPERIOR ROLLERS SO QUIET

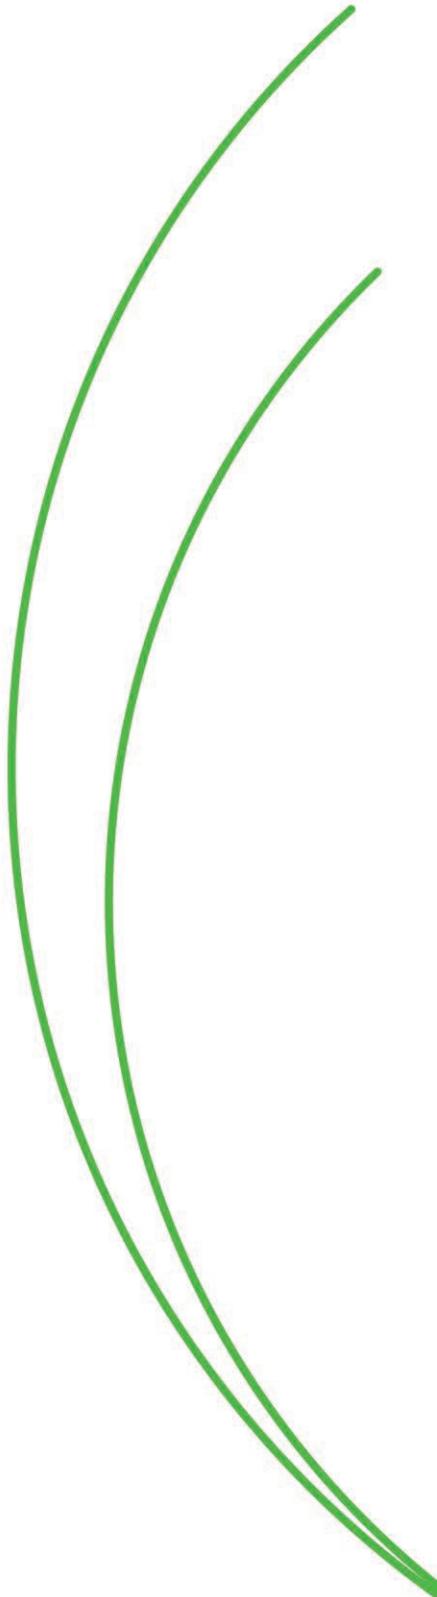

欧洲公司简介 COMPANY PROFILE

欧派克欧洲公司是中山市欧派克五金制品有限公司的全资子公司,总部位于德国,主要从事高端家居滑轮产品系统的研发、生产与销售。

为实现公司“立足中国、定位全球”的发展战略,欧派克高瞻远瞩,系统布局,建厂德国,积极融入欧洲高端产业链。通过吸收欧洲先进的理念、技术、工艺、人才及产业标准,并同中国公司相辅相成,取长补短,从而实现产业升级,并获取创新发展的新动力!

欧洲公司以德国总部为中心,借助欧洲的优势资源,扎根欧洲,并以此为新的战略支点,占领家居滑轮领域至高点,从而实现公司全球发展战略。

未来,欧派克欧洲子公司继续秉承中国母公司专业专注的发展理念,并借助吸收德国的先进设计与制造工艺,致力于将家居滑轮产业做精做强,并为全球客户提供更优全系家居滑动门系统解决方案。

把产品做到极致,是我们的责任!

OPK Europe is a wholly-owned subsidiary of OPIKE Hardware Product Co., Ltd., which specializes in the R&D, production and sales of high-end household roller product systems.

In order to achieve the development strategy of “based in China, positioning the world”, OPK stands on a higher plane and is more farsighted, starts the business in Horb, Germany, and actively enters the high-end Europe market. By absorbing European advanced concepts, technology, talent and industry standards, OPK Europe and OPK China learn from each other to achieve industrial upgrading and gain the new power of development and innovation. With local resource advantages, OPK Europe plans to root deeply in Europe. With this strategy, OPK Europe would be able to stand out from the sliding roller industry and achieve the goal of global development strategy.

OPK Europe will follow the basic development strategy of OPK China, and with advanced technology and design from Europe, OPK dedicates to produce the best products, and therefore OPK concentrates on providing the best sliding roller system solutions to all customers.

Our responsibility is to provide the best products!

家具滑动系统

FURNITURE SLIDING SYSTEM



001-004

磁悬浮电视柜

INTELLIGENT MAGNETIC FOR TV CABINET



053-056

装饰移门

FLAGSHIP S



005-012

航母1号

AIRCRAFT 1



057-060

巡洋1号

CRUISER 1



013-018

航母2号

AIRCRAFT 2



061-064

巡洋2号


CRUISER 2



019-024

航母4号

AIRCRAFT 4



065-068

巡洋3号

CRUISER 3



025-028

远洋1号

OCEAN 1



069-072

巡洋4号三门系统

CRUISER 4 SYSTEM FOR 3 DOORS



029-034

远洋5号

OCEAN 5



073-076

巡洋5号

CRUISER 5



035-038

远洋6号

OCEAN 6



077-078

巡洋6号

CRUISER 6



039-042

远洋7号

OCEAN 7



079-082

登陆1号

LANDING 1



043-052

旗舰5号

FLAGSHIP 5



083-086

柔畅1号

ROUCHANG 1



087-090

扬帆1号
SAILING 1



091-094

扬帆2号
SAILING 2



095-100

迷你1号
MINIROLLER 1



101-106

壁柜轮
SLIDING ROLLER



107-108

家具滑轮
JETSKI



109-116

玉兔号
SPEEDBOAT



117-124

探月号
DISCOVERY



125-160

潜艇号
SUBMARINE

磁悬浮智能滑轮系统-E88系列

MAGNETIC INTELLIGENT SLIDING SYSTEM-E88 SERIES

产品特点：

- 组合式结构专利设计；
- 无需定制，使用更方便；
- 磁力驱动，柔性接触，无硬摩擦，使用更安全；
- 无机械传动结构,无硬连接，滑动更加轻盈、柔畅；
- 减小轨道空间，精致设计，提高空间利用率；
- 停电情况下滑动依然轻柔。

技术概要：

- 额定电压：200-240V
- 额定功率：80W
- 待机功率：5W
- 开门速度：最低0.065M/S 最高0.26M/S
- 控制方式：微电脑处理控制器
- 冲撞机能：在受阻或冲撞条件下反弹
- 停电时手动开闭力：≤10N
- 门宽：≥750mm

Product Features:

- Combined structure patent design.
- No need custom-made, more easier operation.
- Magnetic drive, soft touch no hard friction, more safety to use.
- No mechanical drive mechanism sliding more soft and smooth.
- Sliding still soft and smooth during the power failure.
- Exquisite design to save the rail space improve the space usage.

Technical Points:

- **Voltage Rating:** 200-240V
- **Power Rating:** 80W
- **Standby Power:** 5W
- **Door Opening Speed:** Min: 0.065M/S , Max: 0.26M/S
- **Control Mode:** Microcomputer processing controller
- **Bounce Function:** Rebound in the conditions of damping or bumping
- **Manual Power Needed when Power Off:** ≤10N
- **Door width:** ≥750mm



磁悬浮智能滑轮系统 E88系列(通用型)

MAGNETIC INTELLIGENT SLIDING SYSTEM-E88 SERIES (NORMAL)

≤120kg

产品描述 Product Description		型号 Art.-No.	规格(mm) Specification (mm)	单系统适应门洞(mm) Single mode door opening size(mm)	单系统(条) Single mode	对开系统适应门洞(mm) Inline mode door opening size(mm)	对开系统(条) Inline mode
磁悬浮轨道系统 (电视柜) Intelligent magnetic track system (TV cabinet)		E88-C2000 0100	2000	1400-2000	1	(1400-2000)x2	2
		E88-C2700 0100	2700	2000-2700		(2000-2700)x2	
		E88-C3400 0100	3400	2700-3400		(2700-3400)x2	


标准配置

STANDARD CONFIGURATION


配件描述 Fitting Description				单系统(个) Single mode	对开系统(个) Inline mode
TN551A 配件组件 Accessories	窄边框升降挂盒 Narrow frame adjustable hanging plate	TN357A		2	4
	远洋1号挂趟门 内门左下挂架 Bottom wheel-L	CJ12206		1	2
	远洋1号挂趟门 内门右下挂架 Bottom wheel-R	CJ12206		1	2

TE061A 遥控器C型 Remote control type C	
--	--


型材介绍 FRAME INTRODUCTION

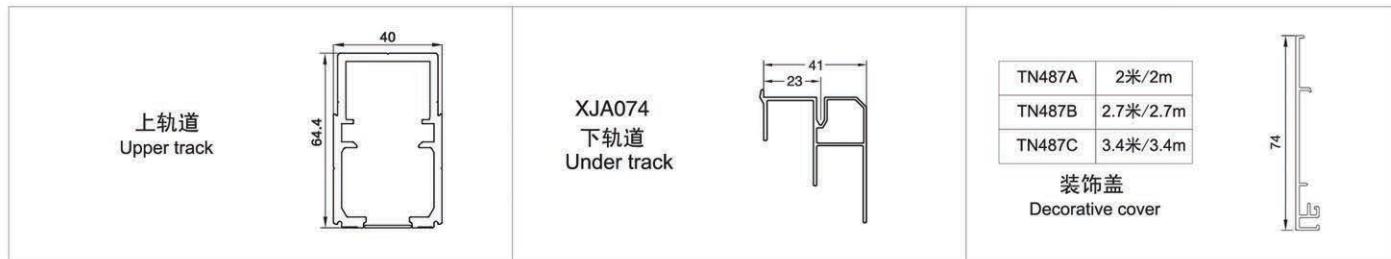


门板背面示意图 THE BACK SIDE VIEW OF DOOR PANEL


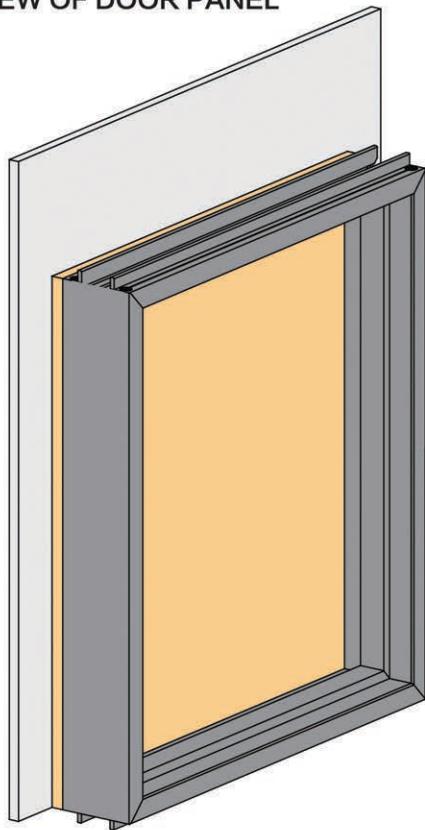


窄边框型材 NARROW FRAME DOOR PROFILES

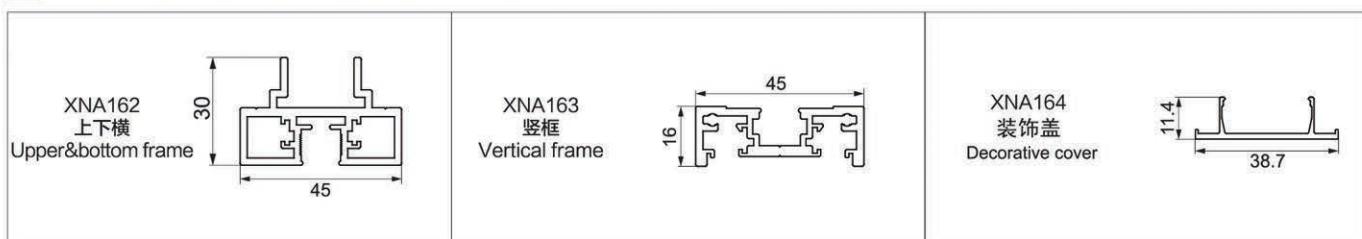

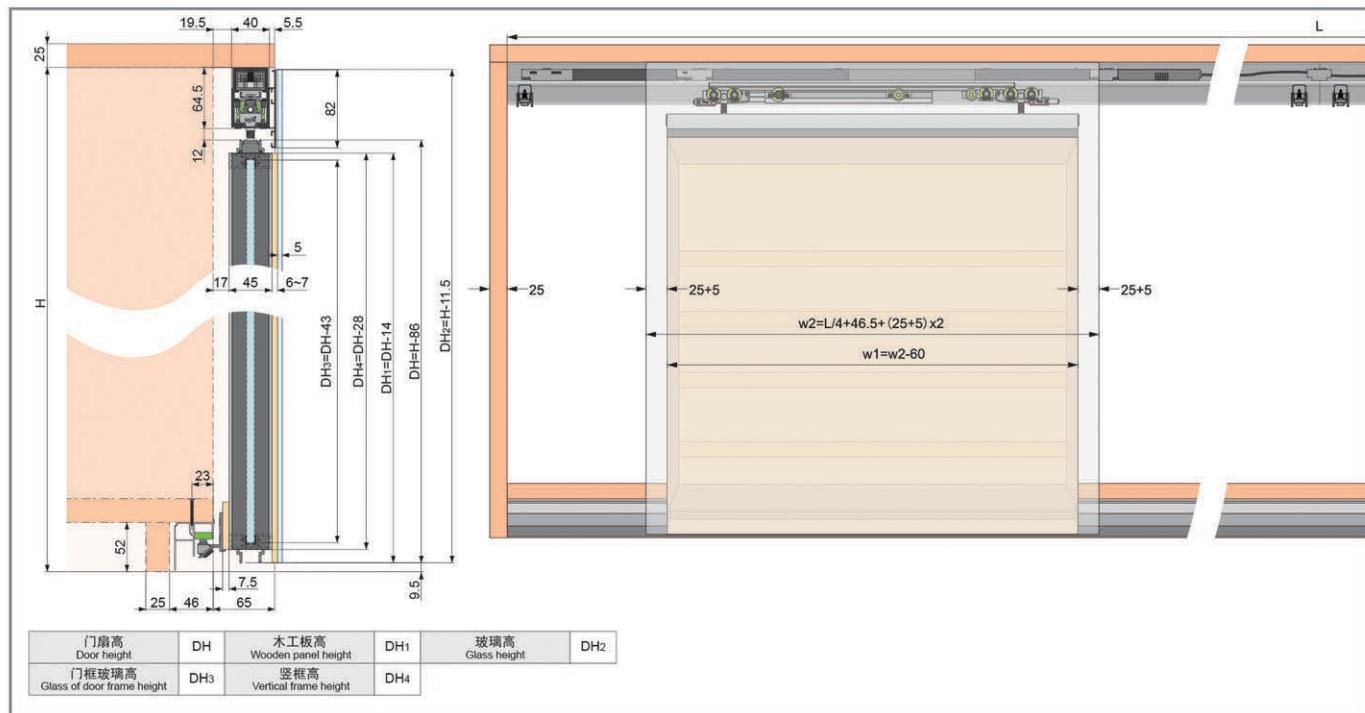安装参数**INSTALLATION PARAMETERS****切割轨道系统****CUTTING THE TRACK SYSTEM**

! 轨道系统过长需要裁切时，两边需切除同样的长度X
 If the track system is too long, both sides need to cut out the same length X
! 轨道系统A和轨道系统B需要切除同样的长度X
 Both track system A and B need to cut out the same length X

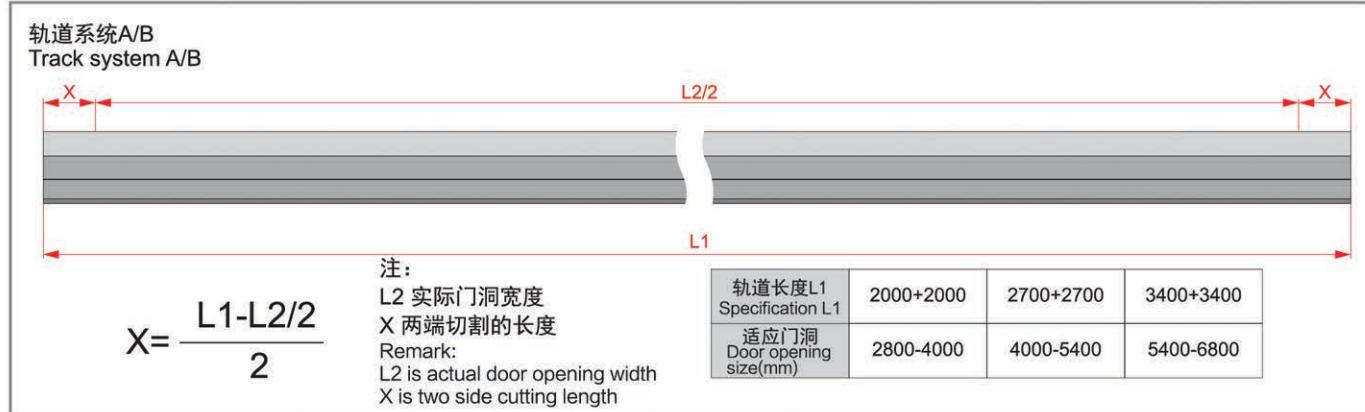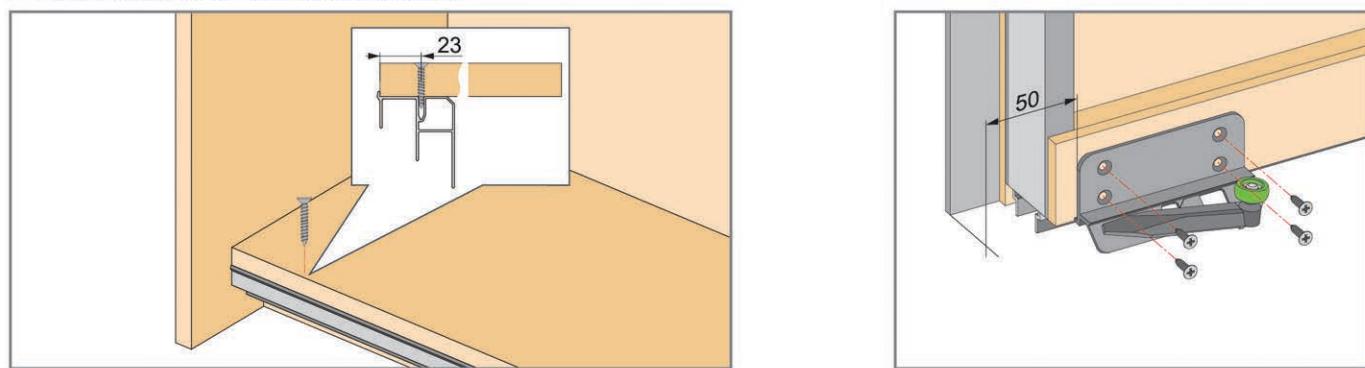**下轨及下滑轮定位****CUTTING THE TRACK SYSTEM**

航母1号

AIRCRAFT 1

此产品有四项专利技术：

- 专利一：阻尼调节技术
- 专利二：下轮调节装置
- 专利三：开启关闭双向阻尼装置
- 专利四：下轨弹力滑轮推入式装置

This product has 4 patented technologies:

- Patent I: Damper Adjustable Device**
- Patent II: Bottom roller adjustable Device**
- Patent III: Open shutoff two-way damping device**
- Patent IV: Elastic push and guide Device for Bottom Roller**

产品特点：

- **平趟门设计：**柜门错位滑动开启，关闭时两扇门在同一平面，整体美观、大气、浑然一体。
- **承重：**采用高强度加厚合金框架，通过增加滑轮数量，使单门最高承重量高达50KG。
- **双向阻尼装置：**根据不同柜门重量，可以自行调节门的关闭的速度。
- **滑轮：**采用优质轴承，并配套使用进口改性尼龙制作的滑轮，经精加工后滑动更加顺畅、静音、大大延长了滑轮的使用寿命。
- **毛刷：**毛刷装置与滑轮同步运行，清扫轨道上的灰尘，保证运行平稳顺畅。
- **表面处理：**采用具有耐腐蚀性的工艺处理，适用于不同环境、气候条件下使用，外形美观大方。
- **智能系统：**加载智能电动系统装置，通过轻触、轻推、遥控，即能自动开启、关闭柜门，尽显智能、时尚、人性化。

技术概要：

- 用于木门、框门、铝框门
- 最大承重50KG/门
- 门厚18~50mm
- 门宽800~1500mm
- 门高600mm~2800mm

Technical Points:

- Application: Applicable to Wood door, Frame door, Aluminum frame door
- Max loading capacity: 50kg
- Door thickness: 18~50mm
- Door width: 800~1500mm
- Door height: 600mm~2800mm




Product Features:

- **Fantastic design:** Overall surface is in the same level when door is closed, creating elegance, nobility and harmony.
- **Load-bearing:** High-strength alloys applied to fittings; Metal tracks and multi-roller combination; max weight 50kg/door.
- **Two-way Damper Device:** Two-way Damper device for door opening and closing. The damping force can be adjusted according to the weight of the door during door closing.
- **Sliding roller:** High-quality ball bearing and imported nylon material adopted; After processing, roller slides more smoothly and quietly, which greatly extends its using life.
- **Brush:** Automatically clearing debris and dust in the rails, ensuring smooth sliding of roller, protecting them from damage; and prolonging the service life.
- **Finishing:** Special surface treatment ensures abrasive resistance feature; Beautiful and dignified appearance; Suitable for different environment and climate.
- **Intelligent system:** Just touch or nudge the intelligent-electric-system-loaded device, then door opens or closes, which brings intelligence, fashion and humanity.



产品应用范围

Product Applicationss

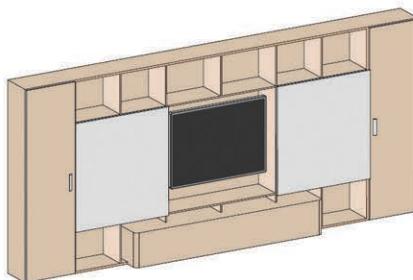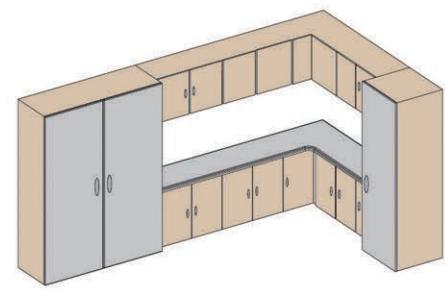电视柜 TV cabinet	衣柜 Wardrobe	橱柜 Cabinets
		



阻尼平趟门/智能平趟门全套配件

Complete fittings

有多种规格可供用户选择 (标准规格)

Various specifications for your choose (Standard Type)

阻尼平趟门型号 Manual type	智能平趟门型号 Intelligent type	规 格 Specification	柜体宽度 Cabinet width
CJ12201N	CJ12203N	1550mm	1600mm
CJ12201P	CJ12203P	1650mm	1700mm
CJ12201A	CJ12203A	1750mm	1800mm
CJ12201B	CJ12203B	1850mm	1900mm
CJ12201C	CJ12203C	1950mm	2000mm
CJ12201D	CJ12203D	2050mm	2100mm
CJ12201E	CJ12203E	2150mm	2200mm
CJ12201F	CJ12203F	2250mm	2300mm
CJ12201G	CJ12203G	2350mm	2400mm
CJ12201H	CJ12203H	2450mm	2500mm
CJ12201I	CJ12203I	2550mm	2600mm
CJ12201J	CJ12203J	2650mm	2700mm
CJ12201K	CJ12203K	2750mm	2800mm
CJ12201L	CJ12203L	2850mm	2900mm
CJ12201M	CJ12203M	2950mm	3000mm

所有规格的柜体侧板标准厚度为25mm

The side board standard thickness is 25mm for all specification of cabinet.

opk智能平趟门电子技术参数说明

- 额定电压：200v~240v 50Hz~60Hz
- 额定功率：30w
- 待机功率：5w
- 开门速度：0.17m/s
- 控制方式：微电脑处理控制器
- 冲撞机能：在受阻或冲撞条件下返回
- 停电时手动开闭力：3kg
- 耗电说明：正常使用下平均8天约耗1度电

Electronic technical parameters for opk Electrical Sliding Door

- Voltage Rating:200v~240v 50Hz~60Hz
- Power Rating:30w
- Standby Power:5w
- Door Opening Speed:0.17m/s
- Control Mode: Microcomputer processing Controller
- Bounce Function: Rebound in the conditions of damping or bumping
- Manual Power Needed when Power Off: 3kg
- Power Consumption: On average, about 1 kWh of electricity consumption in 8 days

阻尼平趟门/智能平趟门配件说明



IN-LINE SLIDING DOOR/INTELLIGENT SYSTEM ACCESSORIES OPTIONS

上轨 Up track	1支/套 1pcs/set		
下轨 Bottom track	1支/套 1pcs/set		
TD002A 二维调节器 2-D regulator		TD002D 二维调节器 (左右随动) 2-D regulator (left-right move)	
★ 此款适用于最大50mm的门厚 Max door thickness: 50mm		各2个/套 2 pcs each type	
下挂配件 Bottom fittings	下轮固定座 bottom roller fix seat		2副/套 2pair/set
	下滑轮 bottom roller		2对/套 2pair/set
智能电动系统 Intelligent system	智能控制盒 Intelligent control box		TD021B
			TD021A
			纽扣电池型号: 2032 (3V)
	TD031A 电源连接线 Power cable	PJQ53001ZZ99 电源插头 Power plug	TD102A 遥控器B型 Remote control type B
	1根/套 1pcs/set	1根/套 1pcs/set	TD019A 蓝牙开关 Bluetooth Switch
其它包装信息 Other package information		安装说明书/1份 Installation Instructions/1 pcs	柜体技术参考图纸/1份 Cabinet technical parameters/1 pcs
		DVD教学光盘/1份 Teaching DVD-ROM/1 pcs	产品使用手册/1份 User manual/1 pcs (只限于智能平趟门) (Apply to intelligent system)
		安装工具/1套 Installation tools/1 set	侧板 Side panel 深13 10.5 23 550 550 12.2 Ø34 离地面 (1M~1.2M)
选配 Optional	TD086A 新款二维调节器 New Type 2-D regulator		TD086B 新款二维调节器 (左右随动) New Type 2-D regulator (left-right move)
	★ 此款适用于最大40mm的门厚 Max door thickness: 40mm		各2个/套 2 pcs each type
			★ 选择此款二维调节器的, 上轨道要多后退10mm For this 2-D regulator, 10mm more space back for the up track

平趟门安装参数介绍



IN-LINE SLIDING DOOR INSTALLATION PARAMETER INTRODUCED

1 安装要求 Installation Requirements

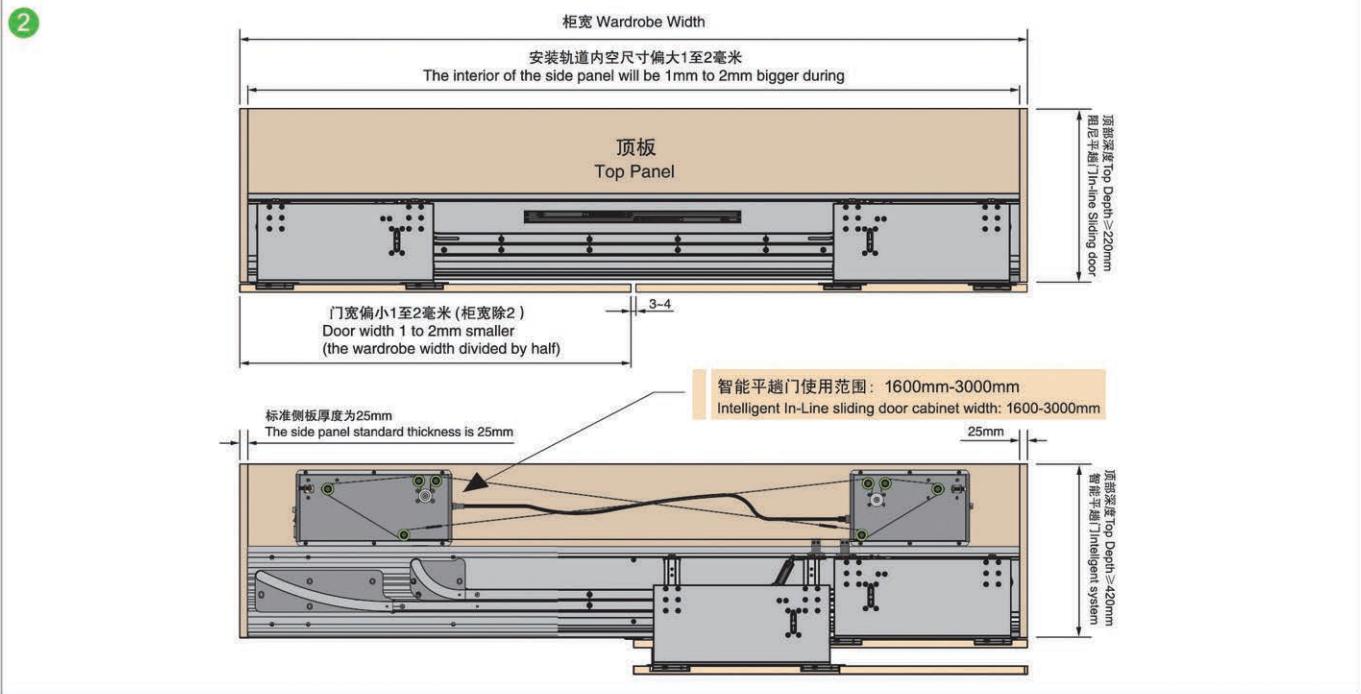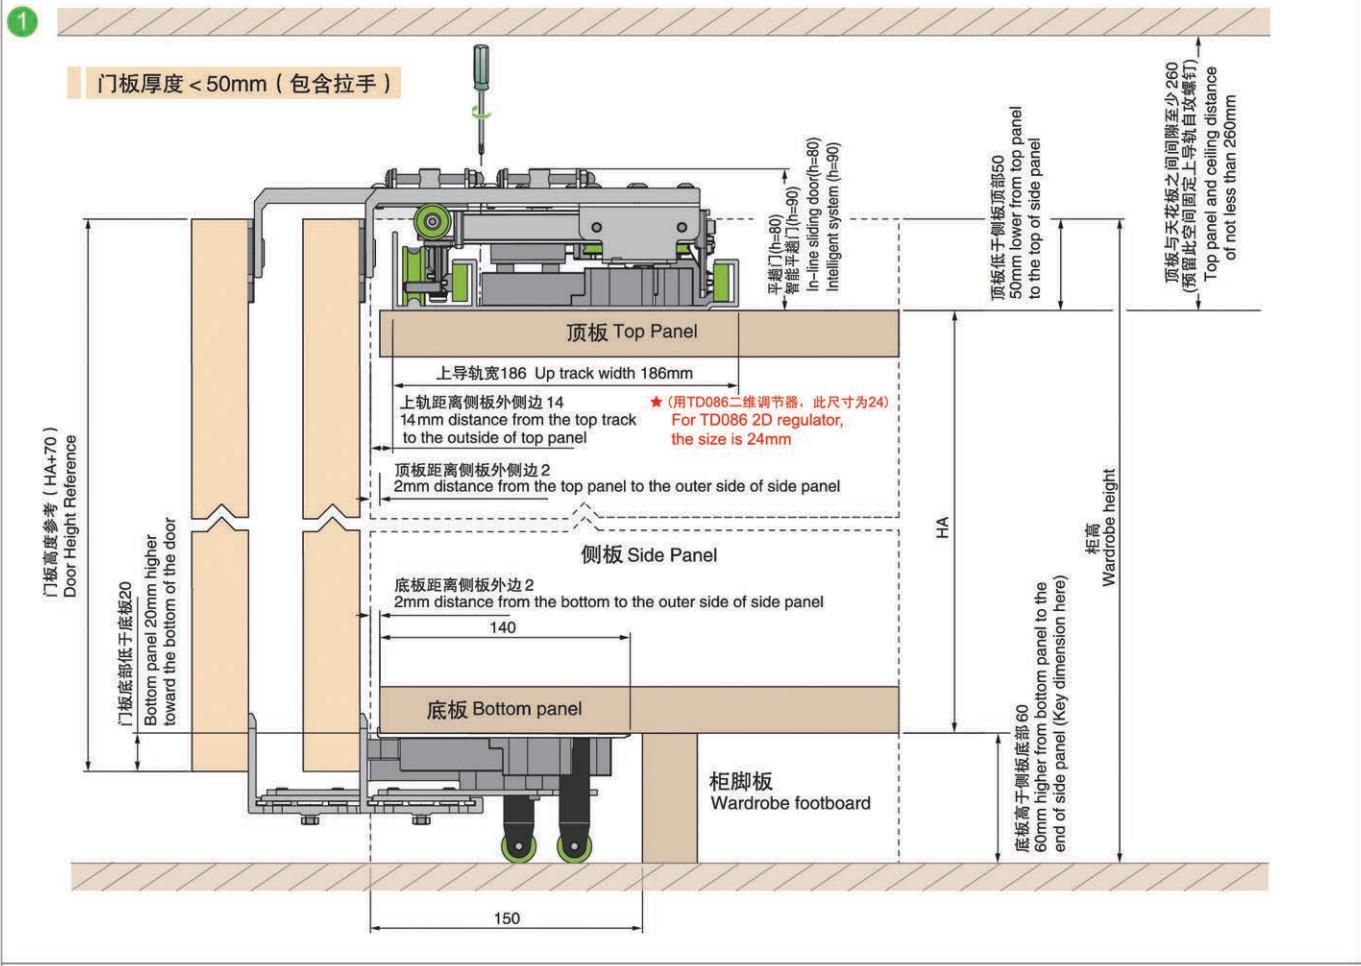


2 柜体要求 Cabinet Requirements

3D柜体图
3D-Cabinet graph

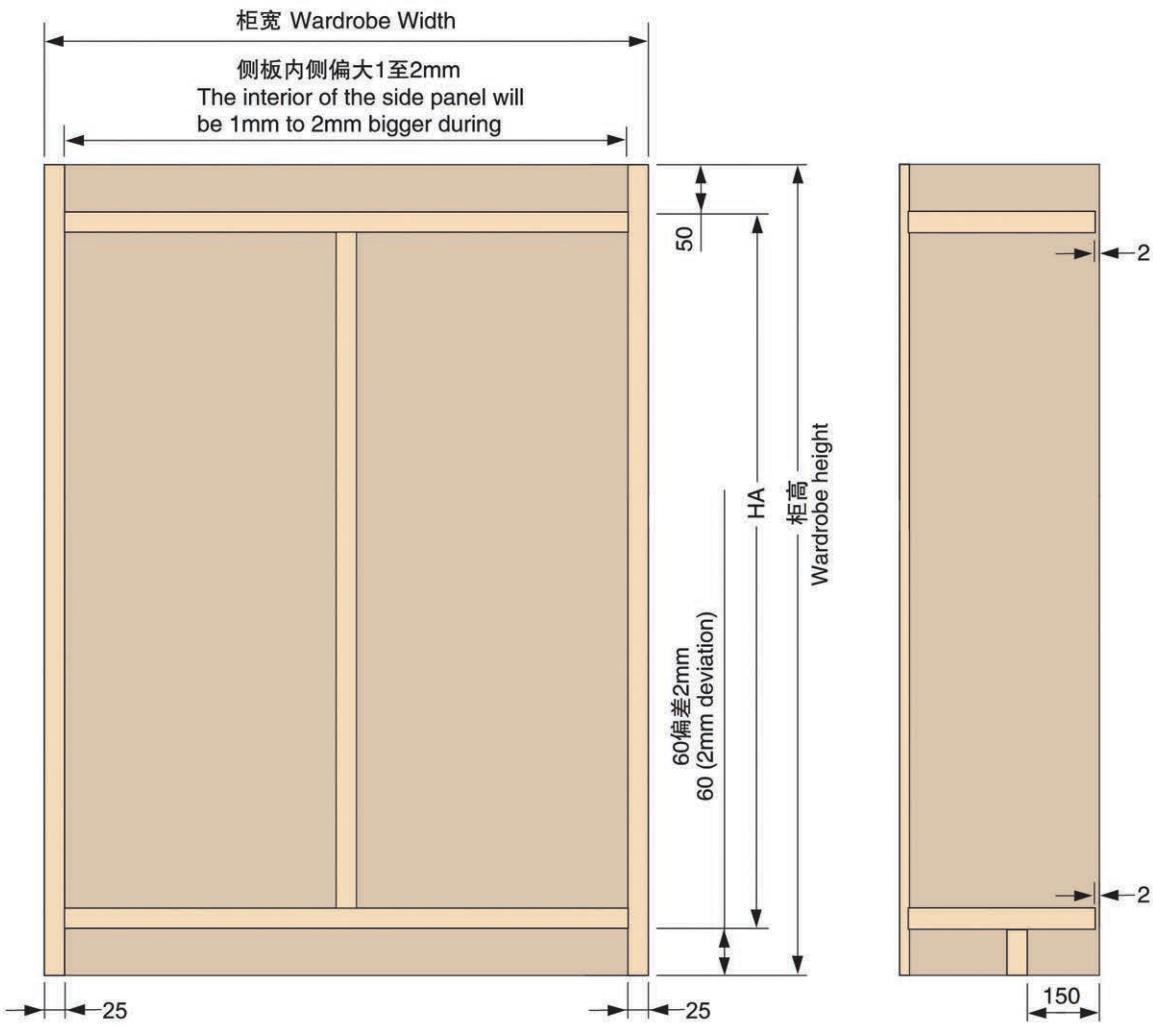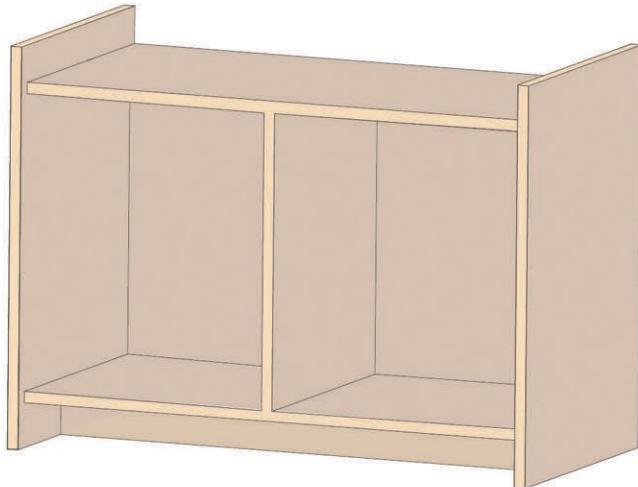


3 门板要求 Door Requirements

① 门板加工参数-1 Door machining parameters


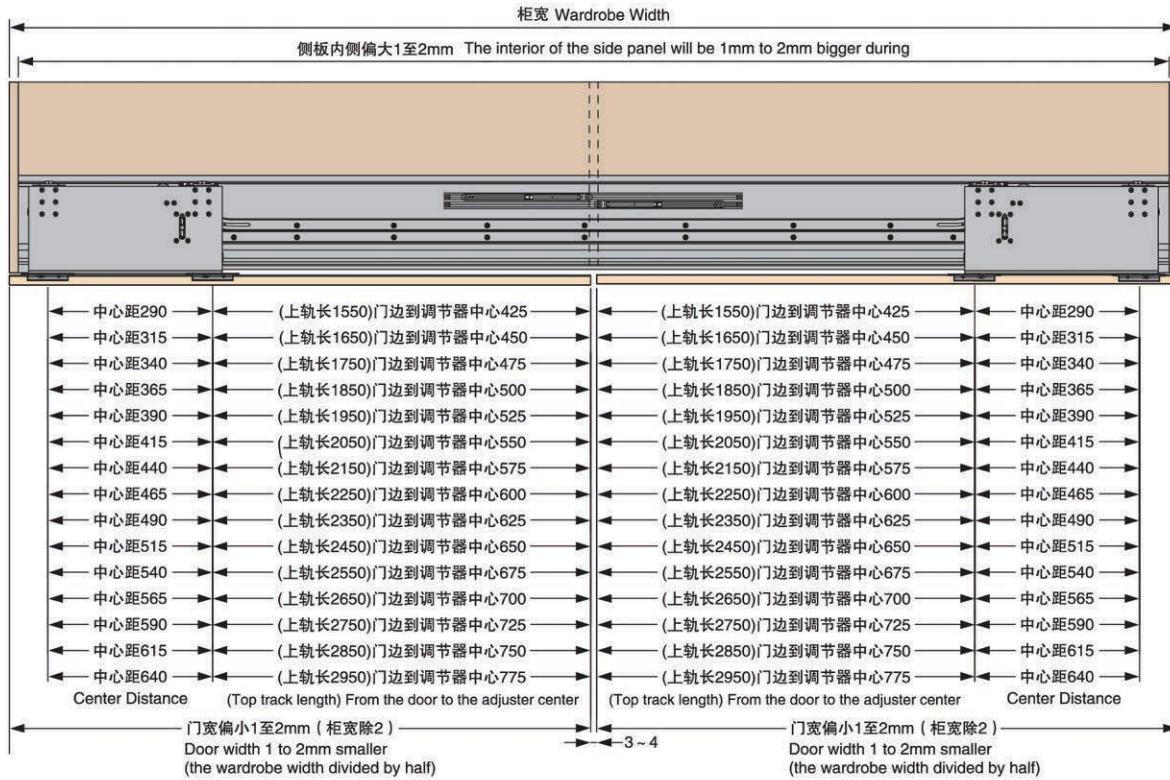


② 门板加工参数-2 (适用于木门) Door machining parameters (Apply to wooden doors)

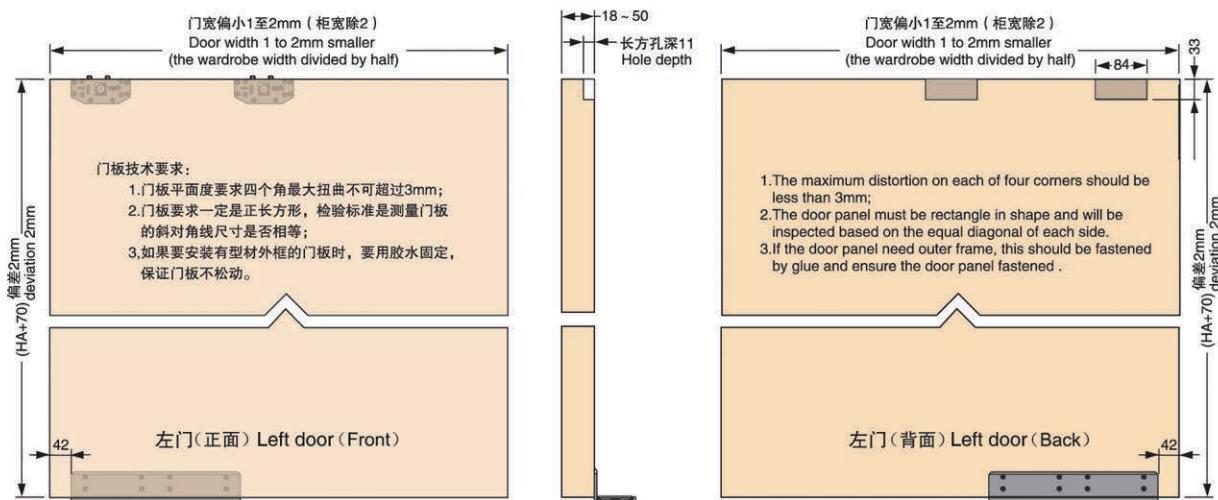

平趟门门框型材分类介绍

IN-LINE SLIDING DOOR DOORFRAME PROFILES CLASSIFICATION INTRODUCED

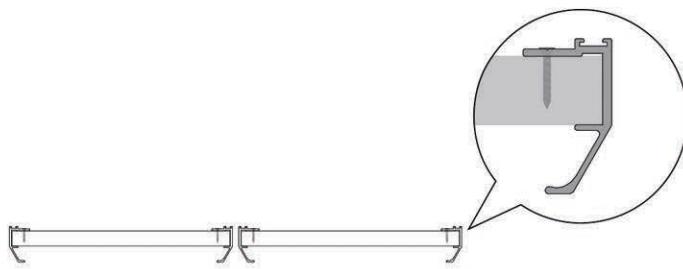H款 TYPE H	 XJA118 A03-18拉手竖框 XJA118-00620 米重: 0.45kg/m	18mm木板 (wood)
		 氧化黑拉丝 (BU) / 氧化银白拉丝 (BX) Anodized brush black(BU)/Anodized brush sliver (BX)



航母2号

AIRCRAFT 2

此产品有两项专利技术：

- 专利一：阻尼调节技术
- 专利二：开启关闭双向阻尼装置

This product has 2 patented technologies

Patent I: Damper Adjustable Device

Patent II: Open shutoff two-way damping device

产品特点：

- **平趟门设计：**柜门错位滑动开启，关闭时两扇门在同一平面，整体美观、大气、浑然一体。
- **承重：**采用高强度加厚合金框架，通过增加滑轮数量，使单门最高承重量高达15KG。
- **双向阻尼装置：**根据不同柜门重量，可以自行调节门的关闭的速度。
- **金属导向弯轨：**采用合金导向弯轨，有效的降低滑动摩擦力和噪音，提高门滑动及关闭复位时的顺畅度。
- **滑轮：**采用优质轴承，并配套使用进口改性尼龙制作的滑轮，经精加工后滑动更加顺畅、静音、大大延长了滑轮的使用寿命。
- **毛刷：**毛刷装置与滑轮同步运行，清扫轨道上的灰尘，保证运行平稳顺畅。
- **表面处理：**采用具有耐腐蚀性的工艺处理，适用于不同环境、气候条件下使用，外形美观大方。

技术概要：

- 用于木门、框门、铝框门
- 最大承重15KG/门
- 门厚：15-20mm(含拉手)
- 门宽：700-1000mm
- 门高：<690mm

Technical Points:

- Application: Application to Wood door, Frame door, Aluminum frame door
- Max loading capacity:15KG
- Door thickness: 15-20mm
(Including handles)
- Door width: 700-1000mm
- Door height: <690mm


Product Features:

- **Fantastic design:** Overall surface is in the same level when door is closed, creating elegance, nobility and harmony.
- **Load-bearing:** High-strength alloys applied to fittings; Metal tracks and multi-roller combination; max weight 15kg/door.
- **Two-way Damper Device:** Two-way Damper device for door opening and closing, The damping force can be adjusted according to the weight of the door during door closing.
- **Metal Oriented Curved Rail:** Alloy-oriented curved rails adopted for effectively reducing friction and noise, ensuring flexibility and smoothness during door sliding.
- **Sliding roller:** High-quality ball bearing and imported nylon material adopted; After processing, roller slides more smoothly and quietly, which greatly extends its using life.
- **Brush:** Automatically clearing debris and dust in the rails, ensuring smooth sliding of roller, protecting them from damage; and prolonging the service life.
- **Finishing:** Special surface treatment ensures abrasive resistance feature; Beautiful and dignified appearance; Suitable for different environment and climate.



吊柜平趟门配件说明

WALL CUPBOARD INLINE SYSTEM INSTRUCTION

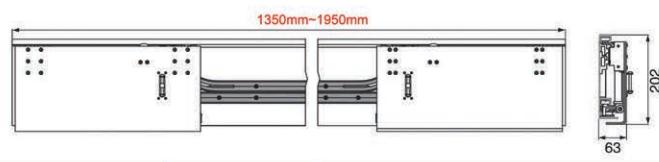上轨 Up track	1支/套 1pcs/set	 
TD086A 新款二维调节器 New Type 2-D regulator 	TD086B 新款二维调节器 (左右随动) New Type 2-D regulator (left-right move) 	各2个/套 2 pcs each type 4 pcs/ set
TJ070A 传动器 Driving device 		
工型轨道 H track		4支/套 4 pcs/set

有多种规格可供用户选择 (标准规格)

Various specifications for your choose (Standard Type)

吊柜平趟门型号规格 Item No.	规 格 Specification	柜体宽度 Cabinet width
CN122127A	1350mm	1400mm
CN122127B	1450mm	1500mm
CN122127C	1550mm	1600mm
CN122127D	1650mm	1700mm
CN122127E	1750mm	1800mm
CN122127F	1850mm	1900mm
CN122127G	1950mm	2000mm


所有规格的柜体侧板标准厚度为25mm

The side board standard thickness is 25mm for all specification of cabinet.

平趟门安装参数介绍


IN-LINE SLIDING DOOR INSTALLATION PARAMETER INTRODUCED

1 安装要求 Installation Requirements

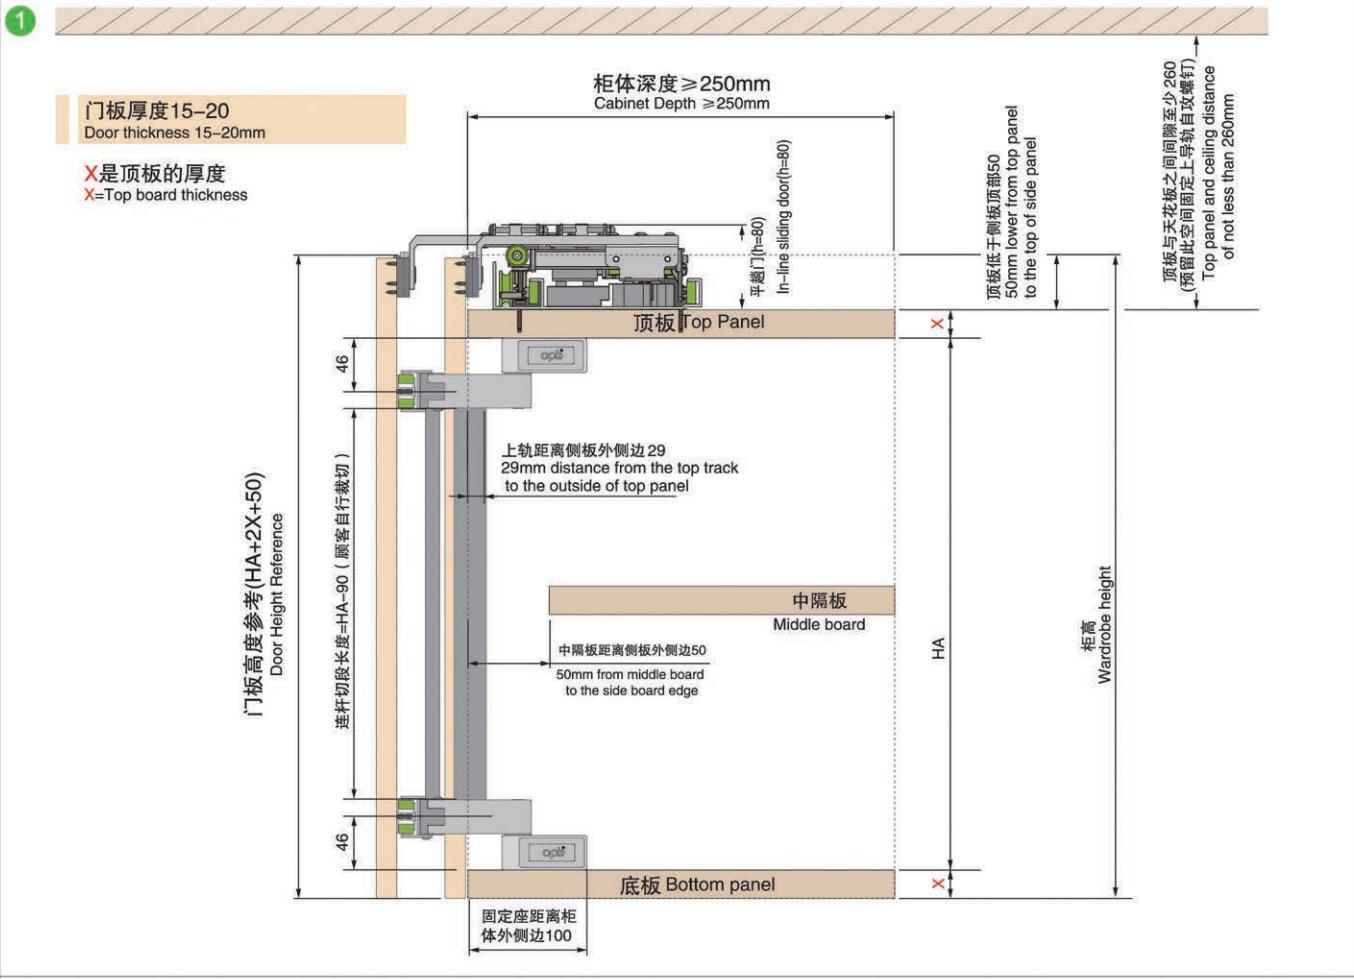


2 齿轮传动盒安装事项 Synchrodrive installation instruction


3 把连杆连接至传动盒

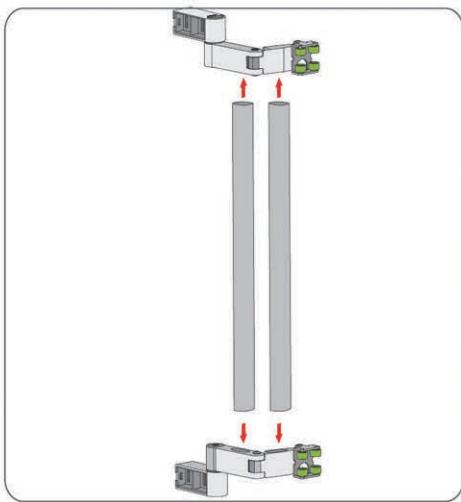


4 把连杆固定座安装到中隔板

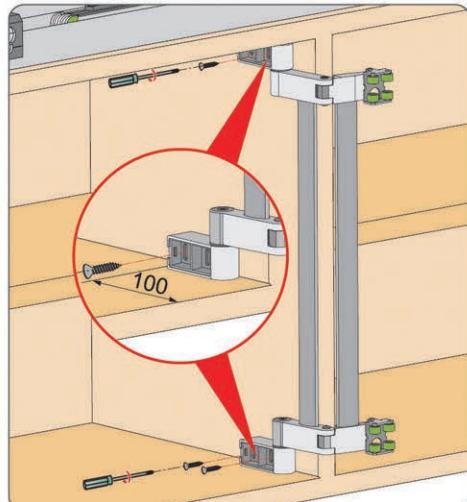

③ 门板定位参考 Door position reference

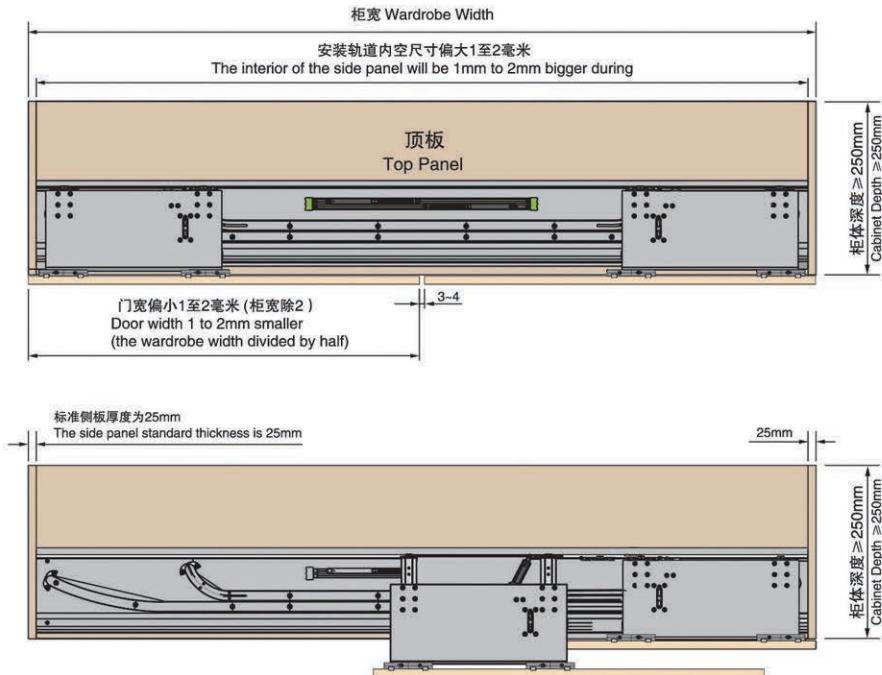


2 柜体要求 Cabinet Requirements

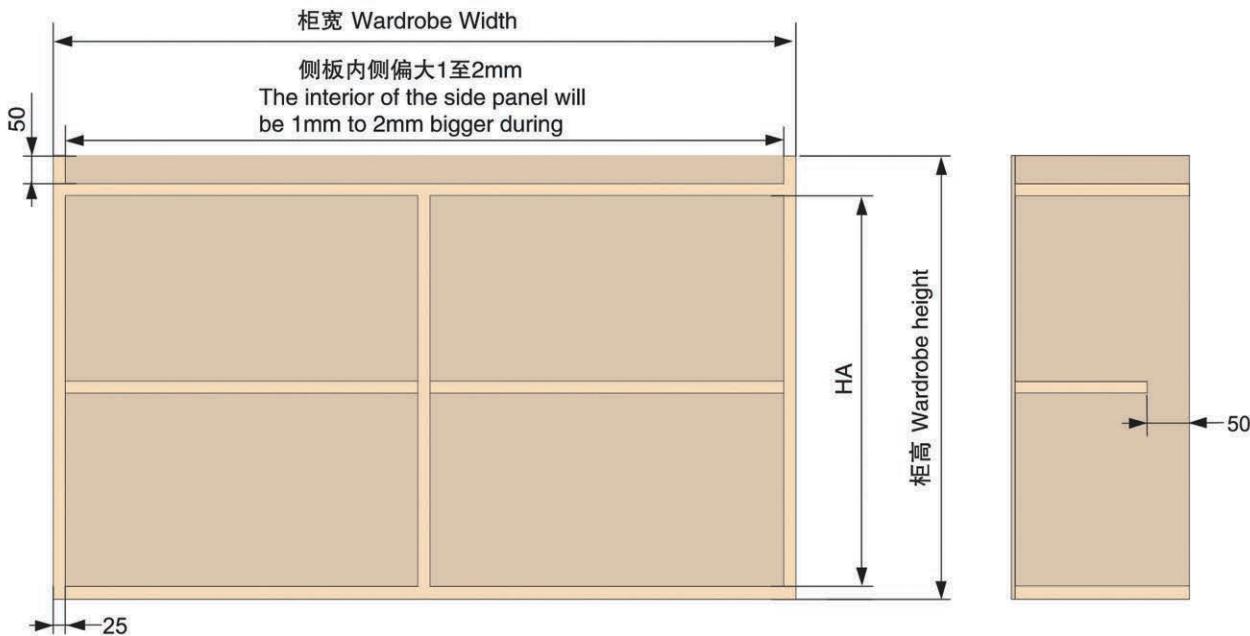


3 门板要求 Door Requirements

① 门板加工参数-1 Door machining parameters

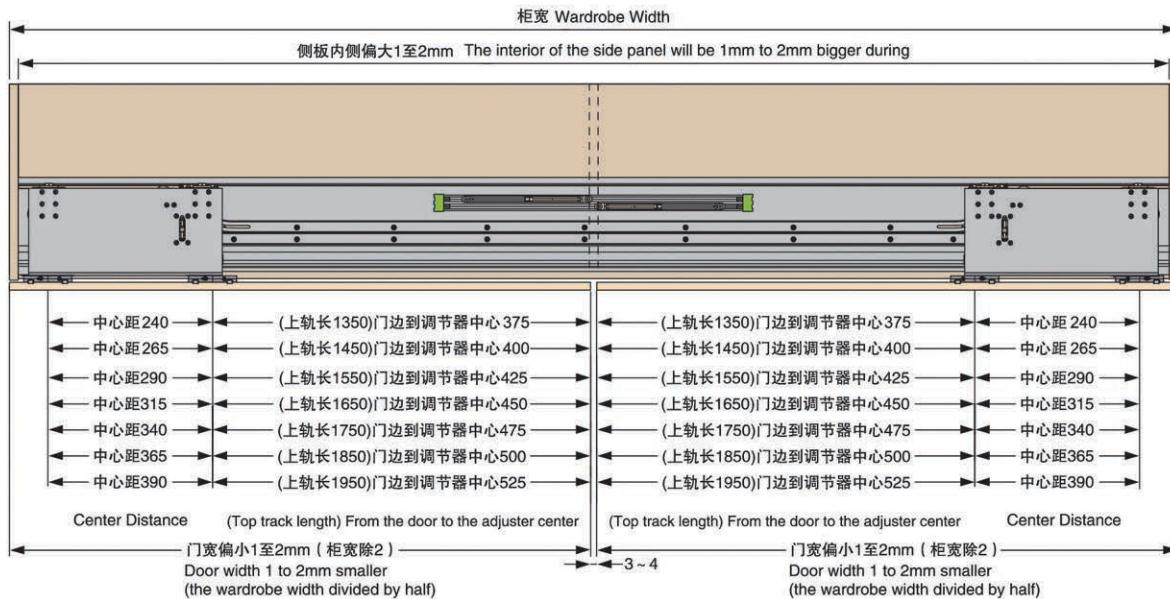

② 门板加工参数-2 (适用于木门) Door machining parameters (Apply to wooden doors)

X是顶板的厚度
X=Top board thickness

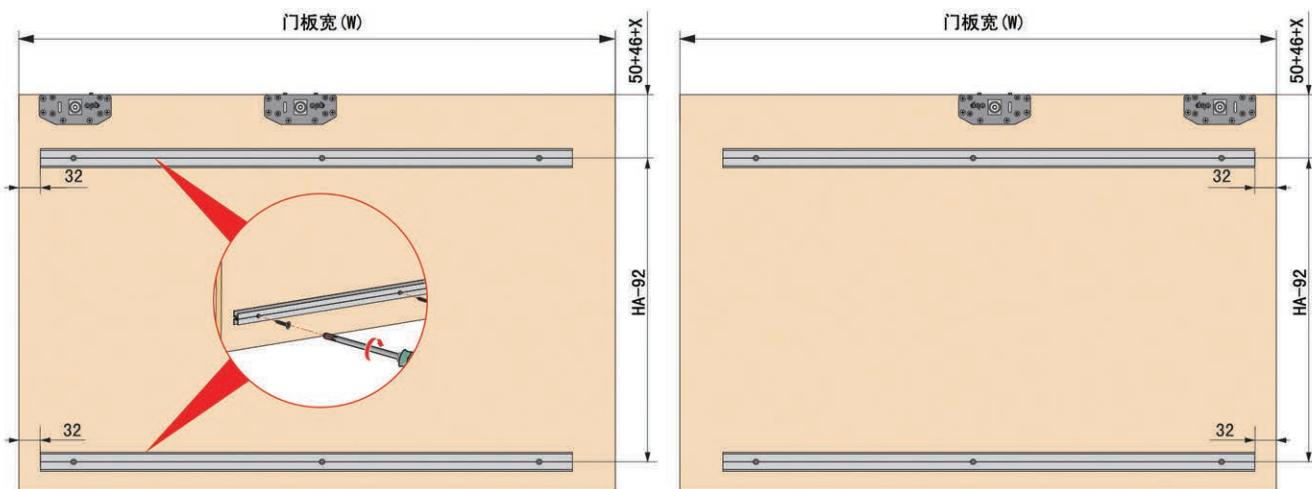

航母4号4门智能平趟门

AIRCRAFT 4

产品特点：

- **平趟门设计：**柜门错位滑动开启，关闭时两扇门在同一平面，整体美观、大气、浑然一体。
- **承重：**采用高强度加厚合金框架，通过增加滑轮数量，使单门最高承重量高达40KG。
- **双向阻尼装置：**根据不同柜门重量，可以自行调节门的关闭的速度。
- **滑轮：**采用优质轴承，并配套使用进口改性尼龙制作的滑轮，经精加工后滑动更加顺畅、静音、大大延长了滑轮的使用寿命。
- **毛刷：**毛刷装置与滑轮同步运行，清扫轨道上的灰尘，保证运行平稳顺畅。
- **表面处理：**采用具有耐腐蚀性的工艺处理，适用于不同环境、气候条件下使用，外形美观大方。
- **智能系统：**加载智能电动系统装置，通过轻触、轻推、遥控，即能自动开启、关闭柜门，尽显智能、时尚、人性化。

技术概要：

- **适用于：**木门、框门、铝框门
- **门重：**单扇门≤40kg
- **门厚：**≤50mm (含拉手)
- **门宽：**800~1200mm


Technical Points:

- **Application:** Applicable to Wood door,Frame door,Aluminum frame door
- **Door Weight:** single door≤40kg
- **Door thickness:**≤50mm(With a hand)
- **Door width:** 800~1200mm

Product Features:

- **Fantastic design:** Overall surface is in the same level when door is closed, creating elegance, nobility and harmony.
- **Load-bearing:** High-strength alloys applied to fittings; Metal tracks and multi-roller combination; max weight 40kg/door.
- **Two-way Damper Device:** Two-way Damper device for door opening and closing. The damping force can be adjusted according to the weight of the door during door closing.
- **Sliding roller:** High-quality ball bearing and imported nylon material adopted; After processing, roller slides more smoothly and quietly, which greatly extends its usage life.
- **Brush:** Automatically clearing debris and dust in the rails, ensuring smooth sliding of roller, protecting them from damage; and prolonging the service life.
- **Finishing:** Special surface treatment ensures abrasive resistance feature; Beautiful and dignified appearance; Suitable for different environment and climate.
- **Intelligent system:** Just touch or nudge the intelligent-electric-system-loaded device, then door opens or closes, which brings intelligence, fashion and humanity.



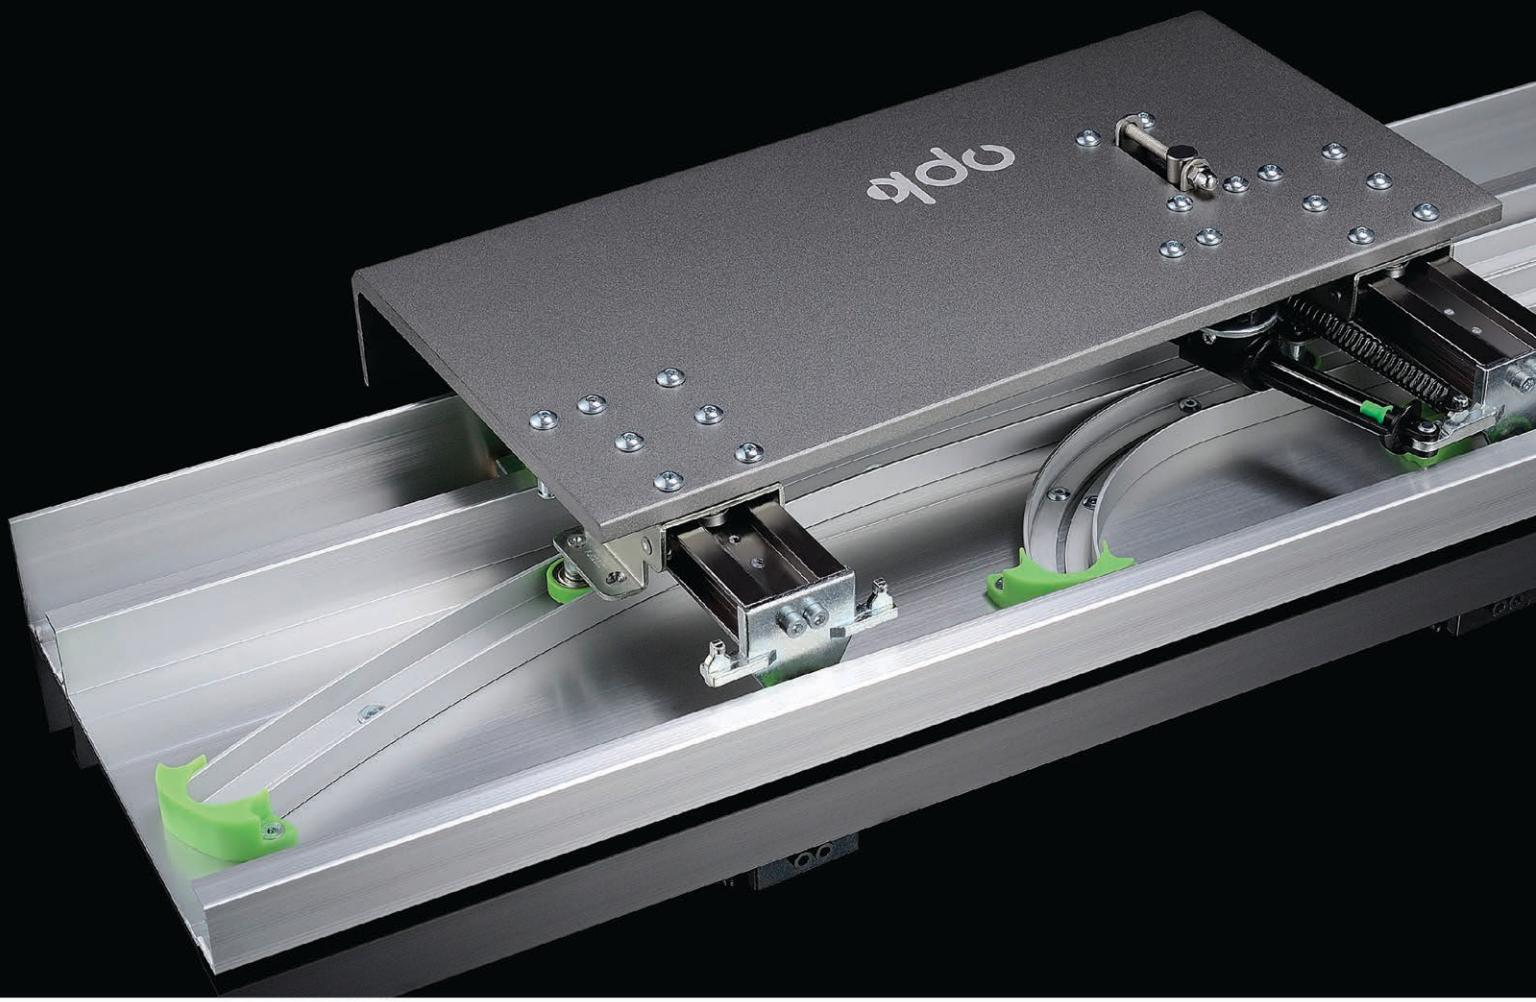

全套配件

Complete fittings

有多种规格可供用户选择 (标准规格)

Various specifications for your choose (Standard Type)

型号 Type	柜体宽度(mm) Cabinet width(mm)	上轨道长度(mm) Upper track extent
CJ12248N-2	3200	1550x2
CJ12248P-2	3400	1650x2
CJ12248A-2	3600	1750x2
CJ12248B-2	3800	1850x2
CJ12248C-2	4000	1950x2
CJ12248D-2	4200	2050x2
CJ12248E-2	4400	2150x2
CJ12248F-2	4600	2250x2
CJ12248G-2	4800	2350x2

所有规格的柜体侧板标准厚度为25mm

The side board standard thickness is 25mm for all specification of cabinet.

opk智能平趟门电子技术参数说明


- 额定电压: 200v~240v 50Hz~60Hz
- 额定功率: 30w
- 待机功率: 5w
- 开门速度: 0.17m/s
- 控制方式: 微电脑处理控制器
- 冲撞机能: 在受阻或冲撞条件下返回
- 停电时手动开闭力: 3kg
- 耗电说明: 正常使用下平均8天约耗1度电

Electronic technical parameters for opk Electrical Sliding Door

- Voltage Rating:200v~240v 50Hz~60Hz
- Power Rating:30w
- Standby Power:5w
- Door Opening Speed:0.17m/s
- Control Mode: Microcomputer processing Controller
- Bounce Function: Rebound in the conditions of damping or bumping
- Manual Power Needed when Power Off: 3kg
- Power Consumption: On average, about 1 kWh of electricity consumption in 8 days

配件说明



ACCESSORIES OPTIONS

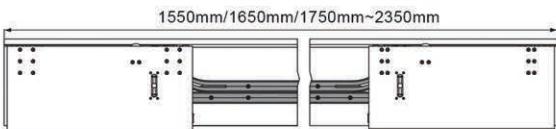上轨 Up track		2组/套 2pcs/set	  		
★ 此款适用于最大50mm的门厚 Max door thickness: 50mm	TD002A 二维调节器 2-D regulator		TD002D 二维调节器 (左右随动) 2-D regulator (left-right move)		各4个/套 4pcs each type 8pcs/set
TJ147A 传动器 Driving device		4组/套 4pcs/set	TD109A 下轨阻尼器 Damper in bottom track		8个/套 8pcs/set
智能电动系统 Intelligent system	智能控制盒 Intelligent control box		5芯信号线 5-core signal wire		纽扣电池型号: 2032 (3V)
	2对/套 2pair/set		3根/套 3pcs/set		TD102A 遥控器 Remote control
轨道 Track					1个/套 1pcs/set
选配 Optional	TD086A 新款二维调节器 New Type 2-D regulator		TD086B 新款二维调节器 (左右随动) New Type 2-D regulator (left-right move)		各4个/套 4pcs each type 8pcs/set
	★ 此款适用于最大40mm的门厚 Max door thickness: 40mm				★ 选择此款二维调节器的，上轨道要多后退10mm For this 2-D regulator, 10mm more space back for the up track

安装参数介绍

INSTALLATION PARAMETER INTRODUCED

柜体尺寸 Cabinet dimensions

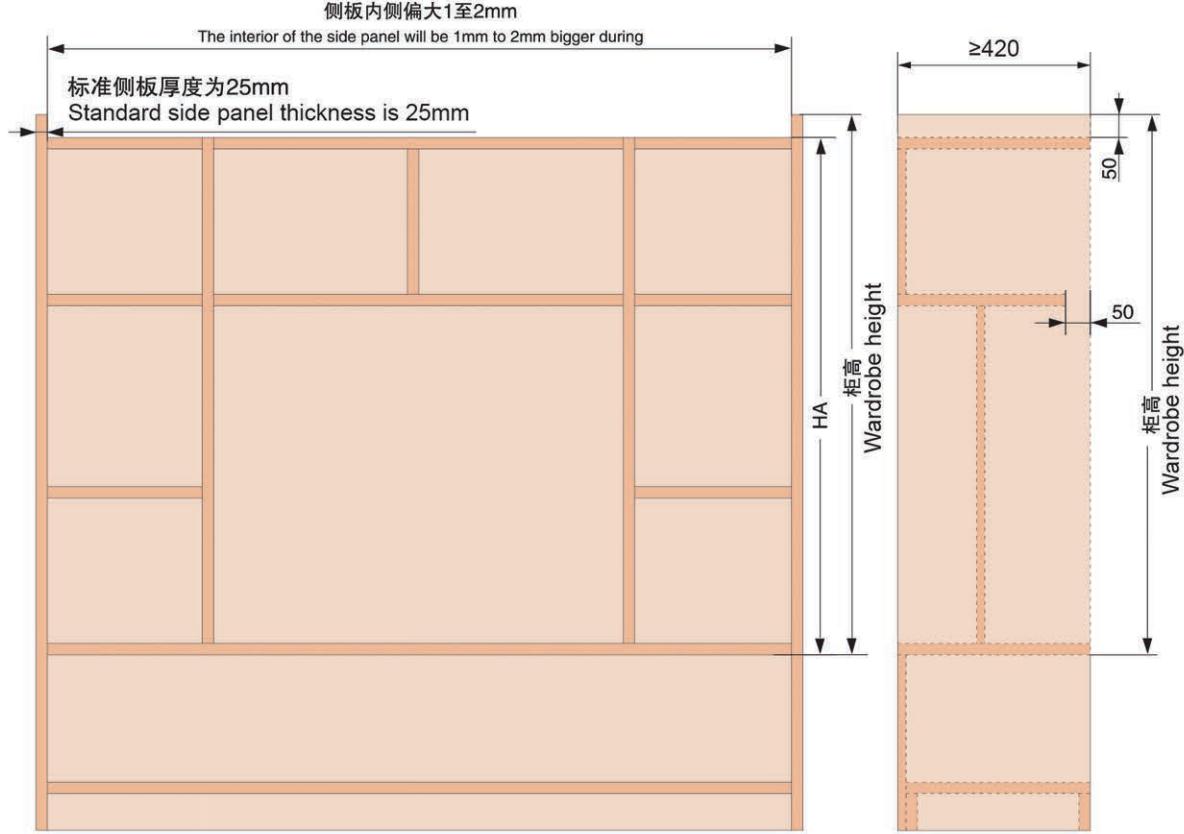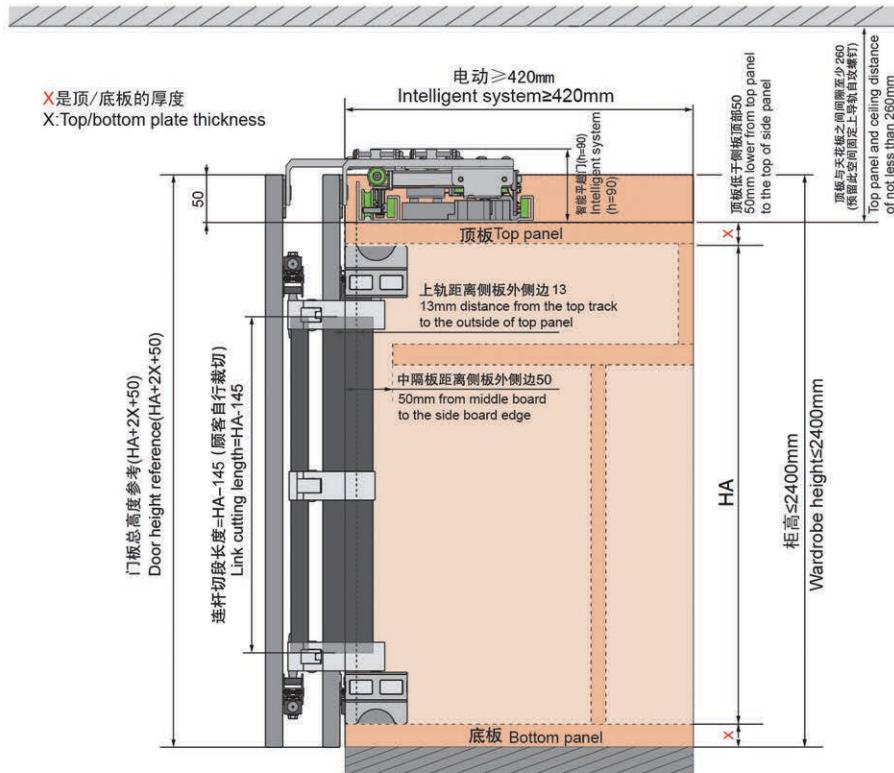

门扇加工参数


Processing parameters of door panel

二维调节器定位开槽尺寸


Dimensions of two dimensional regulator positioning slot

对照相应轨道尺寸，找出相应参数为门板开槽加工

According to the corresponding track size, find out the corresponding parameters for the door slotting processing

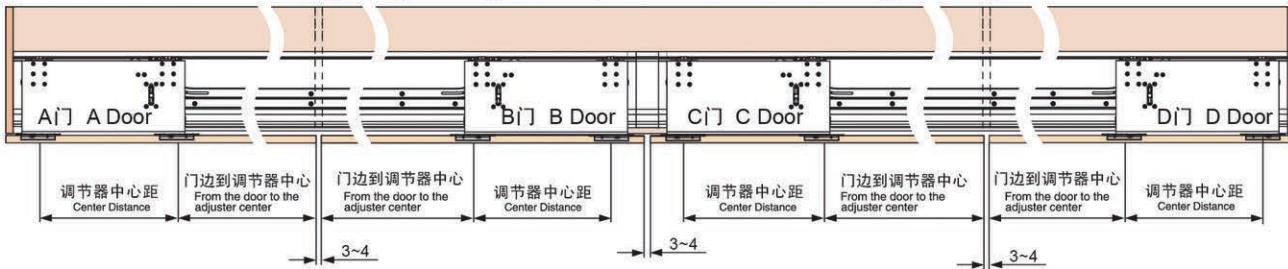

柜体宽度(mm) Cabinet width	上轨道长度(mm) Upper track extent	调节器中心距(mm) Center Distance	门边到调节器中心(mm) From the door to the adjuster center
3200	1550x2	290	425
3400	1650x2	315	450
3600	1750x2	340	475
3800	1850x2	365	500
4000	1950x2	390	525
4200	2050x2	415	550
4400	2150x2	440	575
4600	2250x2	465	600
4800	2350x2	490	625

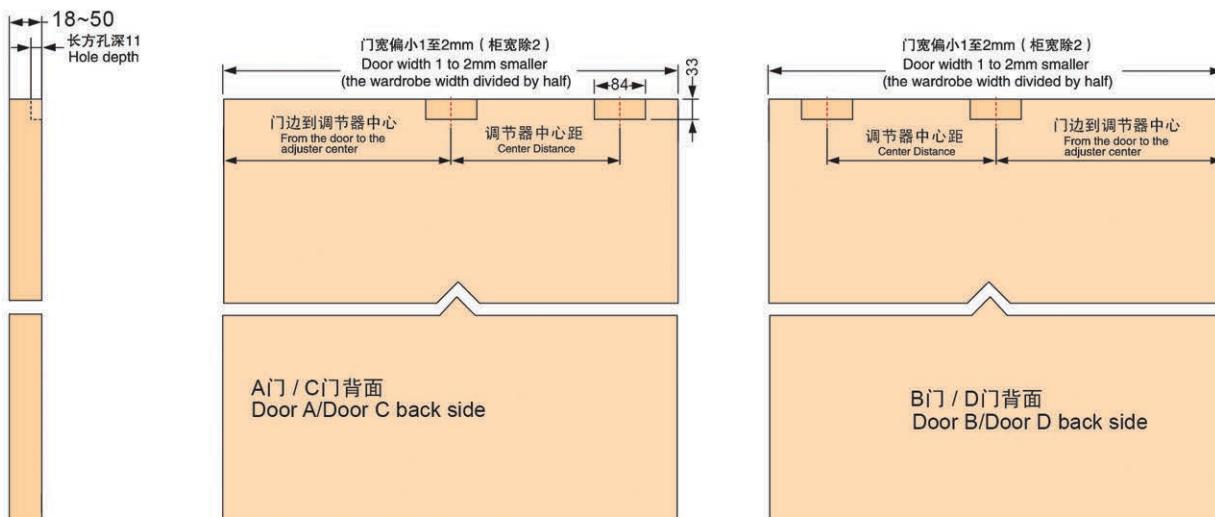

远洋1号

OCEAN 1

技术概要:

- 用于木门、框门、铝框门
- 承重 50kg/门
- 门宽≥530mm

Technical Points:

- Applied to Wooden door, framed door , Aluminum-framed door, etc.
- Max loading capacity: 50kg
- Door width ≥530mm

产品特点:


- 双向阻尼装置，门开启关闭均有缓冲效果
- 滑动平稳，顺畅，静音
- 防脱落装置，消除门跳轨，脱落现象，确保安全。
- 可对门板进行高低、前后间距调节 (适应门厚度: 18~40mm)
- 加强结构设计，单门最大可承重50KG

Product Features:

- Two-way damping device: Damping function exists while door opening and door closing
- Smooth, steady and silent movement;
- Anti- slipping-off mechanism to prevent door panel skipping out of track and to ensure a secure functionality
- Door height and gap between doors adjustable (suitable for door thickness: 18~40mm)
- Reinforced structure design with maximum weight capacity 50kgs per door

产品应用范围









Product Applications

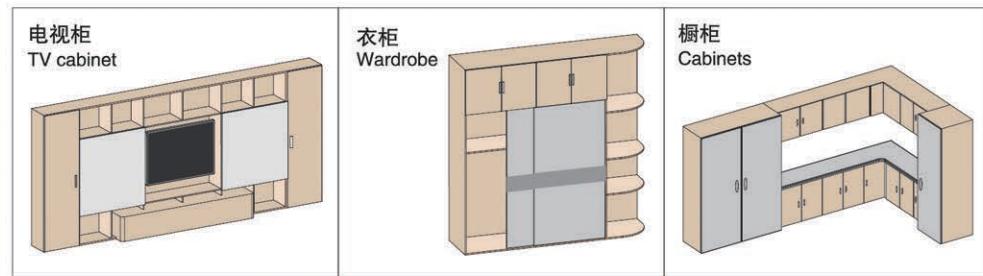

远洋1号配件说明

OCEAN 1 ACCESSORIES OPTIONS

<50kg

	两门 Two panels	门宽≥530mm Door width≥530mm		
CJ12206A 阻尼挂趟外门配件 Hanging Sliding Door Fittings with Damper – for Outer Door				
上轮 Top wheel	 	1对/套 1pair/set		
下轮 Bottom wheel		1对/套 1pair/set		
CJ12206B 阻尼挂趟内门配件 Hanging Sliding Door Fittings with Damper – for Inner Door				
上轮 Top wheel		1对/套 1pair/set		
下轮 Bottom wheel		1对/套 1pair/set		
TD006A 阻尼器 Dampers		4个/套 4pcs/set		
XJA073 挂趟门上轨 Up Track		1支/套 1pcs/set	 0.75kg/m	
XJA074 挂趟门下轨 Bottom Track		1支/套 1pcs/set	 0.56kg/m	 0.46kg/m
柜体要求 Cabinet Requirements				
<p>A</p> <p>B</p> <p>L</p> <p>X</p> <p>A+B+7</p> <p>柜体顶板与底板平齐 Top panel of wardrobe should be parallel and aligned with bottom panel.</p>				

<50kg

远洋1号配件说明



OCEAN 1 ACCESSORIES OPTIONS



三门 (两内一外)
Three panels (Two within one outer)

门宽≥900mm
Door width≥900mm

CJ12206A
阻尼挂趟外门配件
Hanging Sliding Door Fittings with Damper – for Outer Door

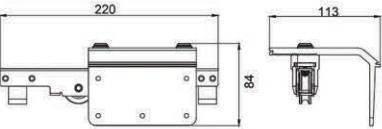上轮 Top wheel			1对/套 1pair/set	
下轮 Bottom wheel			1对/套 1pair/set	


阻尼挂趟内门配件
Hanging Sliding Door Fittings with Damper – for Inner Door

	CJ12206C 内门(左) Inner door(Left)	CJ12206D 内门(右) Inner door(Right)
上轮 Top wheel		
下轮 Bottom wheel		
TD006A 阻尼器 Dampers		6个/套 6pcs/set
XJA073 挂趟门上轨 Up Track		1支/套 1pcs/set
XJA074 挂趟门下轨 Bottom Track		1支/套 1pcs/set

XJA091
外门装饰盖 (选配)
Decorative Profile for
outer Door (Optional)

TJ043A
外门双向阻尼套件 (选配)
Two way damper fittings
for outer door(Alternative)




柜体要求 Cabinet Requirements

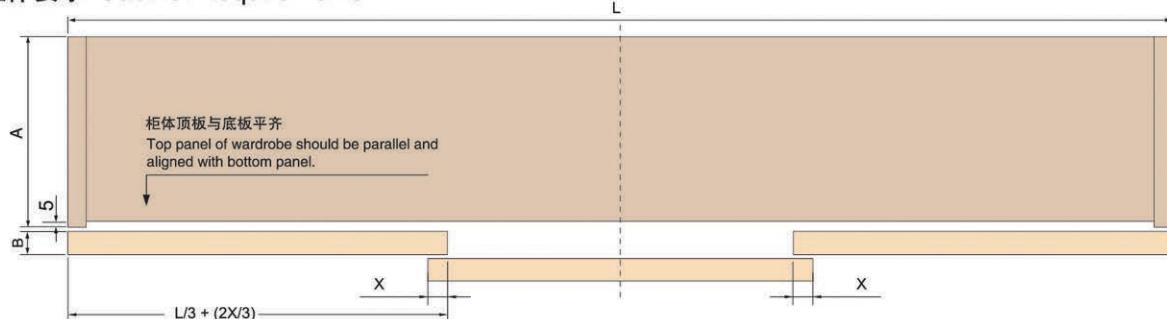


远洋1号安装参数介绍

OCEAN 1 INSTALLATION PARAMETER INTRODUCED

① 安装要求 Installation Requirements

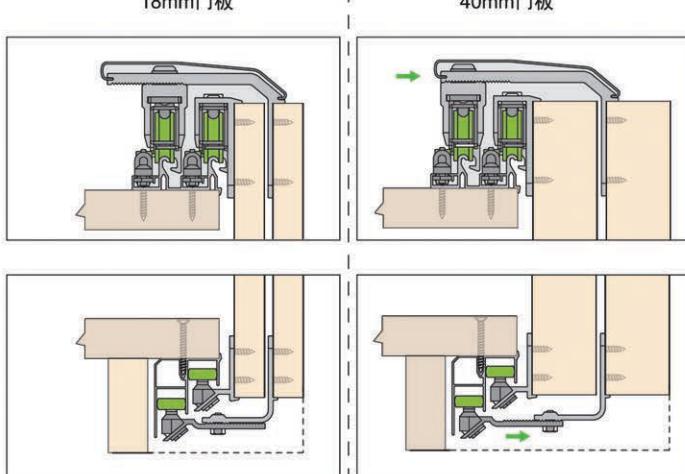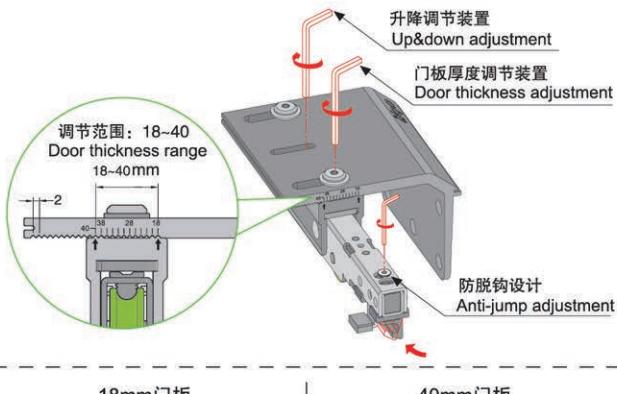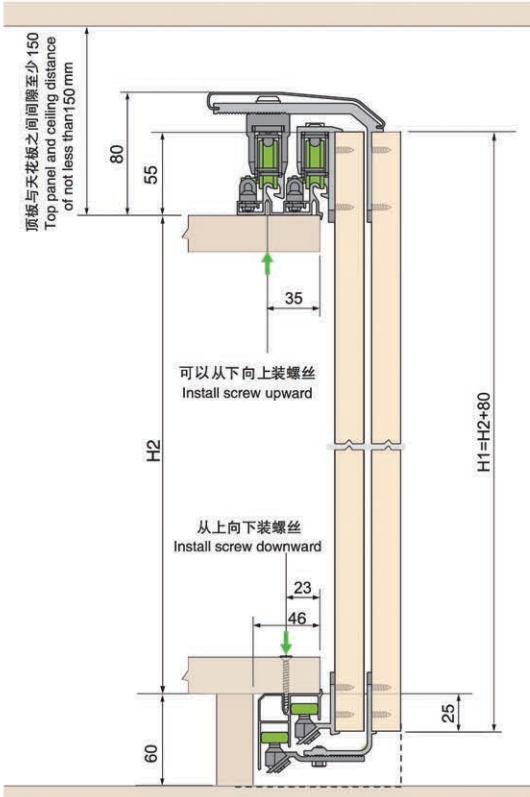

② 安装方式 Installation

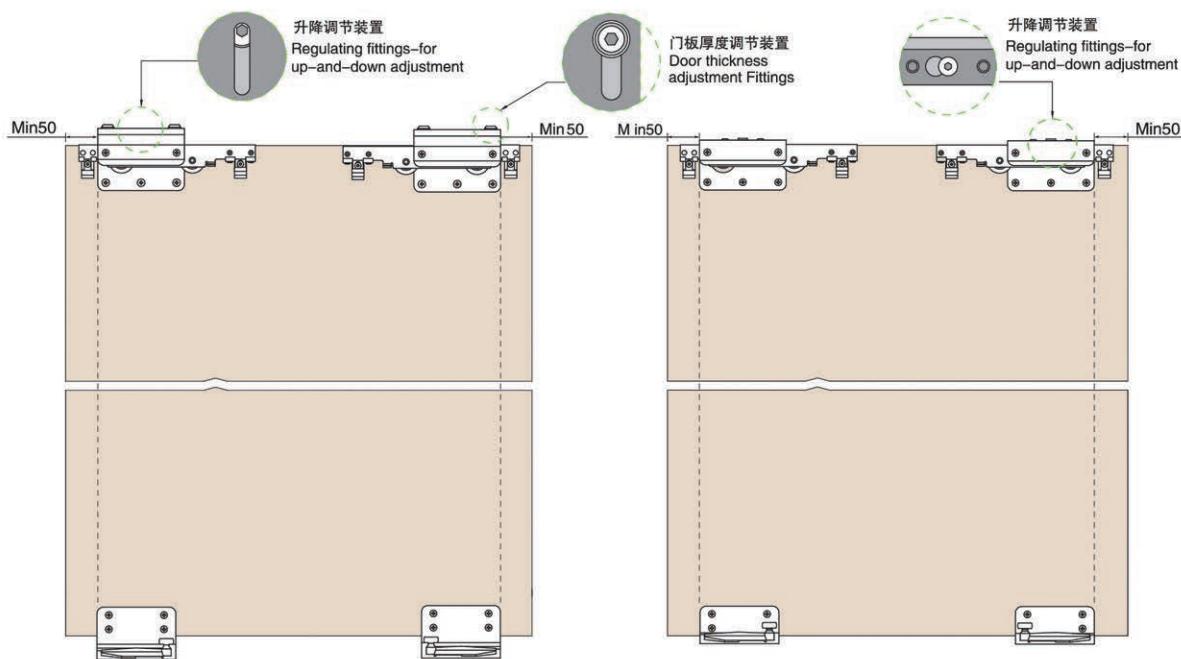

远洋5号

OCEAN 5

技术概要:

- 用于木门、框门、铝框门
- 承重 30kg/门
- 门厚 18~40mm
- 门宽 ≥ 530mm

产品特点:

- 双向阻尼装置，门开启关闭均有缓冲效果
- 滑动平稳，顺畅，静音
- 可对门板进行前后间距调节（适应门厚度：18~40mm）

Technical Points:

- Applied to Wooden door, framed door, Aluminum-framed door, etc.
- Max loading capacity: 30kg
- Door thickness: 18~40mm
- Door width ≥ 530mm


Product Features:

- Two-way damping device: Damping function exists while door opening and door closing
- Smooth, steady and silent movement;
- Door height and gap between doors adjustable (suitable for door thickness: 18~40mm)


产品应用范围

Product Applications


电视柜
TV cabinet

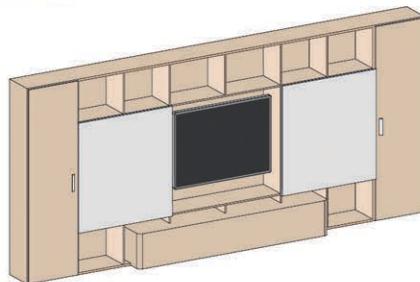

衣柜
Wardrobe



橱柜
Cabinets

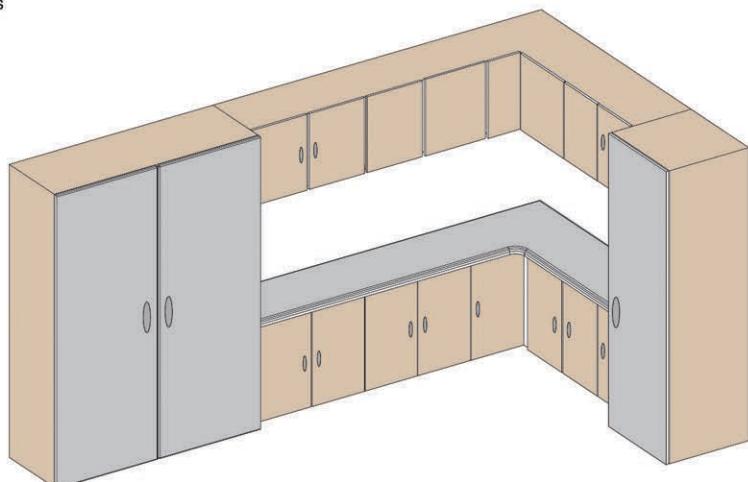



远洋5号带阻尼配件说明

OCEAN 5 WITH DAMPER ACCESSORIES OPTIONS

<30kg
通用型

标准配套

Standard configuration

CJ12212A 下承重简易挂趟门（配巡洋号）

Economic hanging sliding door fittings-door weight in under roller (with cruiser 3 damper)


外门上轮 Top wheel (Outer door)		2个/套 2pcs/set	
内门上轮 Top wheel (Inner door)		2个/套 2pcs/set	
TJ033B 巡洋3号-06 (通用型) Cruiser roller3-06		4个/套 4pcs/set	
CN12271A 明轮 visible sliding roller		4个/套 4pcs/set	
XJA112 挂趟门上轨 Up Track		1支/套 1pcs/set	
781-02 2-2B嵌轨 Under track		1支/套 1pcs/set	

远洋5号安装参数介绍


OCEAN 5 INSTALLATION PARAMETER INTRODUCED

1 安装要求 Installation Requirements

外门 Outer door

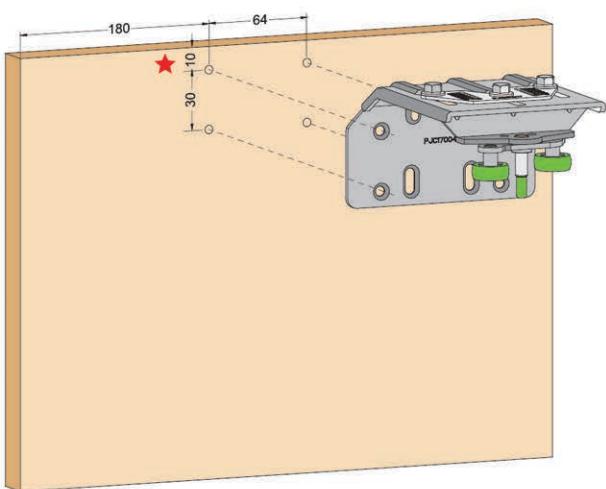


内门 Inner door

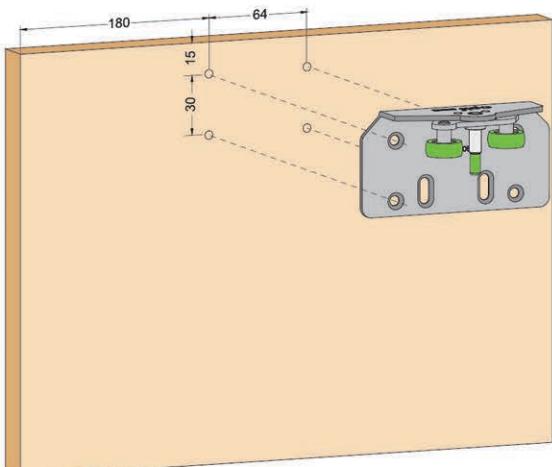


阻尼器安装方向 Damper installation direction

自行调换卡片孔位 Switch hole freely

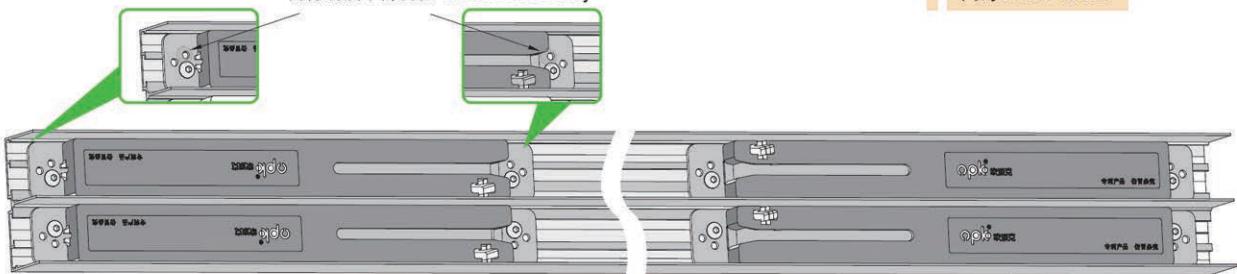




门厚X:18-40mm

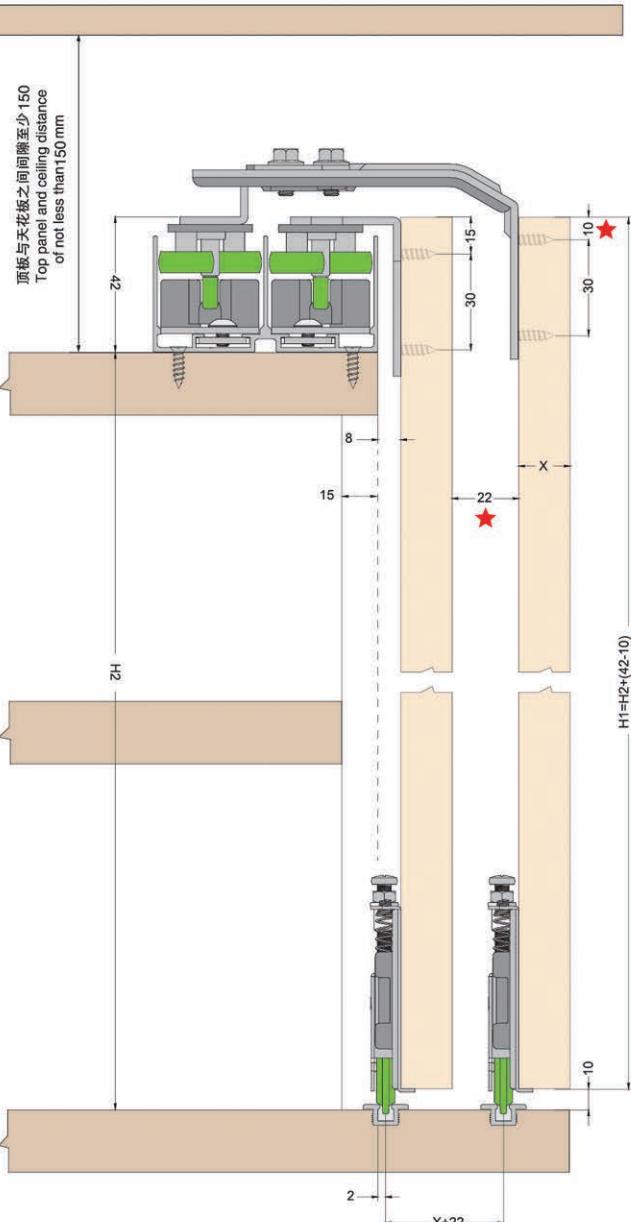

远洋5号带阻尼配件说明

OCEAN 5 WITH DAMPER ACCESSORIES OPTIONS

<30kg
通用型

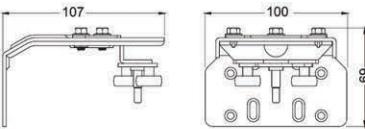

标准配套 Standard configuration			
CJ12212C 下承重简易挂趟门-小门缝（配巡洋号） Economic hanging sliding door fittings-door weight in under roller -slight door slot (with cruiser 3 damper)			
外门上轮 Top wheel (Outer door)		2个/套 2pcs/set	
内门上轮 Top wheel (Inner door)		2个/套 2pcs/set	
TJ033B 巡洋3号-06 (通用型) Cruiser roller3-06		4个/套 4pcs/set	
CJ21270A 嵌入式木门轮-下 Under invisible sliding big roller for wooden door		4个/套 4pcs/set	
XJA112 挂趟门上轨 Up Track		1支/套 1pcs/set	
XJA095 下轨道 Under track		1支/套 1pcs/set	 理论重量: 0.15kg/m

远洋5号安装参数介绍


OCEAN 5 INSTALLATION PARAMETER INTRODUCED

1 安装要求 Installation Requirements

外门 Outer door

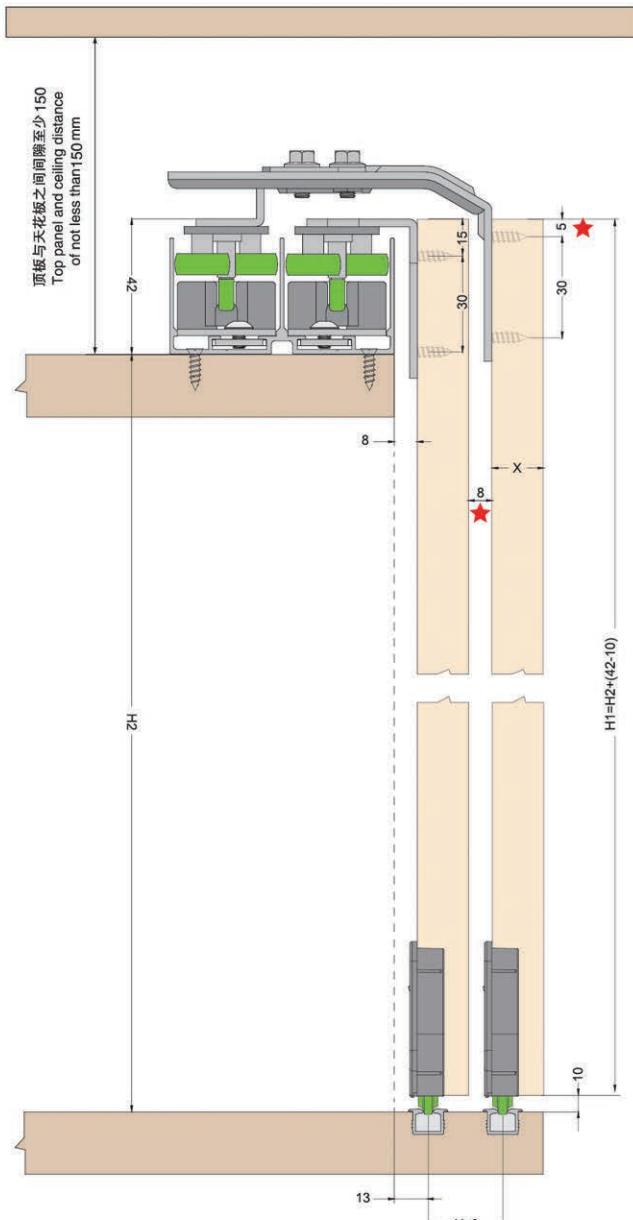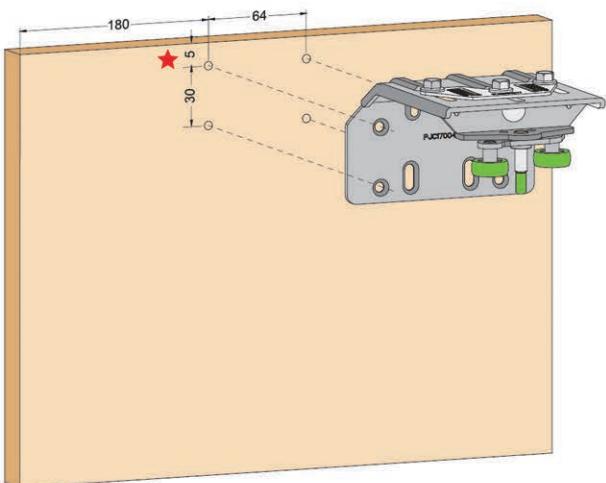


内门 Inner door

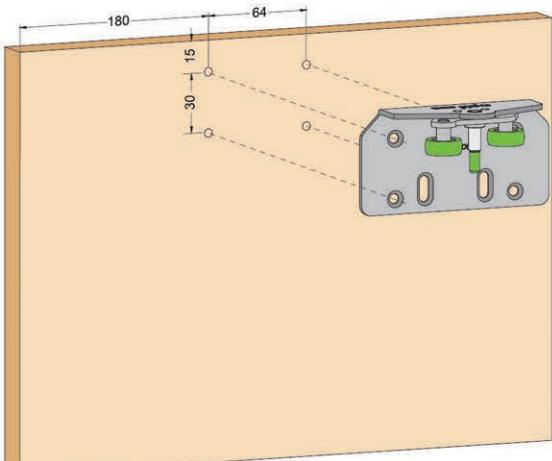

阻尼器安装方向 Damper installation direction

自行调换卡片孔位 Switch hole freely

门厚X:18-40mm

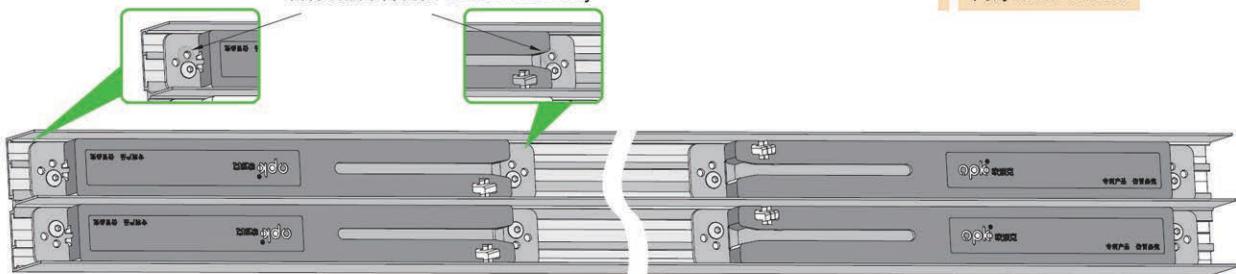

远洋6号

OCEAN 6

技术概要:

- 用于木门、框门、铝框门
- 承重 50 kg/门
- 门厚 18~40mm
- 门宽 ≥ 530mm

Technical Points:

- Applied to Wooden door, framed door , Aluminum-framed door, etc.
- Max loading capacity: 50kg
- Door thickness: 18~40mm
- Door width ≥ 530mm

产品特点:


- 双向阻尼装置，门开启关闭均有缓冲效果
- 滑动平稳，顺畅，静音
- 防脱落装置，消除门跳轨，脱落现象，确保安全。
- 可对门板进行高低、前后间距调节 (适应门厚度: 18~40mm)
- 加强结构设计，单门最大可承重50KG

Product Features:

- Two-way damping device: Damping function exists while door opening and door closing
- Smooth, steady and silent movement;
- Anti- slipping-off mechanism to prevent door panel skipping out of track and to ensure a secure functionality
- Door height and gap between doors adjustable (suitable for door thickness: 18~40mm)
- Reinforced structure design with maximum weight capacity 50 kgs per door

产品应用范围

Product Applications

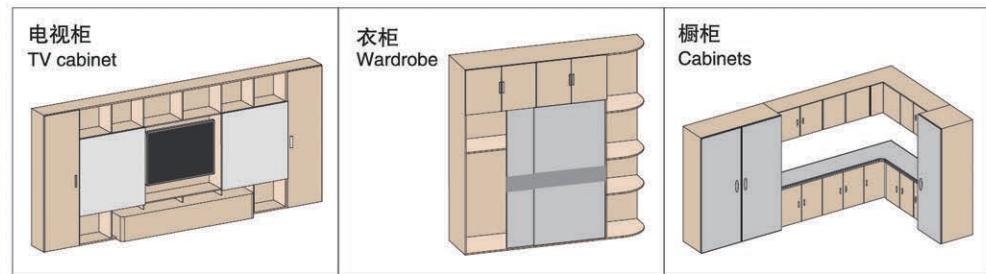

远洋6号配件说明

OCEAN 6 ACCESSORIES OPTIONS

<50kg

两门 Two panels		CJ12214A 远洋6号 挂趟外门配件 Yuanyang roller 6 Hanging Sliding Door Fittings with Damper – for Outer Door		门宽≥530mm Door width≥530mm
上轮 Top wheel		1对/套 1pair/set		
下轮 Bottom wheel		2个/套 2pcs/set		
CJ12214B 远洋6号挂趟内门配件 Yuanyang roller 6 Hanging Sliding Door Fittings with Damper – for Inner Door				
上轮 Top wheel		1对/套 1pair/set		
下轮 Bottom wheel		2个/套 2pcs/set		
TD088A 防脱阻尼器 Damper prevent out of hook		4个/套 4pcs/set		
TD087A 下轨阻尼器 Damper in bottom track		4个/套 4pcs/set		
XJA129 挂趟门上轨 Up Track	 1支/套 1pcs/set 		XJA130 外门装饰盖 (选配) Decorative Profile for outer Door (Optional)	
XJA166 挂趟门下轨 Bottom Track	 1支/套 1pcs/set 			
柜体要求 Cabinet Requirements				

<50kg

远洋6号配件说明

OCEAN 6 ACCESSORIES OPTIONS



三门 (两内一外)

Three panels (Two within one outer)

门宽≥900mm

Door width≥900mm

CJ12214A
远洋6号 挂趟外门配件
Yuanyang roller 6 Hanging Sliding Door Fittings with Damper – for Outer Door


上轮 Top wheel		1对/套 1pair/set	
下轮 Bottom wheel		2个/套 2pcs/set	

远洋6号挂趟内门配件
Yuanyang roller 6 Hanging Sliding Door Fittings with Damper – for Inner Door

	CJ12214C 内门(左) Inner door(Left)	CJ12214D 内门(右) Inner door(Right)
上轮 Top wheel		
下轮 Bottom wheel		4个/套 4pcs/set
TD088A 防脱阻尼器 Damper prevent out of hook		6个/套 6pcs/set
TD087A 下轨阻尼器 Damper in bottom track		4个/套 4pcs/set

XJA129 挂趟门上轨 Up Track		1支/套 1pcs/set		XJA130 外门装饰盖 (选配) Decorative Profile for outer Door (Optional)	
XJA166 挂趟门下轨 Bottom Track		1支/套 1pcs/set		TJ047A 外门双向阻尼套件(选配) Two way damper fittings for outer door(Alternative)	



柜体要求
Cabinet Requirements

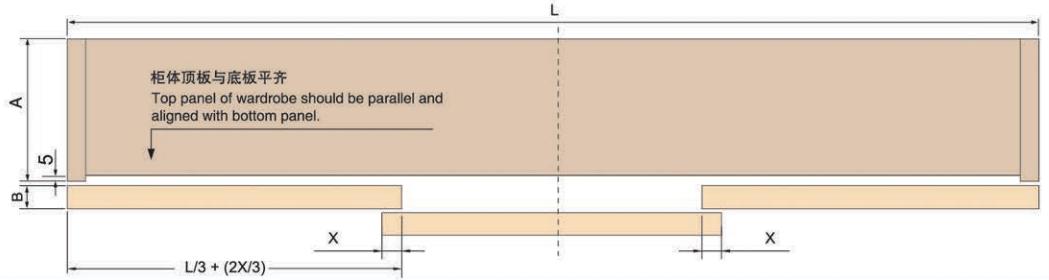




远洋6号安装参数介绍

OCEAN 6 INSTALLATION PARAMETER INTRODUCED


① 安装要求 Installation Requirements

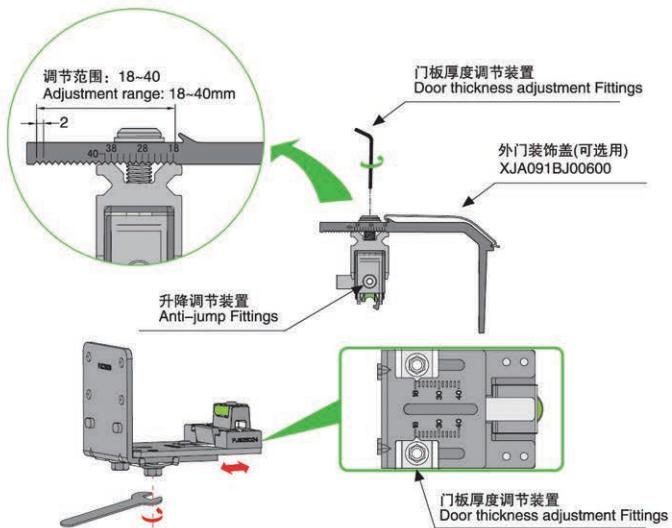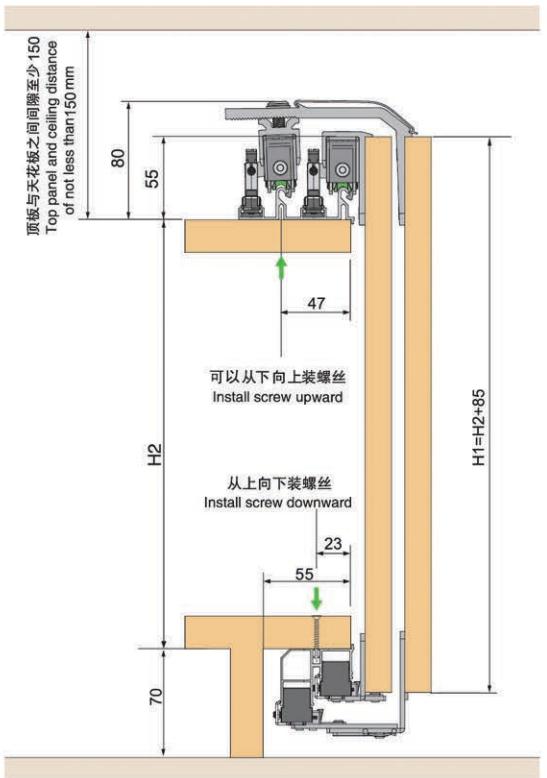

③ 定位阻尼器 Position the damper

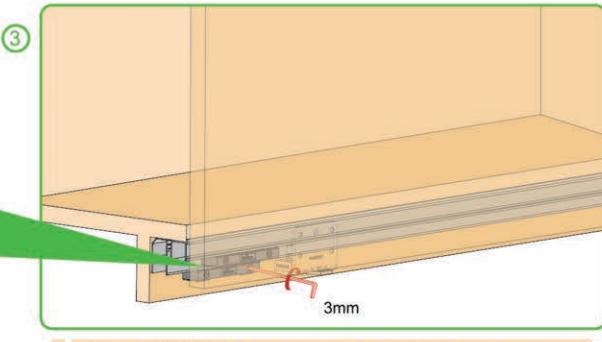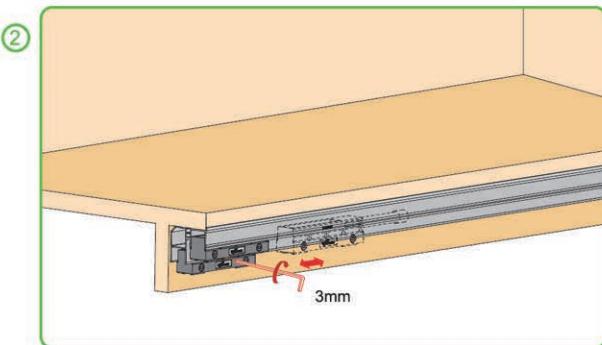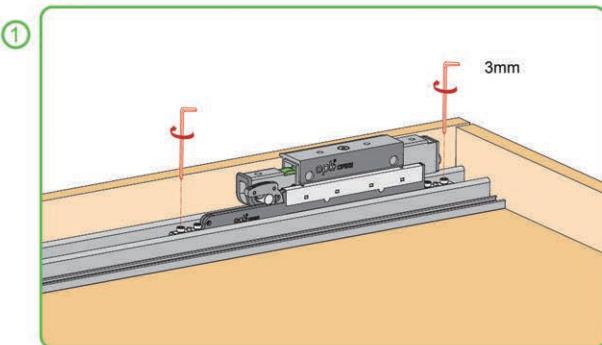

下轨阻尼器到位前后状态对比
Comparison of the status for the damper of bottom track



下轨阻尼器到位后锁紧 Tighten the damper of bottom track when in the right position

远洋7号

OCEAN 7

技术概要:

- 用于木门、框门、铝框门
- 承重 50 kg/门
- 门厚 18~50mm
- 门宽 ≥530mm

Technical Points:

- Applied to Wooden door, framed door , Aluminum-framed door, etc.
- Max loading capacity: 50kg
- Door thickness: 18~50mm
- Door width ≥530mm

产品特点:

- 双向阻尼装置，门开启关闭均有缓冲效果
- 滑动平稳，顺畅，静音
- 上下同步阻尼
- 可对门板进行高低、前后间距调节 (适应门厚度: 18~50mm)
- 加强结构设计，单门最大可承重50KG

Product Features:

- Two-way damping device: Damping function exists while door opening and door closing
- Smooth, steady and silent movement;
- Up and bottom with softing closing synchronously
- Door height and gap between doors adjustable (suitable for door thickness: 18~50mm)
- Reinforced structure design with maximum weight capacity 50 kgs per door

产品应用范围

Product Applications






远洋7号配件说明

OCEAN 7 ACCESSORIES OPTIONS

<50kg

两门
Two panelsCJ12229A
远洋7号 挂趟外门配件
Yuanyang roller 7 Hanging Sliding Door Fittings with Damper – for Outer Door


上轮 Top wheel		1对/套 1pair/set	
下轮 Bottom wheel		1对/套 1pair/set	
CJ12229B 远洋7号挂趟内门配件 Yuanyang roller 6 Hanging Sliding Door Fittings with Damper – for Inner Door			
上轮 Top wheel		1对/套 1pair/set	
下轮 Bottom wheel		1对/套 1pair/set	
TL059A 反向小阻尼器 Reverse damper		4个/套 4pcs/set	
TD109A 下轨阻尼器 Damper in bottom track		4个/套 4pcs/set	
XJA189 挂趟门上轨 Up Track		1支/套 1pcs/set	
XJA190 挂趟门下轨 Bottom Track		1支/套 1pcs/set	

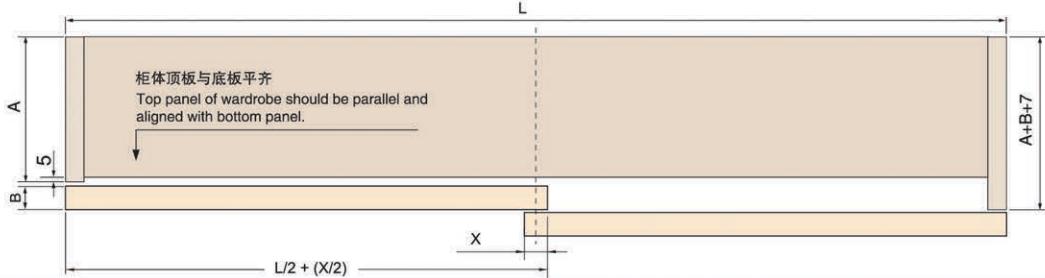柜体要求
Cabinet Requirements


远洋7号安装参数介绍

OCEAN 7 INSTALLATION PARAMETER INTRODUCED

1 安装要求 Installation Requirements

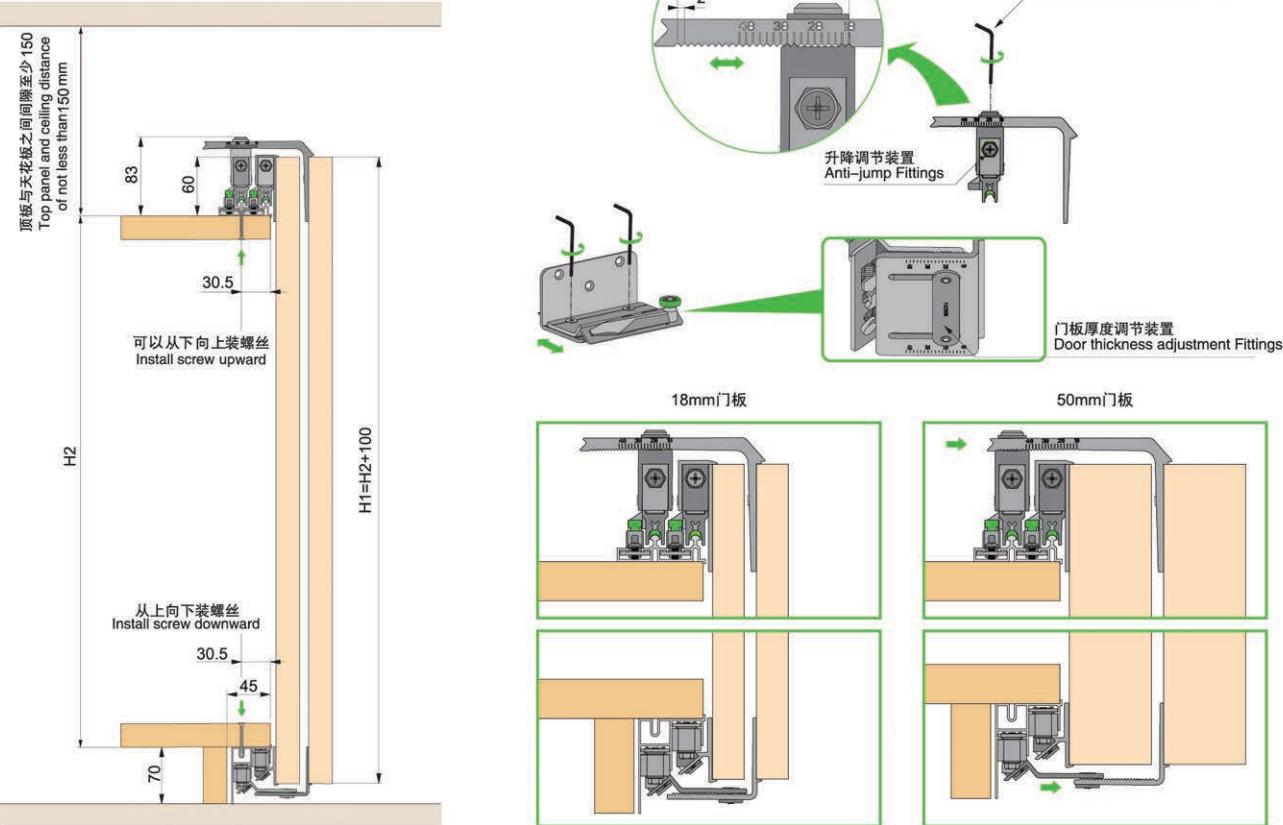

2 安装方式 Installation

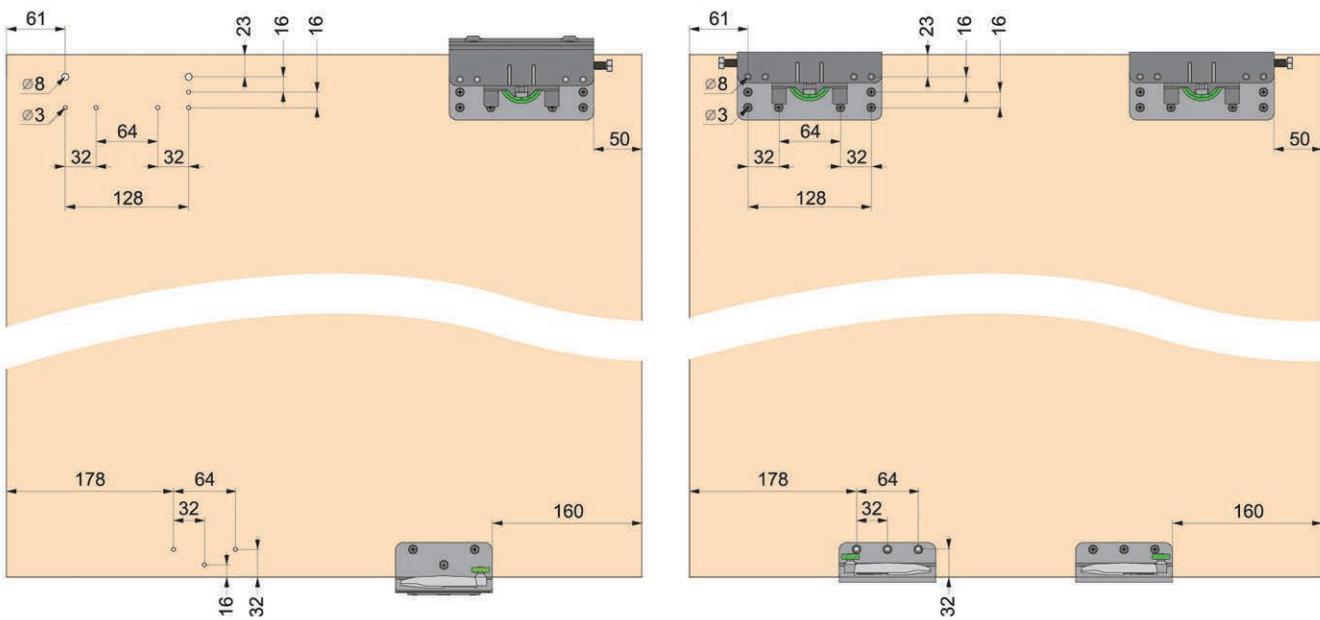

旗舰5号

FLAGSHIP 5

革命性产品 上下同步阻尼 无售后之忧

- 同步阻尼，革命性产品
- 全球独有结构，国际发明专利
- 无售后之忧，阻尼效果前所未有
- 移门阻尼中的终极产品

- Up and down sliding roller with simultaneous damping function—revolutionary product
- Global unique design; International patents
- No after-sales worries,The damping effect is unprecedented
- Achieved best results among all current soft closing sliding-door systems

产品特点:


- 革命性的设计，产品结构与滑轮工程力学完美结合，外形产品美观、独特。
- 上下同步阻尼，缓冲制动效果明显，不跳动，滑动平稳顺畅、静音。
- 承重性能强，最大可承受50KG。
- 颠覆传统滑轮安装方式，安装便捷准确，调试简单。
- 多种组合搭配方式，满足多种效果需求。

Product Features:

- Creative design, pretty and unique appearance, perfect combination of product structure and engineering.
- Up and down sliding roller with simultaneous damping function; Anti-jump and obvious soft-closing buffer effect; Smooth, steady and silent movement.
- Great load-bearing performance; Maximum weight capacity: 50 kgs.
- Innovative, convenient and accurate installation means; Easy to adjust.
- Diversified assembling combination and installation means for choice.

产品应用范围

Product Applications

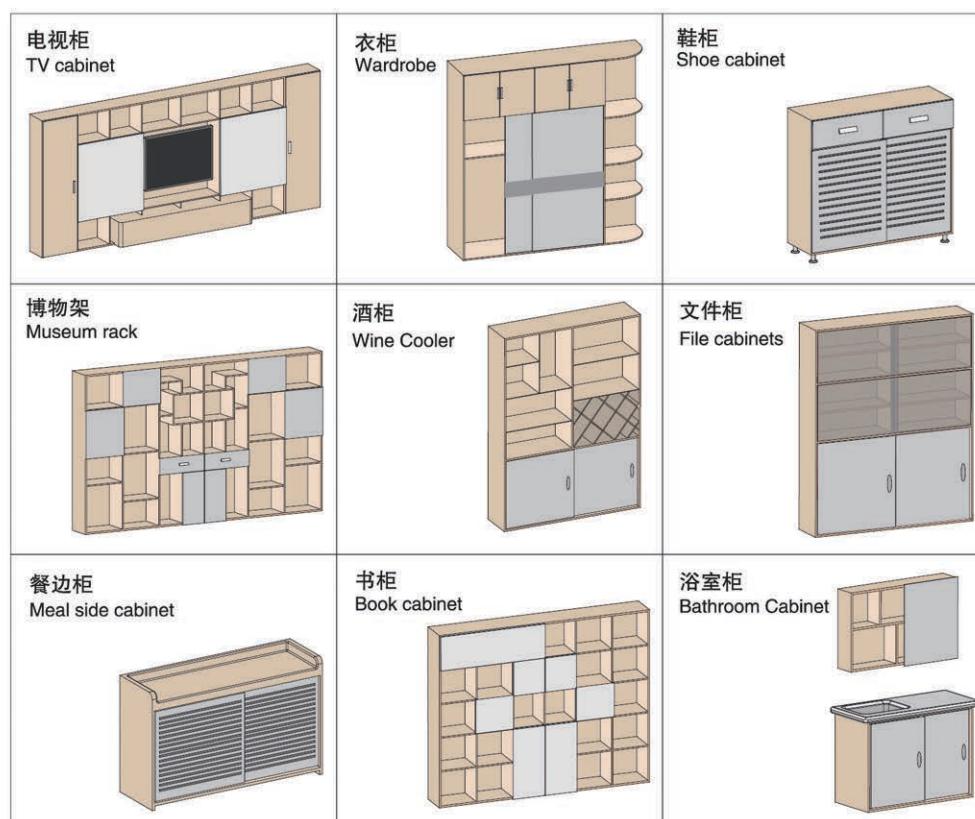




旗舰5号(铝框门)配件说明

FLAGSHIP 5 (ALUMINUM DOORS) FURNITURE ACCESSORIES OPTIONS

上轮 Top wheel		CN21234A	轻型 Light-duty	5-15kg
		CN21234B	通用 Normal	15-30kg
		CN21234C	重型 Heavy-duty	30-50kg
下轮 Bottom wheel		CN21235A	轻型 Light-duty	5-15kg
		CN21235B	通用 Normal	15-30kg
		CN21235C	重型 Heavy-duty	30-50kg
CJ21262A 旗舰3号-03 FLAGSHIP ROLLER 3-03		CJ21233A 01号上轮S1 TOP ROLLER 01 S1		
CJ21263A 旗舰3号-13 FLAGSHIP ROLLER 3-13		TJ011A 限位件 STOPPER		
TJ019A 对碰限位件 TWO-WAY STOPPER				
适用于对开门 Applied to inline mode door				

配件多种组合安装方式 (多组合安装方式国际发明专利)


Accessories minutes combined installation

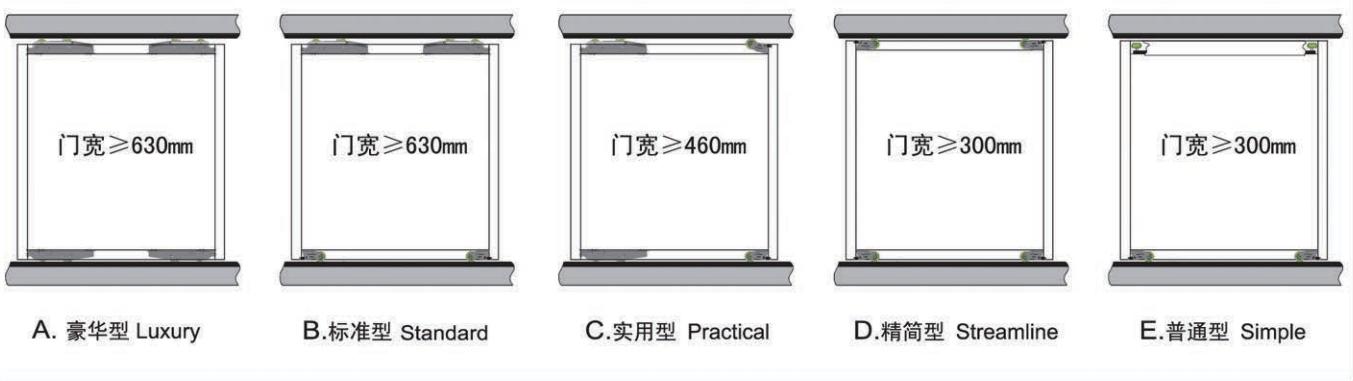

旗舰5号(铝框门)安装参数介绍

FLAGSHIP 5 (ALUMINUM DOORS) INSTALLATION PARAMETER INTRODUCED

门板尺寸计算公式 Door Size Count

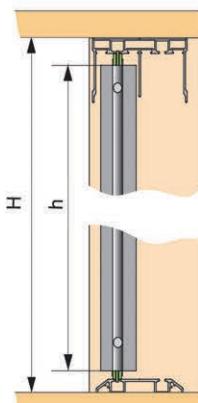

门板高h=门洞高H-40


专利技术:

- 1、多组合安装方式国际发明
- 2、上下同步阻尼安装结构
- 3、脱钩复位功能
- 4、独特上滑轨结构
- 5、独特外形设计


Patent technologies:

- Patent 1. Multi combined installation of international Invention
- Patent 2. Up and down fittings with simultaneous damping function
- Patent 3. Anti-uncouple and reset function
- Patent 4. Unique top track structure
- Patent 5. Special shape design

滑轮调节孔位加工尺寸 Roller Holes Dimension

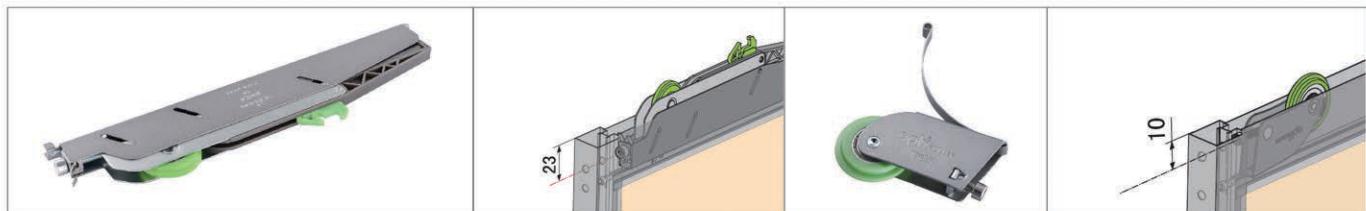


1 通用上轨道



LT E047 通用轨道
0.6kg/m $\delta = 1.15\text{mm}$

LN1 F044 阻尼导向条
0.18kg/m $\delta = 1.0\text{mm}$

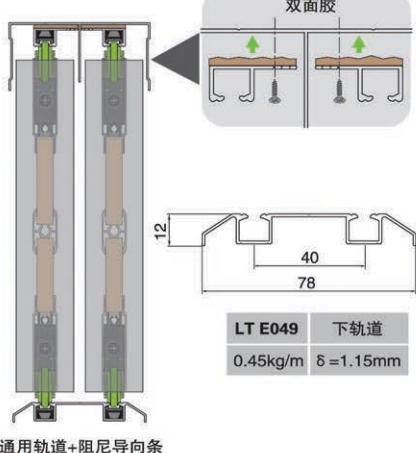


通用轨道+阻尼导向条

旗舰5号(铝门)轨道分类介绍(推荐)


Flagship Roller 5 (Aluminum Doors) Track Classification Introduced

2 经济型隔断门上轨道




LT E052 上轨道
0.63kg/m $\delta = 1.0\text{mm}$

3 1、经济型衣柜门实用型上轨道




LT E056 上轨道
0.47kg/m $\delta = 1.0\text{mm}$


2、经济型衣柜门可造型上轨道




LT E067 上轨道
0.475kg/m $\delta = 1.0\text{mm}$



经济型隔断门








经济型衣柜门

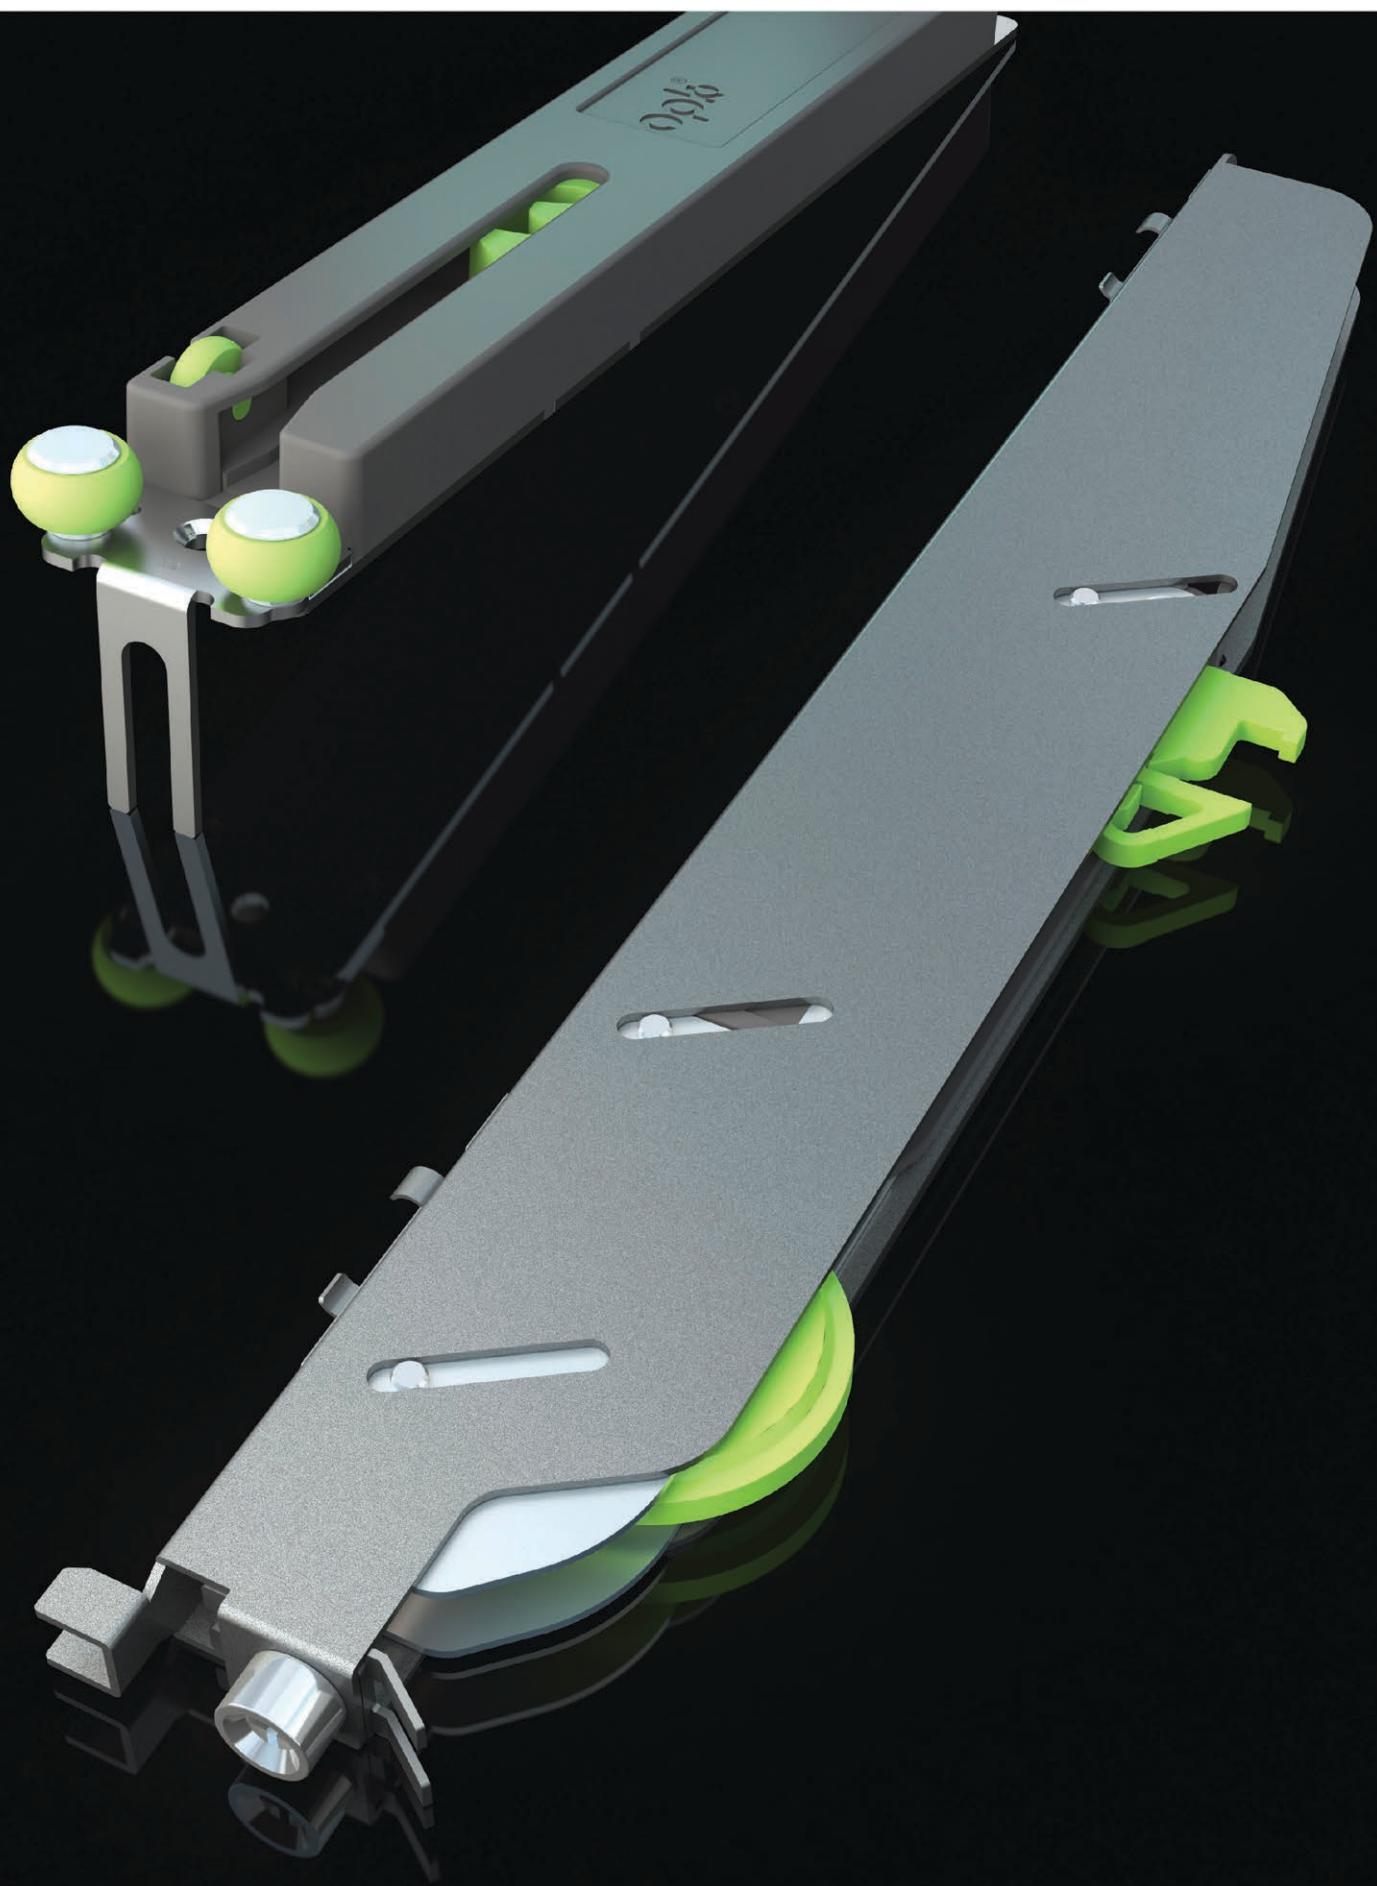

旗舰5号-X 配件说明

FLAGSHIP 5-X FURNITURE ACCESSORIES OPTIONS

<30kg
通用型

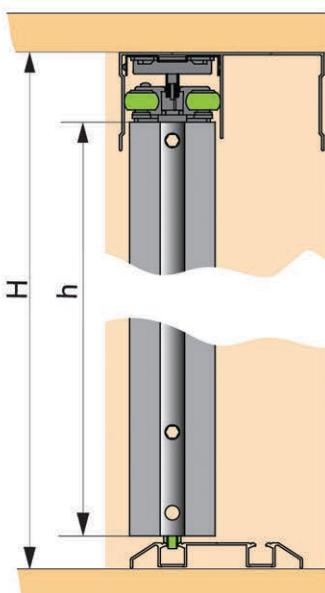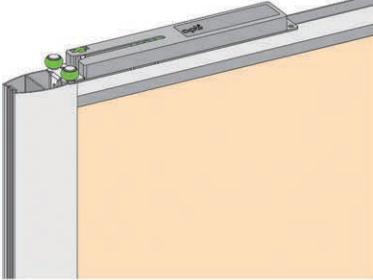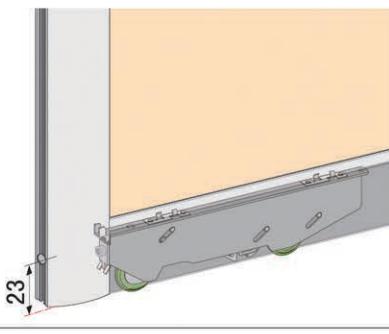		CJ212740A 旗舰5号-X 配件说明 Flagship5-X	CJ212740B	CJ212740C			
巡洋3号-07缓冲器 Cruiser roller 3-07		2个/套 2pcs/set	CN212199A 轻型 Light-duty 5-15kg				
			CN212199B 通用 Normal 15-30kg				
			CN212199C 重型 Heavy-duty 30-50kg				
旗舰5号下轮 Flagship 5 bottom wheel		2个/套 2pcs/set	CN21235A 轻型 Light-duty 5-15kg				
			CN21235B 通用 Normal 15-30kg				
			CN21235C 重型 Heavy-duty 30-50kg				
上轨 Upper track LT E047 通用轨道 0.6kg/m δ = 1.15mm			下轨 Under track LT E049 下轨道 0.45kg/m δ = 1.15mm				
门板尺寸计算公式 Door Size Count		滑轮调节孔位加工尺寸 Roller Holes Dimension					
 门板高h=门洞高H-43		 					
		<p>专利技术：</p> <ul style="list-style-type: none"> 1、上下同步阻尼安装结构 2、脱钩复位功能 3、独特上滑轨结构 4、独特外形设计 <p>Patent technologies:</p> <ul style="list-style-type: none"> Patent 1. Up and down fittings with simultaneous damping function Patent 2. Anti-uncouple and reset function Patent 3. Unique top track structure Patent 4. Special shape design 					

旗舰5号-M (木门)类配件说明

FLAGSHIP 5-M (WOOD DOORS) FURNITURE ACCESSORIES OPTIONS

上轮 Top wheel		CN212121B CN212121A CN212121C	轻型 Light-duty 通用 Normal 重型 Heavy-duty	5-15kg 15-30kg 30-50kg
下轮 Bottom wheel		CN212122B CN212122A	轻型 Light-duty 通用 Normal	5-15kg 15-30kg
上轮 Top wheel		下轮 Bottom wheel		
CJ21270A 嵌入式木门轮-下 Under invisible sliding big roller for wooden door		CJ21271A 嵌入式木门轮-上 Upper invisible sliding big roller for wooden door		
CJ212343A 嵌入式木门轮-下 Under invisible sliding big roller for wooden door		CJ212344A 嵌入式木门轮-上 Upper invisible sliding big roller for wooden door		
TJ013A 嵌入式木门限位件 HIDDEN ROLLER STOPPER		XJA095 CJ21270A新上下轨 Top Bottom frame		理论重量: 0.15kg/m
TJ019A 对碰限位件 TWO-WAY STOPPER				适用于对开门 Applied to inline mode door
XJA161 上轨 Upper track 0.52kg/m		XJA163 门边框 Door Frame 0.32kg/m		
XJA162 下轨 Bottom track 0.49kg/m				

配件多种组合安装方式 (多组合安装方式国际发明专利)

Accessories minutes combined installation



A. 豪华型 Luxury



B. 实用型 Practical



C. 标准型 Standard



D. 经济型 Economic

专利技术:

- 1、多组合安装方式国际发明
- 2、上下同步阻尼安装结构
- 3、脱钩复位功能
- 4、独特上滑轨结构
- 5、独特外形设计


Patent technologies:

- Patent 1. Multi combined installation of international Invention
- Patent 2. Up and down fittings with simultaneous damping function
- Patent 3. Anti-uncouple and reset function
- Patent 4. Unique top track structure
- Patent 5. Special shape design


旗舰5号-M (木门) 安装参数介绍

FLAGSHIP 5-M (WOOD DOORS) INSTALLATION PARAMETER INTRODUCED

门板尺寸计算公式 Door Size Count

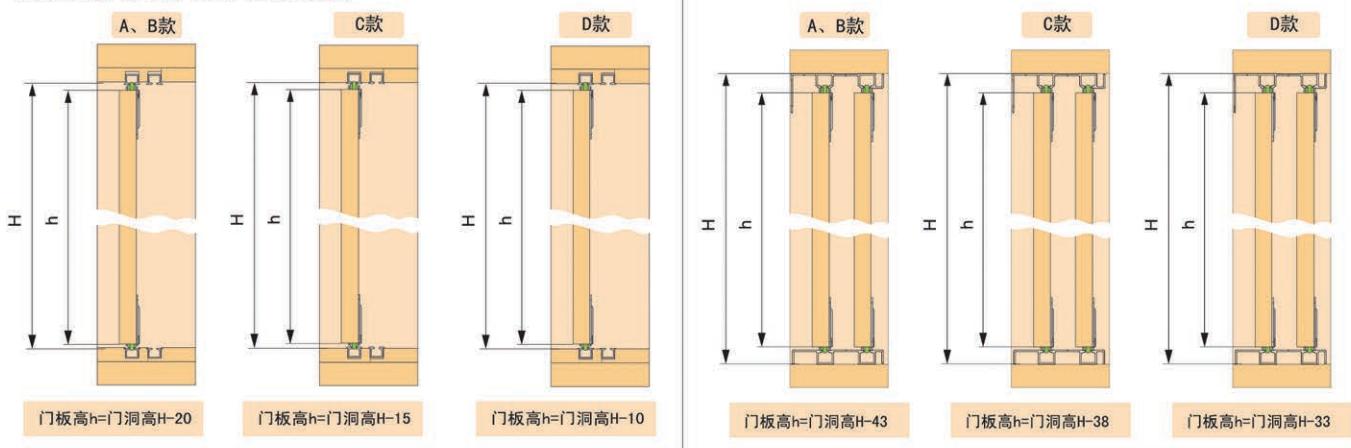







加工参数介绍 Machining Parameters Introduced

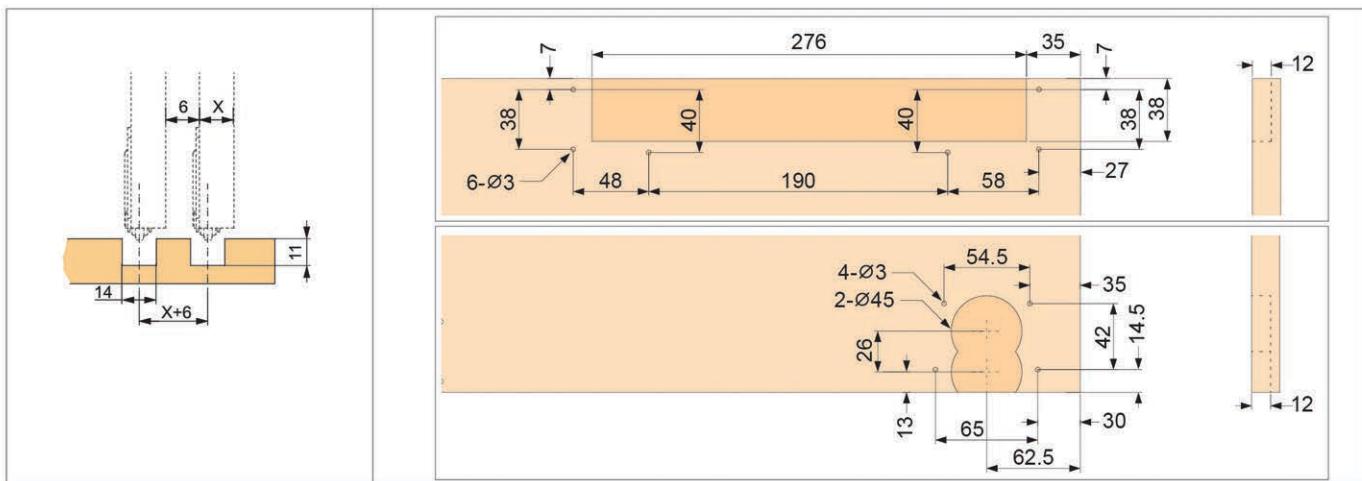

旗舰5号-T (木门)类配件说明

FLAGSHIP 5-T (WOOD DOORS) ACCESSORIES OPTIONS


门厚≥18mm

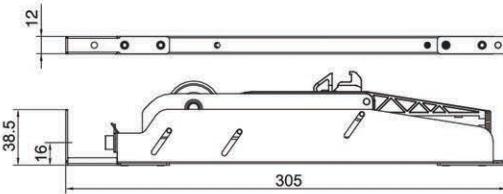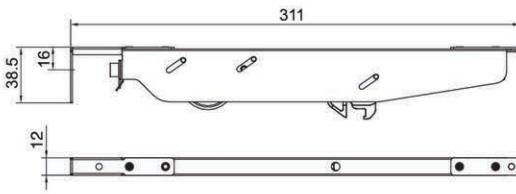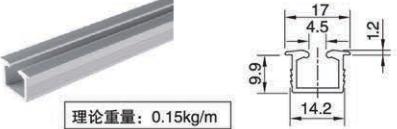上轮 Top wheel		CN12277A	轻型 Light-duty	5-15kg			
		CN12277B	通用 Normal	15-30kg			
		CN12277C	重型 Heavy-duty	30-50kg			
下轮 Bottom wheel		CN12278A	轻型 Light-duty	5-15kg			
		CN12278B	通用 Normal	15-30kg			
		CN12278C	重型 Heavy-duty	30-50kg			
上轮 Top wheel		下轮 Bottom wheel					
							
CJ11232A 旗舰3号-23 FLAGSHIP ROLLER 3-23							
TJ011A 限位件 STOPPER			XJA095 CJ21270A新上下轨 Top Bottom frame	 理论重量: 0.15kg/m			
TJ019A 对碰限位件 TWO-WAY STOPPER				11 8 9.9 17 4.5 12 284 适用于对开门 Applied to inline mode door			
配件多种组合安装方式 (多组合安装方式国际发明专利) Accessories minutes combined installation							
	门宽≥630mm		门宽≥460mm		门宽≥630mm		门宽≥300mm
A. 豪华型 Luxury	B. 实用型 Practical	C. 标准型 Standard	D. 经济型 Economic				

旗舰5号-T (木门)安装参数介绍

FLAGSHIP 5-T (WOOD DOORS) INSTALLATION PARAMETER INTRODUCED

门板尺寸计算公式 Door Size Count

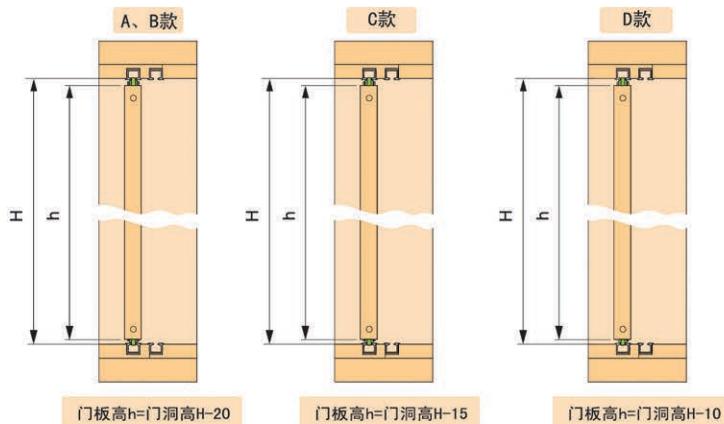


专利技术:

- 1、多组合安装方式国际发明
- 2、上下同步阻尼安装结构
- 3、脱钩复位功能
- 4、独特上滑轨结构
- 5、独特外形设计

Patent technologies:

- Patent 1. Multi combined installation of international Invention
- Patent 2. Up and down fittings with simultaneous damping function
- Patent 3. Anti-uncouple and reset function
- Patent 4. Unique top track structure
- Patent 5. Special shape design

加工参数介绍 Machining Parameters Introduced

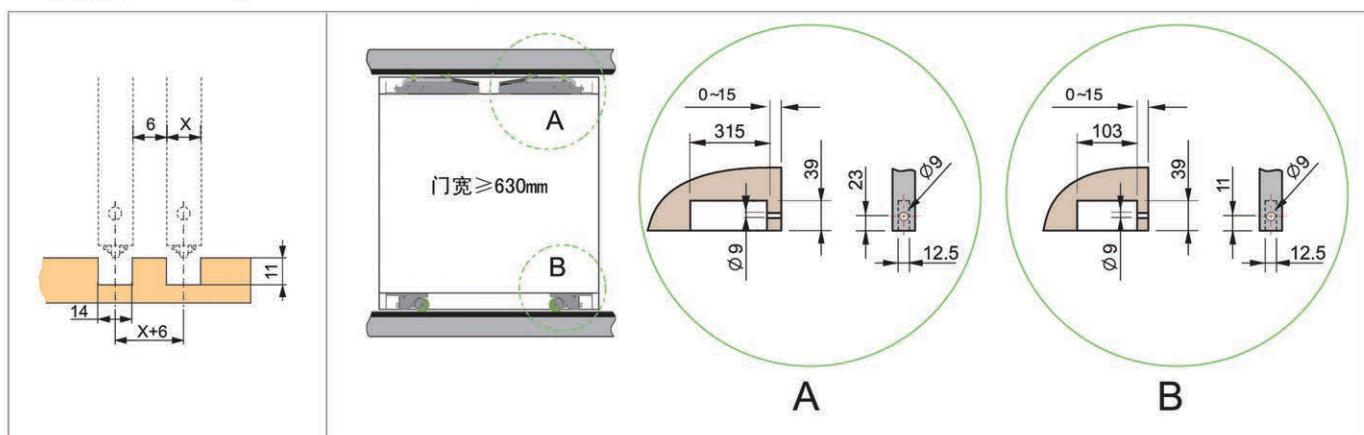

装饰移门


FLAGSHIP S

- 同步阻尼，革命性产品
- 全球独有结构，国际发明专利
- 无售后之忧，阻尼效果前所未有
- 移门阻尼中的终极产品

- Up and down sliding roller with simultaneous damping function—revolutionary product
- Global unique design; International patents
- No after-sales worries, The damping effect is unprecedented
- Achieved best results among all current soft closing sliding-door systems

产品应用范围

Product Applications

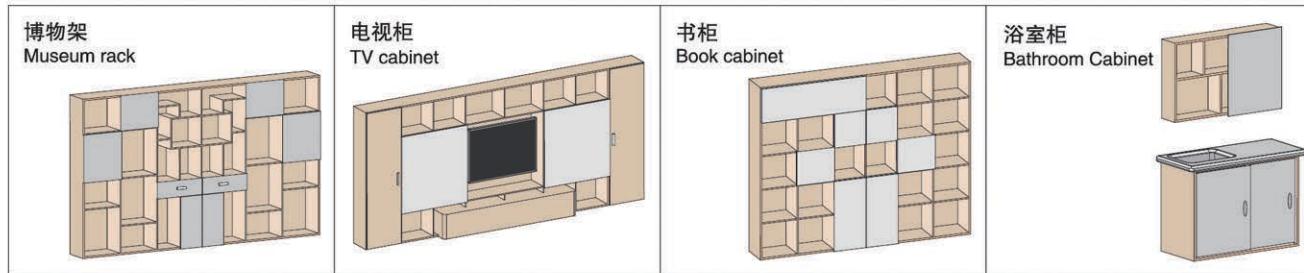

产品特点：

- 滑动顺畅、平稳、静音，开启关闭均有缓冲效果。
- 外盖背框式结构设计，可任意搭配不同类型材料面板。
- 单门最大承重40KG。

Product Features:








- Smooth, steady and silent movement; Damping function exists while door opening and door closing.
- External panel covering over and internal frame structure to ensure different panel materials.
- Maximum weight capacity: 40kgs per door.






装饰移门配件说明

FLAGSHIP S ACCESSORIES OPTIONS


上轮 Top wheel		CN21234A	轻型 Light-duty	5-15kg	
		CN21234B	通用 Normal	15-30kg	
下轮 Bottom wheel		CN21235A	轻型 Light-duty	5-15kg	
		CN21235B	通用 Normal	15-30kg	
TJ012A 轨道限位件 Track stopper			TJ010A 轨道连接件 Track connections	 	
TJ009A 轨道堵头 Track plug			CJ21262A 旗舰3号-03 FLAGSHIP ROLLER 3-03	 	
 LT E055 轨道 Track 0.31kg/m δ = 1.0mm		 LT B057 上下横 Upper&Bottom Door Frame 0.42kg/m δ = 1.0mm		 LT A098 坚框 Vertical Door Frame 0.25kg/m δ = 1.0mm	

配件多种组合安装方式 (多组合安装方式国际发明专利)


Accessories minutes combined installation



A. 豪华型 Luxury



B. 标准型 Standard



C. 实用型 Practical




D. 经济型 Economic

装饰移门安装参数介绍

FLAGSHIP S INSTALLATION PARAMETER INTRODUCED

1 柜体要求 Cabinet Requirements

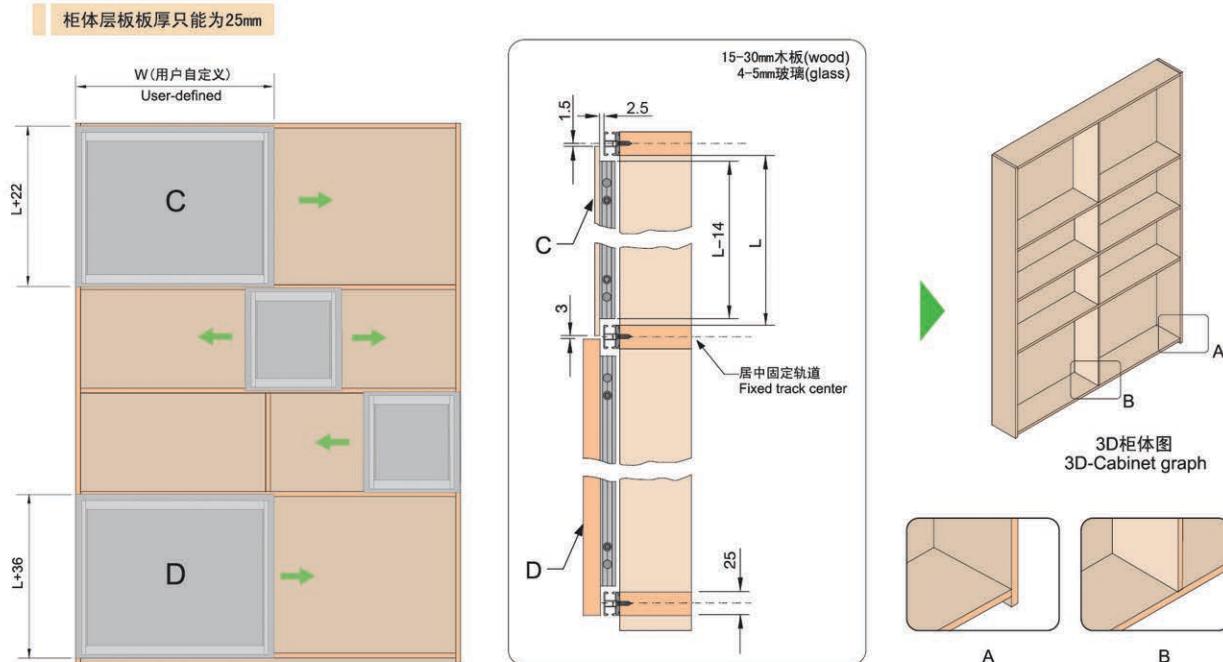

2 门板要求 Door Requirements

① 门板尺寸计算公式 Door Size Count

门板高 (H) = 导轨内空高(L)+22
Door high (H) = Track internal height(L)+22
门板宽 (W) = 用户自定义宽度
Door width (W) = User-defined


② 门板背框尺寸计算公式 Door Frame Size Count

背框高 (h) = 导轨内空高(L)-14
Door frame (h) = Track internal height(L)-14
背框宽 (w) = W-60
Door frame (w) = W-60

③ 滑轮调节孔位加工尺寸 Roller Holes Dimension



④ 门板组装 Door Installation

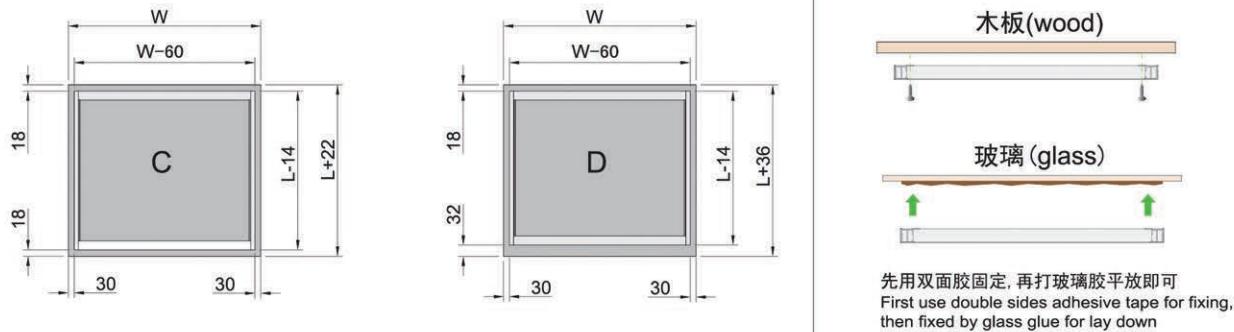

巡洋1号

CRUISER 1

此产品有四项专利技术

- 专利一：防跳装置
- 专利二：封闭外壳组件
- 专利三：多轮距功能
- 专利四：连孔调节偏框功能

Four patent technologies

- Patent I : Anti-jumping device
- Patent II : Closed structure
- Patent III : Multi up roller distance
- Patent IV: Alignments holes
adjustment function for deviation

产品特点:

- 此系列产品有多种轮距规格供客户选择.
- **阻尼器:** 为上下组合, 形成封闭式壳体, 有利保护阻尼管、耐磨、耐用、滑动噪音小、使用寿命长、外观新颖、其结构简单合理、应用广泛.
- **防跳功能:** 通过调节防跳装置, 可以防止关门时门扇向上跳动, 从而避免上下滑轮的损伤, 使门平稳滑行, 延长产品的使用寿命.
- **自动调节装置:** 上轨轨道槽宽于两固定轮或调节轮时, 自动调节轮可紧贴于上轨正常滑行, 不晃动.
- **对铝门竖框槽偏离中心的型材:** 可以调节产品两端的刻度, 使滑轮中心对应上轨槽的中心, 可适用于不同形状的竖框.
- **适用范围:** 铝门、木门均可使用, 安装调节方便.

Product features:

- Various up roller distance for choice
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, more silence, long using life, novel appearance, simple and reasonable structure, wide application.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Auto-adjusting device:** can absorb tolerance of produce and installation, can slide well in wider top track and not shake.
- **For asymmetrical vertical frame:** can adjust the scale to keep central line of up rollers with up track , applicable to different kinds of vertical profiles.
- **Application:** aluminum door, wooden door, easy installation and adjustment.






巡洋1号配件说明

CRUISER 1 ACCESSORIES OPTIONS

≤50kg

巡洋1号（3轮）

Cruiser roller 1 (3 rollers)

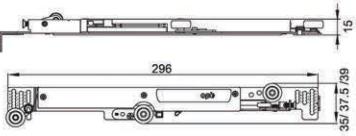上轮-左 Top roller-left	2个/套 2pcs/set					
上轮-右 Top roller-right						
CJ21214B 下轮 Bottom roller	2个/套 2pcs/set					
拔动件 Toggle member	2个/套 2pcs/set					
上轮板固定件 Positioning member	4个/套 2pcs/set		连孔垫片 Positioning pieces	2个/套 2pcs/set		

编号 Item no.	产品名称 Product name	轮距 Up roller distance
CN21201D	壁轮通用阻尼上下轮	39
CN21201K	壁轮轻型阻尼上下轮	39
CN21201R	壁轮重型阻尼上下轮	39
CN21201C	壁轮通用阻尼上下轮	37.5
CN21201J	壁轮轻型阻尼上下轮	37.5
CN21201Q	壁轮重型阻尼上下轮	37.5
CN21201B	壁轮通用阻尼上下轮	35
CN21201I	壁轮轻型阻尼上下轮	35
CN21201P	壁轮重型阻尼上下轮	35

最大承重: 20–50kg




适用范围: 各类铝合金门、木门

Max loading capacity: 20–50kg

Application: all aluminium doors, wooden door

巡洋1号（2轮）

Cruiser roller 1 (2 rollers)

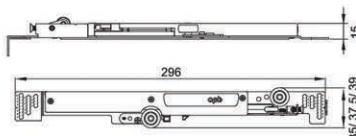上轮-左 Top roller-left	2个/套 2pcs/set					
上轮-右 Top roller-right						
CJ21214B 下轮 Bottom roller	2个/套 2pcs/set					
拔动件 Toggle member	2个/套 2pcs/set					
上轮板固定件 Positioning member	4个/套 2pcs/set		连孔垫片 Positioning pieces	2个/套 2pcs/set		

编号 Item no.	产品名称 Product name	轮距 Up roller distance
CN21201G	壁轮通用阻尼上下轮	39
CN21201N	壁轮轻型阻尼上下轮	39
CN21201U	壁轮重型阻尼上下轮	39
CN21201F	壁轮通用阻尼上下轮	37.5
CN21201M	壁轮轻型阻尼上下轮	37.5
CN21201T	壁轮重型阻尼上下轮	37.5
CN21201E	壁轮通用阻尼上下轮	35
CN21201L	壁轮轻型阻尼上下轮	35
CN21201S	壁轮重型阻尼上下轮	35

最大承重: 20–50kg

适用范围: 各类铝合金门、木门


Max loading capacity: 20–50kg

Application: all aluminium doors, wooden door


巡洋1号安装参数介绍

CRUISER 1 INSTALLATION PARAMETER INTRODUCED

1 安装要求 Installation Requirements

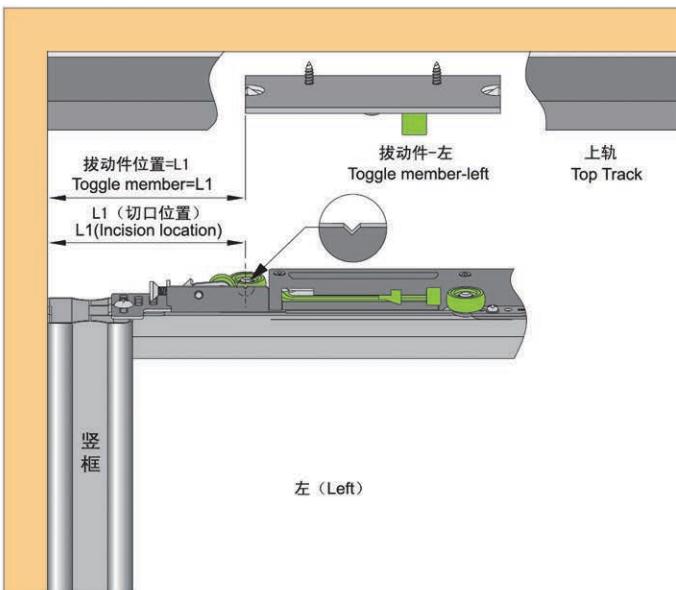


2 柜体要求 Cabinet Requirements

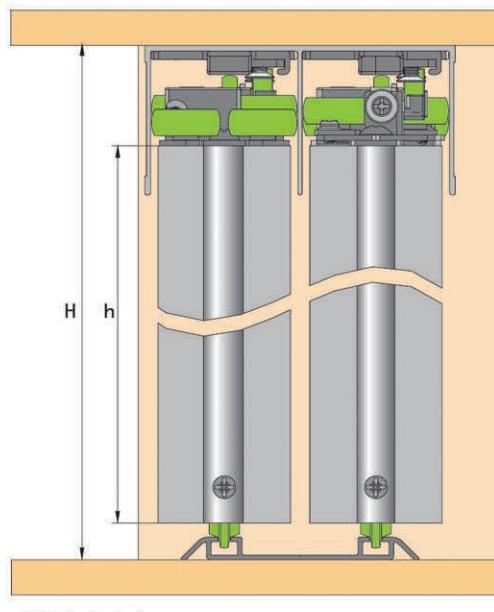


3 技术特点 Product Technical Features


1 门板防跳功能 Prevent the door jumping

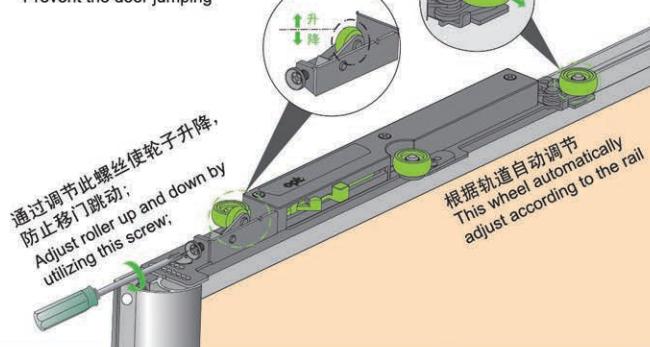


2 以0为中心, 根据移门位置, 固定相对刻度螺丝。 Based on sliding door's position, take 0 as the centre to fix screw to corresponding scale

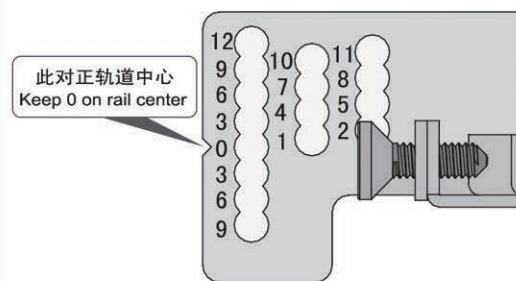

3 偏框配件安装 Asymmetrical profile Installation

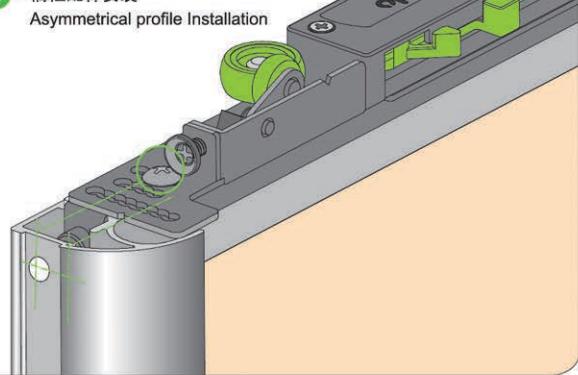

4 正框配件安装 Symmetrical profile Installation

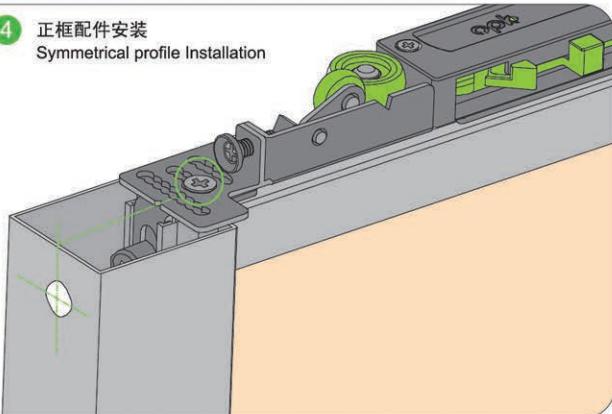

巡洋2号

CRUISER 2

此产品有六项专利技术

- 专利一：防跳装置**
- 专利二：自动挂钩装置**
- 专利三：多轮距功能**
- 专利四：连孔调节偏框功能**
- 专利五：挡件自动定位功能**
- 专利六：挡件高度可调功能**

Six patent technologies

Patent I : Anti-jumping Device

Patent II : Auto-hanging hook device

Patent III: Multi up roller distance

Patent IV: Alignments holes adjustment function for deviation

Patent V: Stopper automatic positioning function

Patent VI: Stopper height adjustable function

产品特点：

- 轮距调节功能：此系列产品有多种轮距供客户调节且无需更换配件.
- 自动挂钩功能：产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能.
- 阻尼器：上下组合，形成封闭壳体，有利保护阻尼管，耐磨，耐用，滑动噪音小，使用寿命长，其结构简单合理，应用广泛.
- 防跳功能：通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使门板平稳滑行，延长产品的使用寿命.
- 安装方便：此款产品属于中心限位阻尼，不分左右，安装时非常方便.
- 对铝门竖框偏心型材通用：可以调节产品两端的刻度，使滑轮中心对应上轨槽的中心，可适用于不同形状的竖框.
- 适用范围：铝门，木门均可使用，安装调节方便.

Product features:

- **Roller distance adjustable function:** Various roller distance is optional for buyer adjustment, and no need to replace the accessories.
- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, more silence, long using life, novel appearance, simple and reasonable structure, wide application.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.
- **For asymmetrical vertical frame:** can adjust the scale to keep central line of up rollers with up track , applicable to different kinds of vertical profiles.
- **Application:** aluminum door, wooden door, easy installation and adjustment.




巡洋2号 CRUISER 2

适用于:壁柜门 (铝框)
Application: Sliding roller (Aluminium door)

≤15kg 轻型
 ≤30kg 通用型
 ≤50kg 重型

产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)
巡洋2号(单阻尼-A1) Cruiser roller 2 Single dampingr-A1	轻型 Light-duty CJ11247A	
	通用型 Normal CJ11247B	
	重型 Heavy-duty CJ11247C	 CJ21237A 精品1号(G608) Masterpiece roller 1 77 42 12
巡洋2号(单阻尼-A2) Cruiser roller 2 Single dampingr-A2	轻型 Light-duty CJ11248A	
	通用型 Normal CJ11248B	
	重型 Heavy-duty CJ11248C	 CJ21237B 精品1号(F608) Masterpiece roller 1 77 42 12
巡洋2号(单阻尼-A3) Cruiser roller 2 Single dampingr-A3	轻型 Light-duty CJ11249A	
	通用型 Normal CJ11249B	
	重型 Heavy-duty CJ11249C	 CJ21237C 精品1号(G6000) Masterpiece roller 1 77 42 12
巡洋2号(单阻尼-A4) Cruiser roller 2 Single dampingr-A4	轻型 Light-duty CJ112111A	
	通用型 Normal CJ112111B	
	重型 Heavy-duty CJ112111C	 CJ212128A 巡洋2号防跳下轮 Cruiser roller 2 anti-jumping bottom roller 103 40.2 43 12
巡洋2号 Cruiser roller 2 CJ11233A 轻型 Light-duty CJ11233B 通用 Normal CJ11233C 重型 Heavy-duty		 344 31 可调轮距: 35mm, 36mm, 37.5mm, 38.3mm, 39mm
CJ21233A 22号上轮S1 Top roller 22 S1		

轨道 TRACK






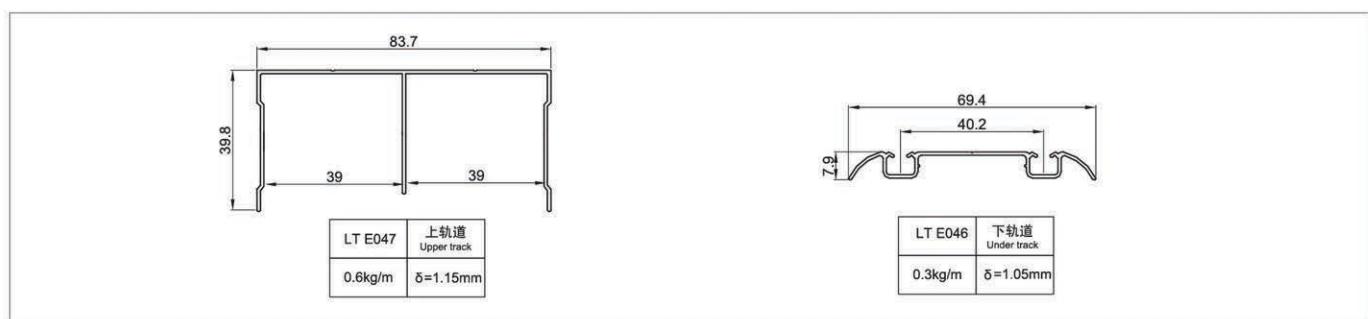


巡洋2号 CRUISER 2


适用于:壁柜门(铝框)

Application: Sliding roller (Aluminium door)

<15kg
轻型<30kg
通用型<50kg
重型

产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)
巡洋2号(双阻尼-B1) Cruiser roller 2 Double dampingr-B1	轻型 Light-duty CJ11250A	 CJ21237A 精品1号(G608) Masterpiece roller 1
	通用型 Normal CJ11250B	 CJ21237B 精品1号(F608) Masterpiece roller 1
	重型 Heavy-duty CJ11250C	 CJ21237C 精品1号(G6000) Masterpiece roller 1
巡洋2号(双阻尼-B2) Cruiser roller 2 Double dampingr-B2	轻型 Light-duty CJ11251A	 CJ21237B 精品1号(F608) Masterpiece roller 1
	通用型 Normal CJ11251B	 CJ21237C 精品1号(G6000) Masterpiece roller 1
	重型 Heavy-duty CJ11251C	 CJ21237C 精品1号(G6000) Masterpiece roller 1
巡洋2号(双阻尼-B3) Cruiser roller 2 Double dampingr-B3	轻型 Light-duty CJ11252A	 CJ21237C 精品1号(G6000) Masterpiece roller 1
	通用型 Normal CJ11252B	 CJ21237C 精品1号(G6000) Masterpiece roller 1
	重型 Heavy-duty CJ11252C	 CJ212128A 巡洋2号防跳下轮 Cruiser roller 2 anti-jumping bottom roller
巡洋2号(双阻尼-B4) Cruiser roller 2 Double dampingr-B4	轻型 Light-duty CJ112111D	 CJ212128A 巡洋2号防跳下轮 Cruiser roller 2 anti-jumping bottom roller
	通用型 Normal CJ112111E	 CJ212128A 巡洋2号防跳下轮 Cruiser roller 2 anti-jumping bottom roller
	重型 Heavy-duty CJ112111F	 CJ212128A 巡洋2号防跳下轮 Cruiser roller 2 anti-jumping bottom roller


轨道 TRACK

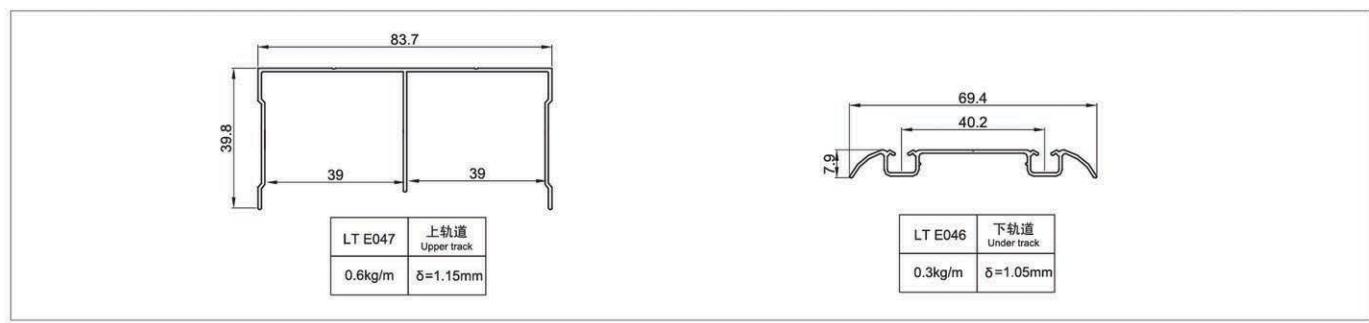

巡洋2号安装参数介绍

CRUISER 2 INSTALLATION PARAMETER INTRODUCED



1 柜体要求 Cabinet Requirements

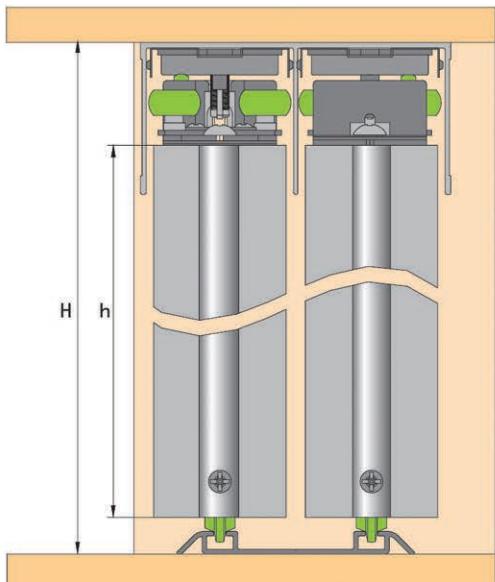


门板高=门洞高-43 (h = H - 43)

2 技术特点 Product Technical Features

- 1 门板防跳功能
Prevent the door jumping

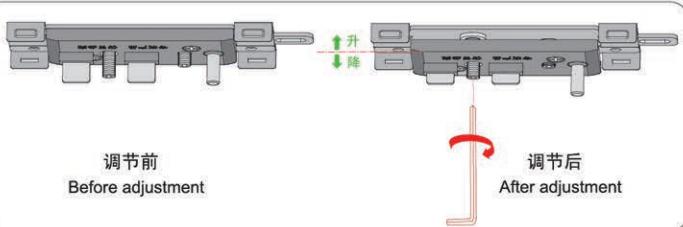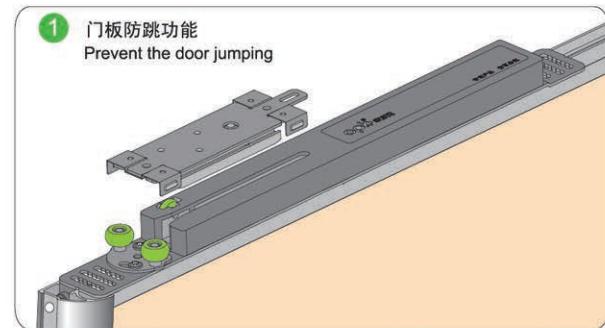


通过调节此螺丝，使阻尼拨动件升降，防止移门跳动
Adjust toggle member up and down by utilizing this screw

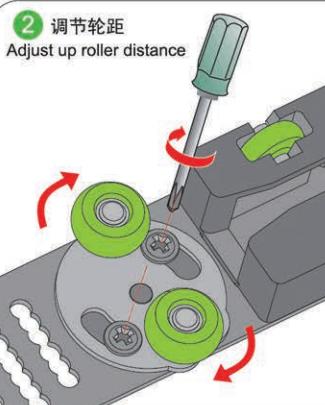


旋转到相应的轮距刻度
Rotate to the corresponding scale

- 3 以0为中心，根据移门位置，固定相对刻度螺丝。
Based on sliding door's position,take 0 as the centre to fix screw to corresponding scale


此对正轨道中心
Keep 0 on rail center



- 4 偏框配件安装
Asymmetrical profile Installation

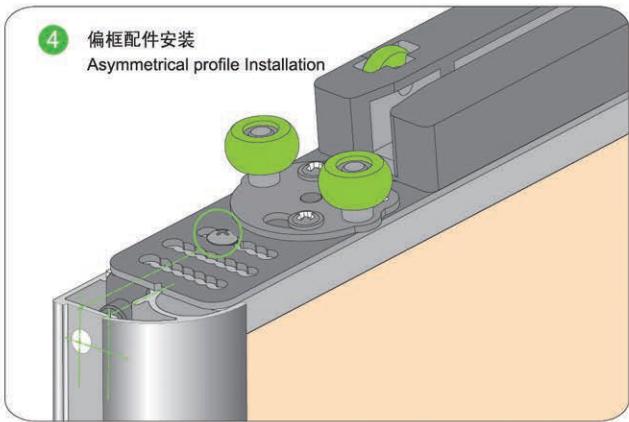

- 5 正框配件安装
Symmetrical profile Installation

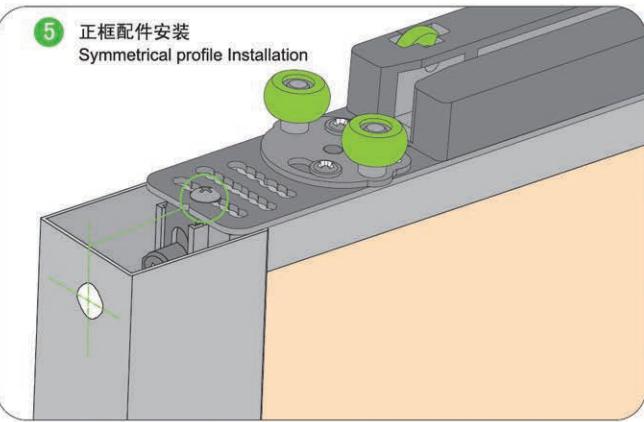

巡洋3号

CRUISER 3

此产品有四项专利技术

专利一：防跳装置

专利二：自动挂钩装置

专利三：挡件自动定位功能

专利四：挡件高度可调功能

产品特点：

- 自动挂钩功能：产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能。
- 阻尼器：上下组合，形成封闭壳体，有利保护阻尼管，耐磨，耐用，滑动噪音小，使用寿命长，其结构简单合理，应用广泛。
- 防跳功能：通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使门板平稳滑行，延长产品的使用寿命。
- 安装方便：此款产品属于中心限位阻尼，不分左右，安装时非常方便。
- 适用范围：木门，安装调节方便。

Four patent technologies

Patent I : Anti-jumping Device

Patent II : Auto-hanging hook device

Patent III: Stopper automatic positioning function

Patent IV: Stopper height adjustable function

Product features:

- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, more silence, long using life, novel appearance, simple and reasonable structure, wide application.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.
- **Application:** wooden door, easy installation and adjustment.



巡洋3号 CRUISER 3

适用于:壁柜门明轮(铝框)

Application:Visible Sliding roller (Aluminium door)

	<15kg 轻型		<30kg 通用型		<50kg 重型
--	-------------	--	--------------	--	-------------

产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)		
巡洋3号(单阻尼-C1) Cruiser roller 3 Single dampingr-C1	轻型 Light-duty CJ11259A			
	通用型 Normal CJ11259B			
	重型 Heavy-duty CJ11259C			
巡洋3号(单阻尼-C2) Cruiser roller 3 Single dampingr-C2	轻型 Light-duty CJ11260A			
	通用型 Normal CJ11260B			
	重型 Heavy-duty CJ11260C			
巡洋3号(双阻尼-D1) Cruiser roller 3 Double dampingr-D1	轻型 Light-duty CJ11261A			
	通用型 Normal CJ11261B			
	重型 Heavy-duty CJ11261C			
巡洋3号(双阻尼-D2) Cruiser roller 3 Double dampingr-D2	轻型 Light-duty CJ11262A			
	通用型 Normal CJ11262B			
	重型 Heavy-duty CJ11262C			

轨道 TRACK




巡洋3号 CRUISER 3

适用于:木门
Application:Wood door

<15kg 轻型
 <30kg 通用型
 <50kg 重型

产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)	
巡洋3号(单阻尼-E1) Cruiser roller 3 Single dampingr-E1	轻型 Light-duty CJ11253A		
	通用型 Normal CJ11253B		
	重型 Heavy-duty CJ11253C	CJ11242A 大木门轮 (G608) Roller for heavy wooden door 	
巡洋3号(单阻尼-E2) Cruiser roller 3 Single dampingr-E2	轻型 Light-duty CJ11254A		
	通用型 Normal CJ11254B		
	重型 Heavy-duty CJ11254C	CJ11242B 大木门轮 (F608) Roller for heavy wooden door 	
巡洋3号(单阻尼-E3) Cruiser roller 3 Single dampingr-E3	轻型 Light-duty CJ11255A		
	通用型 Normal CJ11255B		
	重型 Heavy-duty CJ11255C	CJ21270B 嵌入式木门下轮 Bottom wood roller 	
巡洋3号(双阻尼-F1) Cruiser roller 3 Double dampingr-F1	轻型 Light-duty CJ11256A		
	通用型 Normal CJ11256B		
	重型 Heavy-duty CJ11256C	CJ11242A 大木门轮 (G608) Roller for heavy wooden door 	
巡洋3号(双阻尼-F2) Cruiser roller 3 Double dampingr-F2	轻型 Light-duty CJ11257A		
	通用型 Normal CJ11257B		
	重型 Heavy-duty CJ11257C	CJ11242B 大木门轮 (F608) Roller for heavy wooden door 	
巡洋3号(双阻尼-F3) Cruiser roller 3 Double dampingr-F3	轻型 Light-duty CJ11258A		
	通用型 Normal CJ11258B		
	重型 Heavy-duty CJ11258C	CJ21270B 嵌入式木门下轮 Bottom wood roller 	

轨道 TRACK

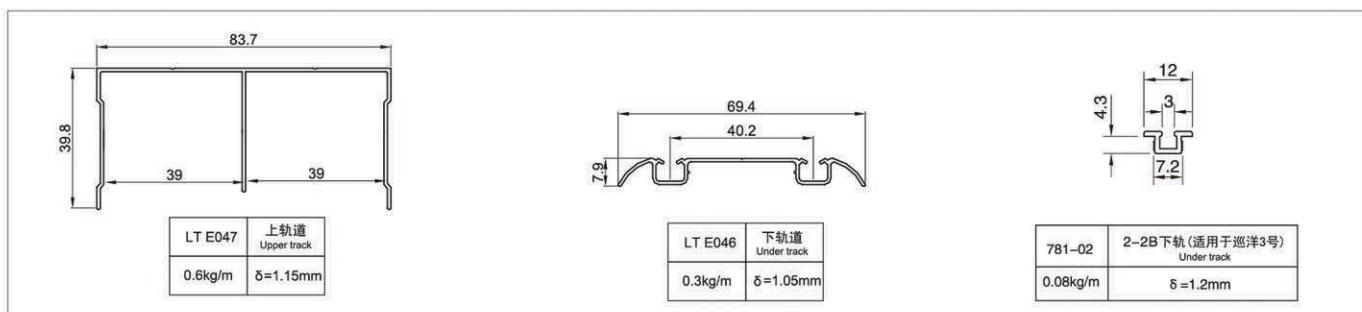


巡洋3号 CRUISER 3

适用于:木门
Application:Wood door

<15kg 轻型
<30kg 通用型
<50kg 重型

产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)		
巡洋3号(单阻尼-J1) Cruiser roller 3 Single dampingr-J1	轻型 Light-duty CJ112112A			
	通用型 Normal CJ112112B			
	重型 Heavy-duty CJ112112C			
巡洋3号(单阻尼-J2) Cruiser roller 3 Single dampingr-J2	轻型 Light-duty CJ112113A			
	通用型 Normal CJ112113B			
	重型 Heavy-duty CJ112113C			
巡洋3号(单阻尼-J3) Cruiser roller 3 Single dampingr-J3	轻型 Light-duty CJ112114A			
	通用型 Normal CJ112114B			
	重型 Heavy-duty CJ112114C			
巡洋3号(双阻尼-K1) Cruiser roller 3 Double dampingr-K1	轻型 Light-duty CJ112112D			
	通用型 Normal CJ112112E			
	重型 Heavy-duty CJ112112F			
巡洋3号(双阻尼-K2) Cruiser roller 3 Double dampingr-K2	轻型 Light-duty CJ112113D			
	通用型 Normal CJ112113E			
	重型 Heavy-duty CJ112113F			
巡洋3号(双阻尼-K3) Cruiser roller 3 Double dampingr-K3	轻型 Light-duty CJ112114D			
	通用型 Normal CJ112114E			
	重型 Heavy-duty CJ112114F			

轨道 TRACK

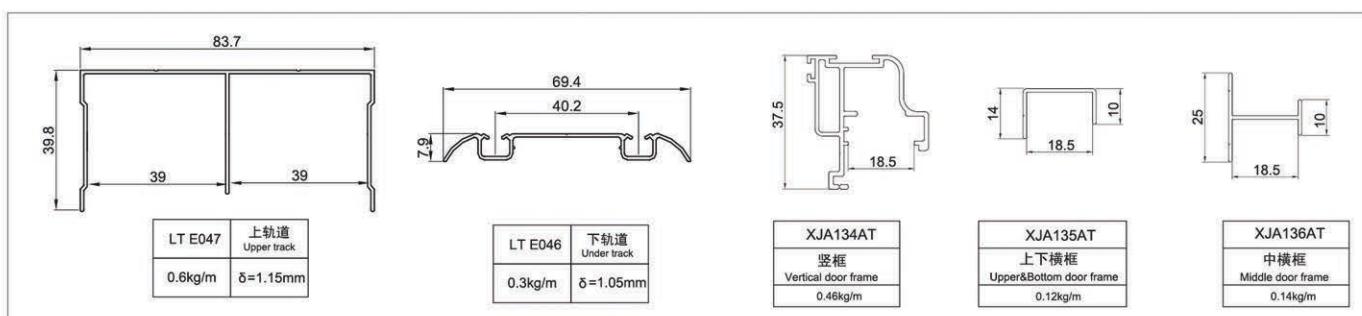

巡洋4号三门系统

CRUISER 4 SYSTEM FOR 3 DOORS

此产品有六项专利技术

专利一：双向缓冲装置

专利二：对碰缓冲装置

专利三：防跳装置

专利四：自动挂钩装置

专利五：多轮距功能

专利六：连孔调节偏框功能

Six patent technologies

Patent I : Two way damper device

Patent II : Collision damper device

Patent III : Anti-jumping device

Patent IV:Auto-Hanging hook device

Patent V : Multi up roller distance

Patent VI : Alignments holes

adjustment function for deviation

产品特点：

- 双向缓冲功能：门板可以越过缓冲器两边滑动，且带缓冲效果.
- 对碰缓冲功能：同一轨道的两门在对撞时，产生缓冲效果.
- 轮距调节功能：此系列产品有多种轮距供客户调节且无需更换配件.
- 自动挂钩功能：产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能.
- 阻尼器：双层阻尼管装置，上下组合，形成封闭壳体，有利保护阻尼管，耐磨，耐用，滑动噪音小，使用寿命长，其结构简单合理，应用广泛.
- 防跳功能：通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使门板平稳滑行，延长产品的使用寿命.
- 安装方便：此款产品属于中心限位阻尼，不分左右，安装时非常方便.
- 对铝门竖框偏心型材通用：可以调节产品两端的刻度，使滑轮中心对应上轨槽的中心，可适用于不同形状的坚框.
- 适用范围：铝门，木门均可使用，安装调节方便.

Product features:

- **Two-way damper function:** The door can pass the damper, sliding on both side with damped function
- **Collision damped function:** when the door in the same track bump up, damped function happen
- **Roller distance adjustable function:** Various roller distance is optional for buyer adjustment, and no need to replace the accessories.
- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, more silence, long using life, novel appearance, simple and reasonable structure, wide application .
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.
- **For asymmetrical vertical frame:** can adjust the scale to keep central line of up rollers with up track , applicable to different kinds of vertical profiles.
- **Application:** aluminum door, wooden door, easy installation and adjustment.



巡洋4号三门系统 CRUISER 4 SYSTEM FOR 3 DOORS


适用于:壁柜门(铝框)
Application: Sliding roller (Aluminium door)

<15kg 轻型	<30kg 通用型	<50kg 重型
-------------	--------------	-------------



巡洋4号三门系统-A1 Cruiser roller 4 system for 3 doors-A1	轻型 Light-duty	CJ112104A	 CJ21237A 精品1号(G608) Masterpiece roller 1	 TN212A 轻型 Light-duty
	通用型 Normal	CJ112104B		
	重型 Heavy-duty	CJ112104C		
巡洋4号三门系统-A2 Cruiser roller 4 system for 3 doors-A2	轻型 Light-duty	CJ112105A	 CJ21237B 精品1号(F608) Masterpiece roller 1	 TN217A 巡洋2号对碰上轮 Cruiser roller 2 collision up roller
	通用型 Normal	CJ112105B		
	重型 Heavy-duty	CJ112105C		
巡洋4号三门系统-A3 Cruiser roller 4 system for 3 doors-A3	轻型 Light-duty	CJ112106A	 CJ21237C 精品1号(G6000) Masterpiece roller 1	 CJ11233A 轻型 Light-duty
	通用型 Normal	CJ112106B		
	重型 Heavy-duty	CJ112106C		


轨道 TRACK

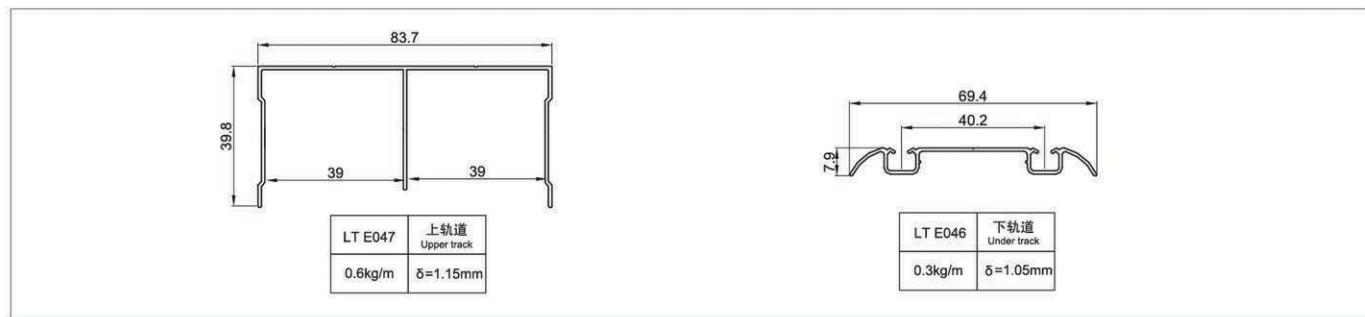

巡洋4号三门系统 安装参数介绍

CRUISER 4 SYSTEM FOR 3 DOORS INSTALLATION PARAMETER INTRODUCED

1 柜体要求 Cabinet Requirements

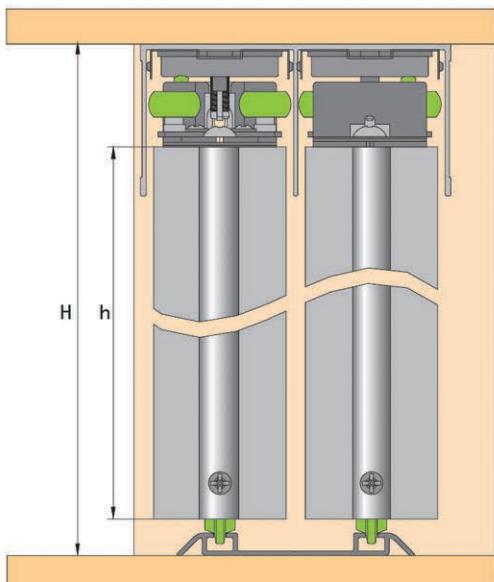


门板高=门洞高-43 (h = H - 43)

2 技术特点 Product Technical Features


1 可左、右移动实现双向缓冲 (内门)

Double buffer to left and right(inner door)

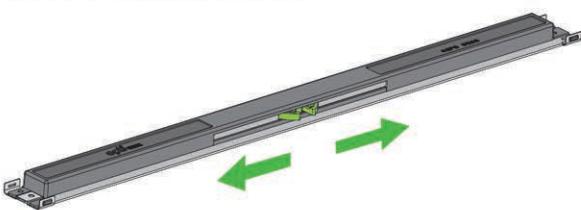

2 对碰缓冲 (外门)


Two-way buffer (outer door)

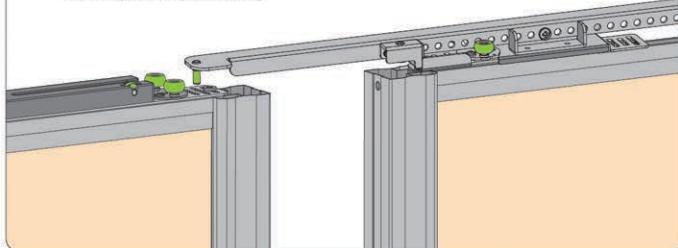

3 门板防跳功能 Prevent the door jumping


Prevent the door jumping

通过调节此螺丝，使阻尼拨动件升降，防止移门跳动

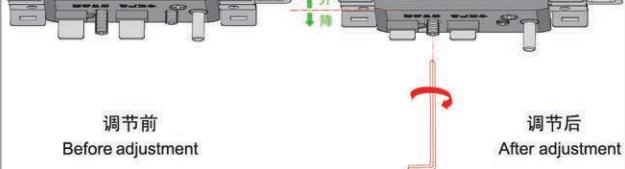

4 调节轮距 Adjust up roller distance

Adjust up roller distance




旋转到相应的轮距刻度
Rotate to the corresponding roller distance scale

5 以0为中心，根据移门位置，固定相对刻度螺丝。


Based on sliding door's position,take 0 as the centre to fix screw to corresponding scale

此对正轨道中心
Keep 0 on rail center

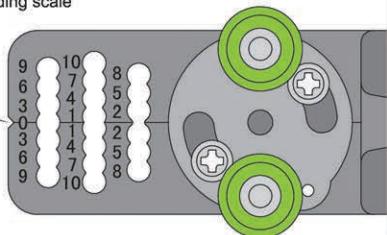


6 偏框配件安装 Asymmetrical profile Installation

Asymmetrical profile Installation

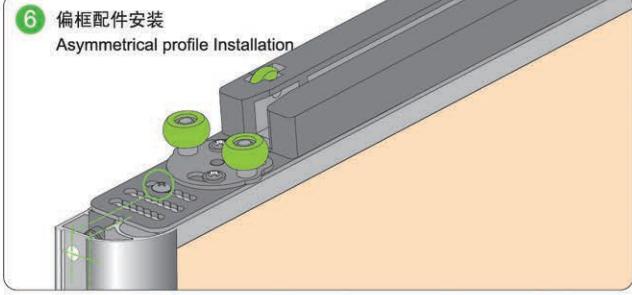

7 正框配件安装 Symmetrical profile Installation

Symmetrical profile Installation

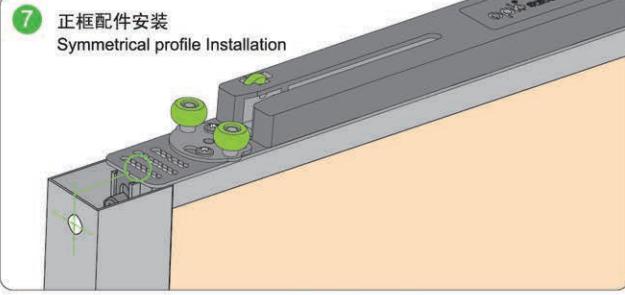

巡洋5号

CRUISER 5

此产品有八项专利技术

- 专利一：防跳装置**
- 专利二：自动挂钩装置**
- 专利三：多轮距功能**
- 专利四：连孔调节偏框功能**
- 专利五：阻尼力度调节功能**
- 专利六：挡件自动定位功能**
- 专利七：挡件高度可调功能**
- 专利八：挡件高度定位装置**

产品特点：

- 轮距调节功能：此系列产品有多种轮距供客户调节且无需更换配件.
- 自动挂钩功能：产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能.
- 阻尼器：双阻尼管装置，上下组合，形成封闭壳体，有利保护阻尼管，耐磨，耐用，滑动噪音小，使用寿命长，其结构简单合理，应用广泛.
- 防跳功能：通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使门板平稳滑行，延长产品的使用寿命.
- 阻尼力度调节功能：根据门板重量和现场安装情况，调节合适的阻尼力度.
- 挡件自动定位功能：挡件无需量尺寸，推动门扇即可精准定位.
- 挡件高度可调功能：挡件高度可调节，解决地板不平所带来的安装困难的问题.
- 挡件高度定位装置：通过此装置可精准调节挡件与阻尼接触的安全高度.
- 安装方便：此款产品属于中心限位阻尼，不分左右，安装时非常方便.
- 对铝门竖框偏心型材通用：可以调节产品两端的刻度，使滑轮中心对应上轨槽的中心，可适用于不同形状的竖框.
- 适用范围：铝门，木门均可使用，安装调节方便.

Eight patent technologies

- Patent I : Anti-jumping Device**
- Patent II : Auto-hanging hook device**
- Patent III: Multi up roller distance**
- Patent IV: Alignments holes adjustment function for deviation**
- Patent V: Damping force adjusting function**
- Patent VI: Stopper automatic positioning function**
- Patent VII: Stopper height adjustable function**
- Patent VIII: Stopper height adjustment device**

Product features:

- **Roller distance adjustable function:** Various roller distance is optional for buyer adjustment, and no need to replace the accessories.
- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, more silence, long using life, novel appearance, simple and reasonable structure, wide application.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Damping force adjusting function:** Adjust the suitable damping force according to the door weight and the installation situation.
- **Stopper automatic positioning function:** the stopper no need measure the size, push the door to find stopper's location precisely.
- **Stopper height adjustable function:** the stopper can adjust the height, to solve the difficult installation problem case from floor uneven
- **Stopper height adjustment device:** adjust suitable safe height for stopper and damper touching.
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.
- **For asymmetrical vertical frame:** can adjust the scale to keep central line of up rollers with up track , applicable to different kinds of vertical profiles.
- **Application:** aluminum door, wooden door, easy installation and adjustment.




巡洋5号 CRUISER 5

适用于:壁柜门(铝框)
Application: Sliding roller (Aluminium door)



产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)
巡洋5号(单阻尼-A1) Cruiser roller 5 Single dampingr-A1	轻型 Light-duty CJ112115A	
	通用型 Normal CJ112115B	
	重型 Heavy-duty CJ112115C	
巡洋5号(单阻尼-A2) Cruiser roller 5 Single dampingr-A2	轻型 Light-duty CJ112116A	
	通用型 Normal CJ112116B	
	重型 Heavy-duty CJ112116C	
巡洋5号(单阻尼-A3) Cruiser roller 5 Single dampingr-A3	轻型 Light-duty CJ112117A	
	通用型 Normal CJ112117B	
	重型 Heavy-duty CJ112117C	
巡洋5号(单阻尼-A4) Cruiser roller 5 Single dampingr-A4	轻型 Light-duty CJ112118A	
	通用型 Normal CJ112118B	
	重型 Heavy-duty CJ112118C	

轨道 TRACK



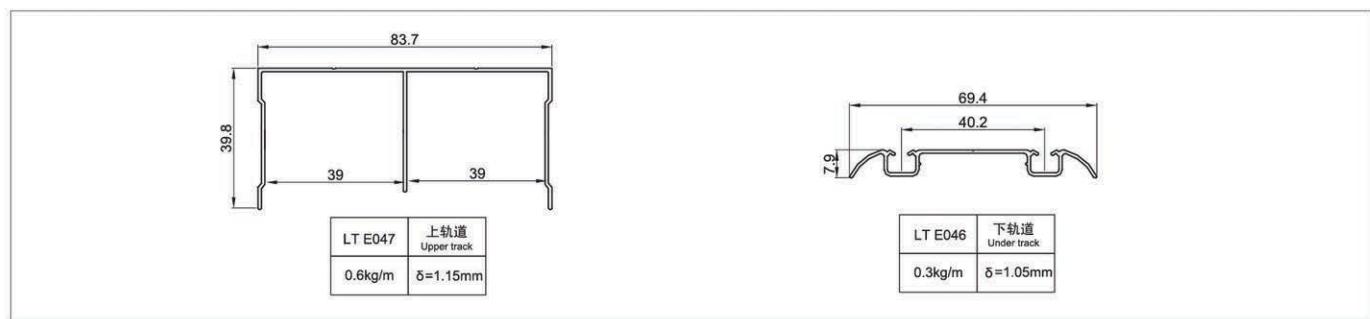



巡洋5号 CRUISER 5

适用于:壁柜门 (铝框)

Application: Sliding roller (Aluminium door)

<15kg
轻型<30kg
通用型<50kg
重型

产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)
巡洋5号 (双阻尼-B1) Cruiser roller 5 Double dampingr-B1	轻型 Light-duty CJ112115D	 CJ112137A 精品1号 (G608) Masterpiece roller 1
	通用型 Normal CJ112115E	 CJ112137B 精品1号 (F608) Masterpiece roller 1
	重型 Heavy-duty CJ112115F	
巡洋5号 (双阻尼-B2) Cruiser roller 5 Double dampingr-B2	轻型 Light-duty CJ112116D	 CJ112137B 精品1号 (F608) Masterpiece roller 1
	通用型 Normal CJ112116E	
	重型 Heavy-duty CJ112116F	
巡洋5号 (双阻尼-B3) Cruiser roller 5 Double dampingr-B3	轻型 Light-duty CJ112117D	 CJ112137C 精品1号 (G6000) Masterpiece roller 1
	通用型 Normal CJ112117E	
	重型 Heavy-duty CJ112117F	
巡洋5号 (双阻尼-B4) Cruiser roller 5 Double dampingr-B4	轻型 Light-duty CJ112118D	 CJ212128A 巡洋2号防跳下轮 Cruiser roller 2 anti-jumping bottom roller
	通用型 Normal CJ112118E	
	重型 Heavy-duty CJ112118F	

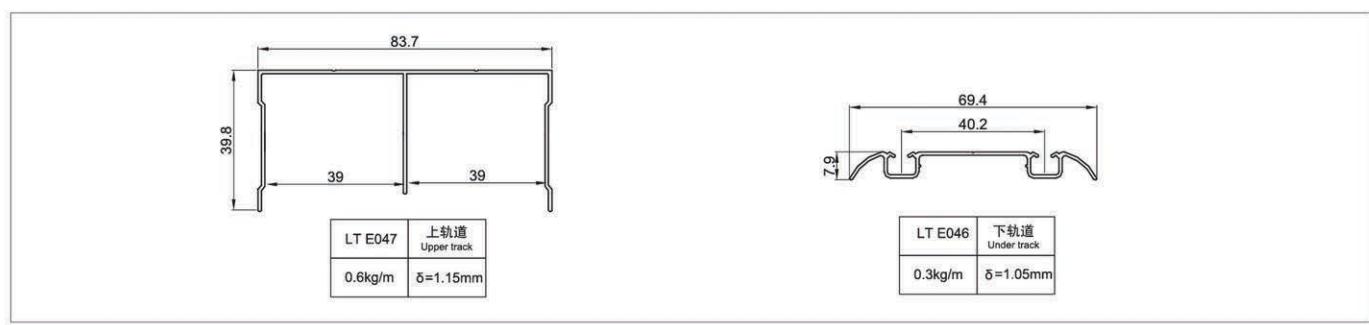轨道 TRACK

巡洋6号 CRUISER 6


适用于:壁柜门(铝框)

Application: Sliding roller (Aluminium door)

<15kg
轻型<30kg
通用型<50kg
重型

产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)		
巡洋6号-A1 Cruiser roller 6-A1	轻型 Light-duty CJ112408A			
	通用型 Normal CJ112408B			
	重型 Heavy-duty CJ112408C			
巡洋6号-A2 Cruiser roller 6-A2	轻型 Light-duty CJ112409A			
	通用型 Normal CJ112409B			
	重型 Heavy-duty CJ112409C			
巡洋6号-A3 Cruiser roller 6-A3	轻型 Light-duty CJ112410A			
	通用型 Normal CJ112410B			
	重型 Heavy-duty CJ112410C			
巡洋6号-A4 Cruiser roller 6-A4	轻型 Light-duty CJ112411A			
	通用型 Normal CJ112411B			
	重型 Heavy-duty CJ112411C			


轨道 TRACK

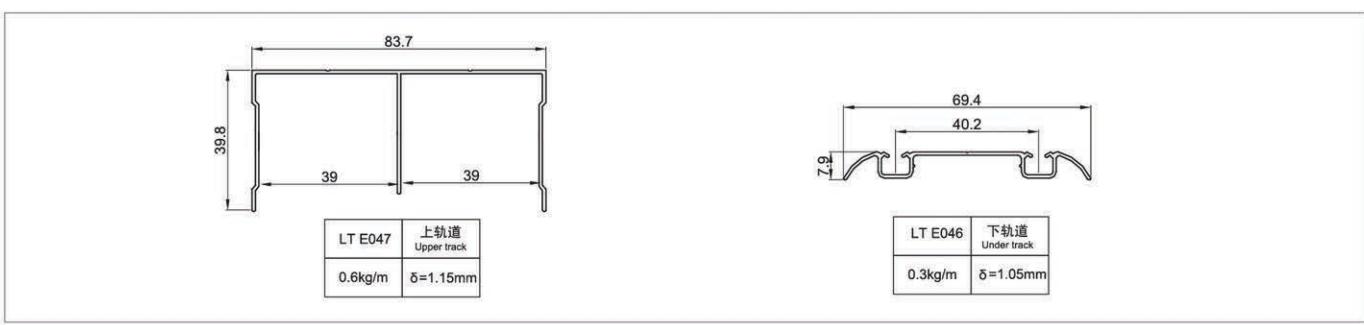

巡洋6号 安装参数介绍

CRUISER 6 INSTALLATION PARAMETER INTRODUCED







1 柜体要求 Cabinet Requirements

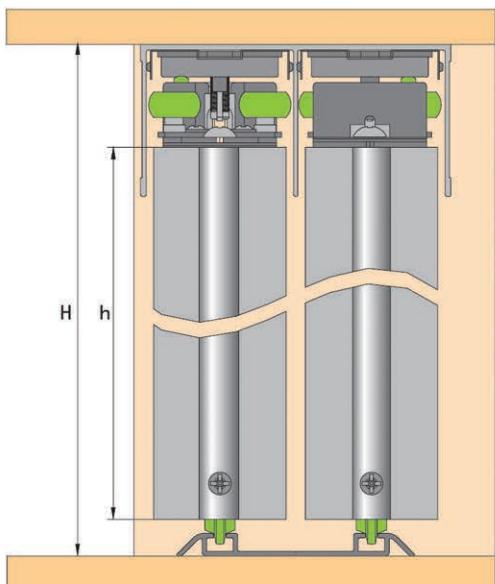

门板高=门洞高-43 (h = H - 43)

2 技术特点 Product Technical Features

- ① 门板防跳功能
Prevent the door jumping

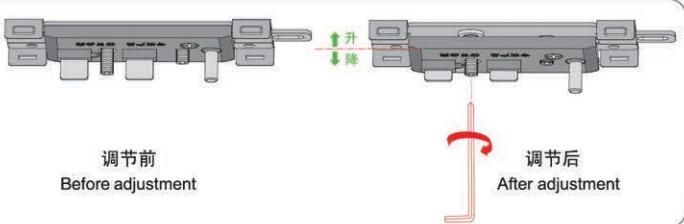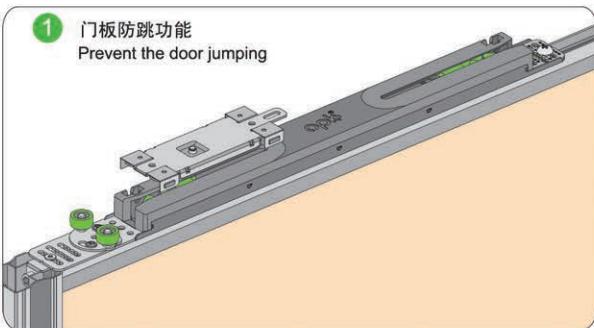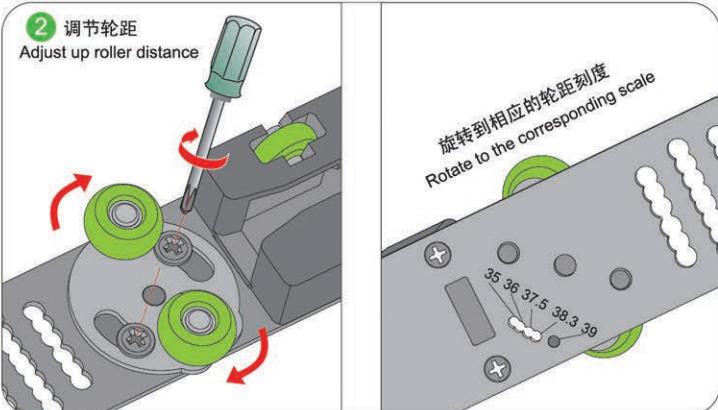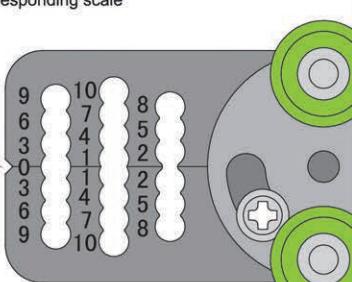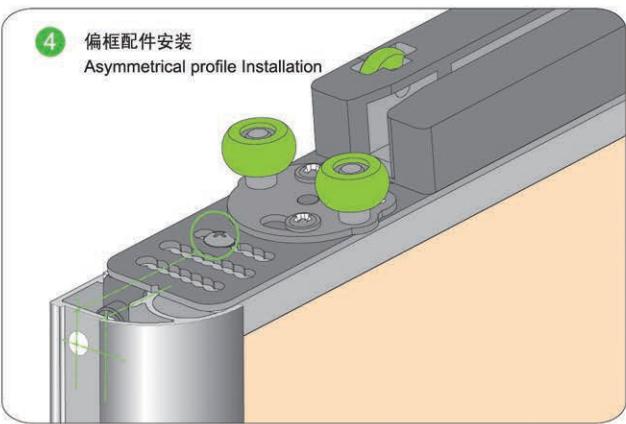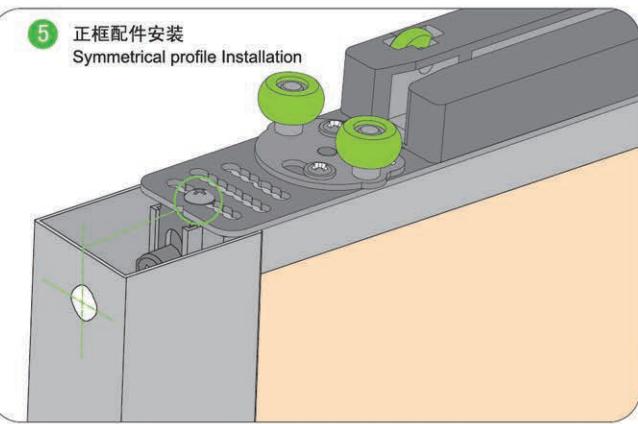通过调节此螺丝，使阻尼拨动件升降，防止移门跳动
Adjust toggle member up and down by utilizing this screw2 调节轮距
Adjust up roller distance3 以0为中心，根据移门位置，固定相对刻度螺丝。
Based on sliding door's position,take 0 as the centre to fix screw to corresponding scale此对正轨道中心
Keep 0 on rail center4 偏框配件安装
Asymmetrical profile Installation5 正框配件安装
Symmetrical profile Installation

登陆1号

LANDING 1

此产品有六项专利技术

- **专利一：防跳装置**
- **专利二：自动挂钩装置**
- **专利三：多轮距功能**
- **专利四：连孔调节偏框功能**
- **专利五：挡件自动定位功能**
- **专利六：挡件高度可调功能**

产品特点：

- 轮距调节功能：此系列产品有多种轮距供客户调节且无需更换配件.
- 自动挂钩功能：产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能.
- 阻尼器：上下组合，形成封闭壳体，有利保护阻尼管，耐磨，耐用，滑动噪音小，使用寿命长，其结构简单合理，应用广泛.
- 防跳功能：通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使门板平稳滑行，延长产品的使用寿命.
- 挡件自动定位功能：挡件无需量尺寸，推动门扇即可精准定位.
- 挡件高度可调功能：挡件高度可调节，解决地板不平所带来的安装困难的问题.
- 安装方便：此款产品属于中心限位阻尼，不分左右，安装时非常方便.
- 对铝门竖框偏心型材通用：可以调节产品两端的刻度，使滑轮中心对应上轨槽的中心，可适用于不同形状的竖框.
- 适用范围：铝门，木门均可使用，安装调节方便.

Six patent technologies

Patent I : Anti-jumping Device

Patent II : Auto-hanging hook device

Patent III: Multi up roller distance

Patent IV: Alignments holes adjustment function for deviation

Patent V : Stopper automatic positioning function

Patent VI: Stopper height adjustable function

Product features:

- **Roller distance adjustable function:** Various roller distance is optional for buyer adjustment, and no need to replace the accessories.
- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, more silence, long using life, novel appearance, simple and reasonable structure, wide application.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Stopper automatic positioning function:** the stopper no need measure the size, push the door to find stopper's location precisely.
- **Stopper height adjustable function:** the stopper can adjust the height, to solve the difficult installation problem case from floor uneven
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.
- **For asymmetrical vertical frame:** can adjust the scale to keep central line of up rollers with up track , applicable to different kinds of vertical profiles.
- **Application:** aluminum door, wooden door, easy installation and adjustment.





登陆1号 LANDING 1


适用于:壁柜门 (铝框)

Application: Sliding roller (Aluminium door)

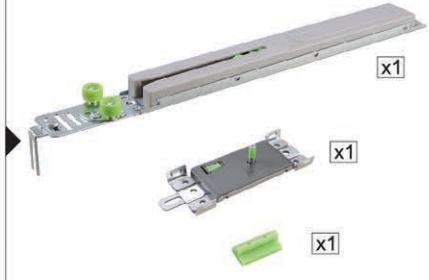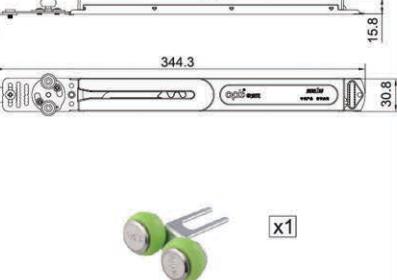

产品名称 Name	产品型号 Model	全套配件组成 (单扇门配件) Package Fittings (Single door)								
登陆1号 (单阻尼-DL9) Denglu roller 1 Single dampingr-DL9	轻型 Light-duty	CJ112130A	 x2							
	通用型 Normal	CJ112130B								
	重型 Heavy-duty	CJ112130C								
登陆1号 (单阻尼-DL11) Denglu roller 1 Single dampingr-DL11	轻型 Light-duty	CJ112138A	 x2	 CJ21233T 22号上轮S2 Top roller 22 S2						
	通用型 Normal	CJ112138B								
	重型 Heavy-duty	CJ112138C								
CJ21201C 精工1号 (G608) Precision-working rooller1			<table border="1"> <tr> <td>登陆1号 Denglu roller 1</td> <td>CJ112110A 轻型 Light-duty</td> </tr> <tr> <td></td> <td>CJ112110B 通用 Normal</td> </tr> <tr> <td></td> <td>CJ112110C 重型 Heavy-duty</td> </tr> </table>		登陆1号 Denglu roller 1	CJ112110A 轻型 Light-duty		CJ112110B 通用 Normal		CJ112110C 重型 Heavy-duty
登陆1号 Denglu roller 1	CJ112110A 轻型 Light-duty									
	CJ112110B 通用 Normal									
	CJ112110C 重型 Heavy-duty									



轨道 TRACK

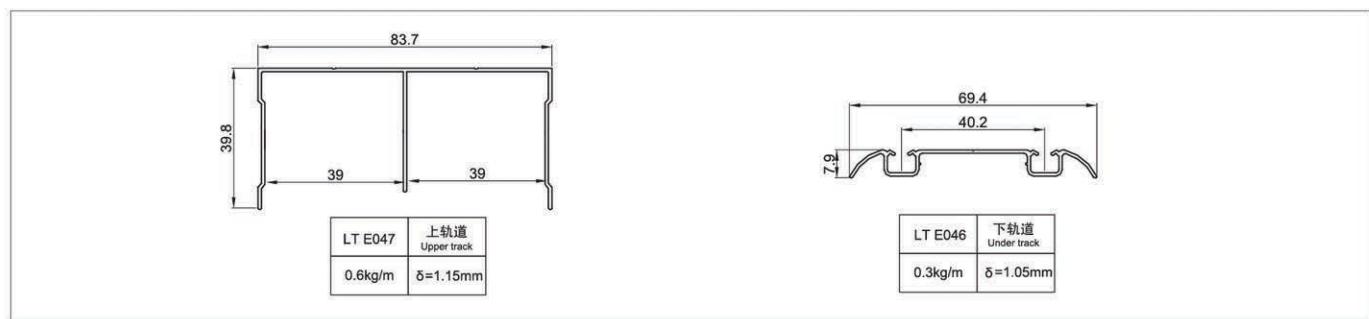


登陆1号 LANDING 1

适用于:壁柜门 (铝框)
Application:Sliding roller (Aluminium door)

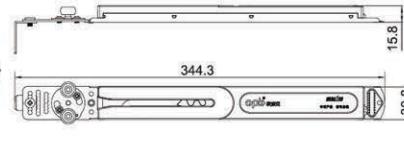

产品名称 Name	产品型号 Model	全套配件组成 (单扇门配件) Package Fittings (Single door)	
登陆1号 (双阻尼-DL4) Denglu roller 1 Single dampingr-DL4	轻型 Light-duty	CJ112125A	 x2
	通用型 Normal	CJ112125B	 x2
	重型 Heavy-duty	CJ112125C	 x2
登陆1号 (双阻尼-DL5) Denglu roller 1 Single dampingr-DL5	轻型 Light-duty	CJ112126A	 x2
	通用型 Normal	CJ112126B	 x2
	重型 Heavy-duty	CJ112126C	 x2

轨道 TRACK

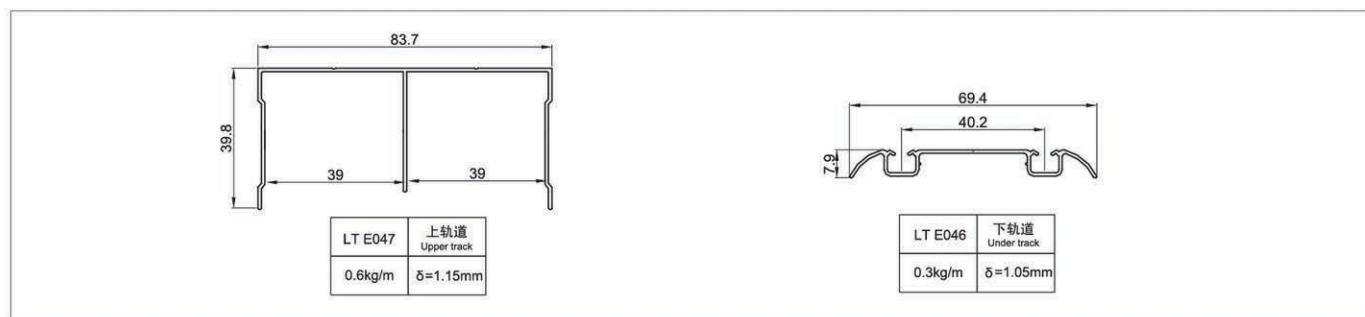

柔畅1号

ROUCHANG 1

此产品有六项专利技术

- **专利一：防跳装置**
- **专利二：自动挂钩装置**
- **专利三：多轮距功能**
- **专利四：连孔调节偏框功能**
- **专利五：挡件自动定位功能**
- **专利六：挡件高度可调功能**

产品特点：

- 轮距调节功能：此系列产品有多种轮距供客户调节且无需更换配件.
- 自动挂钩功能：产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能.
- 阻尼器：上下组合，形成封闭壳体，有利保护阻尼管，耐磨，耐用，滑动噪音小，使用寿命长，其结构简单合理，应用广泛.
- 防跳功能：通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使门板平稳滑行，延长产品的使用寿命.
- 挡件自动定位功能：挡件无需量尺寸，推动门扇即可精准定位.
- 挡件高度可调功能：挡件高度可调节，解决地板不平所带来的安装困难的问题.
- 安装方便：此款产品属于中心限位阻尼，不分左右，安装时非常方便.
- 对铝门竖框偏心型材通用：可以调节产品两端的刻度，使滑轮中心对应上轨槽的中心，可适用于不同形状的竖框.
- 适用范围：铝门，木门均可使用，安装调节方便.

Six patent technologies

Patent I : Anti-jumping Device

Patent II : Auto-hanging hook device

Patent III: Multi up roller distance


Patent IV: Alignments holes adjustment function for deviation

Patent V : Stopper automatic positioning function

Patent VI: Stopper height adjustable function

Product features:






- **Roller distance adjustable function:** Various roller distance is optional for buyer adjustment, and no need to replace the accessories.
- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Damper:** Closed structure greatly protect damper tube, abrasion resistant and durable, more silence, long using life, novel appearance, simple and reasonable structure, wide application.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensures smooth door sliding and long using life.
- **Stopper automatic positioning function:** the stopper no need measure the size, push the door to find stopper's location precisely.
- **Stopper height adjustable function:** the stopper can adjust the height, to solve the difficult installation problem case from floor uneven
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.
- **For asymmetrical vertical frame:** can adjust the scale to keep central line of up rollers with up track , applicable to different kinds of vertical profiles.
- **Application:** aluminum door, wooden door, easy installation and adjustment.

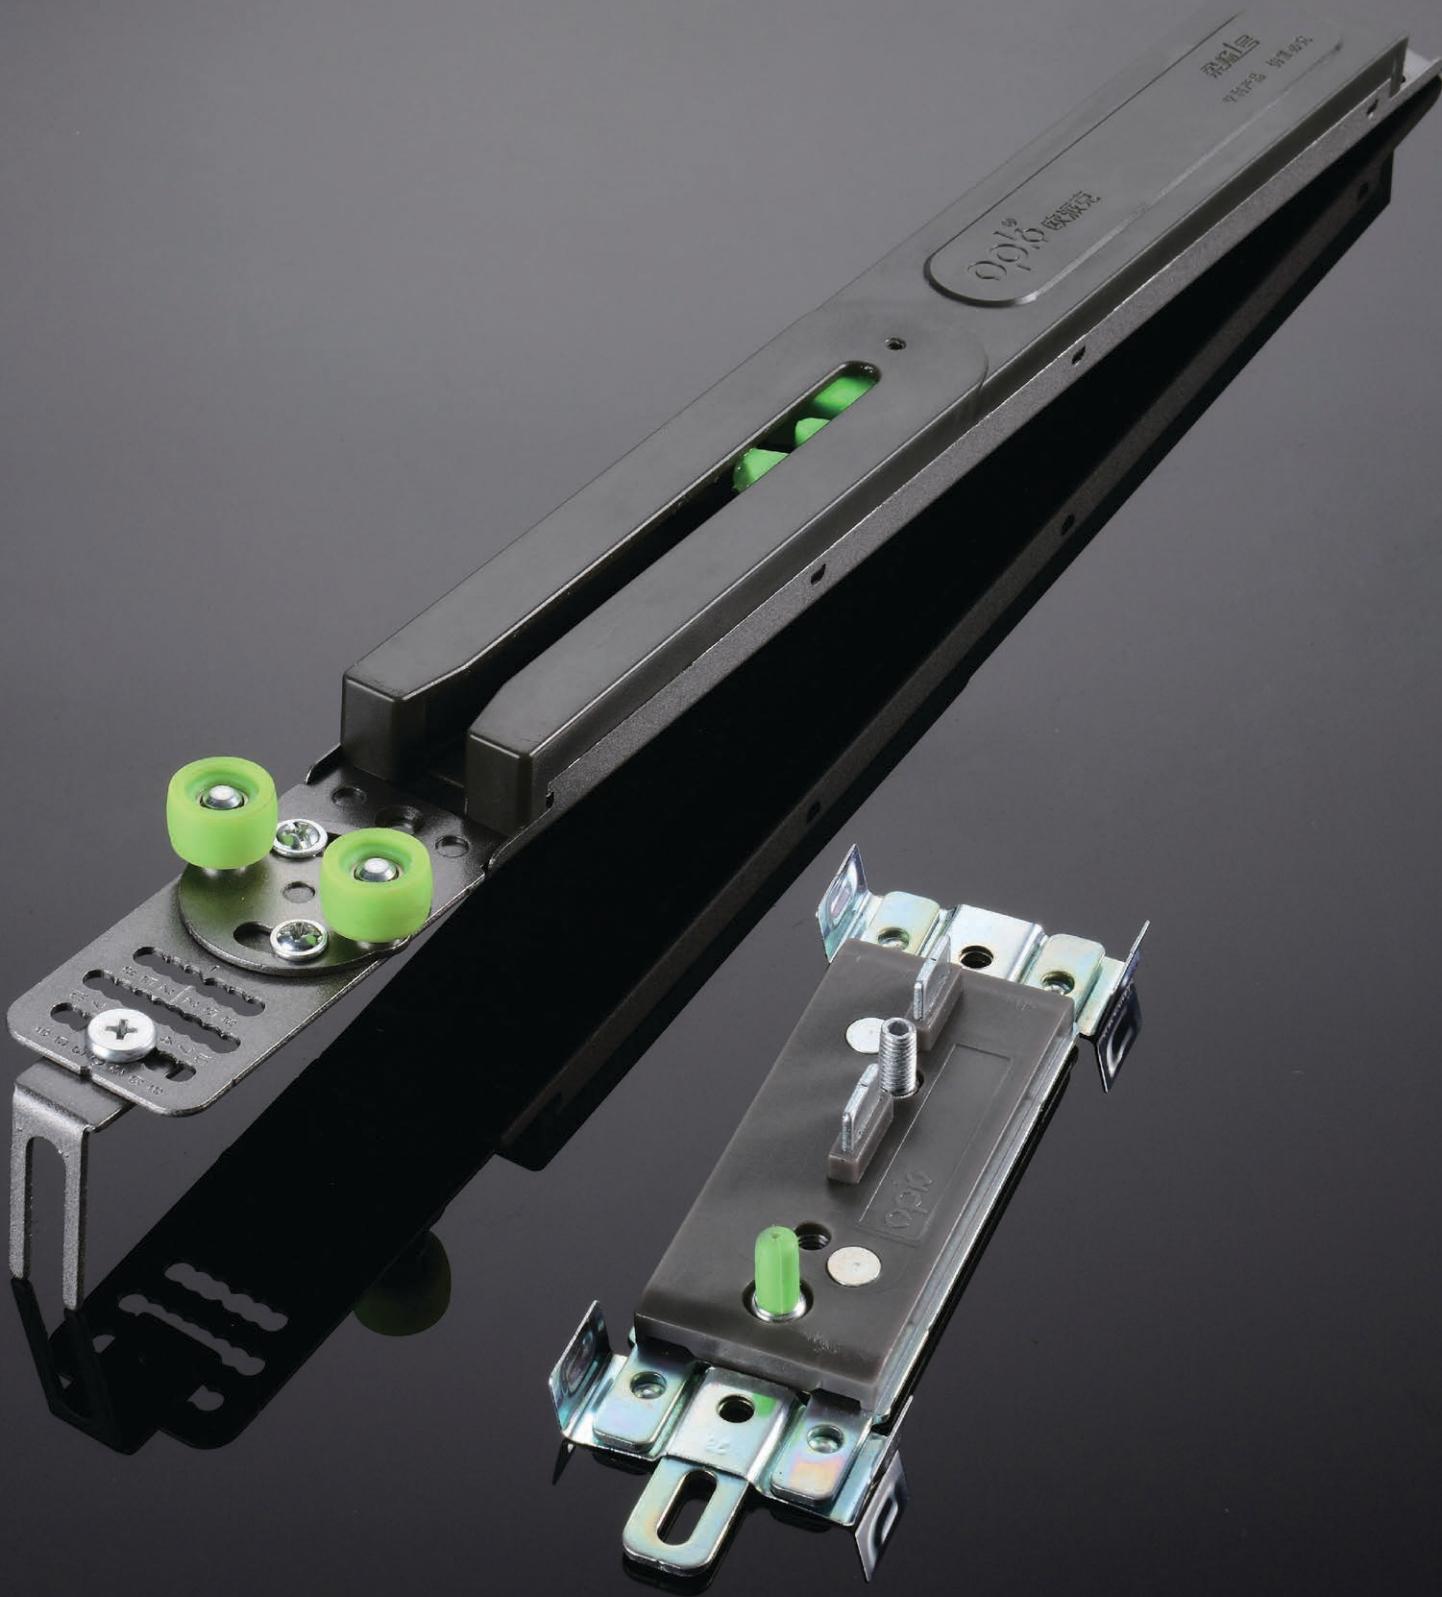


柔畅1号

适用于:壁柜门 (铝框)
Application: Sliding roller (Aluminium door)

<15kg	<30kg	<50kg
轻型	通用型	重型




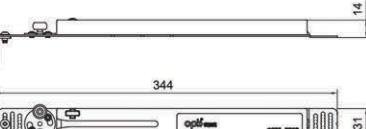
产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)	
柔畅1号 (双阻尼-RC1) Rouchang 1 Double damping-RC1	轻型 Light-duty CJ212408A	 	
	通用型 Normal CJ212408B		 
	重型 Heavy-duty CJ212408C		
柔畅1号 (双阻尼-RC2) Rouchang 1 Double damping-RC2	轻型 Light-duty CJ212409A	 	
	通用型 Normal CJ212409B		
	重型 Heavy-duty CJ212409C		
柔畅1号 (双阻尼-RC3) Rouchang 1 Double damping-RC3	轻型 Light-duty CJ212410A	 	 可调轮距: 35mm, 36mm, 37.5mm, 38.3mm, 39mm
	通用型 Normal CJ212410B		
	重型 Heavy-duty CJ212410C		

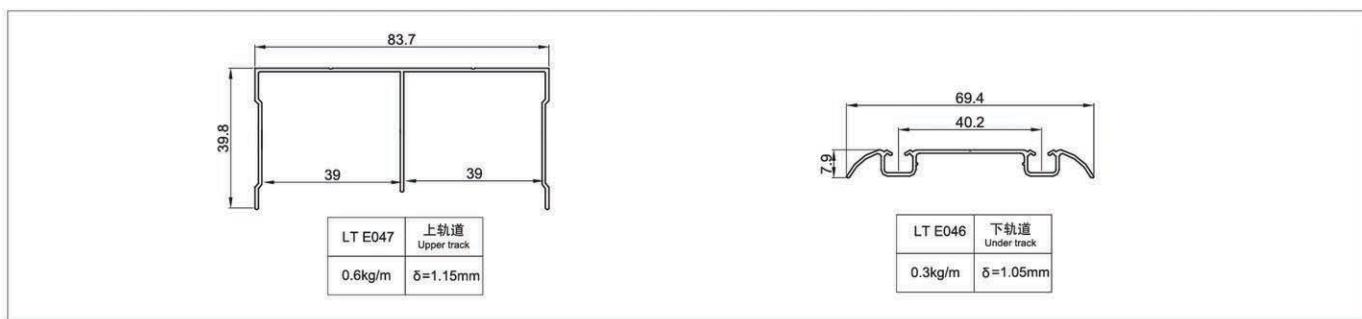轨道 TRACK


柔畅1号

适用于:壁柜门 (铝框)
Application: Sliding roller (Aluminium door)

$\leq 15\text{kg}$	$\leq 30\text{kg}$	$\leq 50\text{kg}$
轻型	通用型	重型

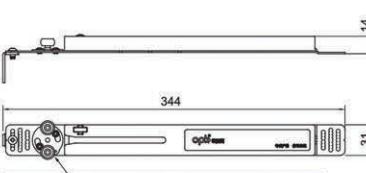产品名称 Name	产品型号 Model	全套配件组成(单扇门配件) Package Fittings (Single door)								
柔畅1号 (单阻尼-RC4) Rouchang 1 Single damping-RC4	轻型 Light-duty CJ212411A	 	 							
	通用型 Normal CJ212411B									
	重型 Heavy-duty CJ212411C	CJ21201B 经典1号 (G608) Classics roller 1								
柔畅1号 (单阻尼-RC5) Rouchang 1 Single damping-RC5	轻型 Light-duty CJ212412A	 	<table border="1"><tr><td>柔畅1号 Rouchang 1</td><td>CJ212396A 轻型 Light-duty</td></tr><tr><td></td><td>CJ212396B 通用 Normal</td></tr><tr><td></td><td>CJ212396C 重型 Heavy-duty</td></tr></table>  可调轮距: 35mm, 36mm, 37.5mm, 38.3mm, 39mm	柔畅1号 Rouchang 1	CJ212396A 轻型 Light-duty		CJ212396B 通用 Normal		CJ212396C 重型 Heavy-duty	
柔畅1号 Rouchang 1	CJ212396A 轻型 Light-duty									
	CJ212396B 通用 Normal									
	CJ212396C 重型 Heavy-duty									
通用型 Normal CJ212412B										
重型 Heavy-duty CJ212412C	CJ21202B 经典1号 (F608) Classics roller 1									
柔畅1号 (单阻尼-RC6) Rouchang 1 Single damping-RC6	轻型 Light-duty CJ212413A	 	 CJ21233B 22号上轮S2 Top roller 22 S2							
	通用型 Normal CJ212413B									
	重型 Heavy-duty CJ212413C	CJ21203B 经典1号 (G6000) Classics roller 1								

轨道 TRACK

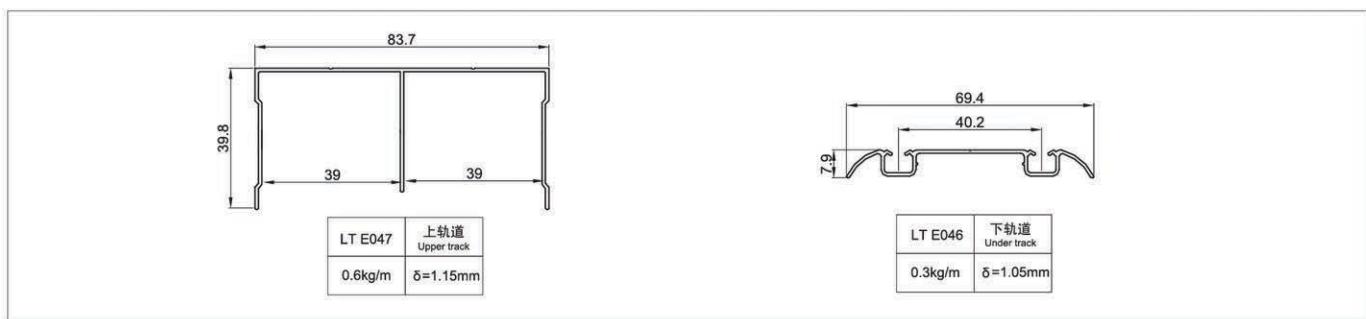

扬帆1号

SAILING 1

产品特点：


- 多扇折叠：结构新颖，美观，大方。可双扇及多扇连接折叠，一举突破传统折叠门柜体宽度小于2米的局限性，大大增加使用空间。
- 静滑设计：采用静音滑轮，滑动更舒畅、更静音。

Product Features:

- **Combined folding:** Novel structure and beautiful appearance; Two doors or multi folding doors structure breaks through the traditional folding wardrobe door width which is limited within 2000mm.
- **Sliding roller:** High-quality door rollers create smooth and quiet sliding movement.

产品应用范围











Product Applications

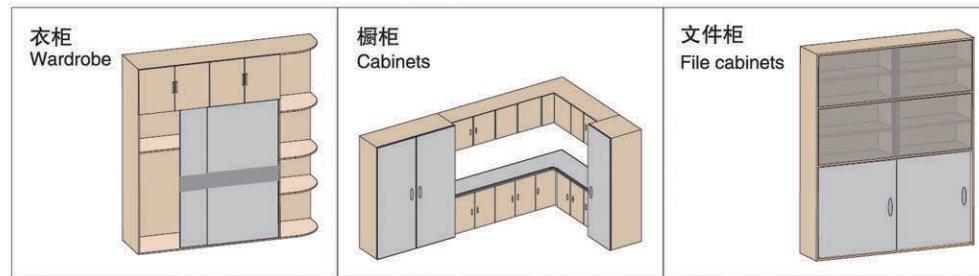




扬帆1号配件说明

SAILING 1 ACCESSORIES OPTIONS


TJ003A 连环折门上挂体 Top Hanging Fittings for Folding Door with Interlinked Hinge 仅用于四门折叠 Only for 4 panels folding system			TJ003B 连环折门下挂体 Bottom Hanging Fittings for Folding Door with Interlinked Hinge 仅用于四门折叠 Only for 4 panels folding system	 
TJ004A 单边折门上挂体 Top Hanging Fittings for One-wing Folding Door			TJ004B 单边折门下挂体 Bottom Hanging Fittings for One-wing Folding Door	 
TJ005A 合页 Hinge		TJ005B 合页打孔模 Drilling mode		
XJA063 上轨 Up Track	 	XJA071 下轨 Bottom Track	 	90053 装饰盖 Decorative cover
CJ22101A 二门折叠 Folding Door (2 panels)		CJ22101B 四门连环折叠 Multi-wing folding door (4 panels)		

配件多种组合安装方式 (多组合安装方式国际发明专利)


Accessories minutes combined installation



A. 四门 Four door(2+2)



B. 六门 Six door(4+2)




C. 八门 Eight door(4+4)

扬帆1号安装参数介绍


SAILING 1 INSTALLATION PARAMETER INTRODUCED

1 柜体要求 Cabinet Requirements

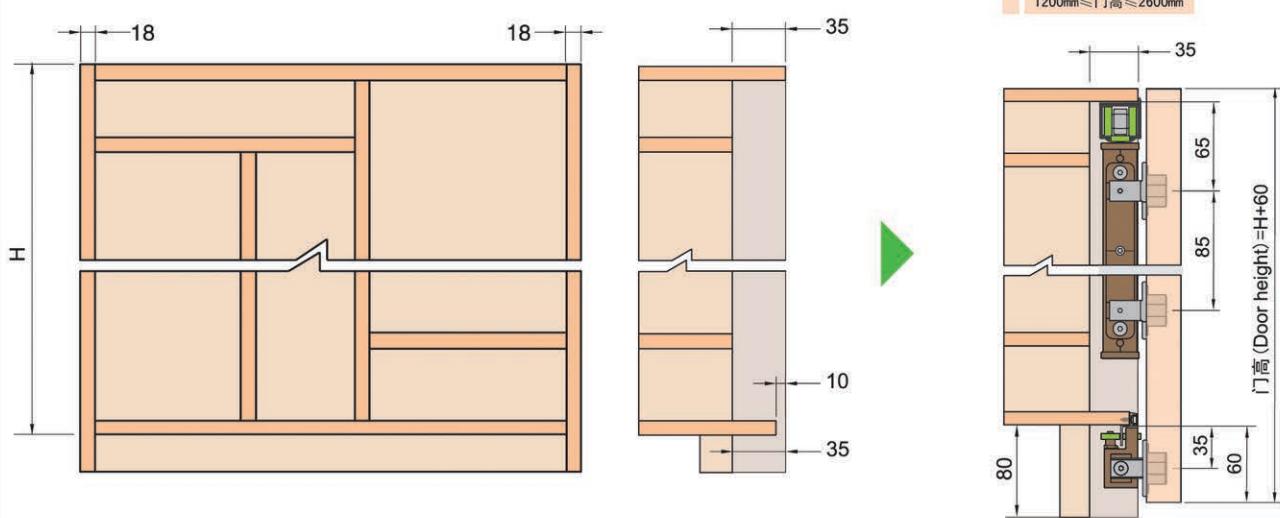

2 门板要求 Door Requirements

① 门板尺寸计算公式 Door size count

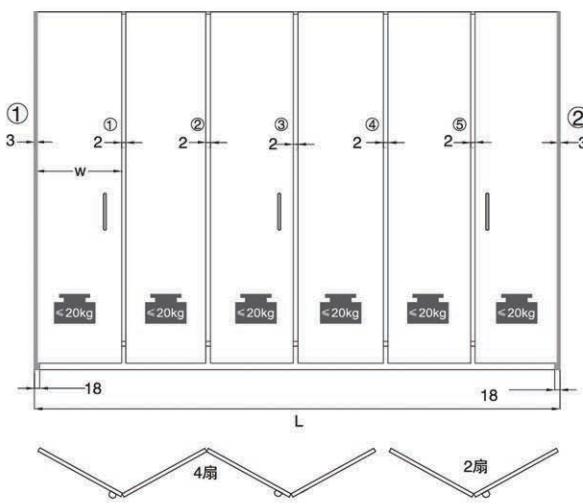

柜体侧板标准厚度为18mm，以四扇连环折叠+两扇折叠为例
Standard thickness of cabinet side panel is 18mm;
Take 4-wing folding door and 2-wing folding door for example

单块门高(h)=H+60

单块门宽(w)={L-(3+3)-(2X5)}/6

(Door height) H=h+60

1 Door Panel Width W= {L-(3+3)-(2X5)}/6

“3”门板未能盖住侧板的尺寸，一般全盖铰链只能盖15mm

“5”门缝数量

“6”门板数量


“3” means length not covered by door panel on side panel

Normally full-cover hinge is able to cover 15mm only

“5” means quantity of door gap

“6” means quantity of door panel


② 孔位加工尺寸 Roller Holes Dimension

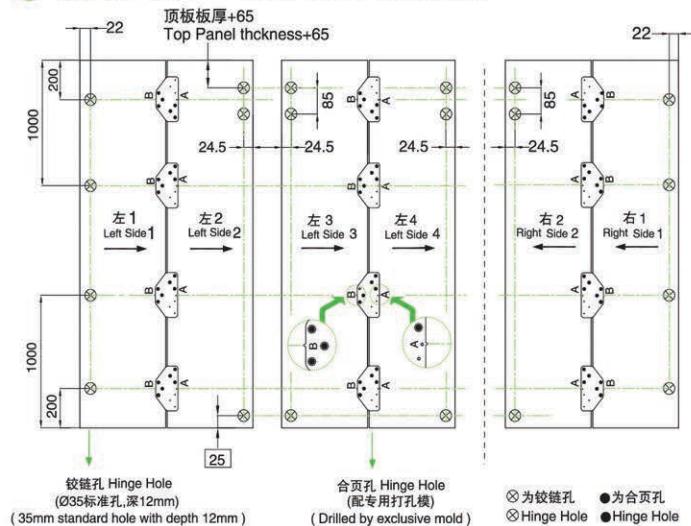


③ 其它安装要求 Other Installation Requirements

90度全盖带缓冲铰链
90 degree full cover soft closing hinge门板侧边铰链由客户自行购买，本公司不提供此配件
Side hinge of Panel be purchased by customer, factory won't supply it.

2.



3.



扬帆2号

SAILING 2

产品特点：

- 多扇折叠：结构新颖，美观，大方。
- 静滑设计：采用静音滑轮，滑动更舒畅、更静音。

Product Features:

- **Combined folding:** Novel structure and beautiful appearance;
- **Sliding roller:** High-quality door rollers create smooth and quiet sliding movement.





≤12kg

扬帆2号(2门)套装(适用于木门)

SAILING 2 (2DOORS) COMPLETE SET (Application to wood door)

产品描述 Product Description	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
带铰链 With hinge	≤12	300~400	TJ044B
不带铰链 Without hinge	≤12	300~400	TJ044A

标准配置


STANDARD CONFIGURATION

配件描述 Fitting Description	不带铰链 Without hinge	带铰链 With hinge
导向杆 Guide rod		1
合页打孔模 Drilling mode		1
合页 Hinge		4
165° 铰链 165° Hinge		0
GB/ST4x16十字沉头自攻钉 GB/ST4x16 Cross Recess Countersunk head Self-drilling Screw		31


扬帆2号安装参数

SAILING 2 INSTALLATION PARAMETERS


顶装 Outer top mounting

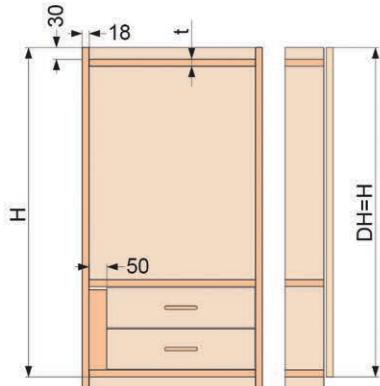




内装 Inner ceiling mounting

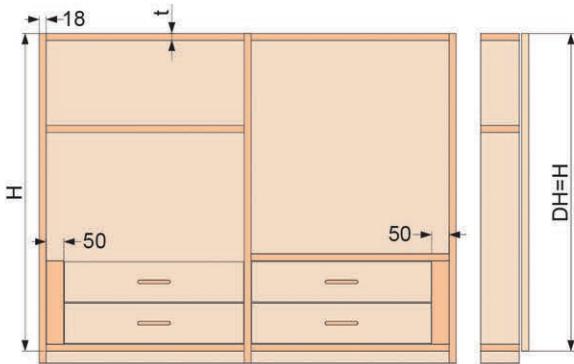

两门 2 Doors



四门 4 Doors

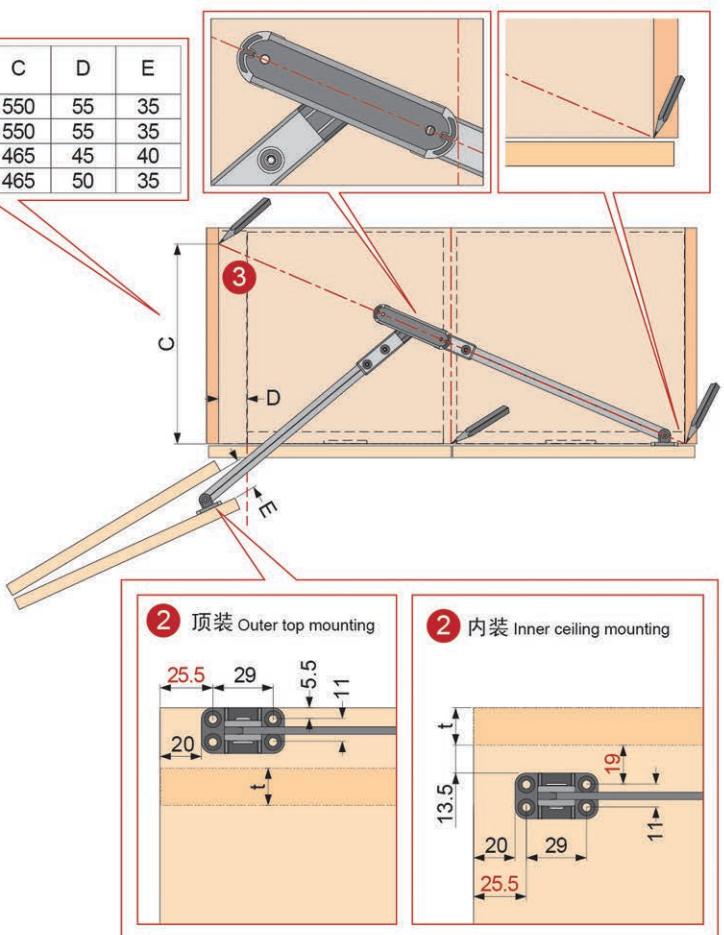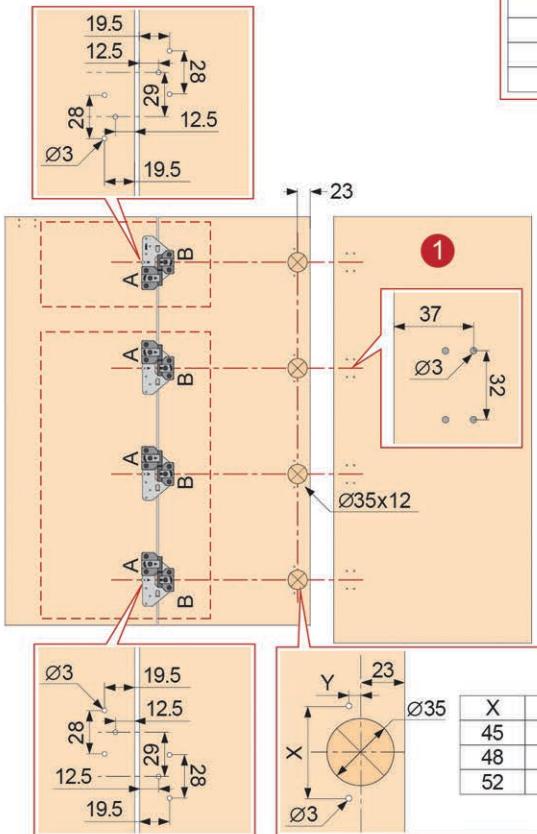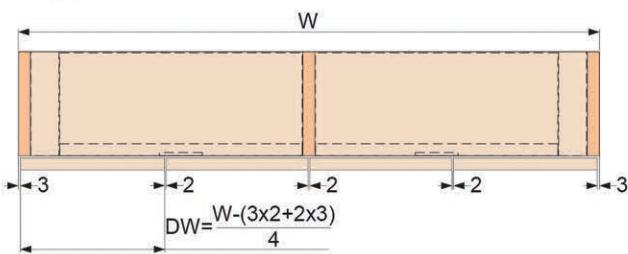

迷你1号 MINIROLLER 1

产品特点：

- 安装、调试方便，门安装好后，不用将门取下，直接对门缝直接调节。
- 轨道采用按扣式连接，使外形更美观。


■ 应用范围：厨柜门、展柜门、书柜门、衣柜门等。

Product Features:

- Easy installation and adjustment, no need to remove the door after installed for adjustament, adjust door crack directly.
- Buckle-connector adopted, making more beautiful appearance.
- **Applications:** Cabinet door, Screen door, Bookcase door and Wardrobe door etc.

产品应用范围


Product Applicationss

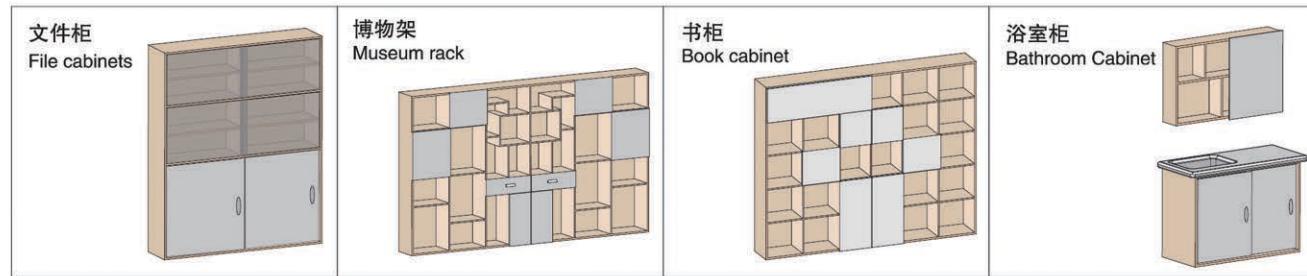

迷你1号配件说明(凸轮)


MINIROLLER 1 ACCESSORIES OPTIONS (CAM)

≤ 15kg

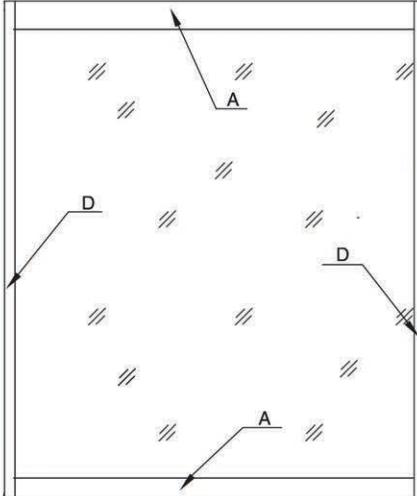CJ31201A 迷你号 (有框) Mini Roller (With Frame)	TJ001A 可调隐轮 Hidden wheel	 x4	 x4
	波浪限位件 Limit piece	 x4	 x4 防碰盖 Anticollision cover (黑色和白色)
轨道门框 Track and door frame			
上下框(A) XJA017-00300 0.22kg/m	上轨(C) XJA037-00300 0.15kg/m	竖框(D) XJA019-00300 0.08kg/m	 喷砂电泳银白(BI)
按扣底版 Kouban	按轨道长度(4个/米) According to the length of the track (4pcs/m)		5mm玻璃(glass)

安装参数介绍

INSTALLATION PARAMETER INTRODUCED

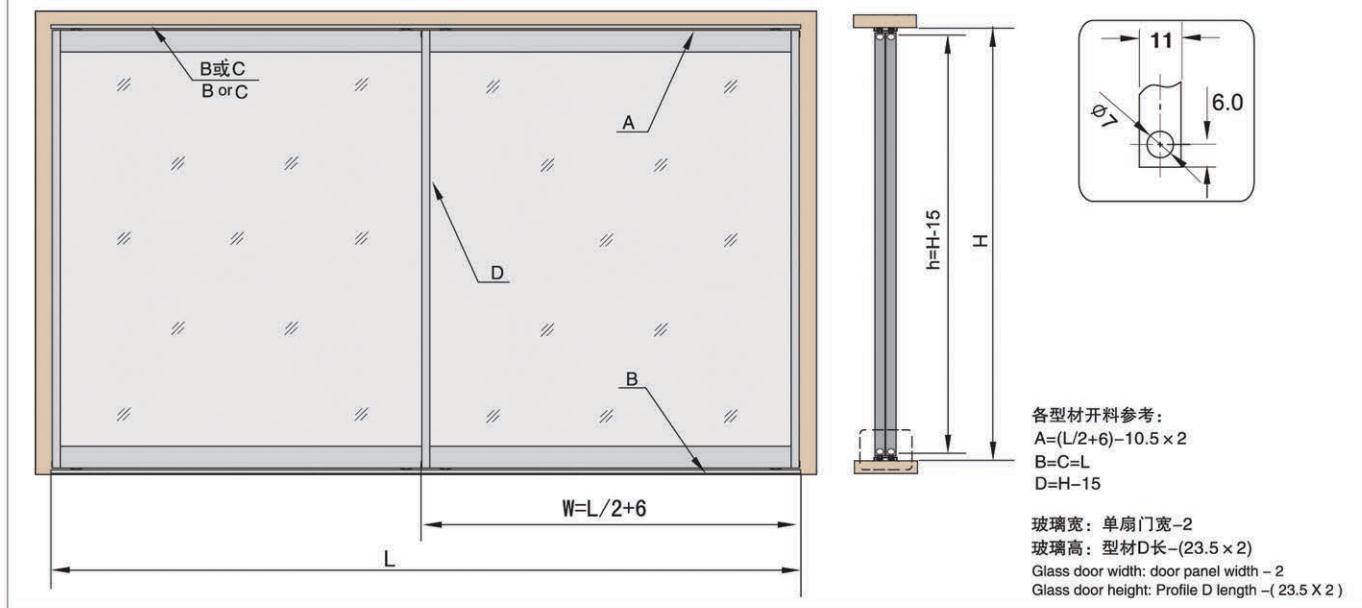

迷你1号配件说明(凸轮)

MINIROLLER 1 ACCESSORIES OPTIONS (CAM)

≤ 15kg

CJ31201B 迷你号 (无框) Mini Roller (without frame)	TJ001A 可调隐轮 Hidden wheel		连接角码 Connecting code
	波浪限位件 Limit piece		端盖 End code (四种颜色配)
			防碰盖 Anticollision cover (黑色和白色)

轨道门框 Track and door frame

 上下框(A) XJA017-00300 0.22kg/m	 上轨(C) XJA037-00300 0.15kg/m	 下轨(B) XJA018-00300 0.11kg/m	 5mm玻璃(glass)
按扣底版 Kouban 	按轨道长度(4个/米) According to the length of the track (4pcs/m)		

安装参数介绍 INSTALLATION PARAMETER INTRODUCED

	<p>各型材开料参考: $A=(L/2+10)-2$ $B=C=L$</p> <p>玻璃宽: 型材A长度+2 玻璃高: $(H-15)-(23.5 \times 2)$ Glass width: Profile A length + 2 Glass height: $(H-15)-(23.5 \times 2)$</p>

迷你1号配件说明(凹轮)

MINIROLLER 1 ACCESSORIES OPTIONS (CONCAVE WHEEL)

< 15kg


CJ31201C 迷你号 (有框) Mini Roller (With Frame)	TJ001A 可调隐轮 Hidden wheel x2	TJ001B 可调隐轮 Hidden wheel x2	连接角码 Connecting code x4
	波浪限位件 Limit piece	x2	防碰盖 Anticollision cover (黑色和白色) x4

轨道门框
Track and door frame

上下框(A) XJA017-00300 0.22kg/m	上轨(C) XJA037-00300 0.15kg/m	竖框(D) XJA019-00300 0.08kg/m	喷砂电泳银白(BI)
下轨(B) XJA218 0.11kg/m	25 12.5 5 10 30 23.5 10	11 10.5 5 11 12.5 25 5 10	A D A D
按扣底版 Kouban	按轨道长度(4个/米) According to the length of the track (4pcs/m)	5mm玻璃(glass)	

安装参数介绍

INSTALLATION PARAMETER INTRODUCED

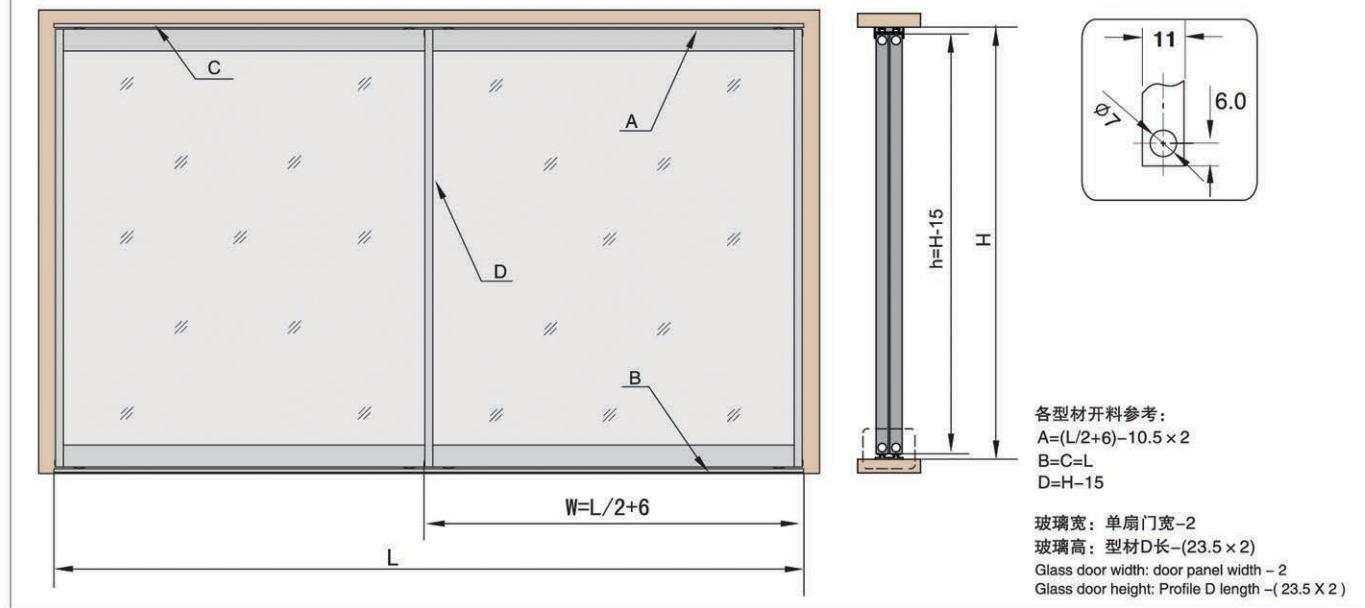




迷你1号配件说明(凹轮)


MINIROLLER 1 ACCESSORIES OPTIONS (CONCAVE WHEEL)

≤ 15kg



CJ31201D 迷你号 (无框) Mini Roller (without frame)	TJ001A 可调隐轮 Hidden wheel  x2	TJ001B 可调隐轮 Hidden wheel  x2	连接角码 Connecting code  x4
	波浪限位件 Limit piece  x2		端盖 End code (四种颜色配)  x4
			防碰盖 Anticollision cover (黑色和白色)  x4

轨道门框
Track and door frame

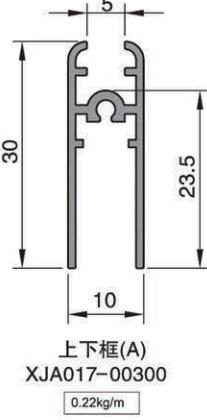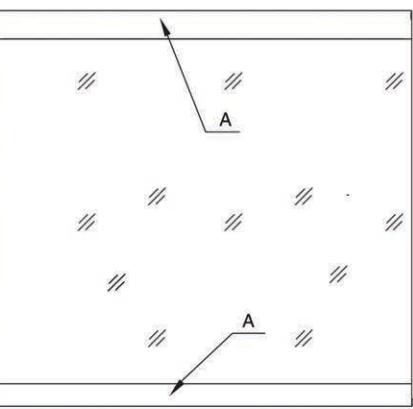
上下框(A) XJA017-00300 0.22kg/m 	上轨(C) XJA037-00300 0.15kg/m 	5mm玻璃(glass) 
按扣底版 Kouban 	按轨道长度(4个/米) According to the length of the track (4pcs/m)	

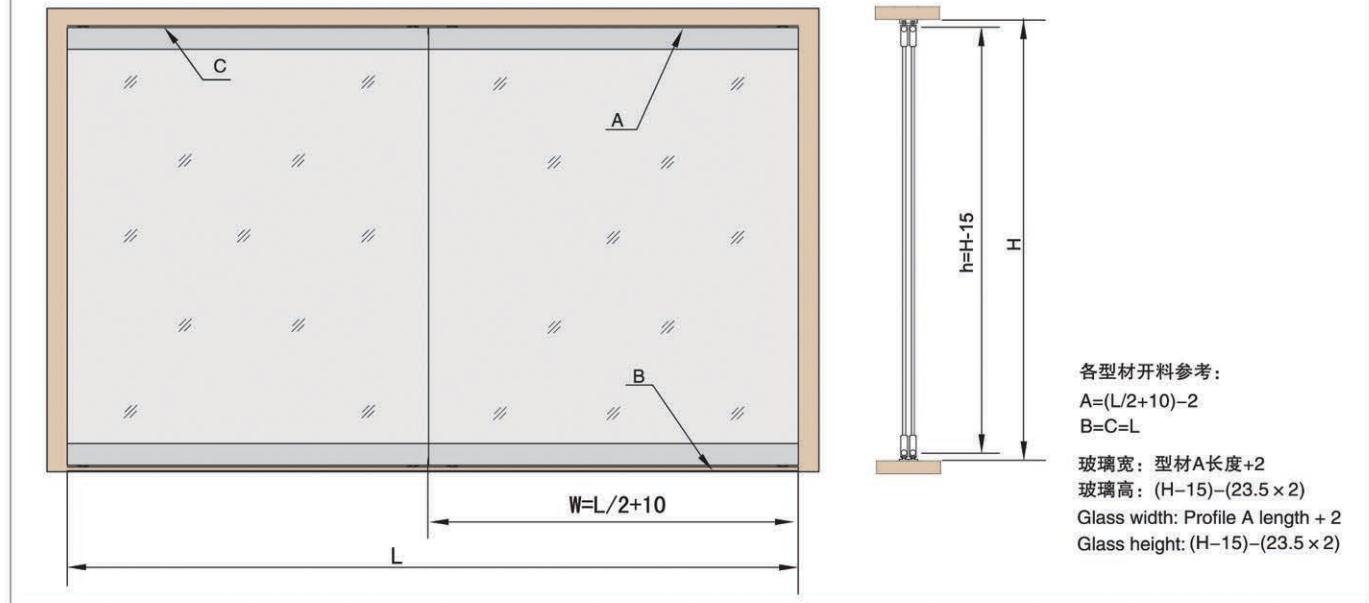安装参数介绍
INSTALLATION PARAMETER INTRODUCED


安装参数示意图
Installment Illustration

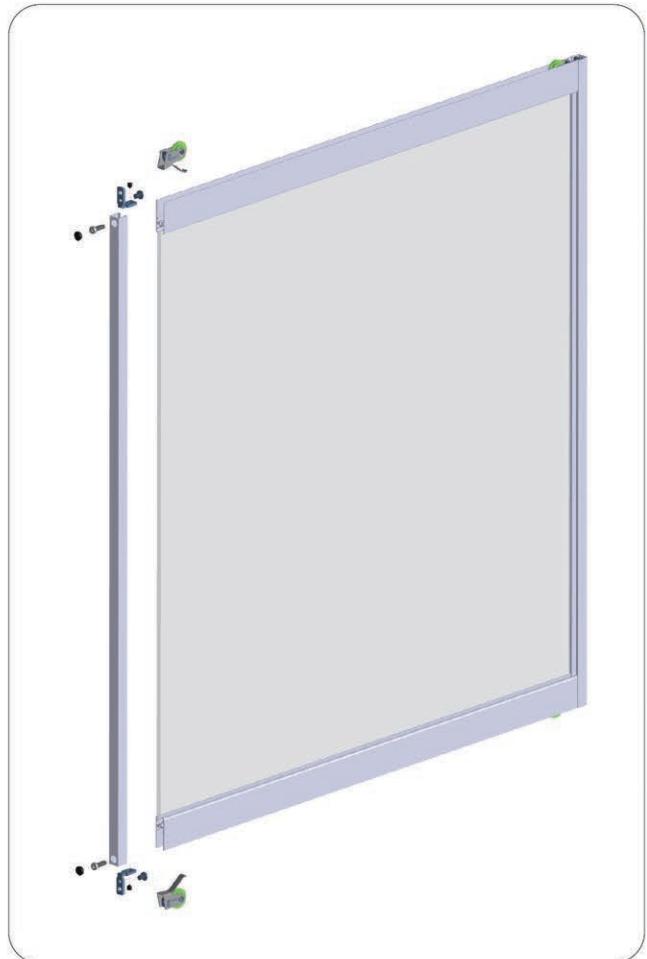

1 将配件插入竖框
Insert parts into vertical frame



2 上紧螺丝
Fasten screw



3 竖框与横框连接
Connect the top and vertical frame



4 固定
Fixing




5 安装滑轮
Installing roller




6 滑轮安装完成效果
Installed roller image


安装分解图 Installation exploded view

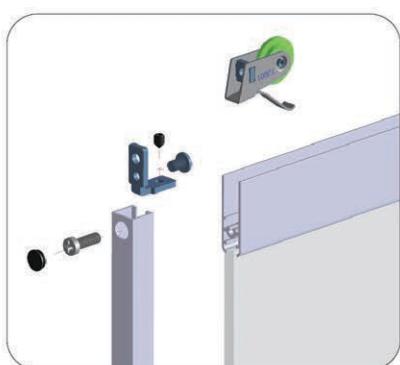

1 有框安装
Installation with frame

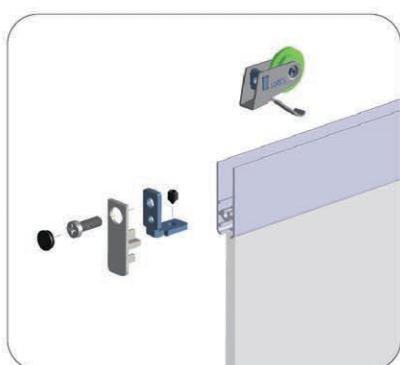

2 无框安装
Installation without frame

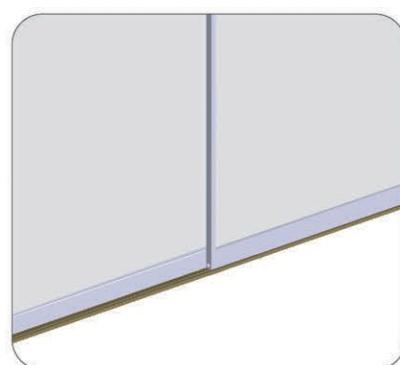

壁柜轮

SLIDING ROLLER

产品特点：

- 滑轮采用进口高端材料，承重量大、强度高、耐磨性强、寿命长。
- 轴承均采用新型材料，手感顺畅、低噪音、间隙小。
- 应用范围：衣柜门、隔断门等。

Product Features:

- Rollers with increased loading capacity, great intensity, abrasion resistance feature, as well as imported high-end material.
- Ballbearings with special material ensures smooth, noiseless and secure movement.
- **Application:** Wardrobe door, Partition door and so on.





轻轨号壁柜轮

Light-rail roller

超静音 超顺滑

SUPER MUTE SUPER SMOOTH

产品特点:

- 滑轮采用高精密轴承，改性尼龙料，结合精密加工制造工艺
- 滑动极致顺畅、静音
- 上轮限位装置，门关时闭限位效果明显，并能实现一柜多门限位

Product Features:

- High-precision bearings and improved nylon material, combined with precision manufacturing processes.
- Ultimate smooth sliding and noise-free effect.
- Top roller with locating devices which creates obvious and wonderful spacing-limitation effect.

轻轨1号-A1 Light-rail roller 1-A1	CJ11263A	<p>CJ21232 A 21号上轮S1 Top roller 21 S1</p>		<p>CJ21223A 轻轨1号 Light-rail roller 1</p>
轻轨1号-A2 Light-rail roller 1-A2	CJ11263B	<p>CJ21233A 22号上轮S1 Top roller 22 S1</p>		
轻轨1号-A3 Light-rail roller 1-A3	CJ11263C	<p>CJ21233B 22号上轮S2 Top roller 22 S2</p>		
轻轨1号-A4 Light-rail roller 1-A4	CJ11263D	<p>CJ21235A 24号上轮S1 Top roller 24 S1</p>		<p>M6x30mm</p>

精品号壁柜轮 Masterpiece roller

精品1号-D1 Masterpiece roller 1-D1	CJ11266A	<p>CJ21232 A 21号上轮S1 Top roller 21 S1</p>		<p>CJ21237A 精品1号(G608) Masterpiece roller 1</p>
精品1号-D2 Masterpiece roller 1-D2	CJ11266B	<p>CJ21233A 22号上轮S1 Top roller 22 S1</p>		
精品1号-D3 Masterpiece roller 1-D3	CJ11266C	<p>CJ21233B 22号上轮S2 Top roller 22 S2</p>		
精品1号-D4 Masterpiece roller 1-D4	CJ11266D	<p>CJ21235A 24号上轮S1 Top roller 24 S1</p>		<p>M6x30mm</p>

精品号壁柜轮 Masterpiece roller

精品1号-E1 Masterpiece roller 1-E1	CJ11267A	<p>CJ21232 A 21号上轮S1 Top roller 21 S1</p>
精品1号-E2 Masterpiece roller 1-E2	CJ11267B	<p>CJ21233A 22号上轮S1 Top roller 22 S1</p>
精品1号-E3 Masterpiece roller 1-E3	CJ11267C	<p>CJ21233B 22号上轮S2 Top roller 22 S2</p>
精品1号-E4 Masterpiece roller 1-E4	CJ11267D	<p>CJ21235A 24号上轮S1 Top roller 24 S1</p>


精品1号-F1 Masterpiece roller 1-F1	CJ11268A	<p>CJ21232 A 21号上轮S1 Top roller 21 S1</p>
精品1号-F2 Masterpiece roller 1-F2	CJ11268B	<p>CJ21233A 22号上轮S1 Top roller 22 S1</p>
精品1号-F3 Masterpiece roller 1-F3	CJ11268C	<p>CJ21233B 22号上轮S2 Top roller 22 S2</p>
精品1号-F4 Masterpiece roller 1-F4	CJ11268D	<p>CJ21235A 24号上轮S1 Top roller 24 S1</p>


精品号壁柜轮
Masterpiece roller

精品2号-G1 Masterpiece roller 2-G1	CJ11269A	<p>CJ21232 A 21号上轮S1 Top roller 21 S1</p>	<p>CJ21225C 精品2号 Masterpiece roller 2</p>
精品2号-G2 Masterpiece roller 2-G2	CJ11269B	<p>CJ21233A 22号上轮S1 Top roller 22 S1</p>	<p>CJ21233B 22号上轮S2 Top roller 22 S2</p>
精品2号-G3 Masterpiece roller 2-G3	CJ11269C	<p>CJ21235A 24号上轮S1 Top roller 24 S1</p>	<p>CJ21235B 24号上轮S2 Top roller 24 S2</p>
精品2号-G4 Masterpiece roller 2-G4	CJ11269D	<p>CJ21241A 明轮下轮 (G608) Under roller</p>	<p>CJ21241B 明轮下轮 (F608) Under roller</p>

精品4号-K1 Masterpiece roller 4-K1	CJ11272A	<p>CJ11241A 明轮下轮 (G608) Under roller</p>	<p>CJ11243A 明轮上轮 Top roller</p>
精品4号-K2 Masterpiece roller 4-K2	CJ11272B	<p>CJ11241B 明轮下轮 (F608) Under roller</p>	<p>CJ11241B 明轮下轮 (F608) Under roller</p>

经典号壁柜轮 Classics roller

经典1号-L1 Classics roller 1-L1	CJ11273A	 <p>CJ21202B 经典1号 (F608) Classics roller 1</p>	 <p>CJ21233B 22号上轮S2 Top roller 22 S2</p>
经典1号-L2 Classics roller 1-L2	CJ11273B	 <p>CJ21203B 经典1号 (G6000) Classics roller 1</p>	 <p>CJ21233B 22号上轮S2 Top roller 22 S2</p>
经典1号-L3 Classics roller 1-L3	CJ11273C	 <p>CJ21201B 经典1号 (G608) Classics roller 1</p>	 <p>M6x30mm</p>

经典1号-L4 Classics roller 1-L4	CJ11273D	 <p>CJ21202B 经典1号 (F608) Classics roller 1</p>	 <p>CJ21233I 22号上轮S5(板厚1.5) Top roller 22 S5</p>
经典1号-L5 Classics roller 1-L5	CJ11273E	 <p>CJ21203B 经典1号 (G6000) Classics roller 1</p>	 <p>CJ21233I 22号上轮S5(板厚1.5) Top roller 22 S5</p>
经典1号-L6 Classics roller 1-L6	CJ11273F	 <p>CJ21201B 经典1号 (G608) Classics roller 1</p>	 <p>M6x30mm</p>

家具滑轮

JETSKI

产品特点：

- 滑动顺畅，平稳，静音
- 多种搭配组合，适用于各类木质移门
- 安装简单，便捷
- 承重范围20~50KG
- 应用范围：厨柜门、展柜门、书柜门、衣柜门等。





Product Features:

- sliding smoothly, stable, noise-free.
- Mixed with various rollers, suitable for many kinds of wooden sliding door.
- easy and quick installation.
- weight bearing: 20~50KG.
- **Applications:** Cabinet door, Screen door, Bookcase door and Wardrobe door etc.



家具滑轮配件说明

JETSKI ACCESSORIES OPTIONS

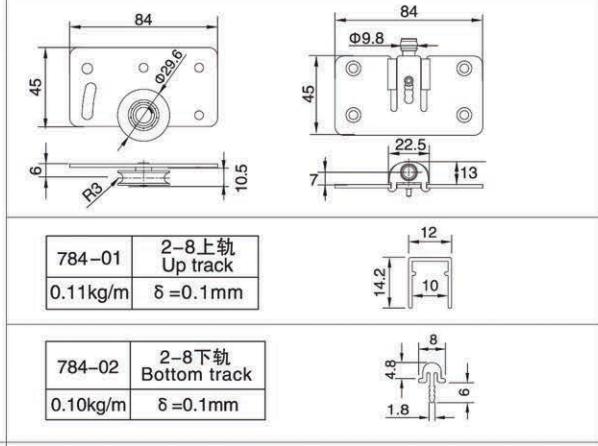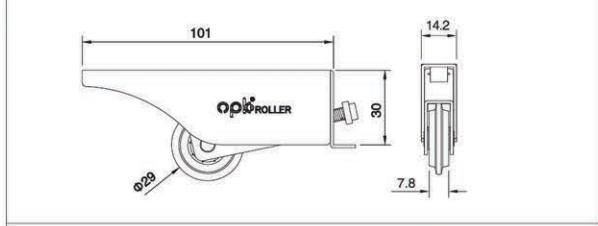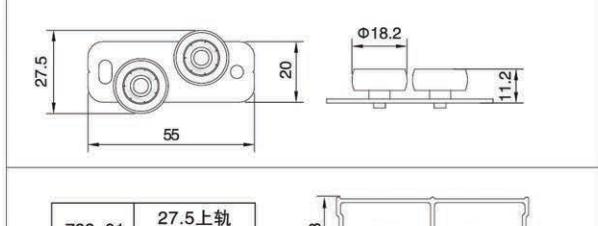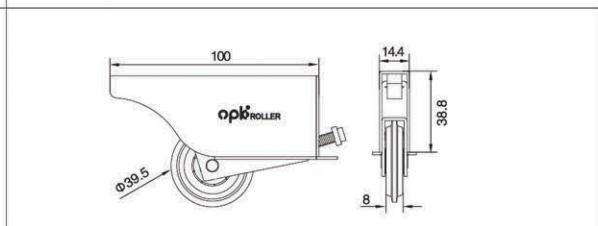家具轮 Furniture roller	CJ11208A	 <p>$\leq 40\text{kg}$</p>	 <table border="1"> <tr> <td>784-01</td><td>2-8上轨 Up track</td><td>0.11kg/m</td><td>$\delta = 0.1\text{mm}$</td></tr> <tr> <td>784-02</td><td>2-8下轨 Bottom track</td><td>0.10kg/m</td><td>$\delta = 0.1\text{mm}$</td></tr> </table>	784-01	2-8上轨 Up track	0.11kg/m	$\delta = 0.1\text{mm}$	784-02	2-8下轨 Bottom track	0.10kg/m	$\delta = 0.1\text{mm}$
784-01	2-8上轨 Up track	0.11kg/m	$\delta = 0.1\text{mm}$								
784-02	2-8下轨 Bottom track	0.10kg/m	$\delta = 0.1\text{mm}$								
小木门轮-A Type A-roller for light wooden door	CJ11209A	 <p>$\leq 40\text{kg}$</p>	 <table border="1"> <tr> <td>781-02</td><td>2-2B嵌轨 Track</td><td>0.08kg/m</td><td>$\delta = 1.2\text{mm}$</td></tr> </table>	781-02	2-2B嵌轨 Track	0.08kg/m	$\delta = 1.2\text{mm}$				
781-02	2-2B嵌轨 Track	0.08kg/m	$\delta = 1.2\text{mm}$								
小木门轮-B Type B-roller for light wooden door	CJ11210A	 <p>$\leq 40\text{kg}$</p>	 <table border="1"> <tr> <td>788-01</td><td>27.5上轨 Up track</td><td>0.47kg/m</td><td>$\delta = 1.2\text{mm}$</td></tr> <tr> <td>788-02</td><td>27.5下轨 Bottom track</td><td>0.30kg/m</td><td>$\delta = 1.2\text{mm}$</td></tr> </table>	788-01	27.5上轨 Up track	0.47kg/m	$\delta = 1.2\text{mm}$	788-02	27.5下轨 Bottom track	0.30kg/m	$\delta = 1.2\text{mm}$
788-01	27.5上轨 Up track	0.47kg/m	$\delta = 1.2\text{mm}$								
788-02	27.5下轨 Bottom track	0.30kg/m	$\delta = 1.2\text{mm}$								
大木门轮 Roller for heavy wooden door	CJ11211A	 <p>$\leq 50\text{kg}$</p>	 <table border="1"> <tr> <td>789-01</td><td>39.2上轨 Up track</td><td>0.67kg/m</td><td>$\delta = 1.2\text{mm}$</td></tr> <tr> <td>789-02</td><td>39.2下轨 Bottom track</td><td>0.31kg/m</td><td>$\delta = 1.2\text{mm}$</td></tr> </table>	789-01	39.2上轨 Up track	0.67kg/m	$\delta = 1.2\text{mm}$	789-02	39.2下轨 Bottom track	0.31kg/m	$\delta = 1.2\text{mm}$
789-01	39.2上轨 Up track	0.67kg/m	$\delta = 1.2\text{mm}$								
789-02	39.2下轨 Bottom track	0.31kg/m	$\delta = 1.2\text{mm}$								

玉兔号

SPEEDBOAT

此系列产品有三项专利技术

专利一：门扇上下调节装置

专利二：挂体外观造型

专利三：限位装置

Three patent technologies

Patent 1: Door panel up and down adjustable device

Patent 2: Structure design of hanging body

Patent 3: Stopper device

产品特点：


- **门扇上下调节装置:** 不用把门卸下来，可借助工具或者徒手调节门板的上升和下降.
- 滑动顺畅、平稳、静音，开启关闭均有缓冲效果.
- 轻便，安装方便，适合薄门板.
- **可调限位装置:** 方便调节限位力度、固定好后不易松动.
- **适用范围:** 木门、玻璃门均可使用，安装调节方便.

Product features:

- **Door up & down adjusting device:** no need to unload door, door panel up & down adjustment can be done by tool or by hand.
- Smooth, steady and silent movement; Damping function exists while door opening and door closing.
- Light-duty, Easy installation, be suitable for thinner door panel.
- **Adjustable stopper device:** Adjustability for convenient operation; Secure and steady function during door sliding.
- **Application range:** Glass door, wood door.

产品应用范围

Product Applications


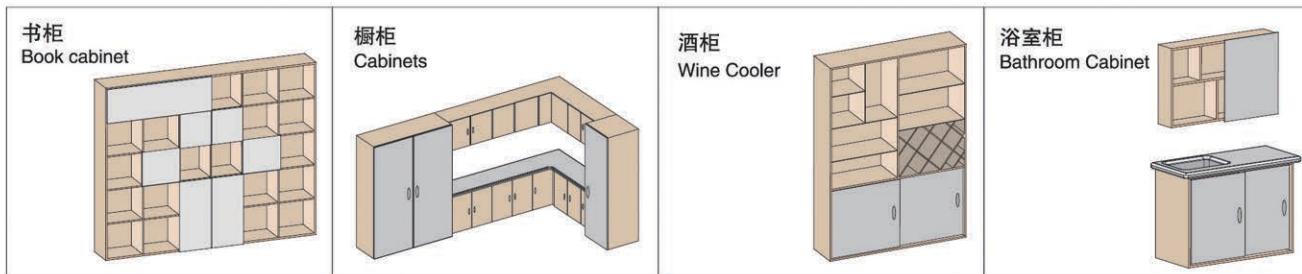




■ 玉兔1号木门套装(适用于单扇门)

SPEEDBOAT 1 WOOD DOOR COMPLETE SET (Application to single door)

≤15kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤15	≥350	CN12220A
双阻尼 Double Damper		≤15	≥560	CN12220B




■ 标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description		单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TN091A	1
上滑轮 Upper Roller		TN086A	1
阻尼限位件 Damper Stopper		TN087A	1
限位件 Stopper		TN088A	1
升降挂盒 Adjustable Hanging Plate		TN492A	2
下定位 Under Roller		PNS12009AS69	1

■ 轨道 TRACK



门高=门洞高-9mm

XNA067 上轨道 Upper track	 0.22kg/m	XNA068 下轨道(木门用) Under track	 0.06kg/m	XNA069 双轨(木门用) Double rail	 0.38kg/m
------------------------------	---	-----------------------------------	---	----------------------------------	---

■ 玉兔2号玻璃门套装(适用于单扇门)

SPEEDBOAT 2 GLASS DOOR COMPLETE SET (Application to single door)

≤15kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		≤15	≥350	CN12221A
双阻尼 Double Damper		≤15	≥560	CN12221B


■ 标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description		单阻尼标准配置(单扇门) Single Damper (Single Door)	双阻尼标准配置(单扇门) Double Damper (Single Door)
阻尼上滑轮 Upper Roller With Damper		TN091A	1
上滑轮 Upper Roller		TN086A	1
阻尼限位件 Damper Stopper		TN087A	1
限位件 Stopper		TN088A	1
玻璃挂架 Glass Clamp		TN109A	2
下定位 Under Roller		PNS97039AS98	1


■ 轨道 TRACK

门高=门洞高-9mm

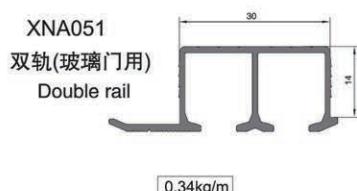


玉兔号安装参数

SPEEDBOAT INSTALLATION PARAMETERS

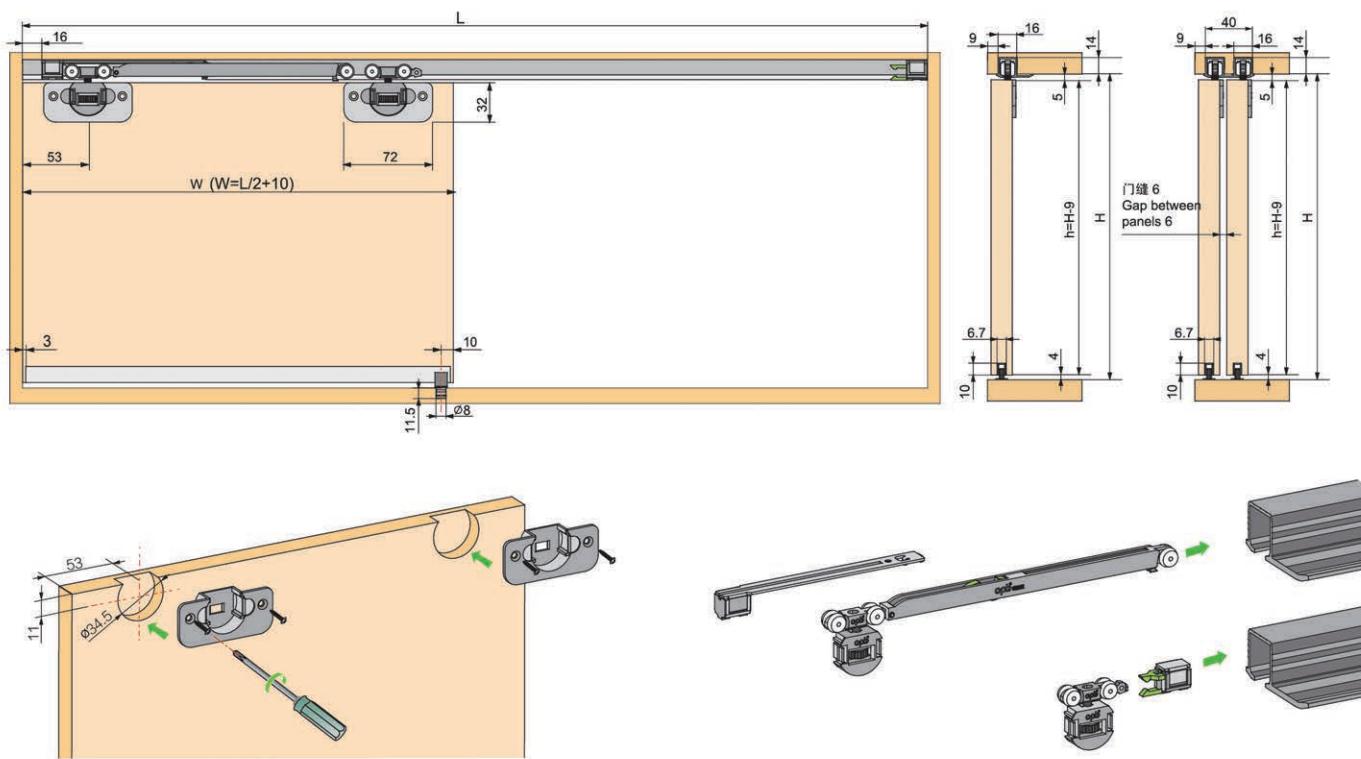

玉兔1号木门
Speedboat 1 Wood Door

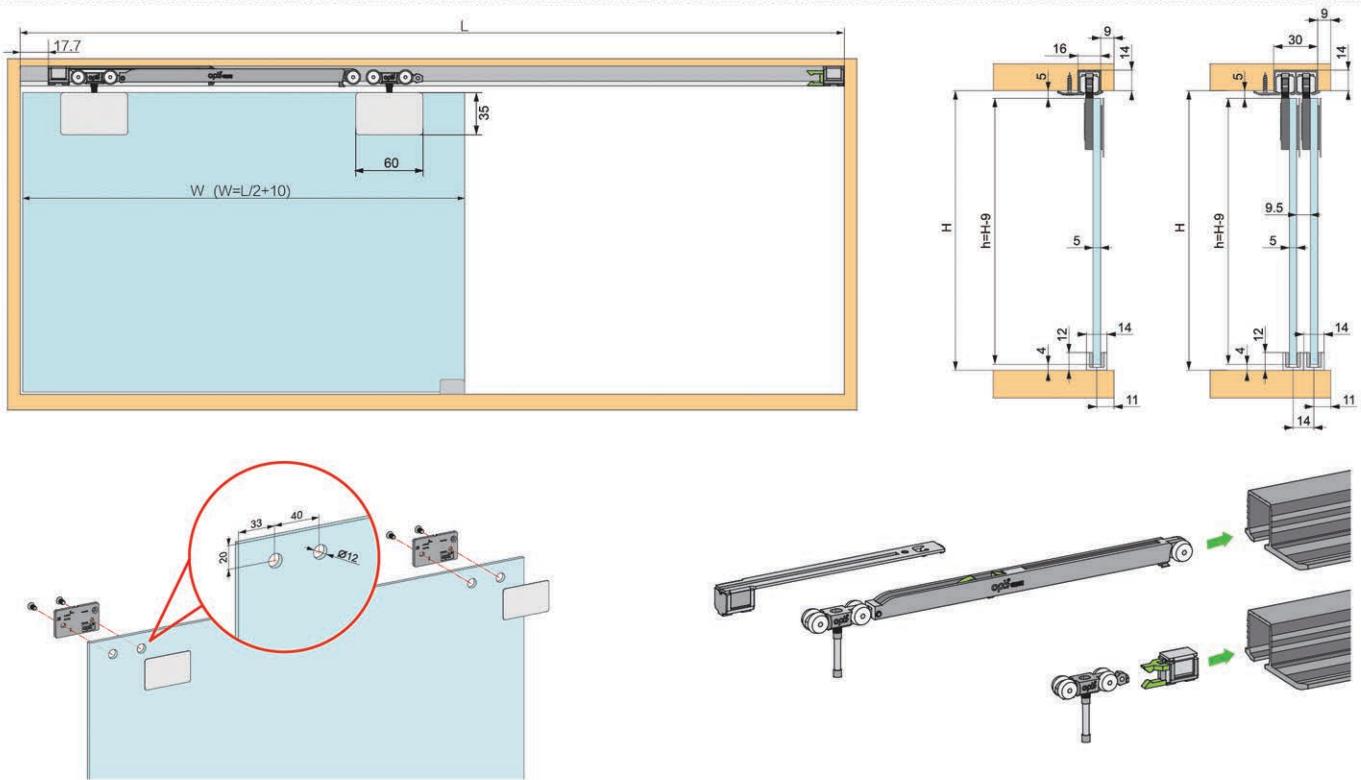

玉兔2号玻璃门
Speedboat 2 Glass door

≤15kg

玉兔1号 - 01 套装

SPEEDBOAT 1-01 COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 No Damper		≤15	≥350	CN122237A
单阻尼 Single Damper		≤15	≥350	CN122237B
双阻尼 Double Damper		≤15	≥560	CN122237C

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description		单阻尼标准配置 Single Damper	双阻尼标准配置 Double Damper	无阻尼标准配置 No Damper
阻尼上滑轮 Upper Roller With Damper		TN091A	2	4
上滑轮 Upper Roller		TN086A	2	—
阻尼限位件 Damper Stopper		TN087A	2	4
限位件 Stopper		TN088A	2	—
升降挂盒 Adjustable Hanging Plate		TN492A	4	4
下定位 Under Roller		PJS25070	1	1

轨道 TRACK

门高=门洞高-9mm

XNA069 双轨 Double rail	 0.38kg/m	XNA068 下轨道 Under track	 0.06kg/m
------------------------------------	--------------	-------------------------------------	--------------

≤15kg

■ 玉兔1号 - 02套装

SPEEDBOAT 1- 02 COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
无阻尼 No Damper		≤15	≥350	CN122238A
单阻尼 Single Damper		≤15	≥350	CN122238B
双阻尼 Double Damper		≤15	≥560	CN122238C

■ 标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description		单阻尼标准配置 Single Damper	双阻尼标准配置 Double Damper	无阻尼标准配置 No Damper
阻尼上滑轮 Upper Roller With Damper		TN091A	1	2
上滑轮 Upper Roller		TN086A	1	—
阻尼限位件 Damper Stopper		TN087A	1	2
限位件 Stopper		TN088A	1	—
升降挂盒 Adjustable Hanging Plate		TN544A	2	2
下定位 Under Roller		PNS12009	1	1



■ 轨道 TRACK

门高=门洞高-2mm



玉兔号安装参数

SPEEDBOAT INSTALLATION PARAMETERS

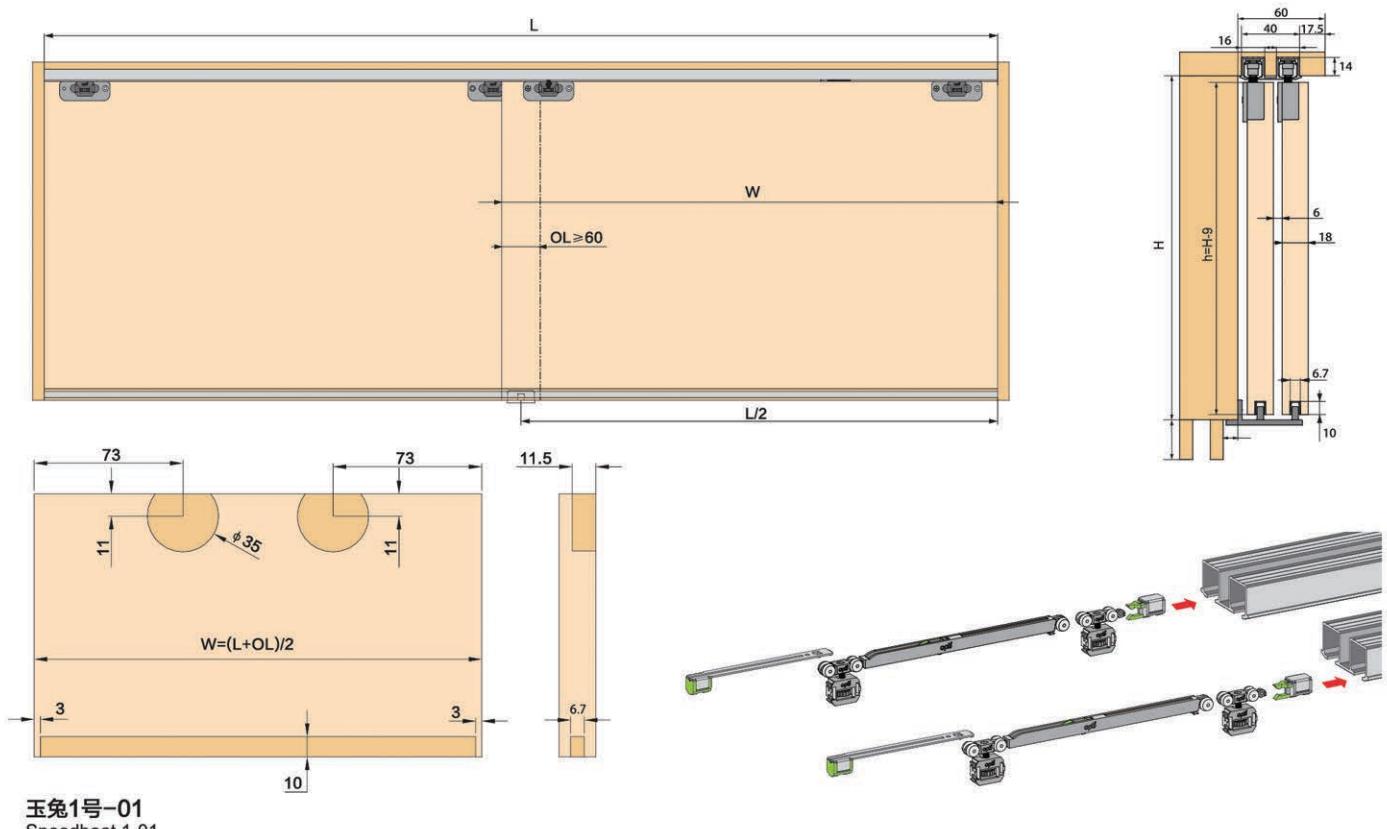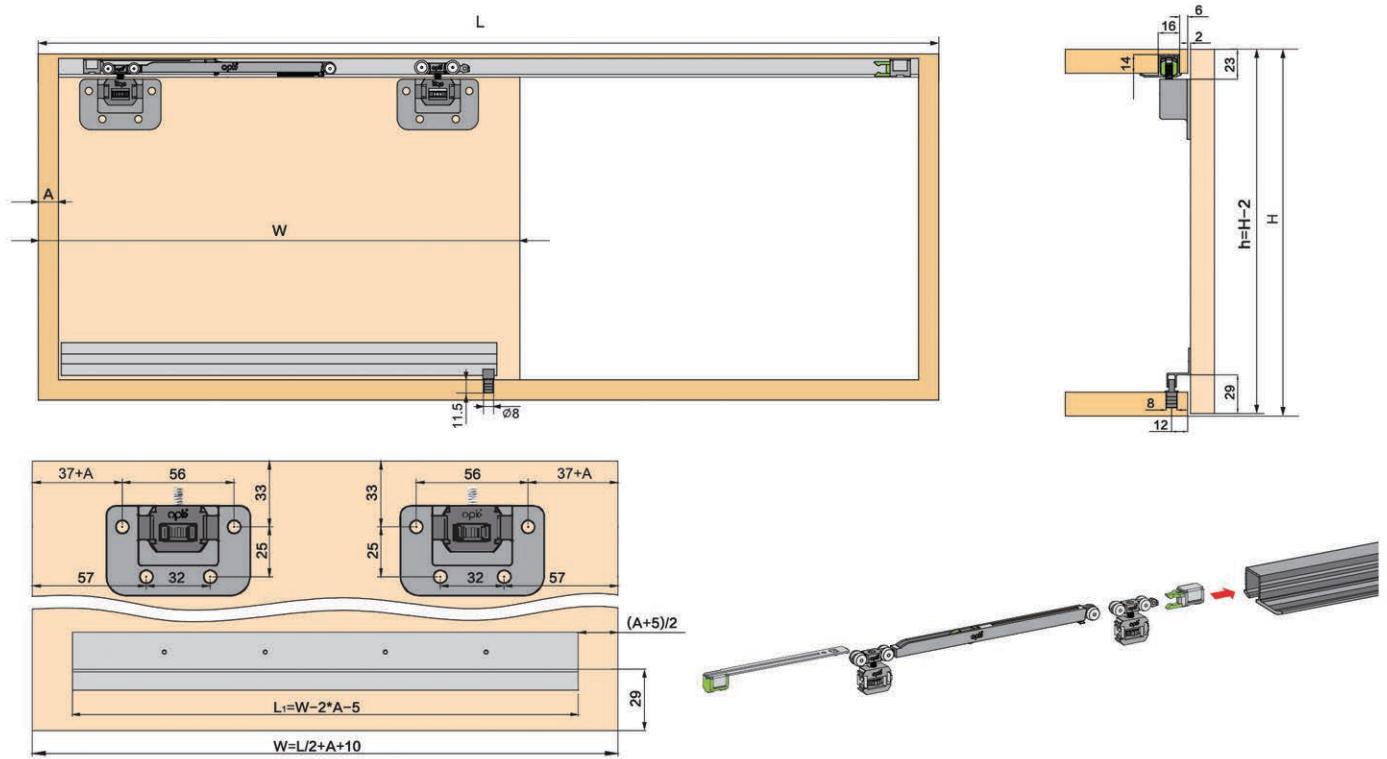玉兔1号-01
Speedboat 1-01玉兔1号-02
Speedboat 1-02

探月号

DISCOVERY

产品特点:


- 滑动顺畅、静音、平稳，阻尼效果明显
- 安装及拆卸便捷
- 适用性范围广，可用于室内门，衣柜，隔断
- 承重可达30KG

Product features:

- Sliding smoothly, Mute, steady, Damping effect is obvious
- Easy installation and removal
- Wide range of applicability, Available for interior doors, Wardrobe, Partitions
- The maximum weight 30KG

产品应用范围

Product Applications

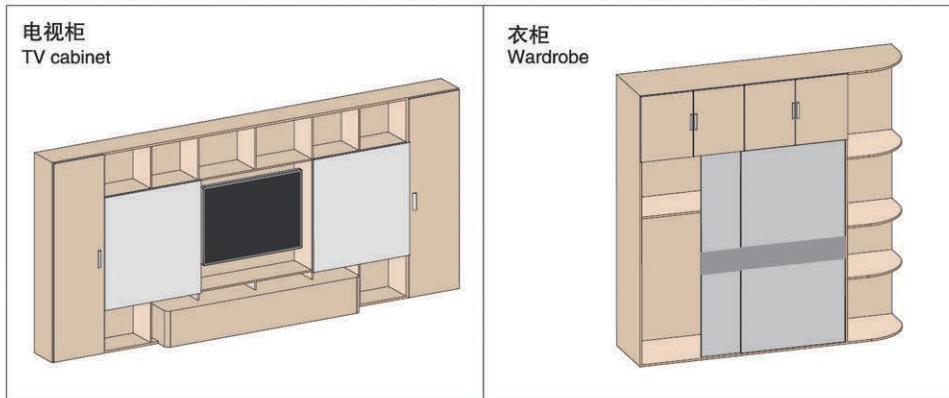



探月号木门1套装(适用于单扇门)

DISCOVERY WOOD DOOR 1 COMPLETE SET (Application to single door)

轻型
5-15kg重型
15-30kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	15-30	≥410	CN12231A
		轻型 Light-duty	5-15	≥410	CN12231F
双阻尼 Double Damper		重型 Heavy-duty	15-30	≥600	CN122158A
		轻型 Light-duty	5-15	≥600	CN122158B
无阻尼 Double Damping		—	≤30	≥300	CN122159A

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description				单阻尼(单扇门) Single Damper	双阻尼(单扇门) Double Damper	无阻尼(单扇门) Without Damping
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TN096A	1	2	—
		轻型 Light-duty	TN096B			
上滑轮 Upper Roller		TN099A		1	—	2
阻尼限位件 Damper Stopper		TN097A		1	2	—
限位件 Stopper		TN098A		1	—	2
7字挂盒-A "L" Hanging Plate A		TN100A		2	2	2
下定位 Under Roller		TN106A		1	1	1

轨道 TRACK




XNA054 上轨道 Upper track	0.44kg/m	XNA055 装饰盖 Decorative cover	0.25kg/m	XNA003 下轨道 Under track	0.18kg/m

探月号木门4套装(适用于单扇门)

DISCOVERY WOOD DOOR 4 COMPLETE SET (Application to single door)


轻型
5-15kg


重型
15-30kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	15-30	≥410	CN12231G
		轻型 Light-duty	5-15	≥410	CN12231H
双阻尼 Double Damper		重型 Heavy-duty	15-30	≥600	CN122158C
		轻型 Light-duty	5-15	≥600	CN122158D
无阻尼 Double Damping		—	≤30	≥300	CN122159B






标准配置**STANDARD CONFIGURATION**

配件描述 Fitting Description				单阻尼(单扇门) Single Damper	双阻尼(单扇门) Double Damper	无阻尼(单扇门) Without Damping
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TN096A	1	2	—
		轻型 Light-duty	TN096B			
上滑轮 Upper Roller		TN099A		1	—	2
阻尼限位件 Damper Stopper		TN097A		1	2	—
限位件 Stopper		TN098A		1	—	2
木门挂架(18) Upper round hanging plate(18)		TN201B		2	2	2
下定位 Under Roller		PNS12009AS69		1	1	1



轨道 TRACK

探月号安装参数

DISCOVERY INSTALLATION PARAMETERS

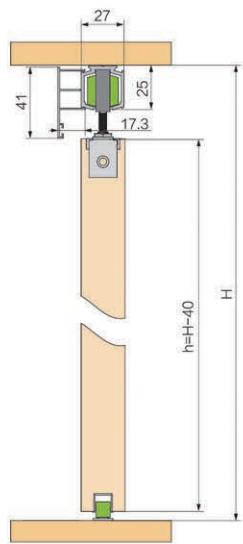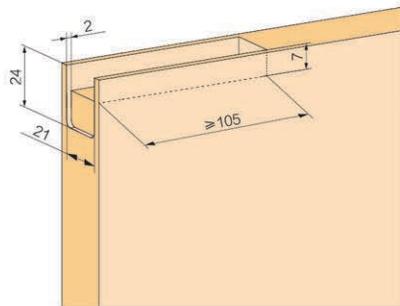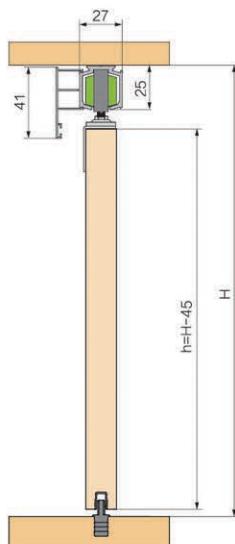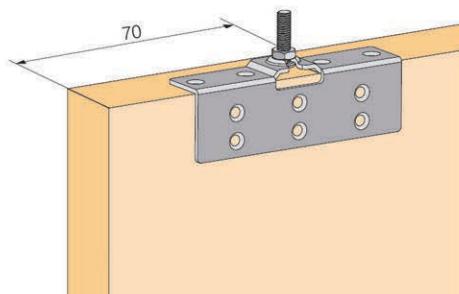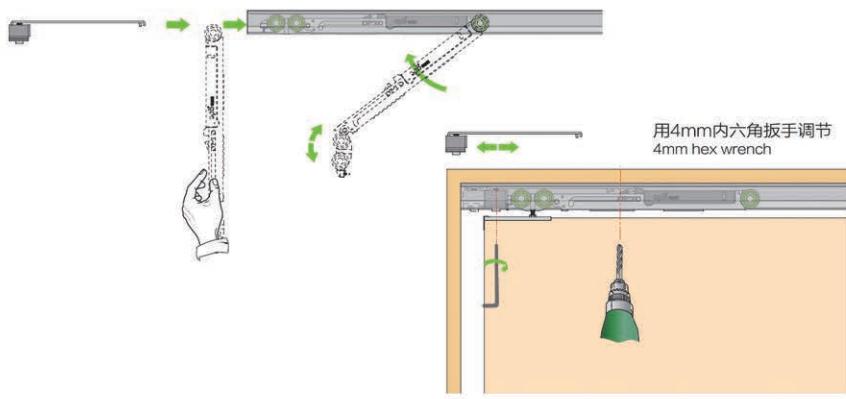木门1
Wood Door 1木门4
Wood Door 4门板开槽尺寸
Door Panel Grooving Size无需开槽
no need to hole用4mm内六角扳手调节
4mm hex wrench1、初调
1. Initial adjustment2、最终固定
2. Final fixed




待调节完成后，再按1、2顺序打孔固定阻尼限位件
After adjustment ending, please make hole drilling in sequence from 1 to 2, then fix the damp stopper.

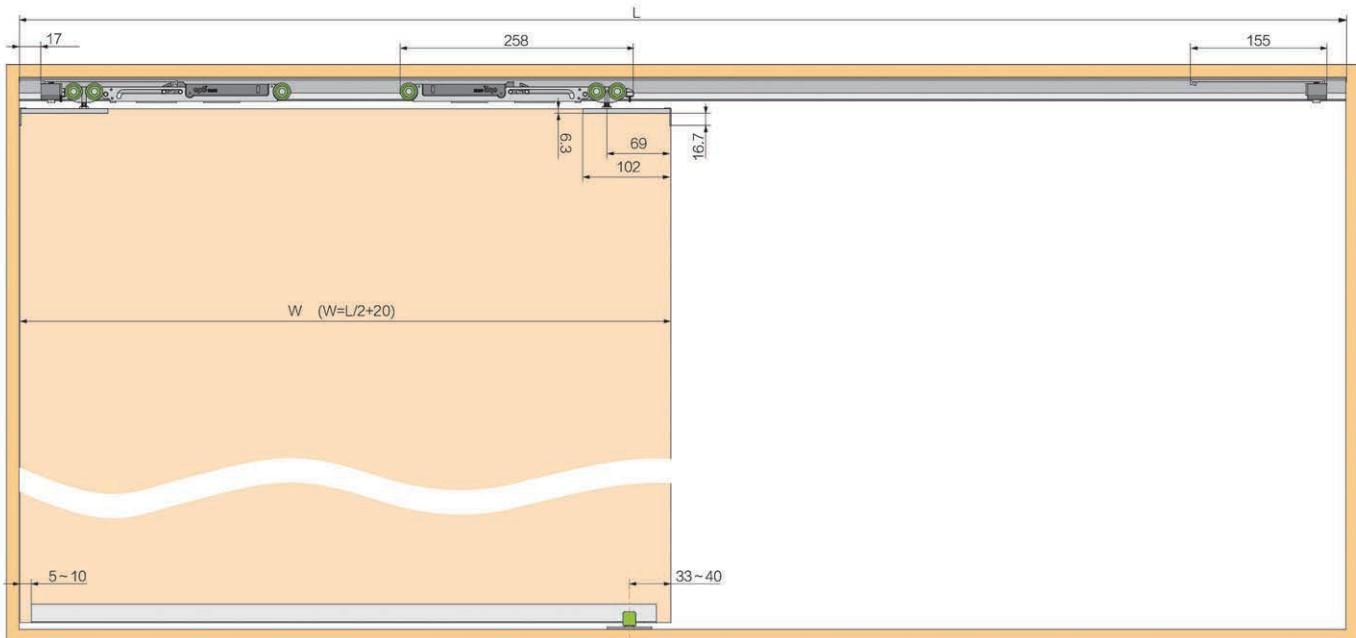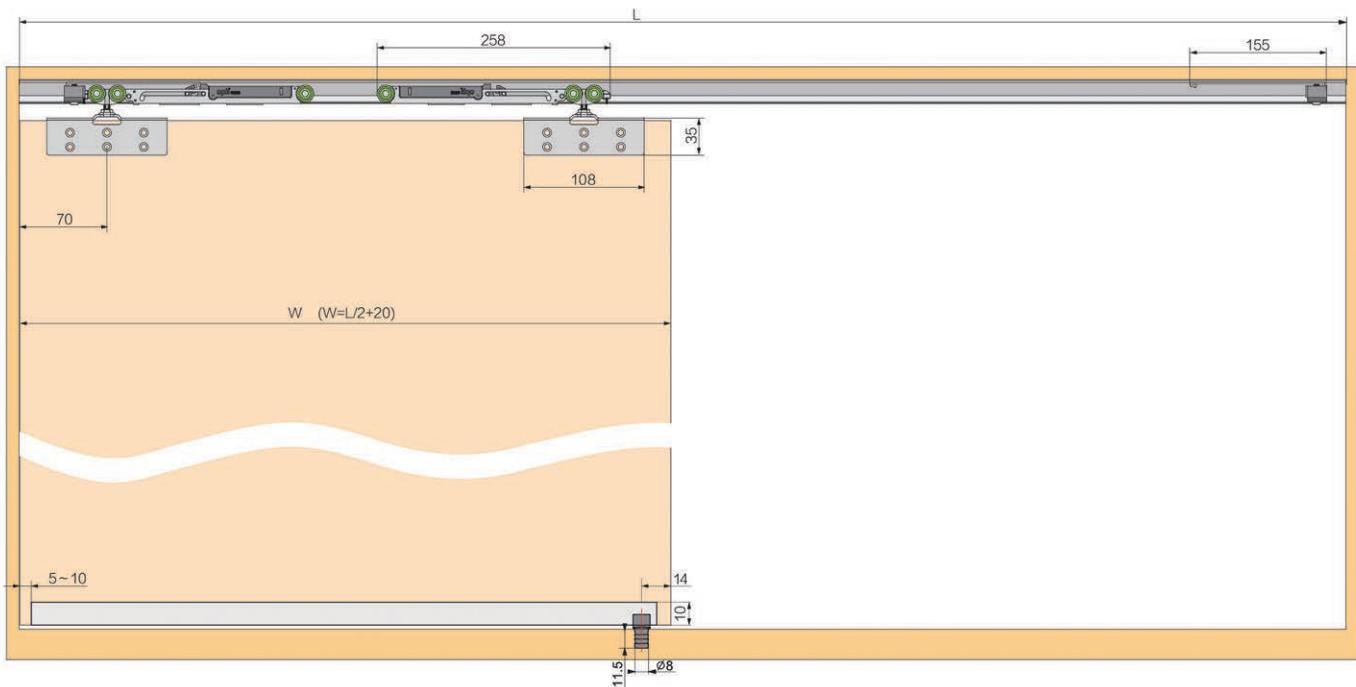探月号安装参数**DISCOVERY INSTALLATION PARAMETERS****木门1 Wood Door 1****木门4 Wood Door 4**

探月号装饰移门

DISCOVERY DECORATION DOOR

轻型
5-15kg重型
15-30kg



产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
单阻尼 Single Damper		重型 Heavy-duty	15-30	≥410	CN12231K
		轻型 Light-duty	5-15	≥410	CN12231L
双阻尼 Double Damper		重型 Heavy-duty	15-30	≥600	CN122158E
		轻型 Light-duty	5-15	≥600	CN122158F
无阻尼 Without Damping		—	≤30	≥300	CN122159C

标准配置

STANDARD CONFIGURATION


配件描述 Fitting Description				单阻尼(单扇门) Single Damper	双阻尼(单扇门) Double Damper	无阻尼(单扇门) Without Damping
阻尼上滑轮 Upper Roller With Damper		重型 Heavy-duty	TN096A	1	2	—
		轻型 Light-duty	TN096B			
上滑轮 Upper Roller		TN099A	1	—	2	—
阻尼限位件 Damper Stopper		TN097A	1	2	—	—
限位件 Stopper		TN098A	1	—	2	—
木门挂架 Upper round hanging plate		TN506A	2	2	2	—
下定位 Under Roller		TN106A	1	1	1	1

轨道 TRACK

					
XNA054 上轨道 Upper track		XNA055 装饰盖 Decorative cover		XNA003 下轨道 Under track	

探月号安装参数

DISCOVERY DECORATION DOOR INSTALLATION PARAMETERS

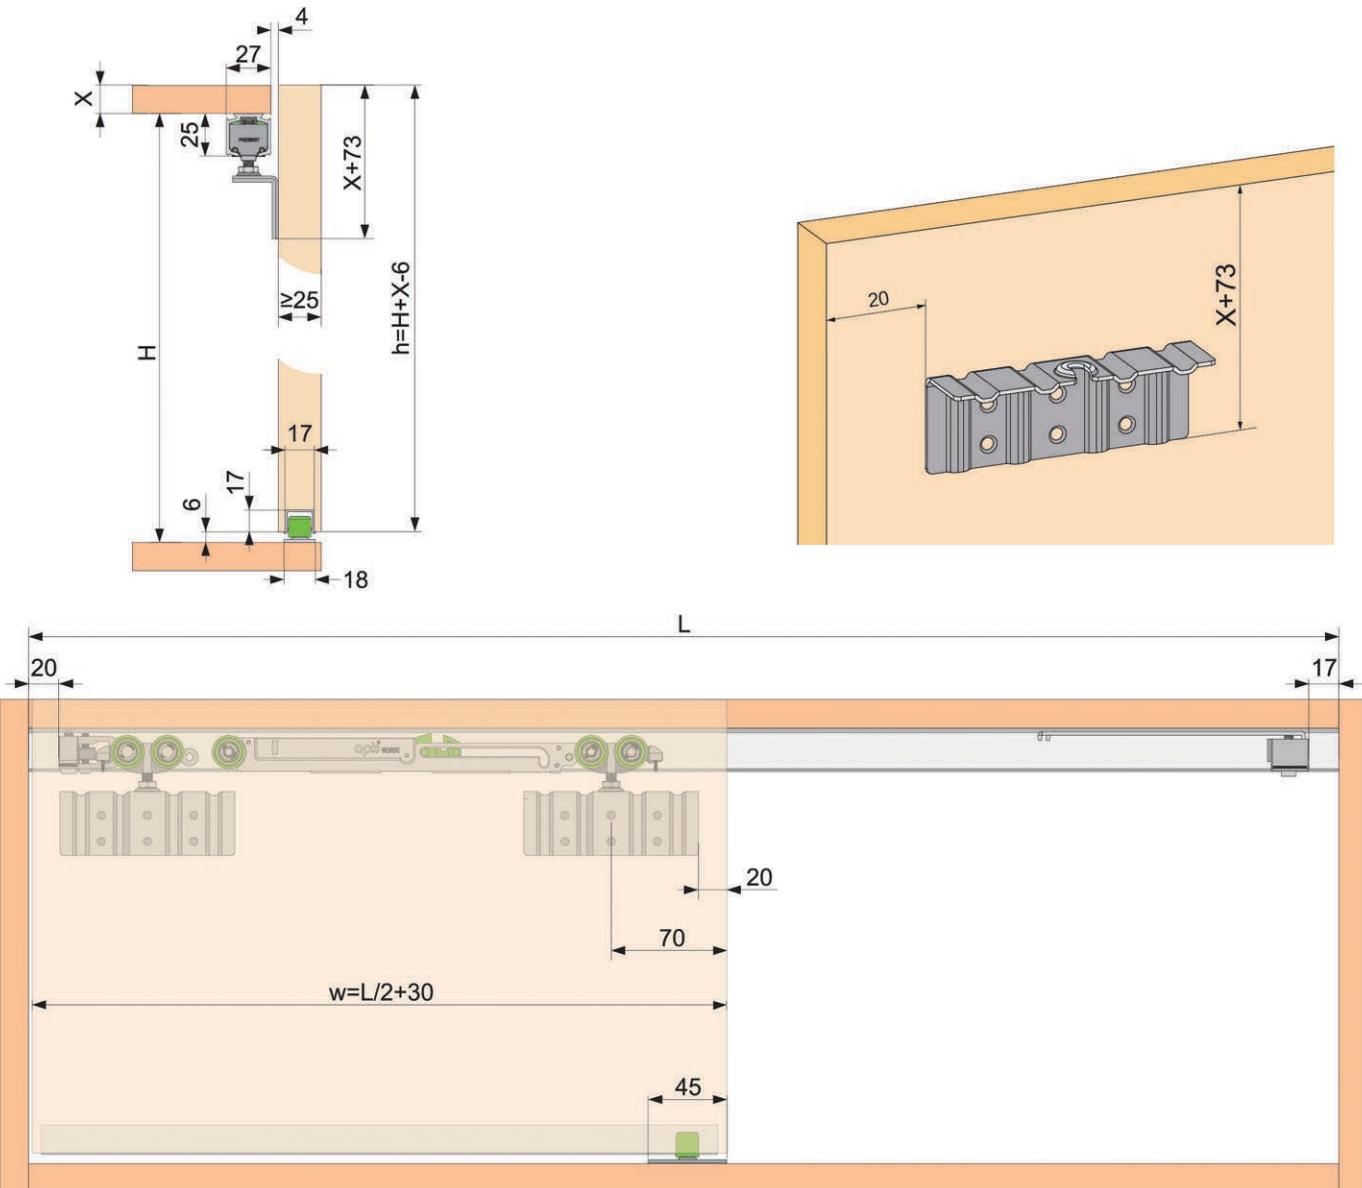

潜艇号 SUBMARINE

专利技术：弹力调节装置

**Patent technology:
Elasticity adjusting device**

产品特点：


- 安装、调试方便，门安装好后，不用将门卸下，直接对门缝进行调节。
- 可用于上、下轮，滑轮隐于门体内，更加美观。
- **应用范围：**衣柜门、厨柜门、书柜门等。

Product Features:

- Easy installation and adjustment, no need to remove the door after installed for adjustament, adjust door crack directly.
- The rollers can be used onto door top and bottom,with bodies hidden in door,which creates famtastic appearance.
- **Applications:** wardrobe Door, Cabinet Door, Bookcase Doors and son on.

产品应用范围

Product Applicationss

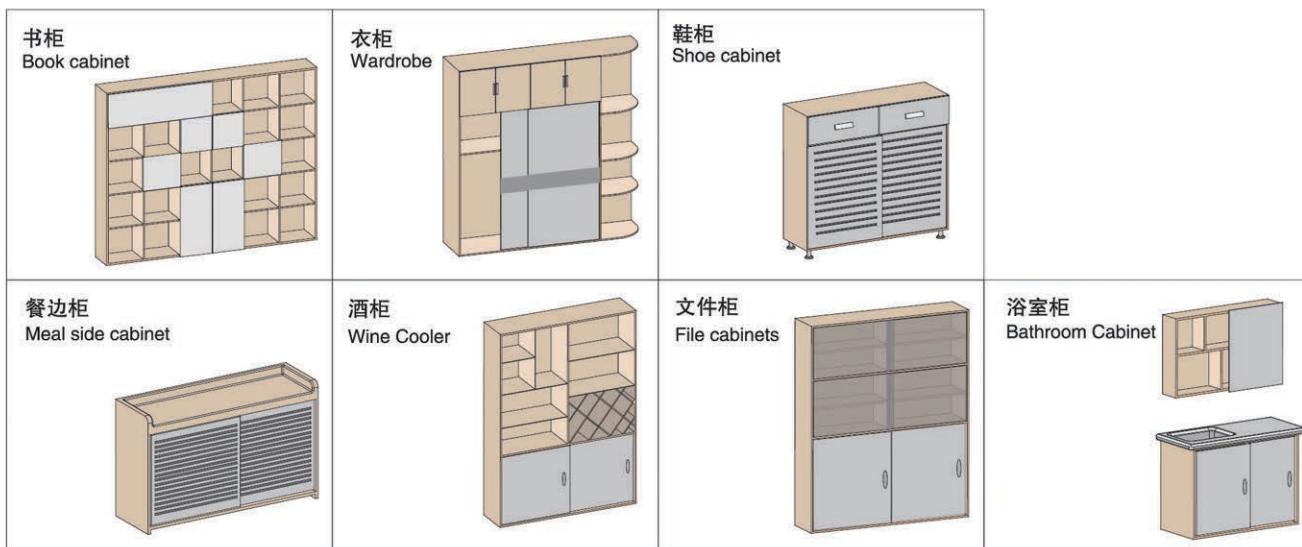



潜艇1号配件说明-1



SUBMARINE 1 ACCESSORIES OPTIONS-1

≤30kg

木门移门隐轮-A


Sliding Wood Door Roller-A

CJ11201A

4个/套
4pic/set扣板底板
Kouban

根据轨道长度配套


According to the length of the track to match

781-02
2-2B嵌轨
Track也可选用此轨道作为上、下轨道
Use this track as the top and bottom track



0.31kg/m

安装参数介绍

INSTALLATION PARAMETER INTRODUCED

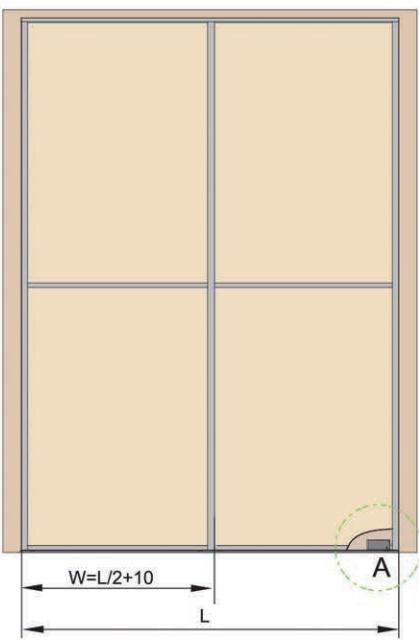

白橡木纹(BL) / 泰柚木纹(BM)

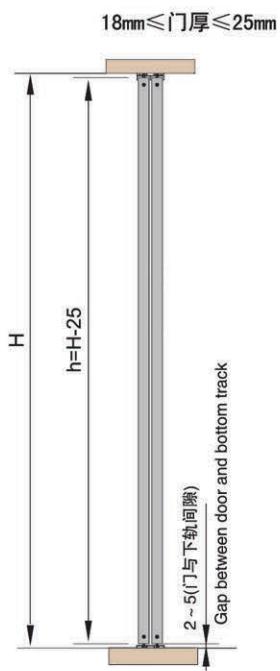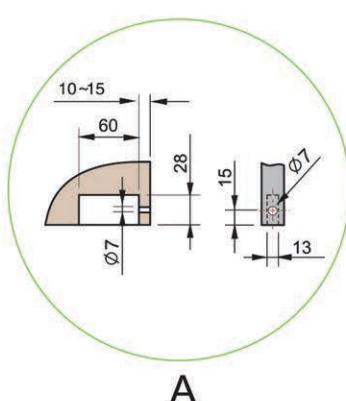


安装示意图


INSTALLATION ILLUSTRATION

铝框木门安装参考图


Installation diagram of aluminum frame doors

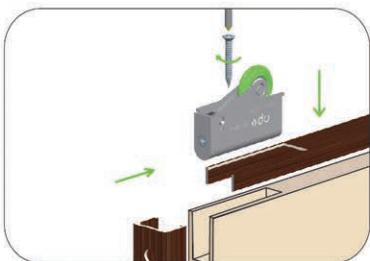


1 上轮安装
Installed Top Roller

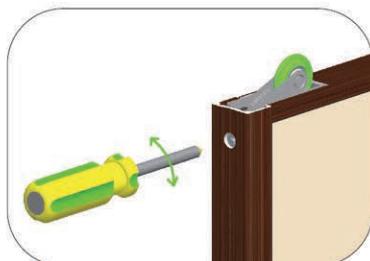

2 调节
Adjust

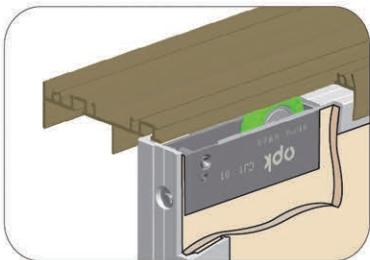


3 上轮铝框包边木门安装
Up Roller-Installed to Al-frame wood Door

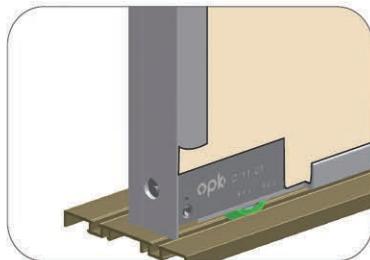


4 下轮铝框包边木门安装
Bottom Roller-Installed to Al-framed wood Door

木门安装参考图


Installation diagram of Solid wood doors

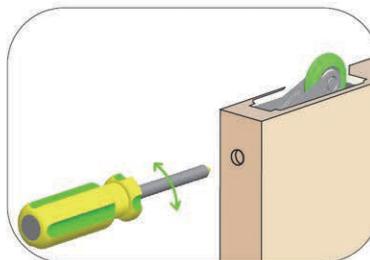

1 上轮安装
Installed Top Roller

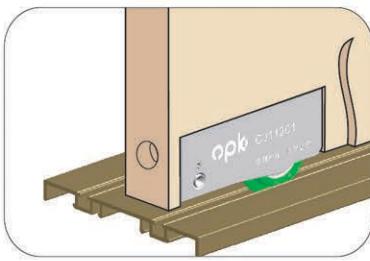

2 下轮木门安装
Bottom Roller-Installed to wood Door

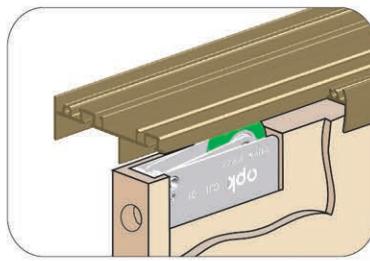

3 上轮木门安装
Up Roller-Installed to wood Door

潜艇2号配件说明-2

SUBMARINE 2 ACCESSORIES OPTIONS-2




≤40kg

木门移门隐轮-B Sliding Wood Door Roller-B	CJ11205A (凸轮)Male			2个/套 2pcs/set
	CJ11205B (凹轮)Female			
上轮 Top Roller	TJ002A 39			2个/套 2pcs/set
	TJ002B 37.5			
	TJ002C 35			

安装参数介绍

INSTALLATION PARAMETER INTRODUCED

28mm≤门厚≤36mm

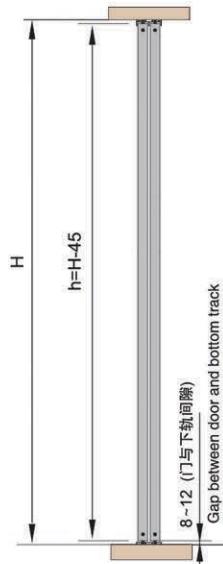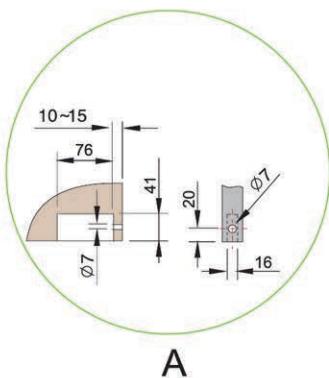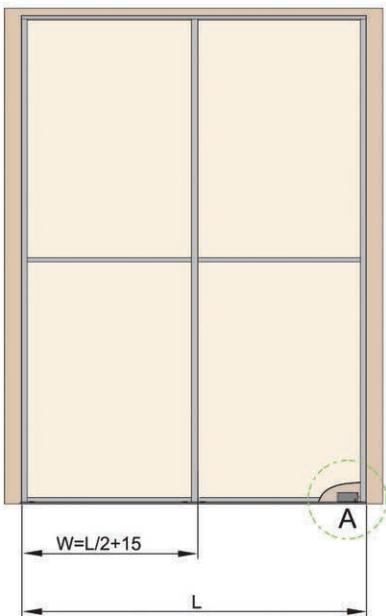


安装要求


Installation Requirements



① 下轮安装
Installed Bottom Roller






② 上轮安装
Installed Top Roller



③ 调节
Adjust


阻尼器套件说明

DAMPER FITTINGS ACCESSORIES OPTIONS

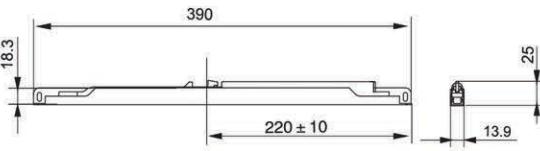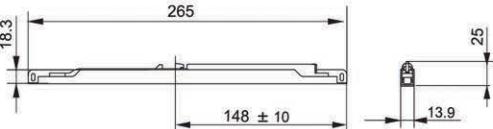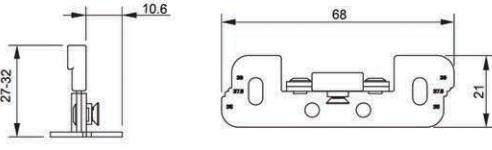
CJ13201A 长阻尼器套件 Long Damper fittings		
CJ13201B 短阻尼器套件 Short Damper fittings		
挡件 block bar		
产品说明 Installation Instructions	阻尼器直接安装于上轨道内侧，安装于门顶之挡件可以调节0-5mm，可应用于35mm-40mm之前轨道。 Applied to 35-40mm wide track; Damper should be installed on the inner side of the top track; Top block pieces can be adjusted by 0-5mm	

安装要求


Installation Requirements

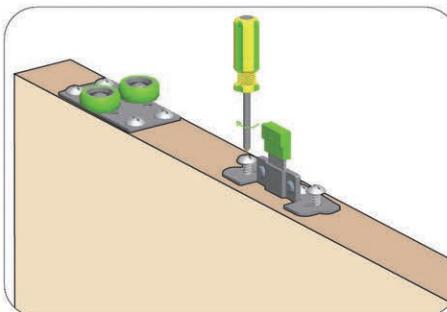

① 挡件安装于木门
Installed in wooden doors

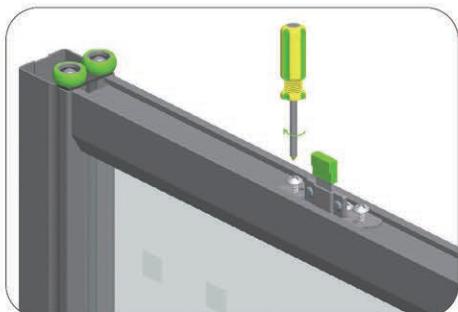

② 挡件安装于铝门
Installed in Aluminum doors

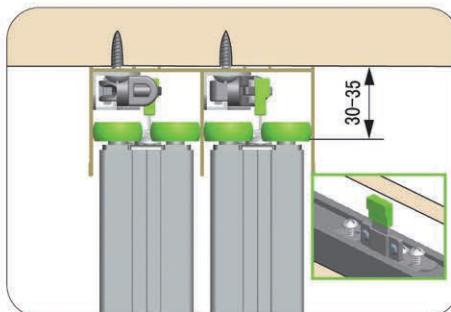

③ 缓冲器安装位置及与挡件方面对应
The damper installation location corresponding to the stopper installation location

潜艇4号

SUBMARINE 4

产品特点：

- 嵌入式结构设计 (上下轮通用);
- 阻尼自动挂钩设计，脱钩自动复位功能;
- 弹性锁紧装置,安装更简便;
- 高度差浮动功能,滑动更平稳顺畅;
- 采用高精级滑轮,承重好、顺滑、静音、耐用。

Product Features:


- Embedded structure design for both up and bottom roller.
- Damper automatic hook design, Automatic reset when out of hook.
- Elastic locking device, easier installation.
- Height difference floating function, sliding more stable and smooth.
- High precision grade roller, stable, smooth and quiet sliding, long service time.

技术概要：

- **适用于：**单扇和双扇木质推拉门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤50kg
- **门宽：**≥500mm
- **门厚：**≥18mm

Technical Points:

- **Application:** Single and double wood sliding door
- **Adjustment performance:** Door panel installation height is adjustable
- **Door Weight:** single door≤50kg
- **Door width:** ≥500mm
- **Door thickness:** ≥18mm

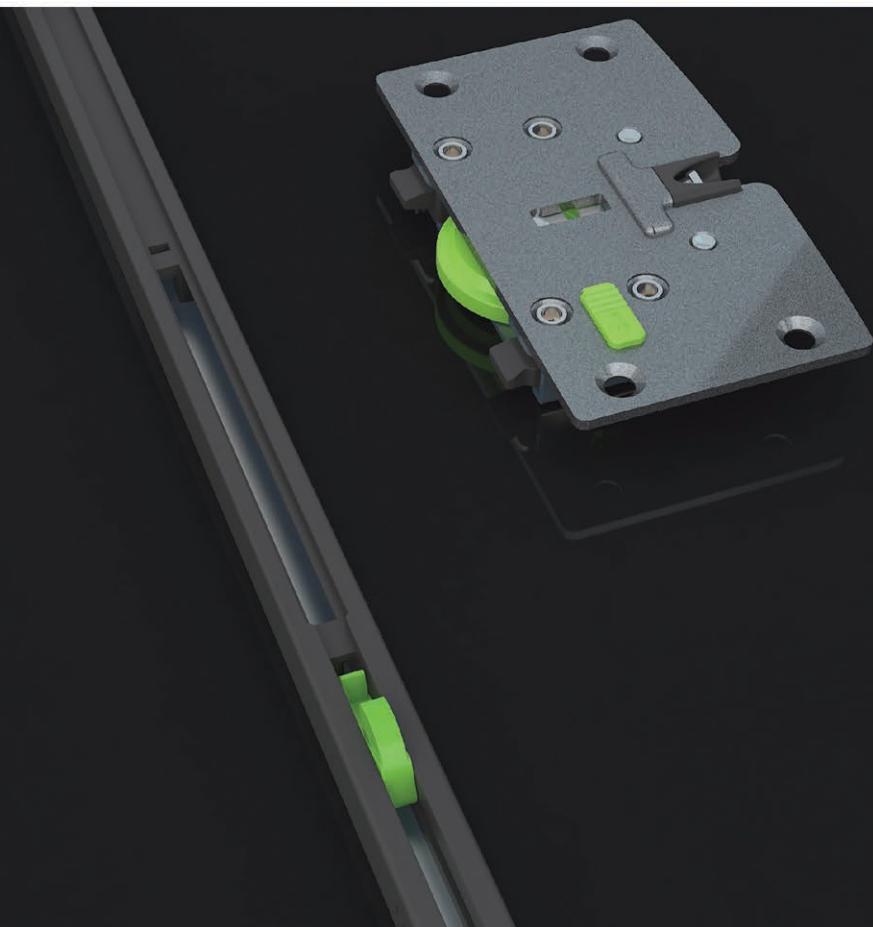

潜艇4号套件 SUBMARINE 4 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty




配件描述 Fitting Description		CJ112242 A/B/C 2门双阻尼	CJ112243 A/B/C 3门双阻尼
CJ212333A 上下轮 Top & Bottom Roller		8	12
TN223A/B/C 反向阻尼 Reverse Damper		4	4
TN274A 轨道堵头 Track plug		8	8
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		32	48
2.5毫米内六角扳手 2.5mm Allen Wrench		1	1

潜艇4号轨道型材 SUBMARINE 4 RACK PROFILE

产品描述 Product Description			材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
C-N	XJA132CB 上下轨 Upper & Bottom Track		铝合金 Aluminium Alloy	0.14	银白 Silver	2000	XJA132CB00200
						2500	XJA132CB00250
	XJA132GB 上下轨 Upper & Bottom Track		铝合金 Aluminium Alloy	0.14	玫瑰红 Rose Red	3000	XJA132CB00300
						2000	XJA132CG00200
						2500	XJA132CG00250
						3000	XJA132CG00300

安装参数 INSTALLATION PARAMETERS

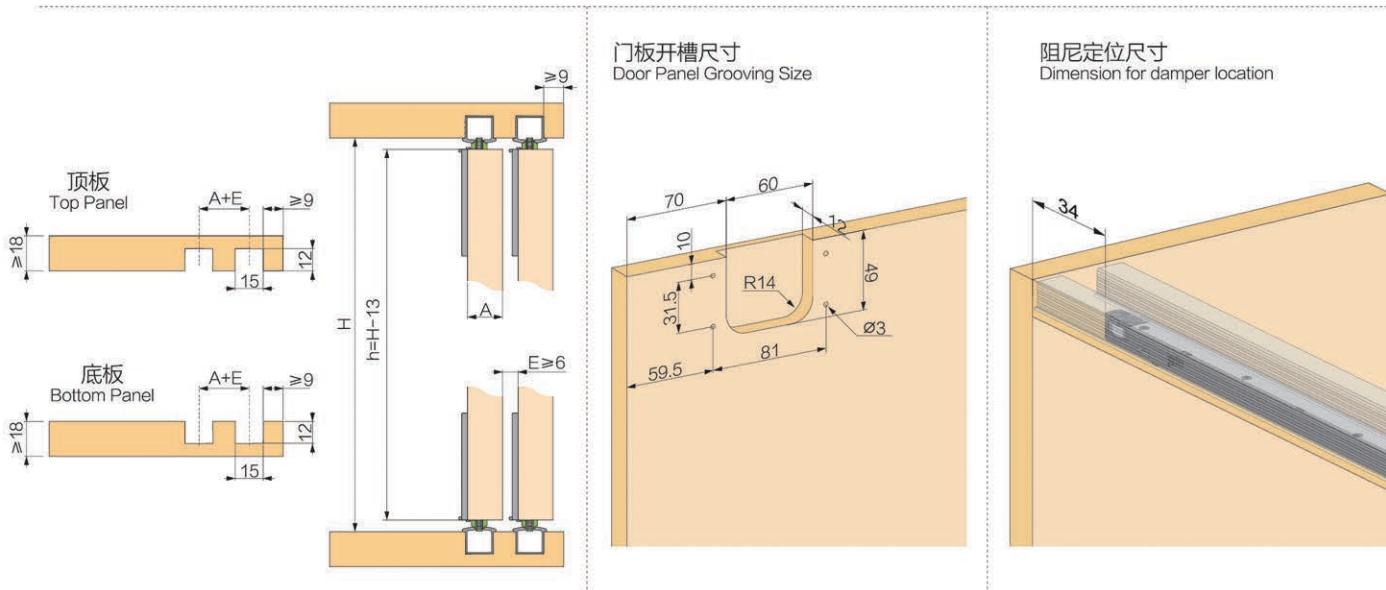

潜艇6号

SUBMARINE 6

产品特点：

- 阻尼自动挂钩设计，脱钩自动复位功能；
- 弹性锁紧装置，安装更简便；
- 轮距调节设计，解决门扇前后晃动，使推拉达到最佳效果；
- 毛刷装置，与滑轮同步运行清除轨道上的杂物，滑动更顺畅；
- 高度差浮动功能，滑动更平稳顺畅；
- 采用高精级滑轮，承重好、顺滑、静音、耐用。

Product Features:

- Damper automatic hook design, Automatic reset when out of hook.
- Elastic locking device, easier installation.
- Roller distance adjustable, avoid door waggle, sliding with good performance.
- Brush device, clean the track when sliding, making sliding more smooth.
- Height difference floating function, sliding more stable and smooth.
- High precision grade roller, stable, smooth and quiet sliding, long service time.

技术概要：

- **适用于：**单扇和双扇木质推拉门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤50kg
- **门宽：**≥580mm
- **门厚：**≥18mm

Technical Points:

- **Application:** Single and double wood sliding door
- **Adjustment performance:** Door panel installation height is adjustable
- **Door Weight:** single door≤50kg
- **Door width:** ≥580mm
- **Door thickness:** ≥18mm



潜艇6号套件
SUBMARINE 6 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty

轻型
5-15kg通用型
15-30kg重型
30-50kg

配件描述 Fitting Description		CJ212596A 2门无阻尼	CJ212593 A/B/C 2门单阻尼	CJ212594 A/B/C 2门双阻尼	CJ212595 A/B/C 3门双阻尼
CJ212363A 上轮 Upper Roller		4	4	4	6
CJ212581A 下轮 Bottom roller		4	4	4	6
TJ055A/B/C 缓冲器 Buffer		-	2	4	4
GB/ST4.2×25十字槽沉头自攻钉 GB/ST4.2×25 Cross Recess Countersunk head Self-drilling Screw		-	4	8	8
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		28	28	28	42








潜艇6号轨道型材

SUBMARINE 6 RACK PROFILE

产品描述 Product Description			材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
轨道 27.2mm	XJA151CB 上轨道 Upper Track		铝合金 Aluminium Alloy	0.61	银白 Silver	2000	XJA151CB00200
						2500	XJA151CB00250
						3000	XJA151CB00300
	XJA153CB 下轨道 Under Track		铝合金 Aluminium Alloy	0.27	银白 Silver	2000	XJA153CB00200
						2500	XJA153CB00250
						3000	XJA153CB00300
轨道 32.4mm	XJA152CB 上轨道 Upper Track		铝合金 Aluminium Alloy	0.67	银白 Silver	2000	XJA152CB00200
						2500	XJA152CB00250
						3000	XJA152CB00300
	XJA154CB 下轨道 Under Track		铝合金 Aluminium Alloy	0.29	银白 Silver	2000	XJA154CB00200
						2500	XJA154CB00250
						3000	XJA154CB00300
轨道 39mm	XJA194CB 上轨道 Upper Track		铝合金 Aluminium Alloy	0.75	银白 Silver	2000	XJA194CB00200
						2500	XJA194CB00250
						3000	XJA194CB00300
	XJA195CB 下轨道 Under Track		铝合金 Aluminium Alloy	0.32	银白 Silver	2000	XJA195CB00200
						2500	XJA195CB00250
						3000	XJA195CB00300
轨道 39mm	XJA194GB 上轨道 Upper Track		铝合金 Aluminium Alloy	0.75	玫瑰金 Rose Gold	2000	XJA194GB00200
						2500	XJA194GB00250
						3000	XJA194GB00300
	XJA195GB 下轨道 Under Track		铝合金 Aluminium Alloy	0.32	玫瑰金 Rose Gold	2000	XJA195GB00200
						2500	XJA195GB00250
						3000	XJA195GB00300

潜艇6号安装参数

SUBMARINE 6 INSTALLATION PARAMETERS

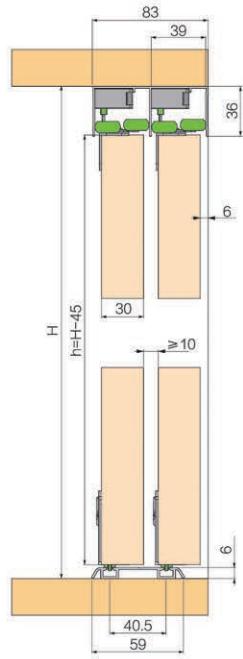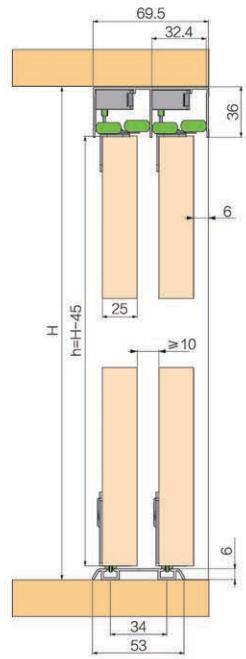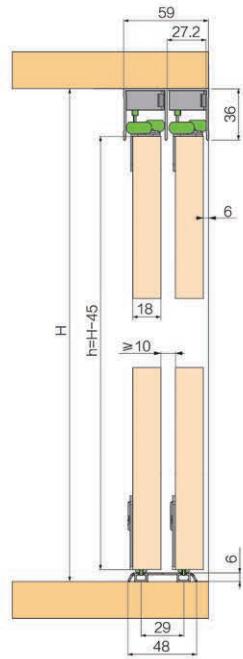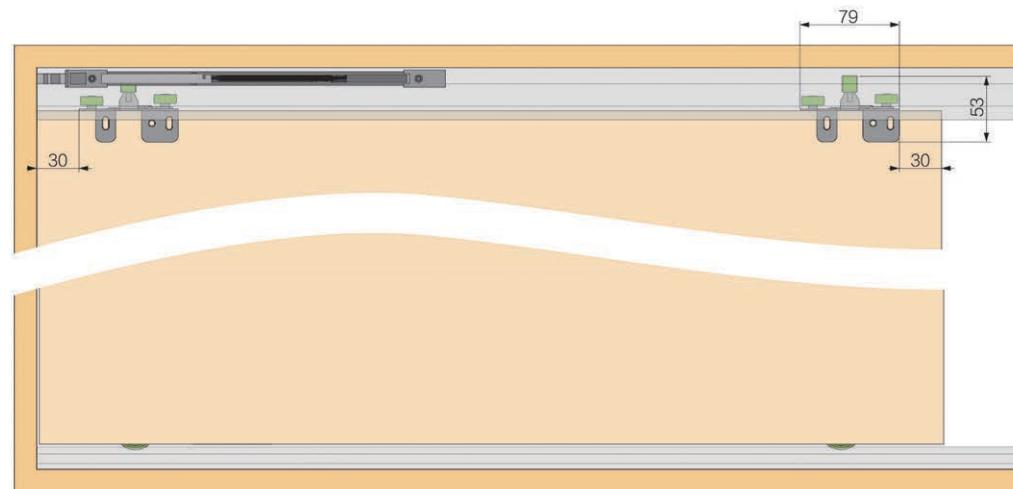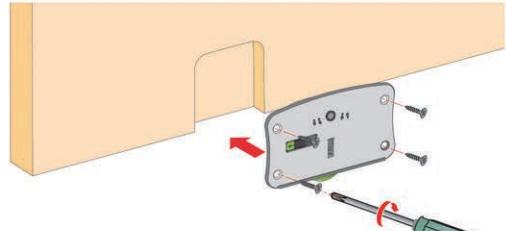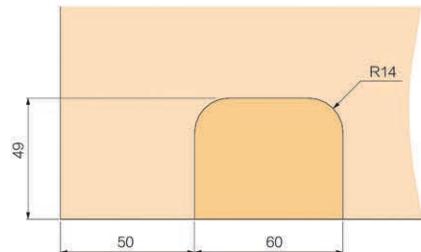轨道27.2mm
TRACK 27.2MM轨道32.4mm
TRACK 32.4MM轨道39mm
TRACK 39MM门板开槽尺寸
Door Panel Grooving Size

潜艇8号

SUBMARINE 8

产品特点：

- **轮距调节功能：**此系列产品有多种轮距供客户调节且无需更换配件；
- **自动挂钩功能：**安装后无须担心会出现脱钩现象；
- **防跳功能：**通过调节防跳装置，可以防止关门时门扇向上跳动，从而避免上下滑轮的损伤，使门板平稳滑行，延长产品的使用寿命；
- **挡件自动定位功能：**挡件无需量尺寸，推动门扇即可精准定位；
- **挡件高度可调功能：**挡件高度可调节，解决地板不平所带来的安装困难的问题；
- **挡件高度定位装置：**通过此装置可精准调节挡件与阻尼接触的安全高度；
- **对铝门竖框偏心型材能用：**可以调节产品两端的刻度，使滑轮中心对应上轨槽的中心，可适用于不同形状的竖框；
- **安装方便：**此款产品属于中心限位阻尼，不分左右，安装时非常方便。

Product Features:


- **Roller distance adjustable function:** Various roller distance is optional for buyer adjustment, and no need to replace the accessories.
- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Anti-jumping function:** Adjust anti-jumping device for preventing door jump when closing and to avoid roller damage, which ensured smooth door sliding and long using life.
- **Stopper automatic positioning function:** The stopper no need measure the size, push the door to find stopper's location precisely.
- **Stopper height adjustable function:** The stopper can adjust the height, to solve thd difficult installation problem case form floor uneven.
- **Stopper height adjustment device:** Adjust suitable safe height for stopper and damper touching.
- **For asymmetrical vertical frame:** Can adjust the scale to keep central line of up rollers with up track, applicable to different kinds of vertical profiles.
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is mor converient for installation.

技术概要：

- **适用于：**单扇和双扇铝框门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤50kg

Technical Points:

- **Application:** Single and double aluminum door
- **Adjustment performance:** Door panel installation height is adjustable
- **Door Weight:** single door≤50kg

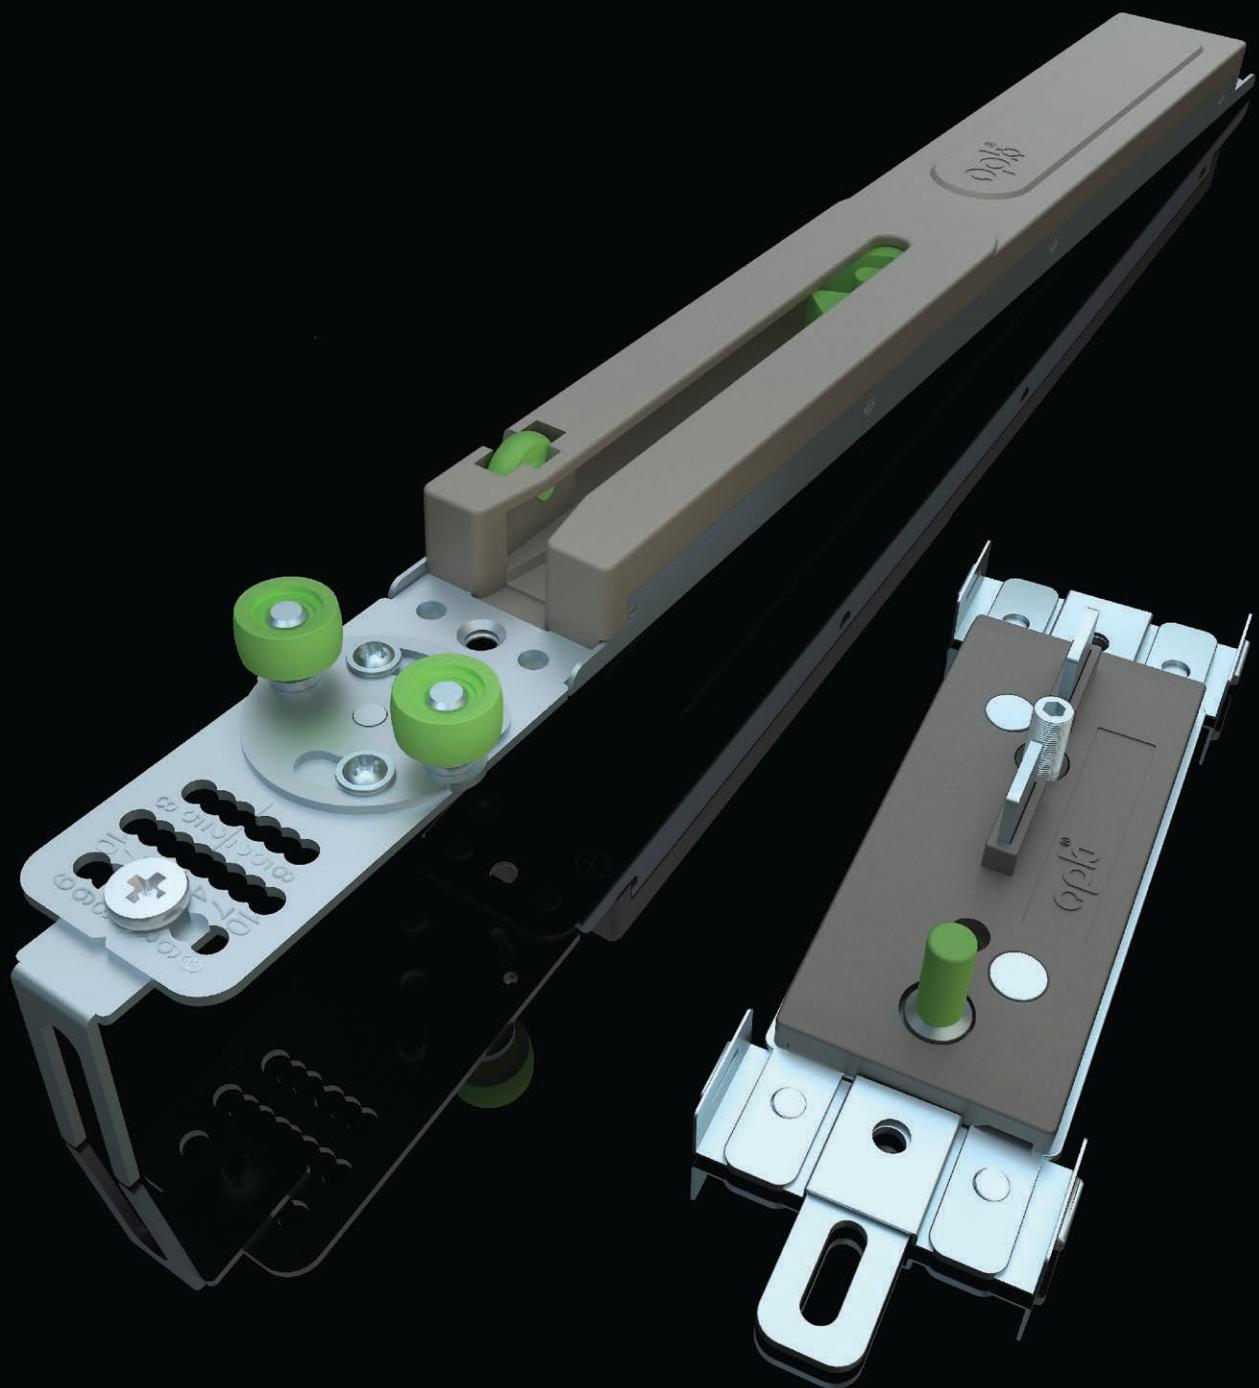

潜艇8号铝门双阻尼套装

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty

SUBMARINE 8 ALUMINUM DOORS DOUBLE DAMPER KIT

轻型
5-15kg通用型
15-30kg重型
30-50kg

产品描述 Product Description		CJ212620 A/B/C 单门(不带下轮)	CJ212456 A/B/C 单门(带下轮)	CJ212457 A/B/C 双门(带下轮)	CJ212458 A/B/C 三门(带下轮)
CJ212452A/B/C 阻尼上滑轮 Top Roller With Damper		2	2	4	5
TJ020A/B/C/D 标配39, 可选(37.5、36、35) 阻尼限位件 Damper Stopper		2	2	4	4
CJ212492A F608下轮 F608 Bottom Roller		—	2	4	6
TN212A/B/C 双向缓冲器 Two-way Damper		—	—	—	1
TN213A 双向缓冲器限位件 Stopper For Two-way Damper		—	—	—	1
TN217A 对碰上轮 Collision Top Roller		—	—	—	1
LT E047 上轨道(银白) Upper Track (Silver)		选配 Optional	选配 Optional	选配 Optional	选配 Optional
LT E046 下轨道(银白) Under Track (Silver)		选配 Optional	选配 Optional	选配 Optional	选配 Optional
TN008A/上轮板固定件-1 Positioning member		2	2	4	8
GB/ST4×9.5十字槽蘑菇头自攻钉 GB/ST4×9.5 Cross Recess Pan Head Self-drilling Screw		2	2	—	3
GB/ST4.2×20十字槽蘑菇头自攻钉 GB/ST4.2×20 Cross Recess Pan Head Self-drilling Screw		4	4	4	16
GB/ST4.2×9.5十字槽蘑菇头带胶垫圈自攻钉 GB/ST4.2×9.5 Cross Recess Pan Head Self-drilling Screw With Washer		2	2	4	5
GB/ST4.2×20十字槽蘑菇头带胶垫圈自攻钉 GB/ST4.2×20 Cross Recess Pan Head Self-drilling Screw With Washer		2	2	4	5

潜艇8号铝门单阻尼套装

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty

SUBMARINE 8 ALUMINUM DOORS SINGLE DAMPER KIT



轻型
5-15kg通用型
15-30kg重型
30-50kg

产品描述 Product Description		CJ212619 A/B/C 单门(不带下轮)	CJ212462 A/B/C 单门(带下轮)	CJ212463 A/B/C 双门(带下轮)	CJ212464 A/B/C 三门(带下轮)
CJ212452A/B/C 阻尼上滑轮 Top Roller With Damper		1	1	2	2
TJ020A/B/C/D 标配39, 可选(37.5、36、35) 阻尼限位件 Damper Stopper		1	1	2	2
CJ212492A F608下轮 F608 Bottom Roller		—	2	4	6
CJ212144A 上滑轮 Top Roller		1	1	2	4
TN212A/B/C 双向缓冲器 Two-way Damper		—	—	—	1
TN213A 双向缓冲器限位件 Stopper For Two-way Damper		—	—	—	1
LT E047 上轨道(银白) Upper Track (Silver)		选配 Optional	选配 Optional	选配 Optional	选配 Optional
LT E046 下轨道(银白) Under Track (Silver)		选配 Optional	选配 Optional	选配 Optional	选配 Optional
TN008A 上轮板固定件-1 Positioning member		1	1	2	4
GB/ST4×9.5十字槽磨菇头自攻钉 GB/ST4×9.5 Cross Recess Pan Head Self-drilling Screw		1	1	—	2
GB/ST4.2×20十字槽磨菇头自攻钉 GB/ST4.2×20 Cross Recess Pan Head Self-drilling Screw		2	2	2	8
GB/ST4.2×9.5十字蘑菇头带胶垫圈自攻钉 GB/ST4.2×9.5 Cross Recess Pan Head Self-drilling Screw With Washer		1	1	1	2
GB/ST4.2×20十字蘑菇头带胶垫圈自攻钉 GB/ST4.2×20 Cross Recess Pan Head Self-drilling Screw With Washer		1	1	1	2

潜艇8号木门单阻尼套装

SUBMARINE 8 WOOD DOOR SINGLE DAMPER KIT

轻型
5-15kg通用型
15-30kg重型
30-50kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	套装型号 Set Model
2门单阻尼 2 Doors Single Damper		轻型 Light-duty	5-15	CJ212547A
		通用型 Normal	15-30	CJ212547B
		重型 Heavy-duty	30-50	CJ212547C
3门单阻尼 3 Doors Single Damper		轻型 Light-duty	5-15	CJ212549A
		通用型 Normal	15-30	CJ212549B
		重型 Heavy-duty	30-50	CJ212549C

标准配置


STANDARD CONFIGURATION

配件描述 Fitting Description			2门单阻尼标准配置 2 Doors Single Damper	3门单阻尼标准配置 3 Doors Single Damper
阻尼上滑轮 Top Roller With Damper		轻型 Light-duty	CJ212540A	2
		通用型 Normal	CJ212540B	
		重型 Heavy-duty	CJ212540C	
阻尼限位件 Damper Stopper		TJ020A/B/C/D 标配39, 可选 (37.5、36、35)		2
平板上轮 39 Flat Top Roller		TJ002A		4
下轮 Bottom roller		CJ212581A		6
双向缓冲器 Two-way Damper		轻型 Light-duty	TN212A	1
		通用型 Normal	TN212B	
		重型 Heavy-duty	TN212C	
双向缓冲器限位件 Stopper For Two-way Damper		TN213A		1
对碰上轮 Collision Top Roller		TN217B		—
789-01上轨道(银白) 789-01 Upper Track (Silver)		XJA205CB		选配 Optional
789-01下轨道(银白) 789-01 Under Track (Silver)		XJA206CB		选配 Optional
GB/ST4.2×16十字槽磨菇头自攻钉 GB/ST4.2×16 Cross Recess Pan Head Self-drilling Screw		16		28
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		16		24

潜艇8号木门双阻尼套装

SUBMARINE 8 WOOD DOOR DOUBLE DAMPER KIT

轻型
5-15kg通用型
15-30kg重型
30-50kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	套装型号 Set Model
2门双阻尼 2 Doors Double Damper		轻型 Light-duty	5-15	CJ212548A
		通用型 Normal	15-30	CJ212548B
		重型 Heavy-duty	30-50	CJ212548C
3门双阻尼 3 Doors Double Damper		轻型 Light-duty	5-15	CJ212550A
		通用型 Normal	15-30	CJ212550B
		重型 Heavy-duty	30-50	CJ212550C









标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			2门双阻尼标准配置 2 Doors Double Damper	3门双阻尼标准配置 3 Doors Double Damper
阻尼上滑轮 Top Roller With Damper		轻型 Light-duty	CJ212540A	4
		通用型 Normal	CJ212540B	
		重型 Heavy-duty	CJ212540C	
阻尼限位件 Damper Stopper		TJ2020A/B/C/D 标配39, 可选 (37.5、36、35)		4
下轮 Bottom roller		CJ212581A		4
双向缓冲器 Two-way Damper		轻型 Light-duty	TN212A	—
		通用型 Normal	TN212B	
		重型 Heavy-duty	TN212C	
双向缓冲器限位件 Stopper For Two-way Damper		TN213A		—
对碰上轮 Collision Top Roller		TN217B		—
789-01上轨道(银白) 789-01 Upper Track (Silver)		XJA205CB		选配 Optional
789-01下轨道(银白) 789-01 Under Track (Silver)		XJA206CB		选配 Optional
GB/ST4.2×16十字槽蘑菇头自攻钉 GB/ST4.2×16 Cross Recess Pan Head Self-drilling Screw		16		24
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		16		24

潜艇8号铝门安装说明


SUBMARINE 8 ALUMINUM DOORS INSTALLATION PARAMETERS

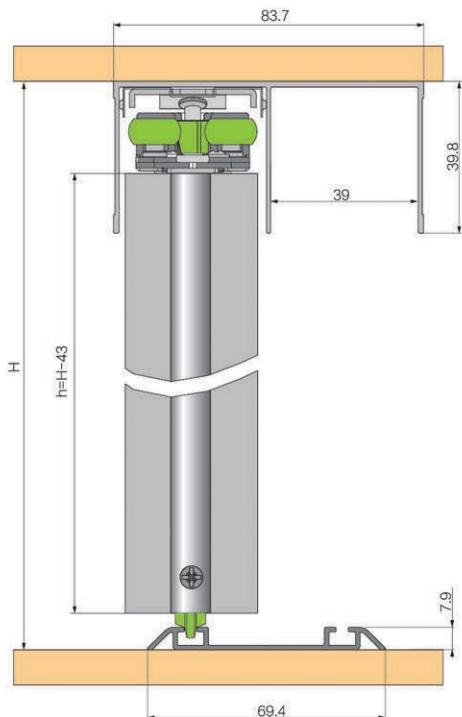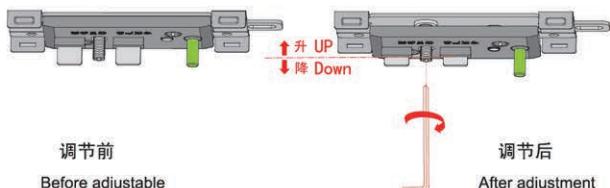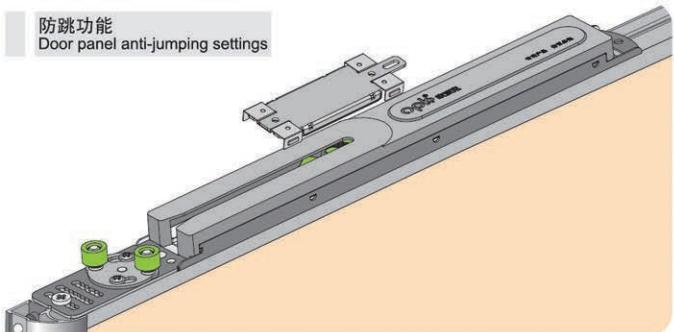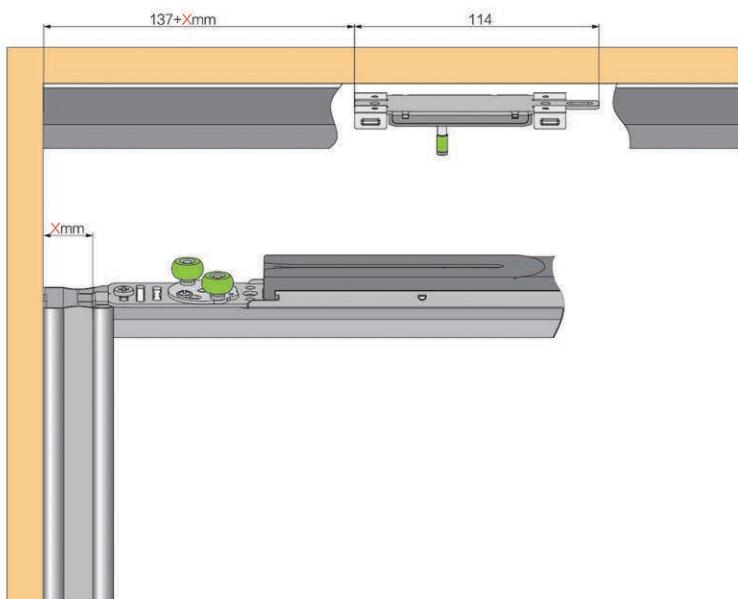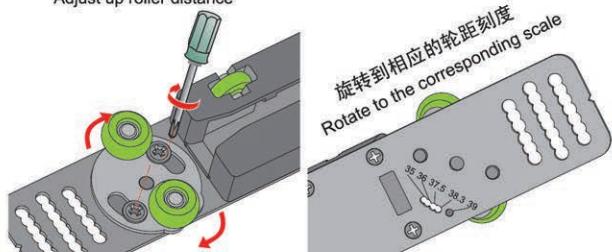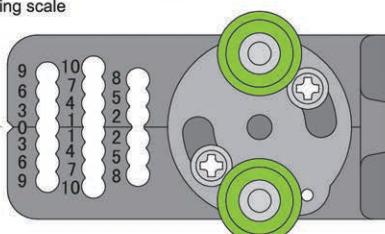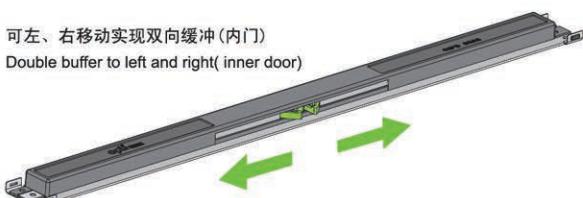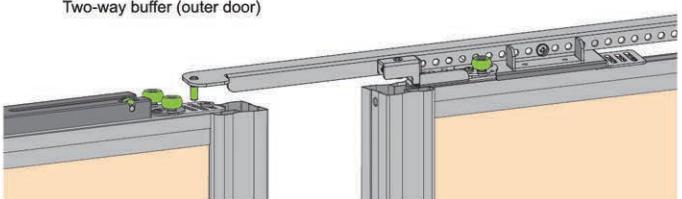防跳功能
Door panel anti-jumping settings通过调节此螺丝，使挡件斜柱升降，从而跟阻尼挂钩充分接触
Adjust toggle up and down by utilizing this screw调节轮距
Adjust up roller distance以0为中心，根据移门位置，固定相对刻度螺丝。
Based on sliding door's position,take 0 as the centre to fix screw to corresponding scale此对正轨道中心
Keep 0 on rail center可左、右移动实现双向缓冲(内门)
Double buffer to left and right(inner door)对碰缓冲(外门)
Two-way buffer (outer door)


潜艇8号木门安装说明

SUBMARINE 8 WOOD DOOR INSTALLATION PARAMETERS


门板高h=门洞高H-43mm
h (Door Height) = H - 43mm

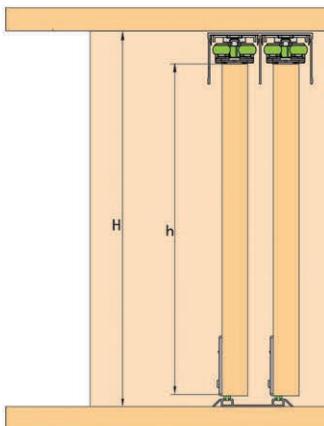


防跳功能
Door panel anti-jumping settings

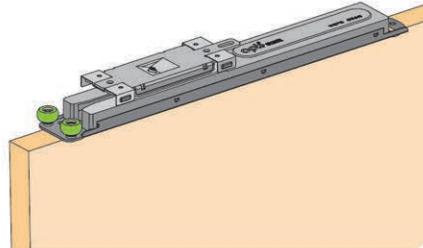


安装平板上轮
Install flat top roller




安装阻尼上轮
Install damping top roller

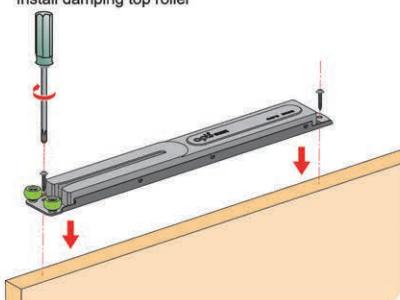

门板开槽尺寸
Door panel grooving size

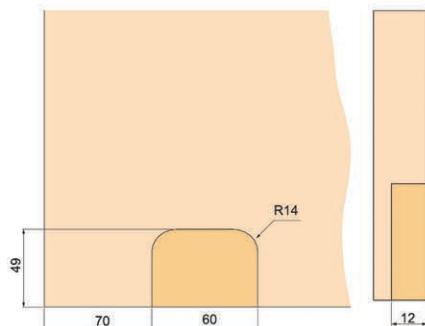

安装下轮
Install bottom roller

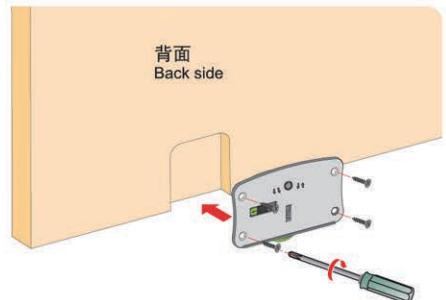



潜艇9号

SUBMARINE 9

产品特点：

- 双面可安装设计，明装/嵌入式(上下轮通用)；
- 阻尼自动挂钩设计，脱钩自动复位功能；
- 弹性锁紧装置,安装更简便；
- 高度调节简便、快捷；
- 采用进口定制改性工程塑料，增加承重，牢固、耐用；
- 高度差浮动功能,滑动更平稳顺畅；
- 采用高精级滑轮,承重好、顺滑、静音、耐用。

Product Features:

- Double-sided installation design, Visible/Invisible (Upper roller and bottom roller are universal).
- Damper automatic hook design, Automatic reset when out of hook.
- Elastic locking device, easier installation.
- Height adjustment design, easy and quick to adjust.
- Made of imported customize improved POM , increase the load bearing, strong and durable.
- Height difference floating function, sliding more stable and smooth.
- High precision grade roller, stable, smooth and quiet sliding,long service time.

技术概要：

- **适用于：**单扇和双扇木质推拉门、铝边框门
- **调节性能：**门扇安装高度可调
- **门重：**单扇门≤50kg
- **门宽：**≥500mm
- **门厚：**≥18mm

Technical Points:

- **Application:** Single and double wood sliding door、aluminum door
- **Adjustment performance:** Door panel installation height is adjustable
- **Door Weight:** single door≤50kg
- **Door width:**≥500mm
- **Door thickness:**≥18mm



潜艇9号暗装套件

SUBMARINE 9 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty



产品描述 Product Description		CJ212252A 2门无阻尼	CJ212591 A/B/C 2门单阻尼	CJ212254 A/B/C 2门双阻尼	CJ212255 A/B/C 3门双阻尼
CJ21473A 上下轮 Top & Bottom Roller		8	8	8	12
TJ069A 限位件 Stopper		4	2	-	-
TD107A/B/C 缓冲器 Buffer		-	2	4	4
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		32	32	32	48
2毫米内六角扳手 2mm Allen Wrench		1	1	1	1


轨道型材

RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
C-M	XJA132CB 上下轨 Upper & Bottom Track		铝合金 Aluminium Alloy	0.14	银白 Silver	2000
						2500
						3000
C-M	XJA185CB 上下轨 Upper & Bottom Track		铝合金 Aluminium Alloy	0.06	银白 Silver	2000
						2500
						3000

安装参数

INSTALLATION PARAMETERS

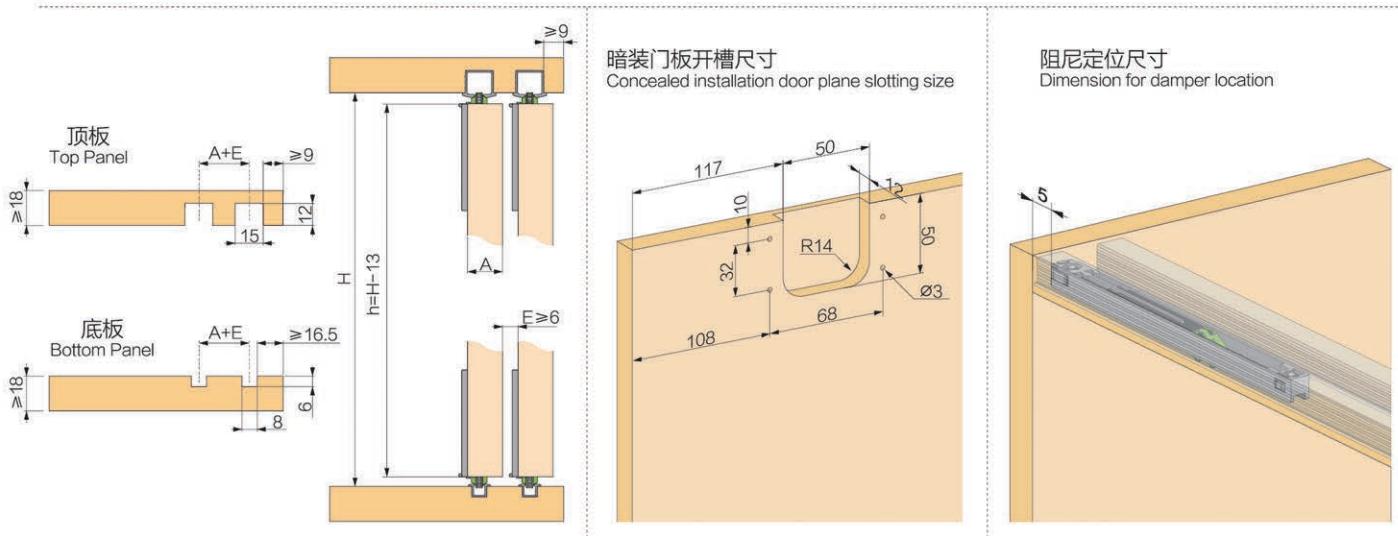

潜艇9号暗装套件 SUBMARINE 9 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty




	产品描述 Product Description	CJ212252A 2门无阻尼	CJ212591 A/B/C 2门单阻尼	CJ212254 A/B/C 2门双阻尼	CJ212255 A/B/C 3门双阻尼
CJ21473A 上下轮 Top & Bottom Roller		8	8	8	12
TD107A/B/C 缓冲器 Buffer		-	2	4	4
TJ069A 限位件 Stopper		4	2	-	-
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		32	32	32	48
2毫米内六角扳手 2mm Allen Wrench		1	1	1	1

轨道型材 RACK PROFILE

	产品描述 Product Description	材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
C - 18	XJA165CB 上轨道 Upper Track	铝合金 Aluminium Alloy	0.46	银白 Silver	2000	XJA165CB00200
					2500	XJA165CB00250
					3000	XJA165CB00300
C - 18	XJA184CB 下轨道 Under Track	铝合金 Aluminium Alloy	0.25	银白 Silver	2000	XJA184CB00200
					2500	XJA184CB00250
					3000	XJA184CB00300

安装参数 INSTALLATION PARAMETERS

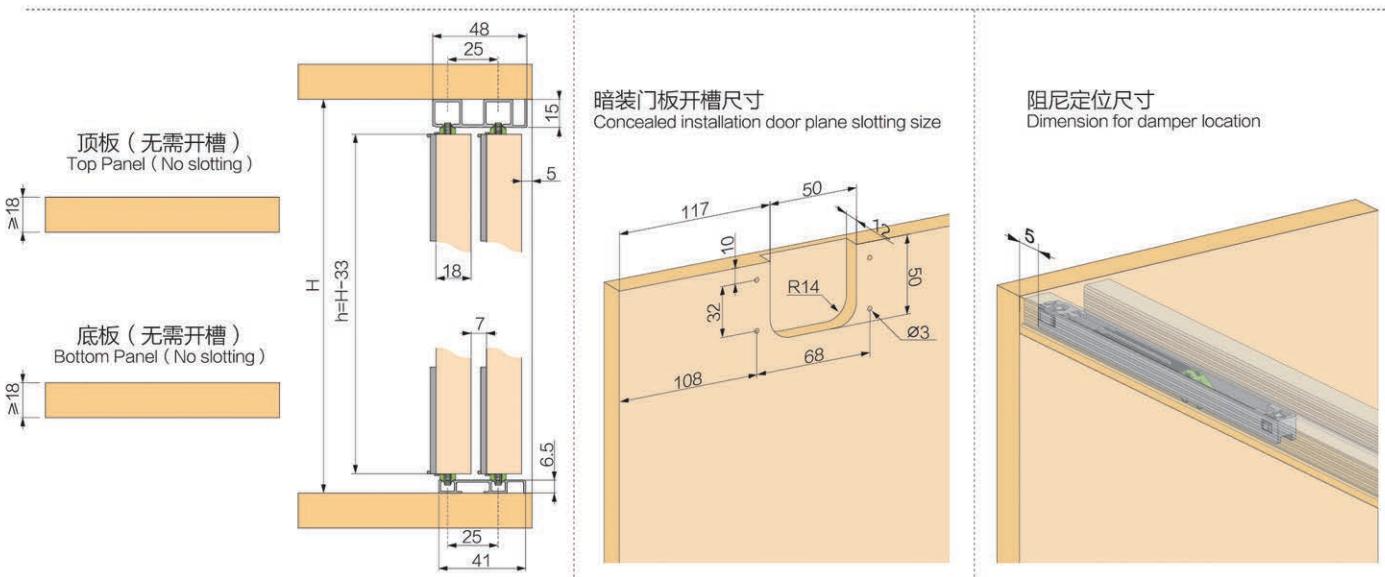

潜艇9号暗装套件

SUBMARINE 9 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty

轻型	5-15kg
通用型	15-30kg
重型	30-50kg

产品描述 Product Description	CJ212252A 2门无阻尼	CJ212591 A/B/C 2门单阻尼	CJ212254 A/B/C 2门双阻尼	CJ212255 A/B/C 3门双阻尼
CJ21473A 上下轮 Top & Bottom Roller		8	8	8
TD107A/B/C 缓冲器 Buffer		-	2	4
TJ069A 限位件 Stopper		4	2	-
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		32	32	32
2毫米内六角扳手 2mm Allen Wrench		1	1	1


轨道型材

RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
D-18	XJA158CB 上轨道 Upper Track		铝合金 Aluminium Alloy	0.5	银白 Silver	2000
						2500
						3000
D-18	XJA184CB 下轨道 Under Track		铝合金 Aluminium Alloy	0.25	银白 Silver	2000
						2500
						3000

安装参数

INSTALLATION PARAMETERS

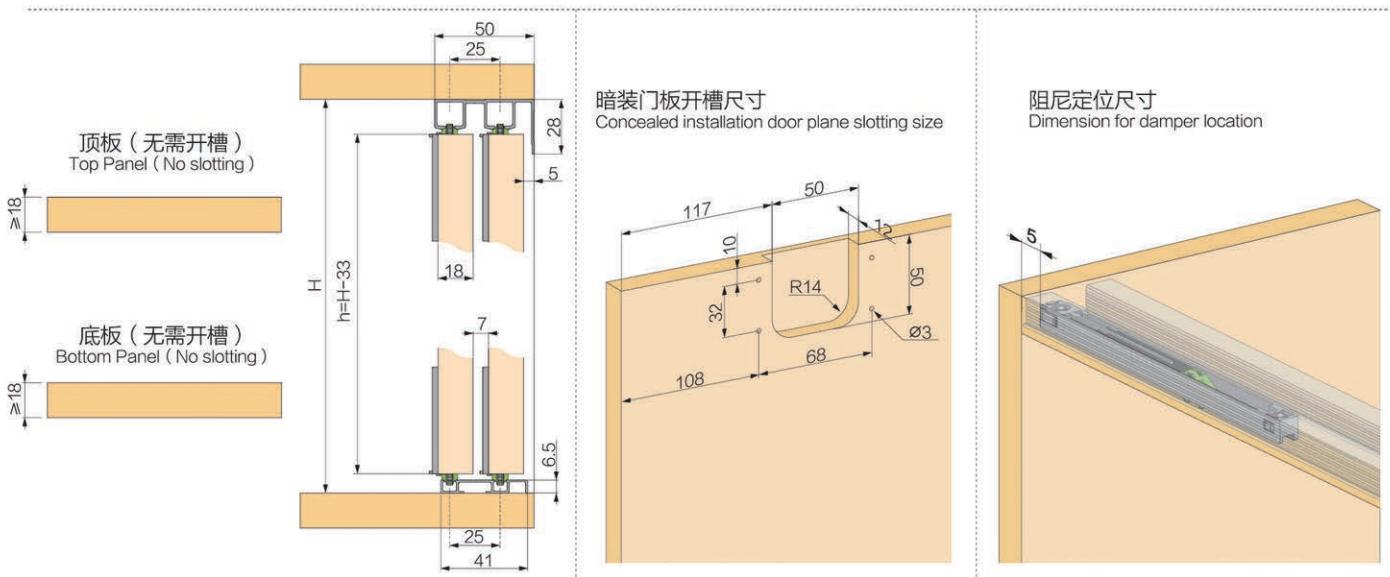

潜艇9号暗装套件 SUBMARINE 9 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty


轻型 5-15kg
通用型 15-30kg
重型 30-50kg

产品描述 Product Description		CJ212252A 2门无阻尼	CJ212591 A/B/C 2门单阻尼	CJ212254 A/B/C 2门双阻尼	CJ212255 A/B/C 3门双阻尼
CJ21473A 上下轮 Top & Bottom Roller		8	8	8	12
TD107A/B/C 缓冲器 Buffer		-	2	4	4
TJ069A 限位件 Stopper		4	2	-	-
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		32	32	32	48
2毫米内六角扳手 2mm Allen Wrench		1	1	1	1

轨道型材 RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model	
D-25	XJA180CB 上轨道 Upper Track		铝合金 Aluminium Alloy	0.56	银白 Silver	2000	XJA180CB00200
						2500	XJA180CB00250
						3000	XJA180CB00300
D-25	XJA181CB 下轨道 Under Track		铝合金 Aluminium Alloy	0.3	银白 Silver	2000	XJA181CB00200
						2500	XJA181CB00250
						3000	XJA181CB00300

安装参数 INSTALLATION PARAMETERS

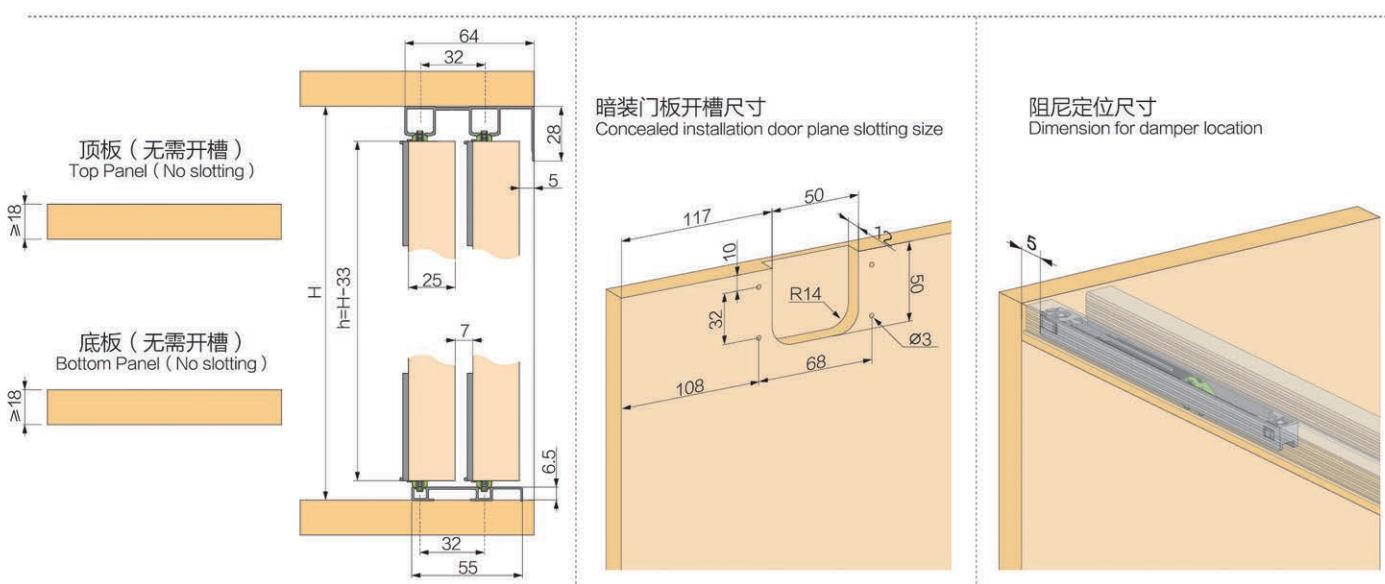

潜艇9号装饰门(18MM)套装

SUBMARINE 9 (18MM) COMPLETE SET

(A) 轻型 Light-duty (B)通用型 Normal

轻型
5-15kg通用型
15-30kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	套装型号 Set Model
单门带阻尼 Single Door With Damping		轻型 Light-duty	5-15	CJ112317A
		通用型 Normal	15-30	CJ112317B

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			单门带阻尼标准配置 Single Door With Damping	
上下轮 Upper & Bottom Roller		CJ212473A	4	
缓冲器 Buffer		轻型 Light-duty	TD107A	
		通用型 Normal	TD107B	
垫块		PJS25052	8	
18mm轨道限位件 18mm Track Stopper		TJ045B	4	
18mm轨道连接件 18mm Track Connections		PJS38008AR69	16	
18mm轨道堵头 18mm Track Plug		PJS97072AV63	4	
18mm 轨道连接件打孔模板 18mm Punching template of track connector		PJC96034AF12	1	
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw			64	
内六角扳手 Allen Wrench			2	
18mm轨道 18mm Track 选配(Optional)		XJA140CB 银白 Silver	3米/条 3m/pc	
装饰板(黑色) Decoration Profile (Black) 选配(Optional)		XJA141AN	3米/条 3m/pc	




潜艇9号装饰门(18MM)安装包
SUBMARINE 9 (18MM)

配件描述 Fitting Description				单门带阻尼标准配置 Single Door With Damping
TN469A 安装包	垫块		PJS25052	8
	18mm轨道限位件 18mm Track Stopper		TJ045B	4
	18mm轨道连接件 18mm Track Connections		PJS38008AR69	16
	18mm轨道堵头 18mm Track Plug		PJS97072AV63	4
	18mm 轨道连接件打孔模板 18mm Punching template of track connector		PJC96034AF12	1
	GB/ST4.2 × 16十字槽沉头自攻钉 GB/ST4.2 × 16 Cross Recess Countersunk head Self-drilling Screw			64
	内六角扳手 Allen Wrench			2

潜艇9号装饰门(18MM)安装参数

SUBMARINE 9 (18MM) INSTALLATION PARAMETERS

柜体要求 Cabinet Requirements

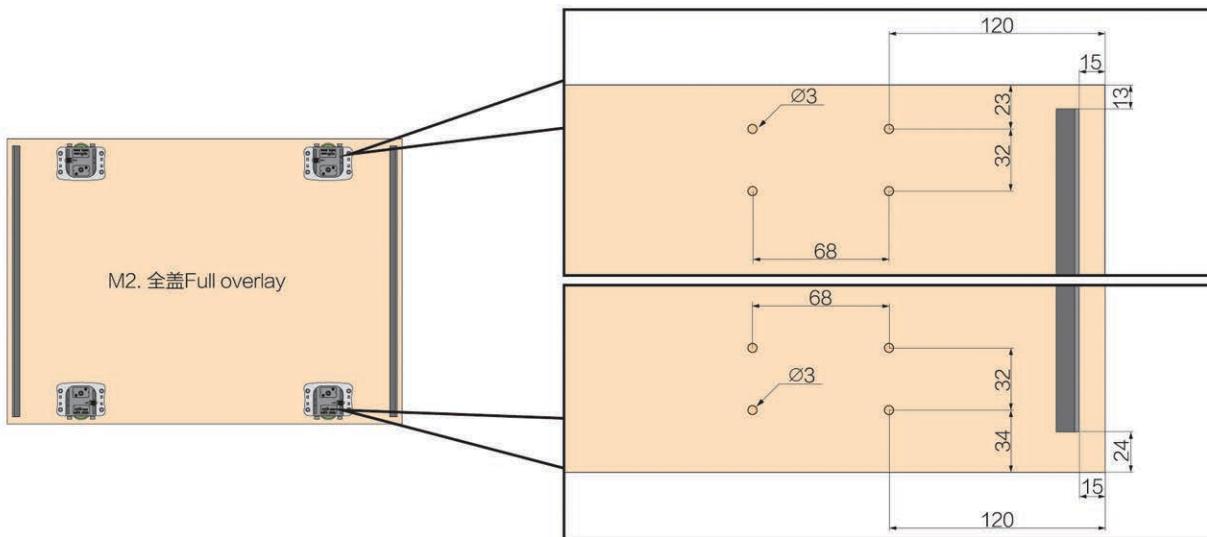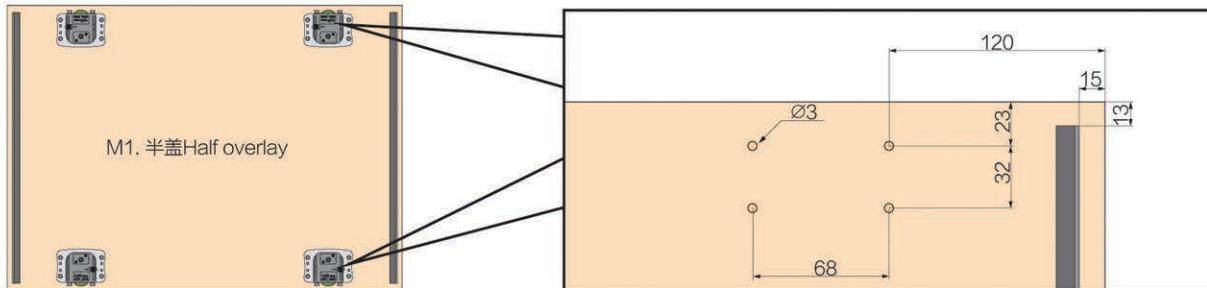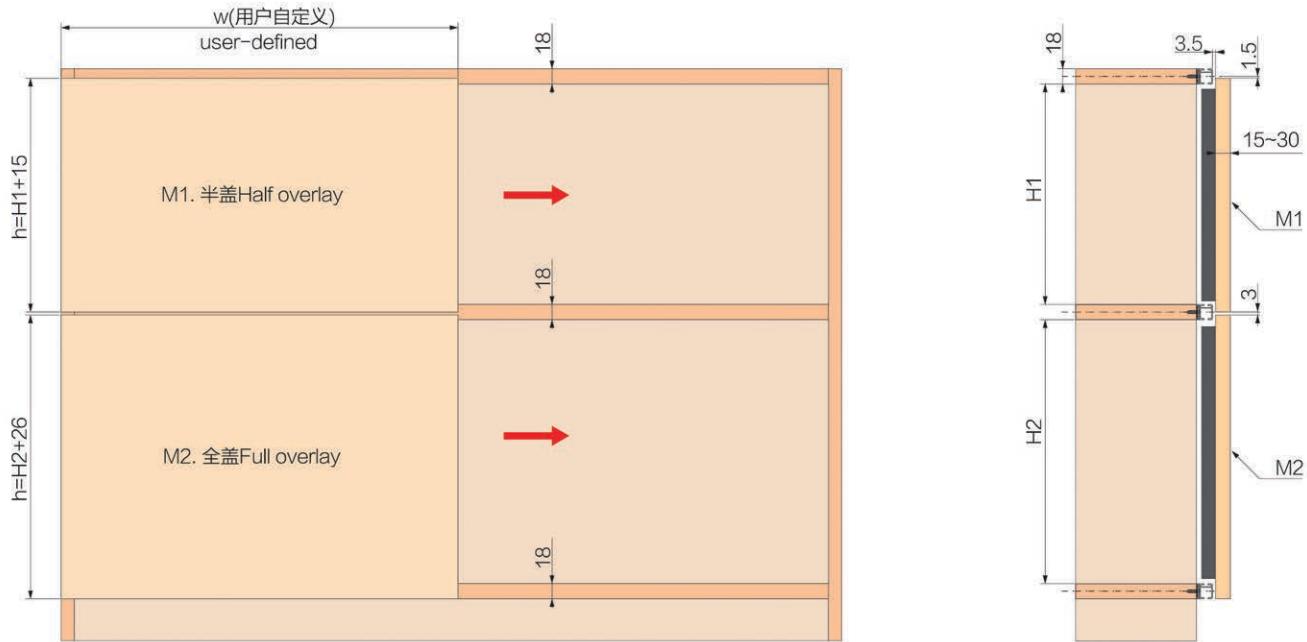


潜艇9号装饰门(25MM)套装

SUBMARINE 9 (25MM) COMPLETE SET



(A) 轻型 Light-duty (B)通用型 Normal

轻型
5-15kg通用型
15-30kg

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	套装型号 Set Model
单门带阻尼 Single Door With Damping		轻型 Light-duty	5-15	CJ112318A
		通用型 Normal	15-30	CJ112318B

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			单门带阻尼标准配置 Single Door With Damping	
上下轮 Upper & Bottom Roller		CJ212473A	4	
缓冲器 Buffer		轻型 Light-duty	TD107A	
		通用型 Normal	TD107B	
垫块		PJS25052	8	
25mm轨道限位件 25mm Track Stopper		TJ045A	4	
25mm轨道连接件 25mm Track Connections		PJS38007AR69	16	
25mm轨道堵头 25mm Track Plug		TJ046A	4	
25mm 轨道连接件打孔模板 25mm Punching template of track connector		PJC96016AF12	1	
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw			64	
内六角扳手 Allen Wrench			2	
25mm轨道(银白) 25mm Track (Silver) 选配(Optional)		XJA139CB 银白 Silver		3米/条 3m/pc
装饰板(黑色) Decoration Profile (Black) 选配(Optional)		XJA141AN		3米/条 3m/pc




潜艇9号装饰门(25MM)安装包
SUBMARINE 9 (25MM)

配件描述 Fitting Description				单门带阻尼标准配置 Single Door With Damping
TN470A 安装包	垫块		PJS25052	8
	25mm轨道限位件 25mm Track Stopper		TJ045A	4
	25mm轨道连接件 25mm Track Connections		PJS38007AR69	16
	25mm轨道堵头 25mm Track Plug		TJ046A	4
	25mm 轨道连接件打孔模板 25mm Punching template of track connector		PJC96016AF12	1
	GB/ST4.2 × 16十字槽沉头自攻钉 GB/ST4.2 × 16 Cross Recess Countersunk head Self-drilling Screw			64
	内六角扳手 Allen Wrench			2

潜艇9号装饰门(25MM)安装参数

SUBMARINE 9 (25MM) INSTALLATION PARAMETERS

柜体要求 Cabinet Requirements

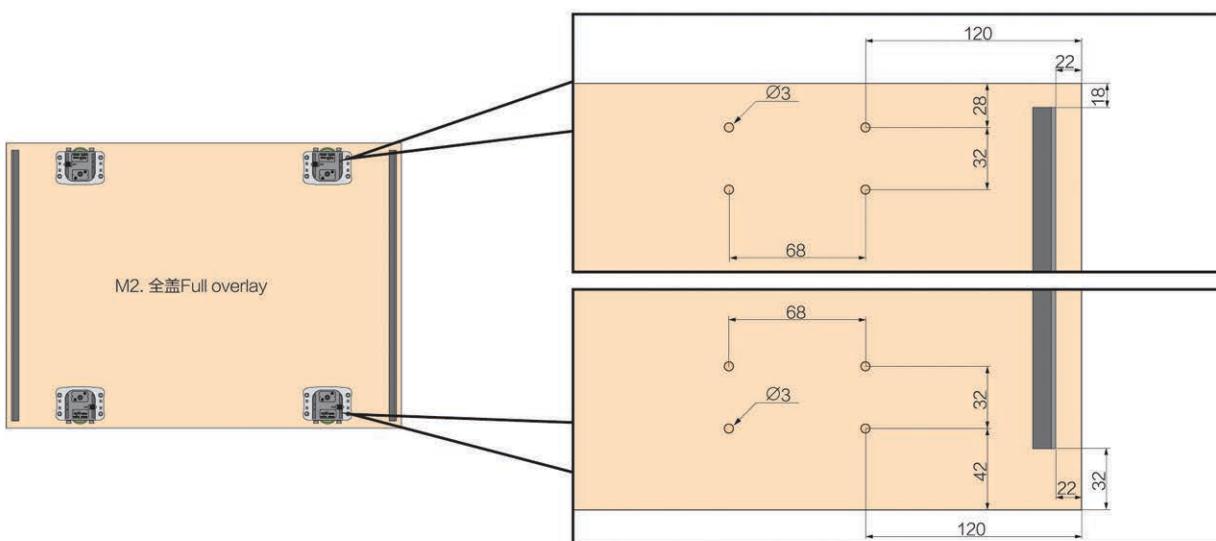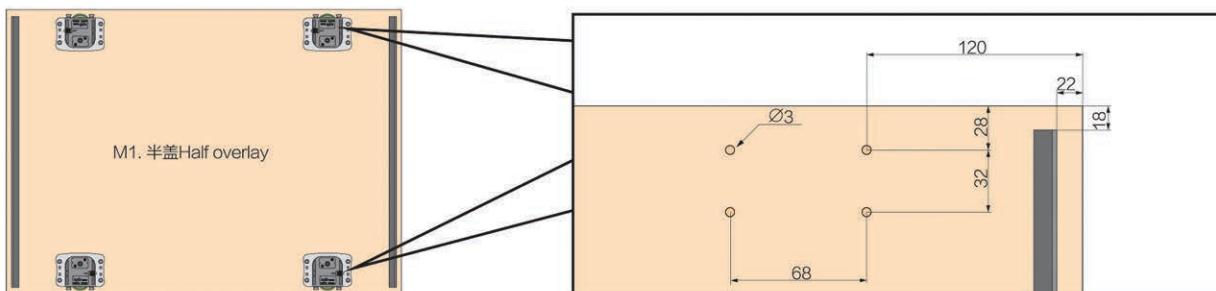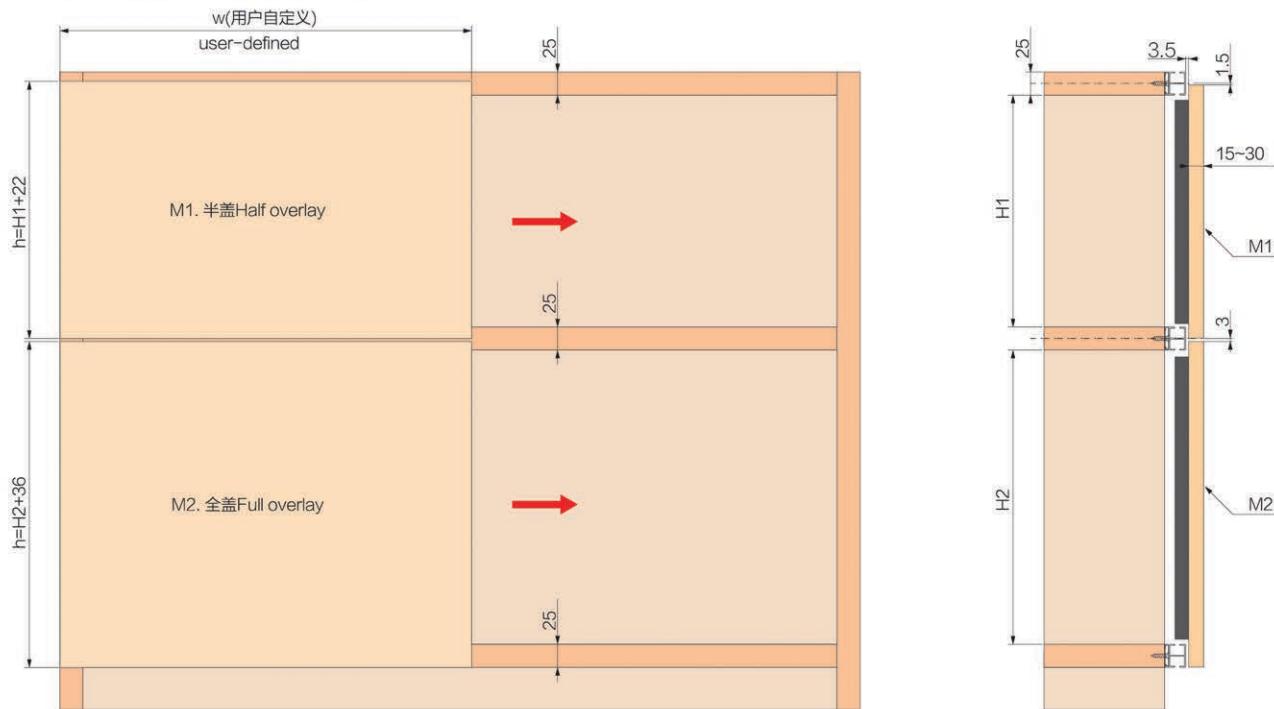

潜艇10号

SUBMARINE 10

产品特点：

- 双面可安装设计，明装/嵌入式(上下轮通用)；
- 阻尼自动挂钩设计，脱钩自动复位功能；
- 弹性锁紧装置,安装更简便；
- 高度调节简便、快捷；
- 采用进口定制改性工程塑料，增加承重，牢固、耐用
- 高度差浮动功能,滑动更平稳顺畅；
- 采用高精度滑轮,承重好、顺滑、静音、耐用。

Product Features:

- Double-sided installation design, Visible/Invisible (Upper roller and bottom roller are universal).
- Damper automatic hook design, Automatic reset when out of hook.
- Elastic locking device, easier installation.
- Height adjustment design, easy and quick to adjust.
- Made of imported customize improved POM , increase the load bearing, strong and durable.
- Height difference floating function, sliding more stable and smooth.
- High precision grade roller, stable, smooth and quiet sliding,long service time.

技术概要：

- **适用于:** 单扇和双扇木质推拉门、铝边框门
- **调节性能:** 门扇安装高度可调
- **门重:** 单扇门≤50kg
- **门宽:** ≥500mm
- **门厚:** ≥18mm

Technical Points:

- **Application:** Single and double wood sliding door、aluminum door
- **Adjustment performance:** Door panel installation height is adjustable
- **Door Weight:** single door≤50kg
- **Door width:**≥500mm
- **Door thickness:**≥18mm



潜艇10号暗装套件 SUBMARINE 10 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty

轻型 5-15kg
通用型 15-30kg
重型 30-50kg

产品描述 Product Description		CJ112366A 单门无阻尼	CJ112365 A/B/C 单门双阻尼	CJ212597A 2门无阻尼	CJ112293 A/B/C 2门双阻尼	CJ112294 A/B/C 3门双阻尼
CJ212474A 上下轮 Top & Bottom Roller		4	4	8	8	12
TN223A/B/C 反向阻尼 Reverse Damper		-	2	-	4	4
TN274A 轨道堵头 Track plug		4	4	8	8	8
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		16	16	32	32	48
2.5毫米内六角扳手 2.5mm Allen Wrench		-	1	-	1	1


轨道型材

RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
C-N	XJA132CB 上下轨 Upper & Bottom Track		铝合金 Aluminium Alloy	0.14	2000	XJA132CB00200
	XJA132GB 上下轨 Upper & Bottom Track				2500	XJA132CB00250
	XJA132CB 上下轨 Upper & Bottom Track		铝合金 Aluminium Alloy	0.14	3000	XJA132CB00300
					2000	XJA132CG00200
					2500	XJA132CG00250
	XJA132GB 上下轨 Upper & Bottom Track		铝合金 Aluminium Alloy	0.14	3000	XJA132CG00300
					2000	XJA132CG00200
					2500	XJA132CG00250

安装参数

INSTALLATION PARAMETERS

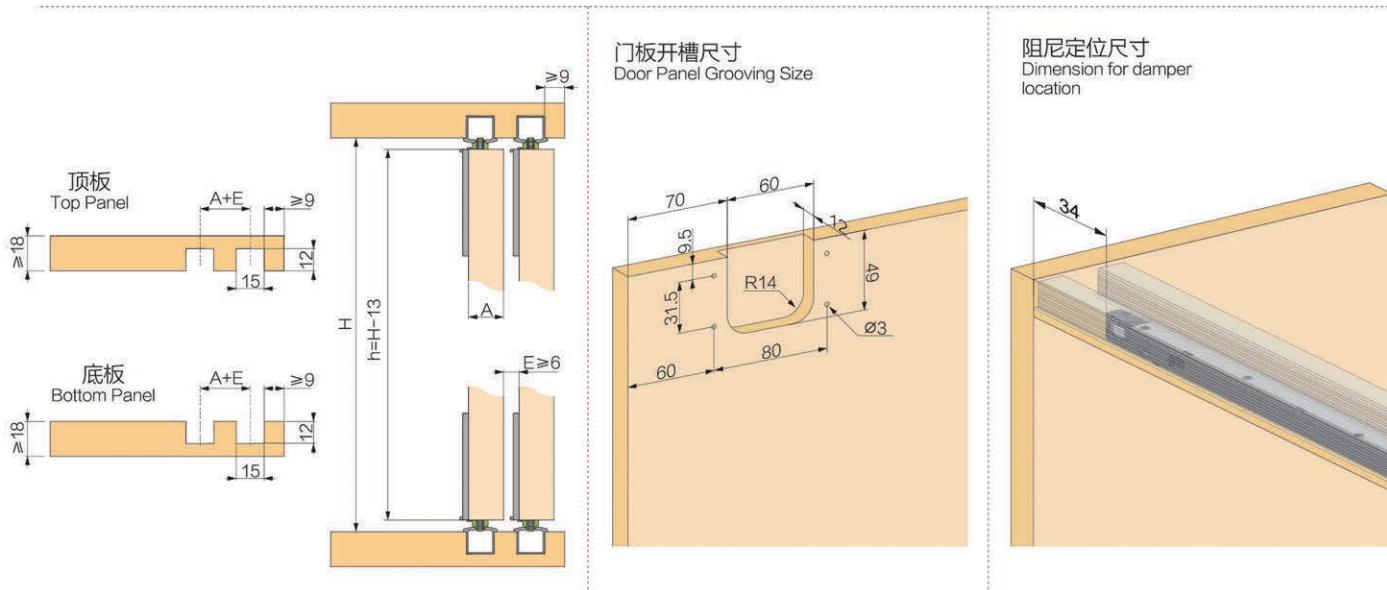

潜艇10号明装套件 SUBMARINE 10 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty

轻型
5-15kg通用型
15-30kg重型
30-50kg

产品描述 Product Description		CJ112293 A/B/C 2门双阻尼	CJ112294 A/B/C 3门双阻尼
CJ212474A 上下轮 Top & Bottom Roller		8	12
TN223A/B/C 反向阻尼 Reverse Damper		4	4
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		32	48
2.5毫米内六角扳手 2.5mm Allen Wrench		1	1


轨道型材

RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
A-18	XJA131AT 上轨道 Upper Track		铝合金 Aluminium Alloy	0.56	银白 Silver	2000 XJA131AT00200
						2500 XJA131AT00250
						3000 XJA131AT00300
	XJA196CB 下轨道 Under Track		铝合金 Aluminium Alloy	0.36	银白 Silver	2000 XJA196CB00200
						2500 XJA196CB00250
						3000 XJA196CB00300

安装参数

INSTALLATION PARAMETERS

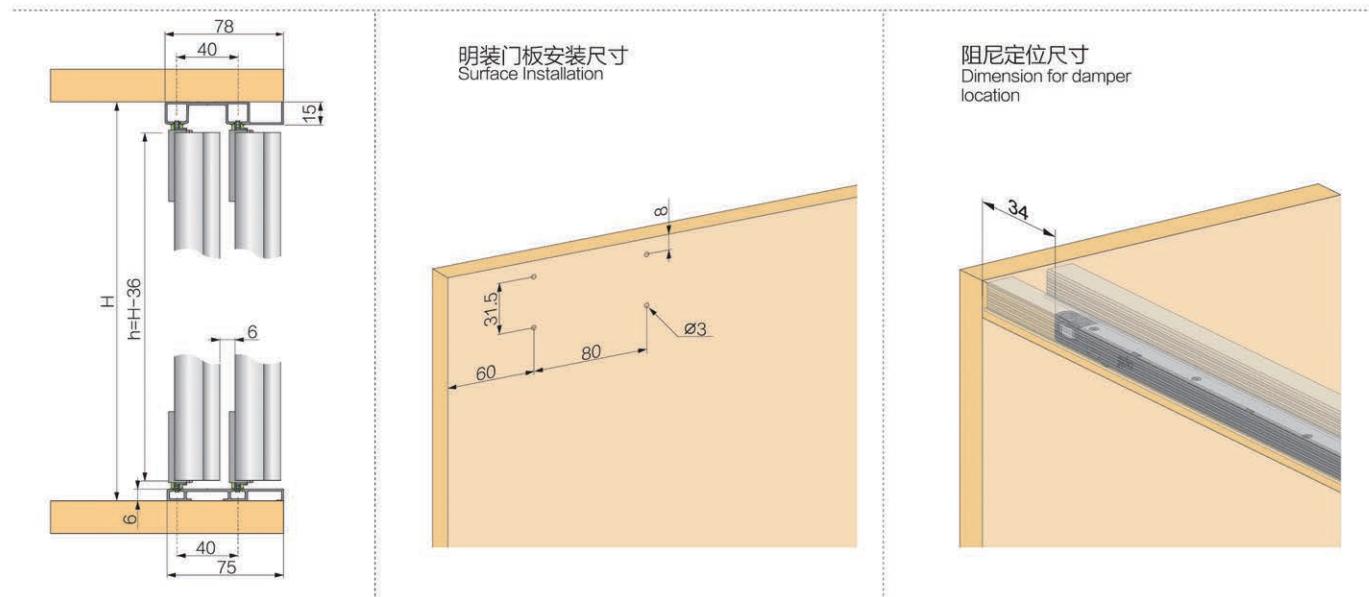

潜艇10号明装套件 SUBMARINE 10 KIT

(A) 轻型 Light-duty (B)通用型 Normal (C)重型 Heavy-duty

轻型
5-15kg通用型
15-30kg重型
30-50kg

产品描述 Product Description		CJ112293 A/B/C 2门双阻尼	CJ112294 A/B/C 3门双阻尼
CJ212474A 上下轮 Top & Bottom Roller		8	12
TN223A/B/C 反向阻尼 Reverse Damper		4	4
GB/ST4.2×16十字槽沉头自攻钉 GB/ST4.2×16 Cross Recess Countersunk head Self-drilling Screw		32	48
2.5毫米内六角扳手 2.5mm Allen Wrench		1	1


轨道型材

RACK PROFILE

产品描述 Product Description		材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
B-18	XJA160CB 上轨道 Upper Track		铝合金 Aluminium Alloy	0.62	银白 Silver	2000 XJA160CB00200
						2500 XJA160CB00250
						3000 XJA160CB00300
B-18	XJA196CB 下轨道 Under Track		铝合金 Aluminium Alloy	0.36	银白 Silver	2000 XJA196CB00200
						2500 XJA196CB00250
						3000 XJA196CB00300

安装参数

INSTALLATION PARAMETERS

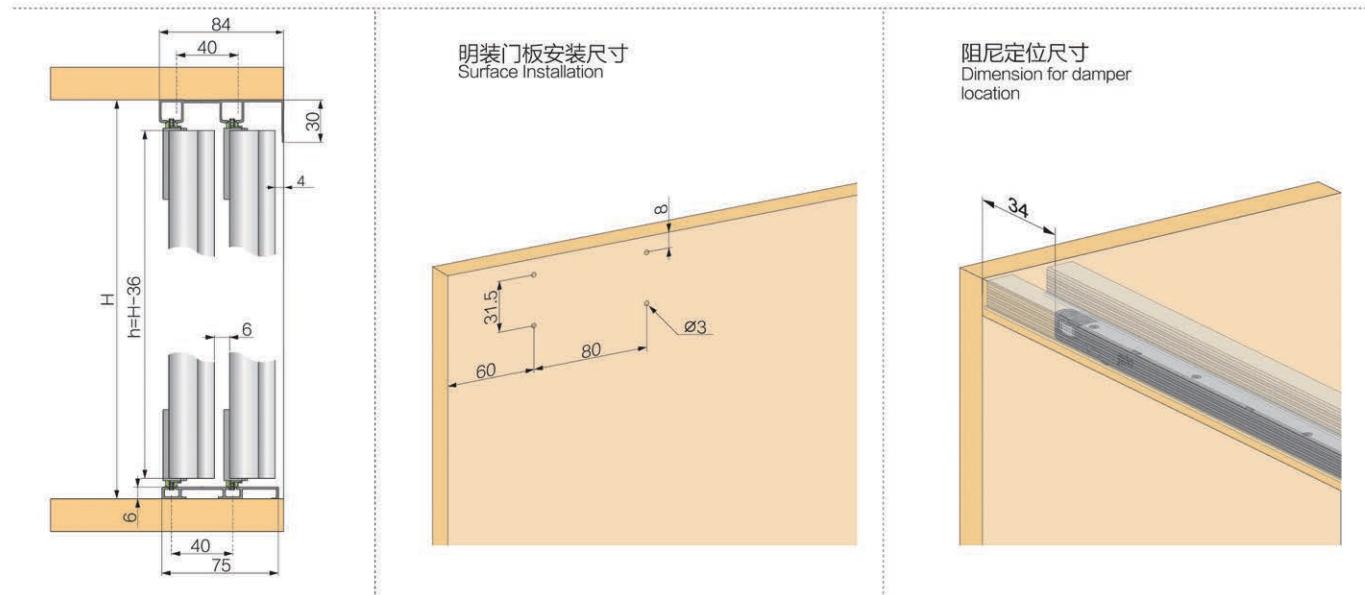



中山市欧派克五金制品有限公司
OPIKE HARDWARE PRODUCTS CO., LTD.

地址: 广东省中山市小榄镇永宁螺沙瑞和路11号

电话: 400 804 9989

传真: 0760-2227 9177

ADD: NO.11, Ruihe Road, YongningLuosha, Xiaolan
Town, Zhongshan City, GD., China.

TEL: 400 804 9989

FAX: 0760-2227 9177

[Http://www.opike.cc](http://www.opike.cc) E-mail: sales@opk.cc

本资料产品款式、颜色及有关数据仅供参考，印刷时可

能使资料内产品与实物有轻微差别，请以实物为准。

Image shown in this catalog is indicative only . If
there is any inconsistency between the image and
the actual product you receive , the actual product
will govern.



欧派克公众号



欧派克网址