


# 22



**ALWAYS**

Specialized In Magnet Light

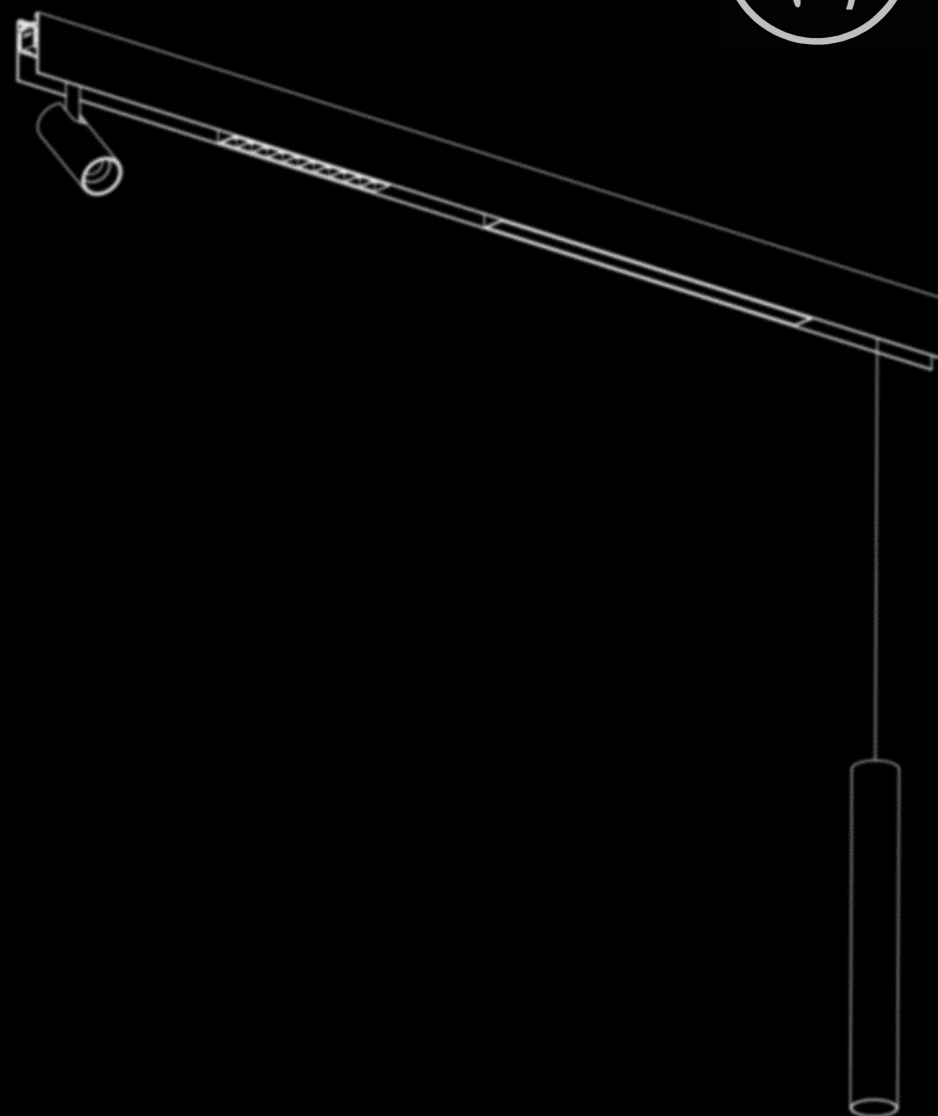

**ALWAYS**


LIGHTING TECHNOLOGY CO.,LTD



48V MAGNETIC TRACK

—SERIES—

ALWAYS

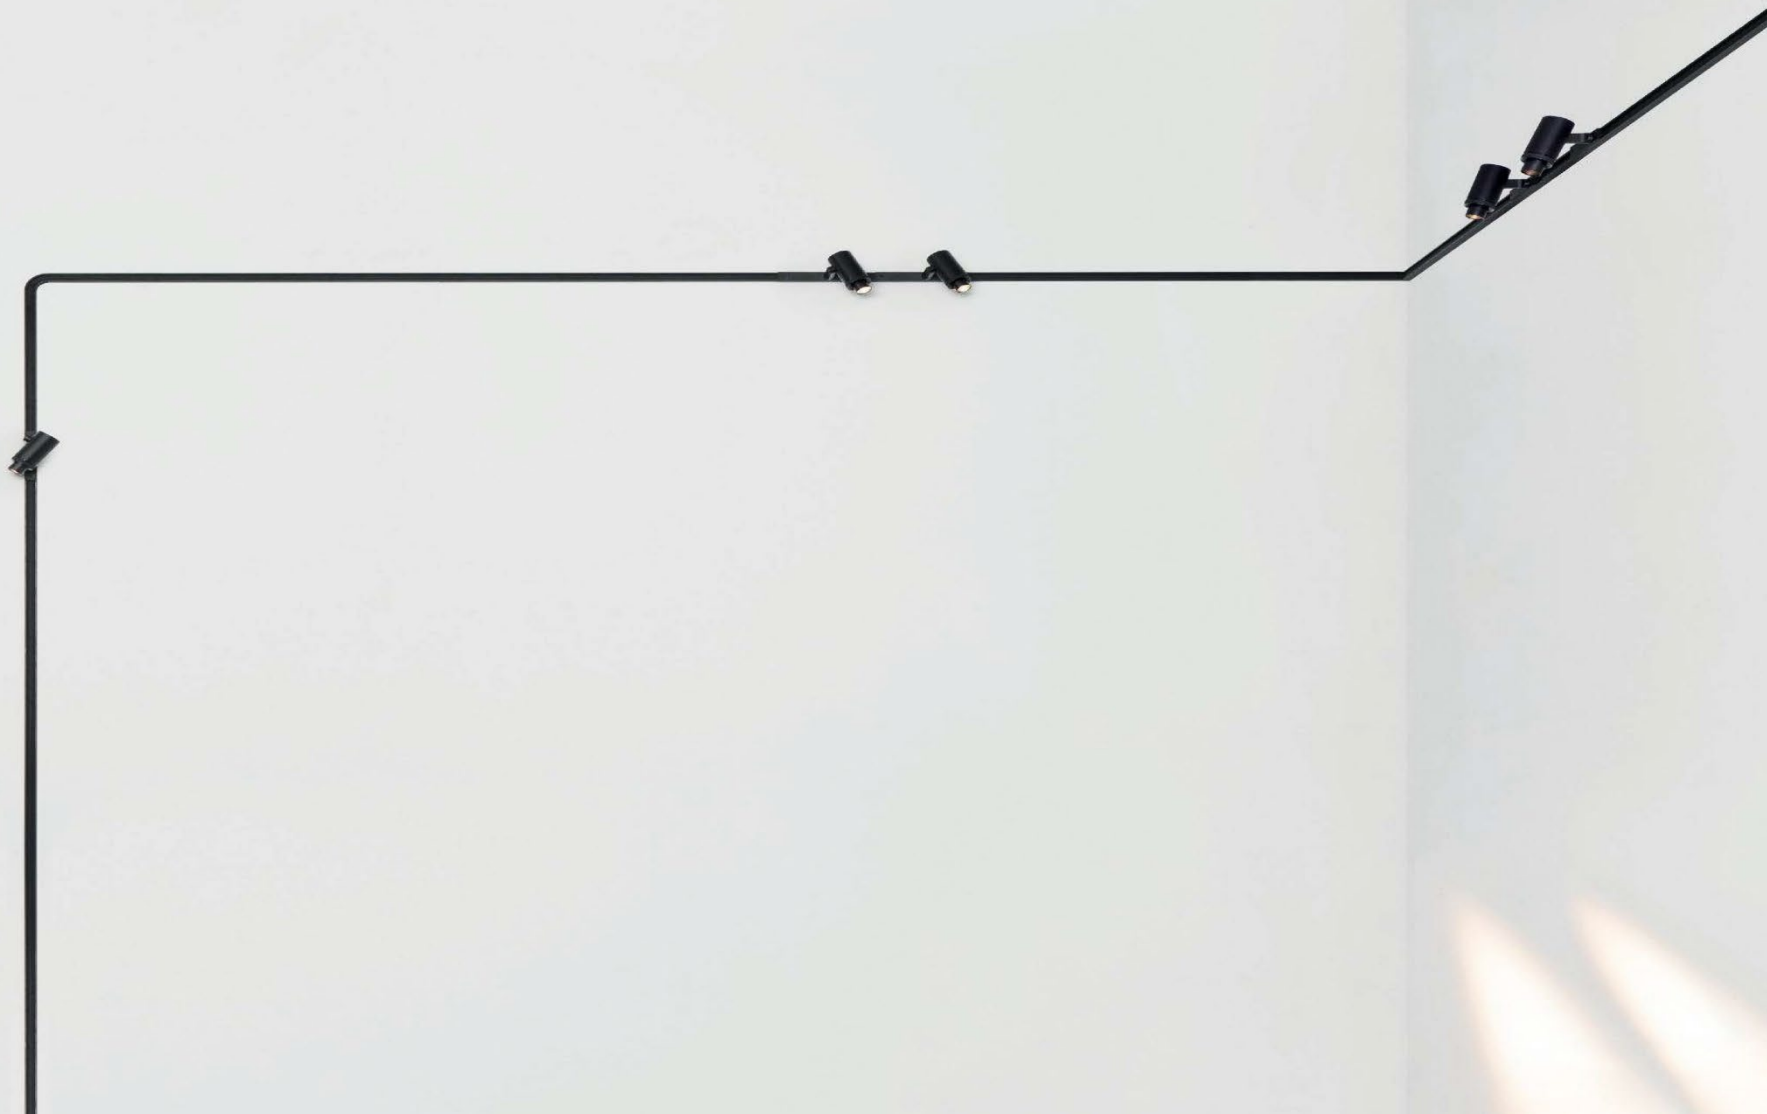

IRON BAR ( TRACK )



MAGNET ( LAMP )  
COPPER WIRE ( TRACK )

TRACK 48V SURFACE

## MAGNETIC TRACK

> 3M

HEIGHT OF CEILING

< 3M

COMMERCIAL USE

— SERIES —


HOME USE

M35

M20




SUSPENDED  
SURFACE



RECESSED




| Line colors                                                                       | In put          |
|-----------------------------------------------------------------------------------|-----------------|
|  | + DC48V         |
|  | - DC48V         |
|  | + 0-10V/ + DALI |
|  | - 0-10V/ - DALI |

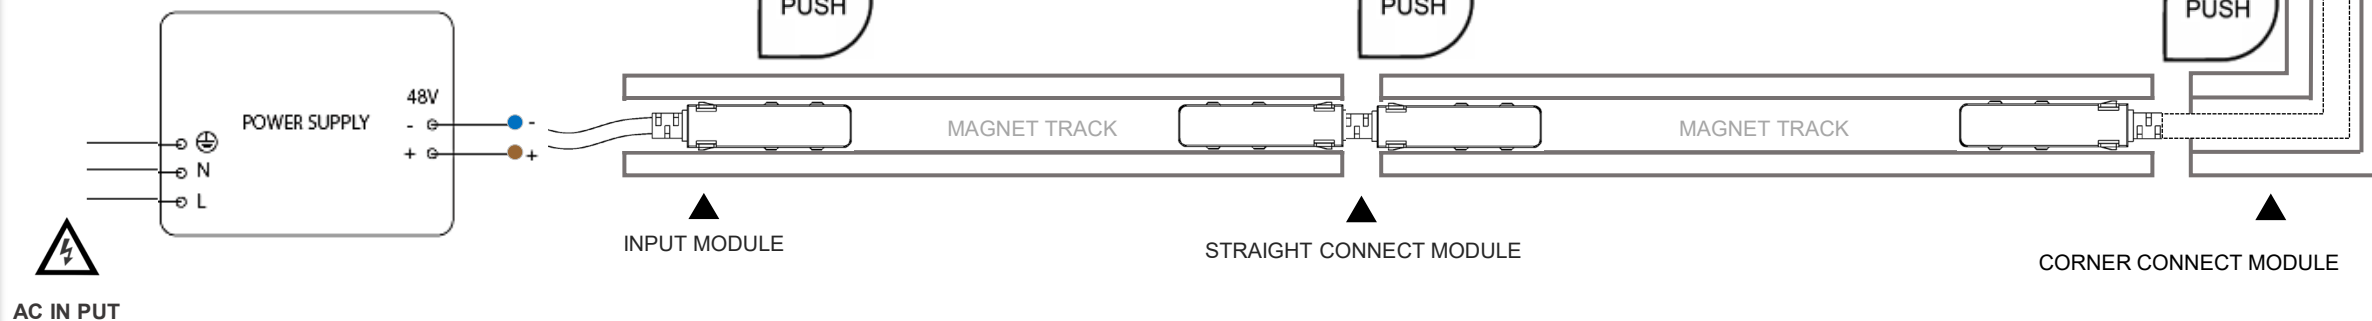


◆ REGULAR MODE


◆ BLUETOOTH MODE

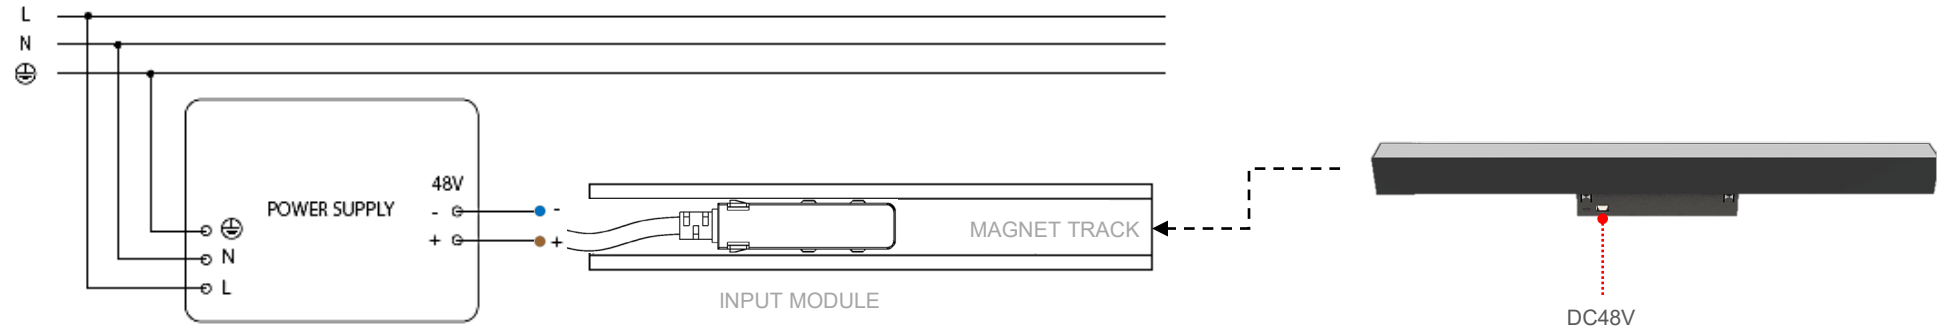


◆ DALI CONTROL

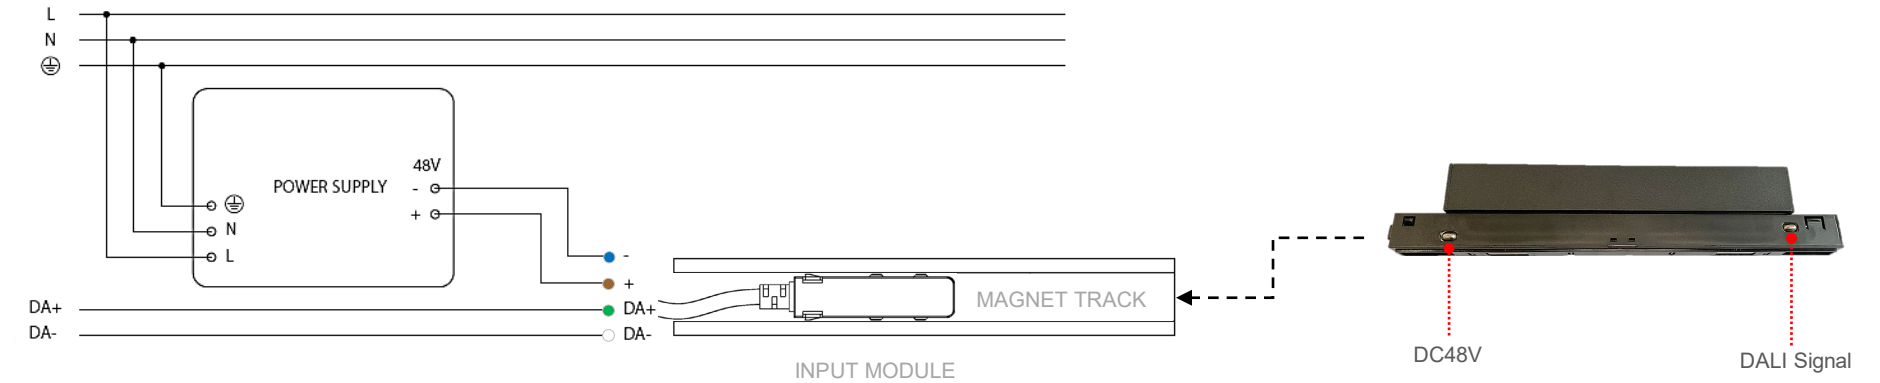

◆ 0-10V CONTROL

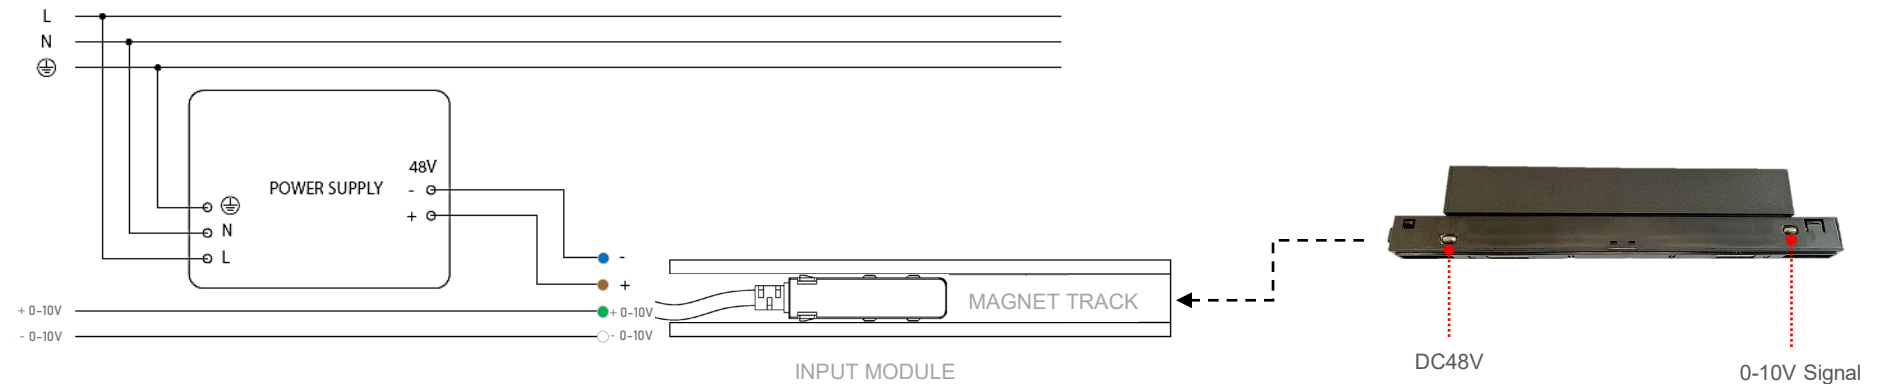

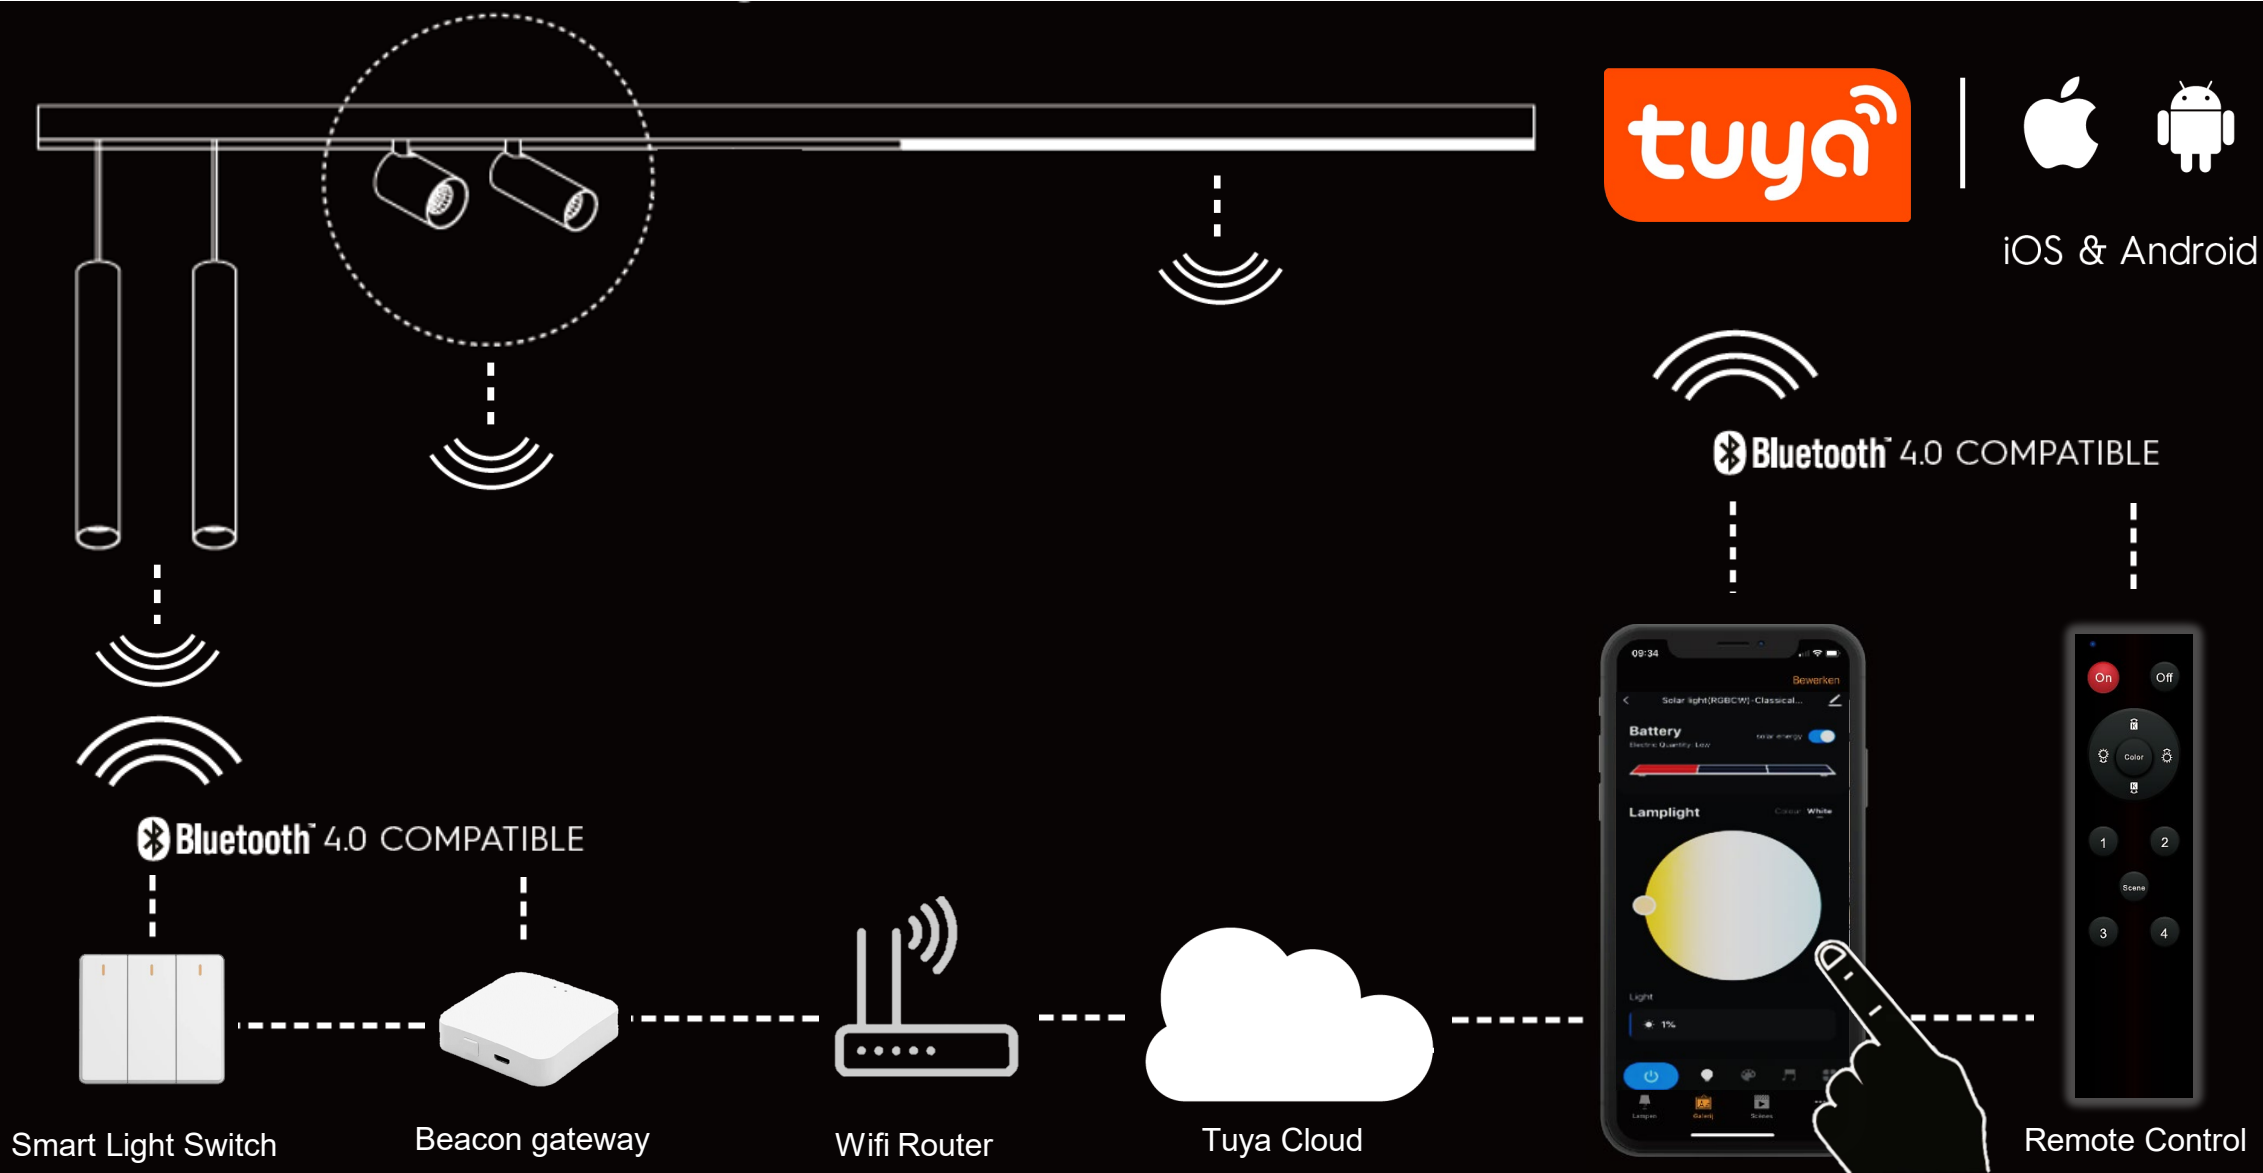

# M16

contracted


48V MAGNETIC TRACK

—SERIES—






## 16TRACK SERIE-TC16

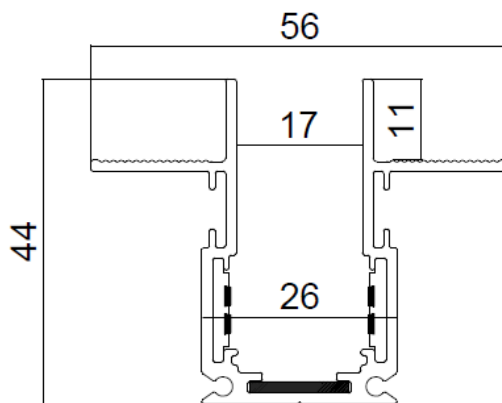

### Installation: Recessed

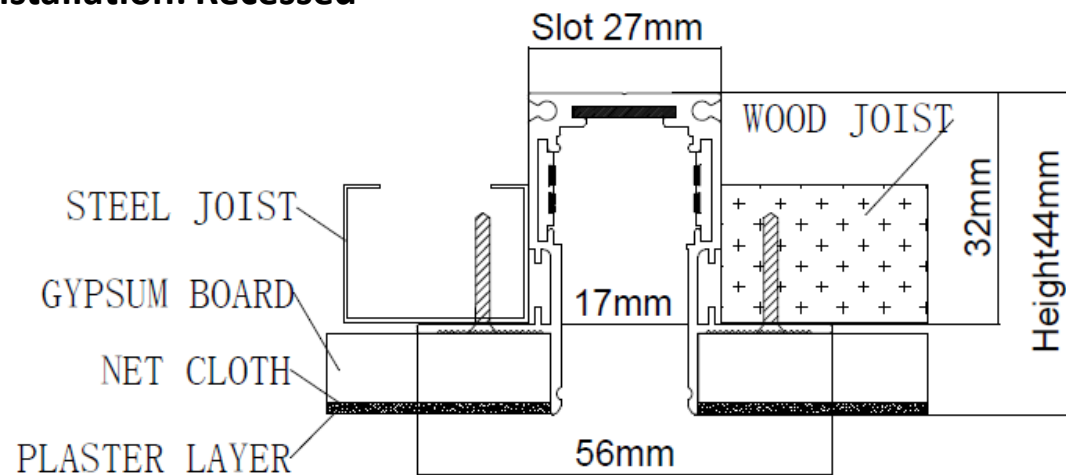

### TC16 Corners

Thickness

1.5mm

Weight

0.98kg

Standard  
Length


1000mm

1500mm


2000mm

3000mm


**END CAPS**




**90° corner  
(C TO C)**



**90° corner IN  
(C TO W)**




**90° corner OUT  
(W TO W)**






## 16TRACK SERIE-TC16L

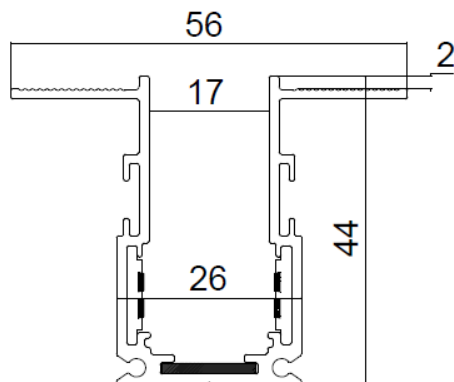

Installation: Recessed

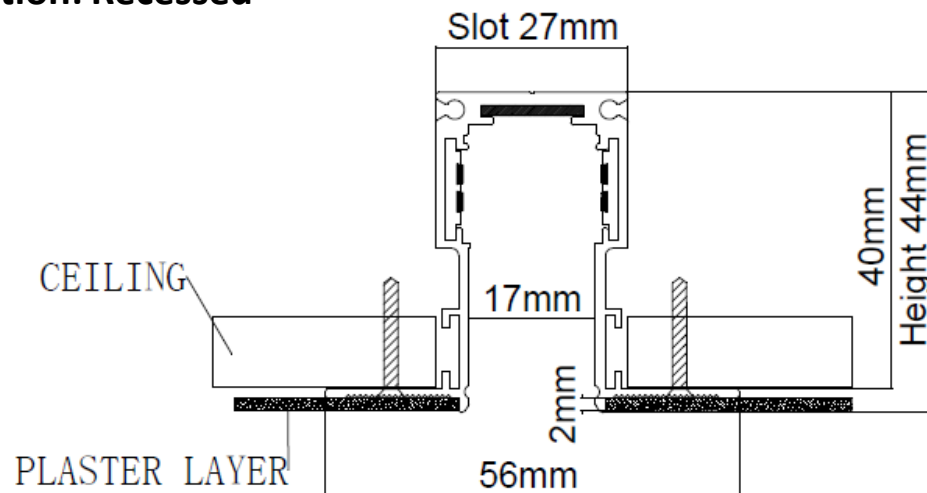

TC16L Corners

Thickness

1.5mm

Weight

0.98kg

Standard  
Length


1000mm

1500mm


2000mm

3000mm


END CAPS




90° corner  
(C TO C)




90° corner IN  
(C TO W)



90° corner OUT  
(W TO W)





# 16TRACK SERIE-TH16

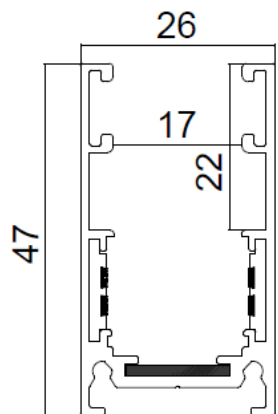

Installatio

SURFACE

SUSPENDED

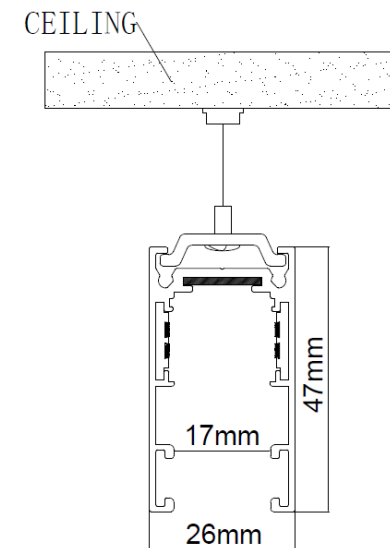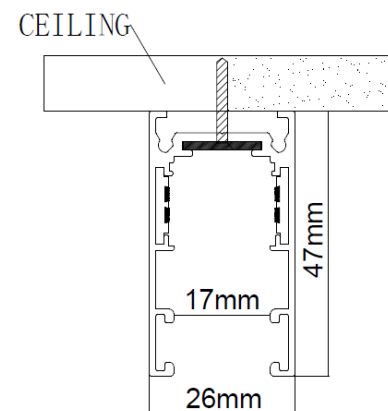

TH16 Corners

Thickness

1.5mm

Weight

0.87kg

Standard  
Length


1000mm

1500mm


2000mm

3000mm


END CAPS




90° corner  
(C TO C)



90° corner IN  
(C TO W)



90° corner OUT  
(W TO W)




# M16

Magnetic LED Spot Linear

new



## Types

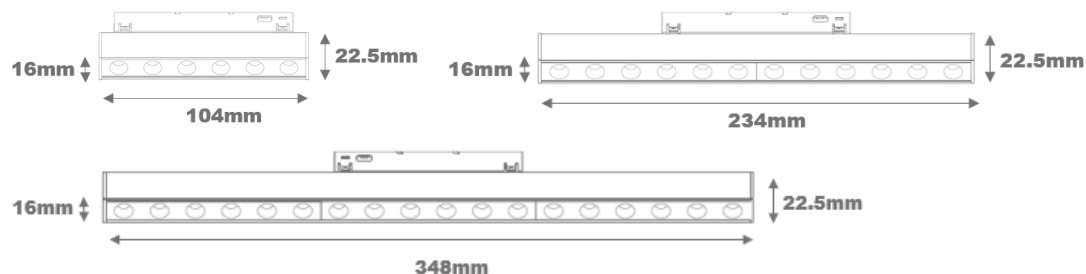

## ◆LB6 ◆LB12 ◆LB18

| Code | Power | Size (mm)   | Colours                                                                             |
|------|-------|-------------|-------------------------------------------------------------------------------------|
| LB6  | 5W    | 104*16*22.5 |  |
| LB12 | 10W   | 234*16*22.5 |                                                                                     |
| LB18 | 15W   | 348*16*22.5 |                                                                                     |

Beam angle : ■ 36°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : □ Adjustable ■ Fixed

Ambient Temperature : -20°C ~ +40°C


Dimm/Control : □ 0-10V □ Dali □ Bluetooth □ Zigbee




# M16

Magnetic LED Diffused Linear

new



## Types



## ◆DF360 ◆DF700

| Code  | Power | Size (mm)   | Colours                                                                             |
|-------|-------|-------------|-------------------------------------------------------------------------------------|
| DF360 | 10W   | 346*16*22.5 |  |
| DF700 | 20W   | 688*16*22.5 |                                                                                     |

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C




Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee




# M16

Magnetic LED Spot Linear

new

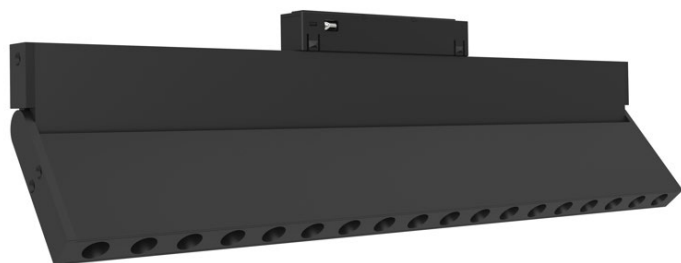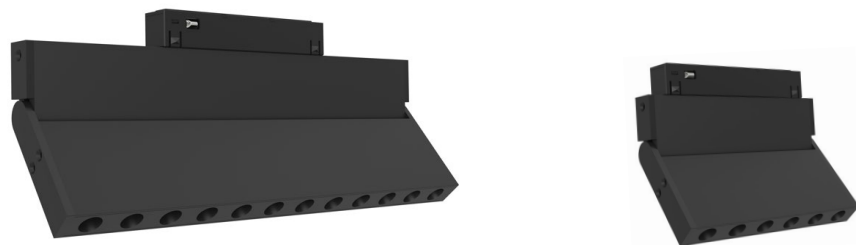




Types

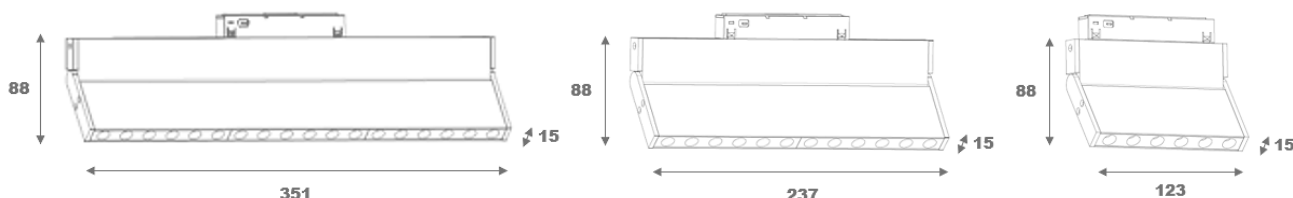

## ◆FD6X ◆FD12X◆FD18X

| Code                                                                                                                                                                   | Power | Size (mm) | Colours                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|-------------------------------------------------------------------------------------|
| FD6X                                                                                                                                                                   | 5W    | 123*15*88 |  |
| FD12X                                                                                                                                                                  | 10W   | 237*15*88 |                                                                                     |
| FD18X                                                                                                                                                                  | 15W   | 351*15*88 |                                                                                     |
| Beam angle : <input checked="" type="checkbox"/> 36°                                                                                                                   |       |           |                                                                                     |
| CCT : <input checked="" type="radio"/> 3000K <input checked="" type="radio"/> 4000K <input checked="" type="radio"/> 5000K <input checked="" type="radio"/> 3000-5000K |       |           |                                                                                     |
| CRI : ≥ 92                                                                                                                                                             |       |           |                                                                                     |
| Input Voltage : 48VDC                                                                                                                                                  |       |           |                                                                                     |
| Structure : <input checked="" type="checkbox"/> Adjustable <input type="checkbox"/> Fixed                                                                              |       |           |                                                                                     |
| Ambient Temperature : -20°C ~ +40°C                                                                                                                                    |       |           |                                                                                     |
| Dimm/Control : <input type="checkbox"/> 0-10V <input type="checkbox"/> Dali <input type="checkbox"/> Bluetooth <input type="checkbox"/> Zigbee                         |       |           |                                                                                     |









# M16

Magnetic LED Diffused Linear

new

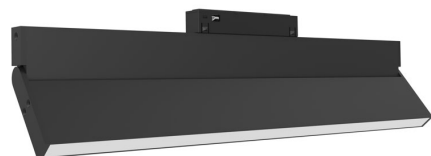

## Types

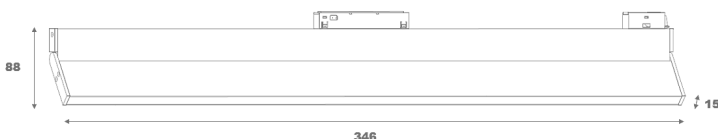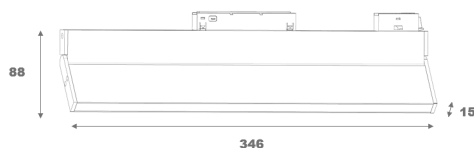

## ◆FD360X ◆FD700X

| Code   | Power | Size (mm) | Colours                                                                             |
|--------|-------|-----------|-------------------------------------------------------------------------------------|
| FD340X | 10W   | 352*15*88 |  |
| FD680X | 20W   | 694*15*88 |                                                                                     |

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee






# M20

**HOME USE**



**48V MAGNETIC TRACK**

— **SERIES** —

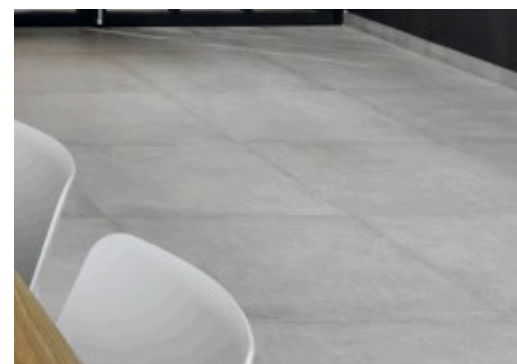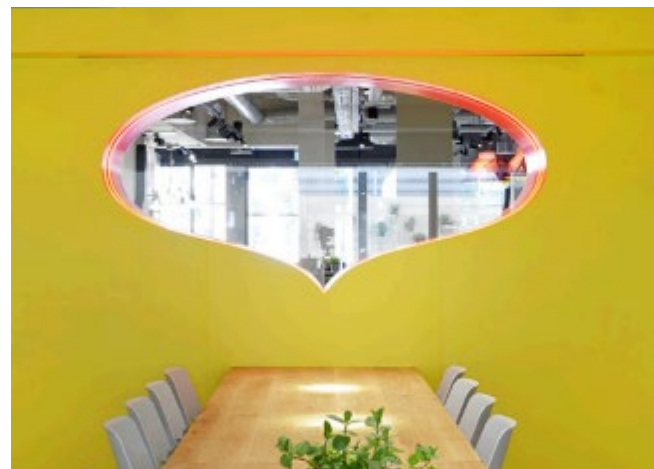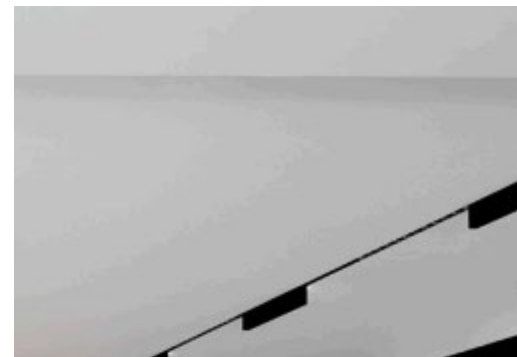




## 20TRACK SERIE-TC20

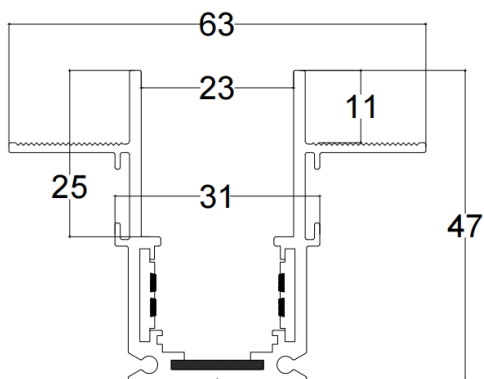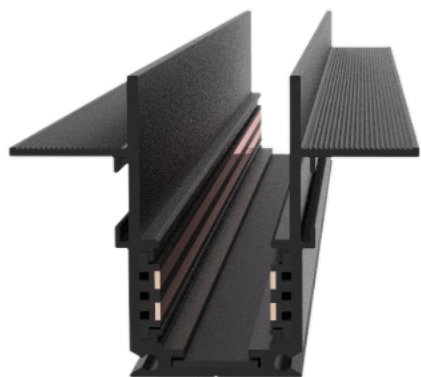

### Installation: Recessed

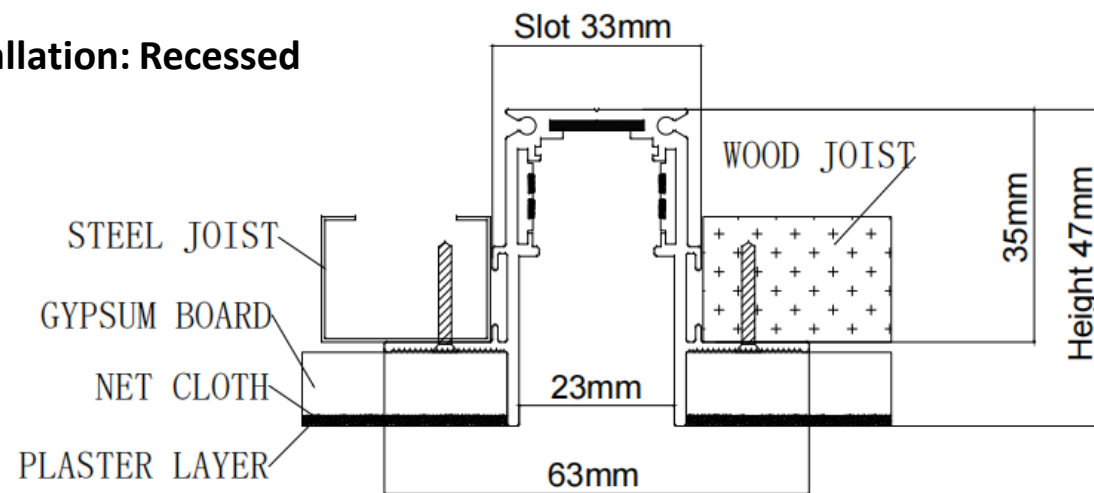

### TC20 Corners

Thickness

1.8mm

Weight

1.1kg

Standard  
Length


1000mm

1500mm


2000mm

3000mm


**END CAPS**




**90° corner  
(C TO C)**





**90° corner IN  
(C TO W)**




**90° corner OUT  
(W TO W)**



## 20TRACK SERIE-TC20L

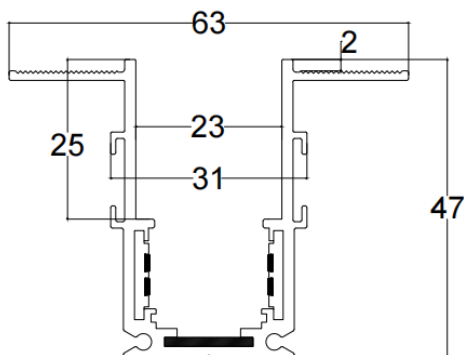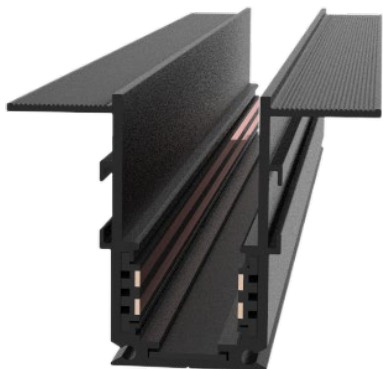

### Installation: Recessed

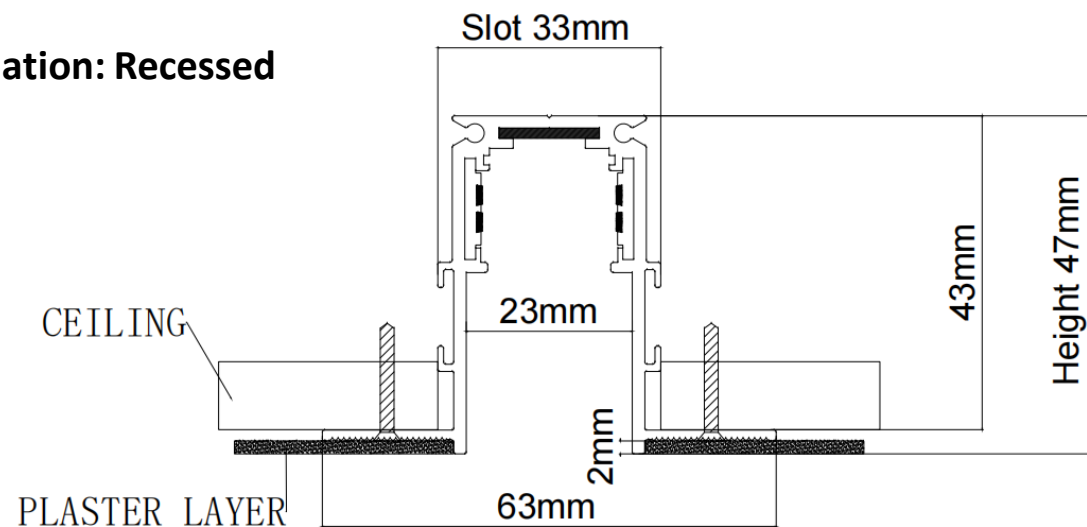

### TC20L Corners

Thickness

1.8mm

Weight

1.1kg

Standard  
Length


1000mm

1500mm


2000mm

3000mm


**END CAPS**




**90° corner  
(C TO C)**





**90° corner IN  
(C TO W)**



**90° corner OUT  
(W TO W)**





## 20TRACK SERIE-TH20

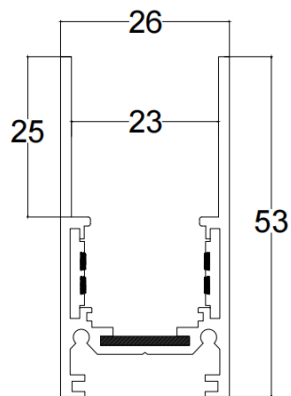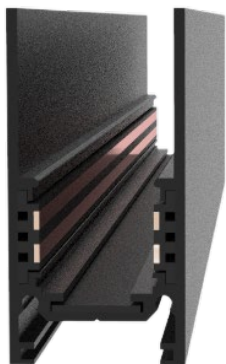

Installation:

**SURFACE**

**SUSPENDED**

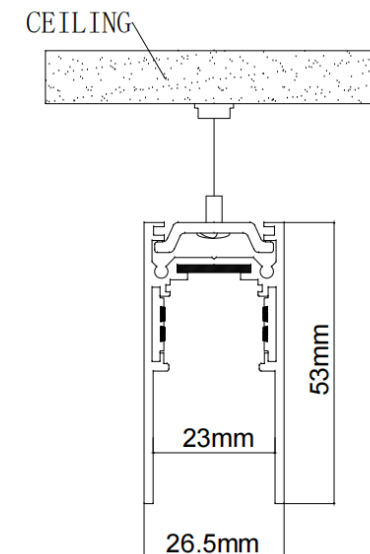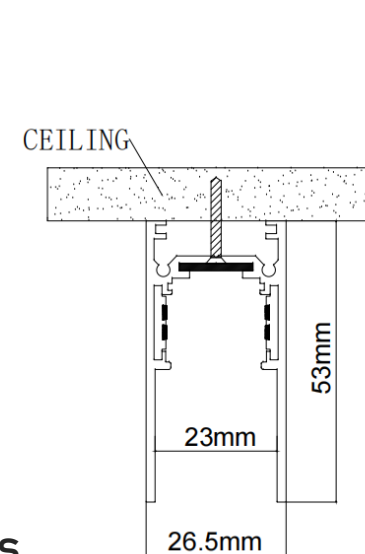

### TH20 Corners

Thickness

1.8mm

Weight

0.9kg

Standard  
Length


1000mm

1500mm


2000mm

3000mm


**END CAPS**




**90° corner  
(C TO C)**



**90° corner IN  
(C TO W)**



**90° corner OUT  
(W TO W)**





# M20

Magnetic LED Spot Linear

new



## Types

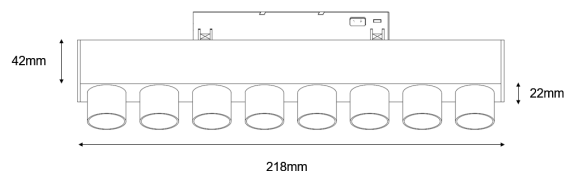

## ◆SP4 ◆SP8

| Code | Power | Size (mm) | Colours                                                                                                                                                                 |
|------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SP4  | 8W    | 110*22*42 |   |
| SP8  | 16W   | 218*22*42 | ( default black )                                                                                                                                                       |

Beam angle : ☐ 15° ☒ 30° ☐ 50°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C


Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee




# M20

Magnetic LED Spot Linear

new

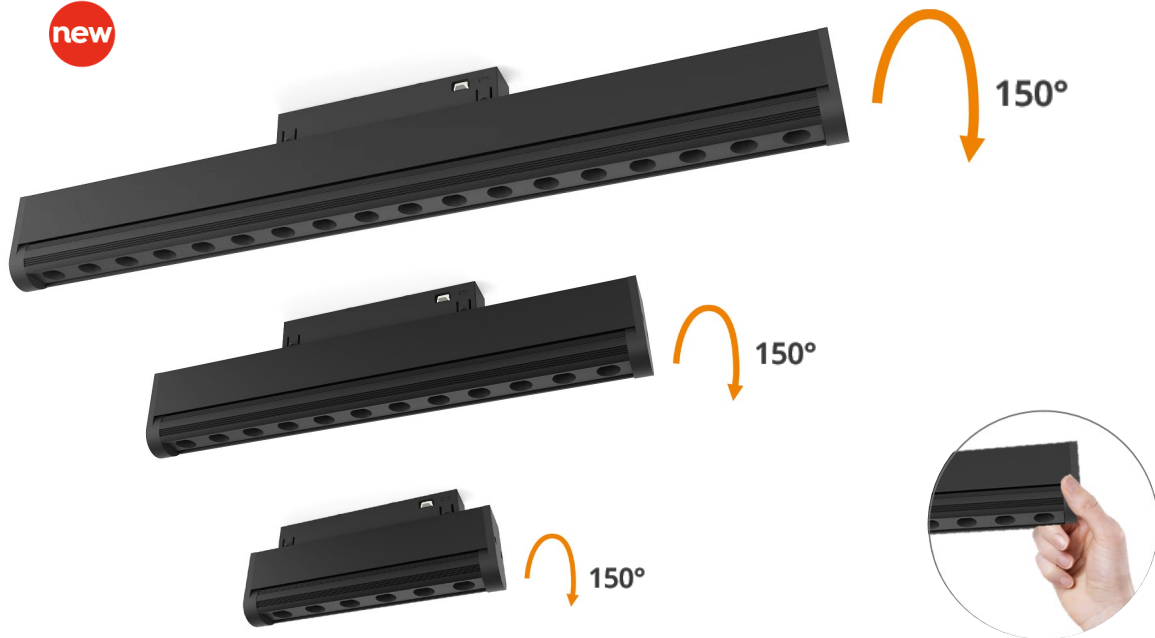

## Types

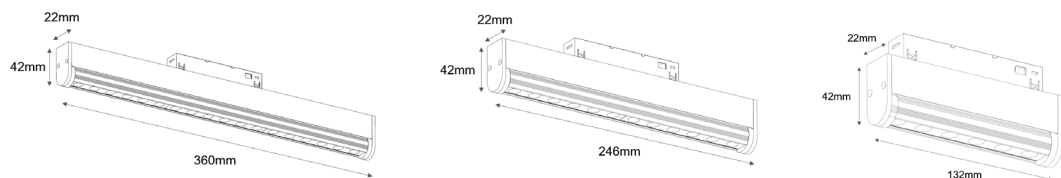

## ◆LBR6 ◆LBR12 ◆LBR18

| Code  | Power | Size (mm) | Colours                                                                                                                                                                 |
|-------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LBR6  | 6W    | 132*22*42 |   |
| LBR12 | 12W   | 246*22*42 | ( default black )                                                                                                                                                       |
| LBR18 | 18W   | 360*22*42 |                                                                                                                                                                         |

Beam angle : 30°

CCT :  3000K  4000K  5000K  3000-5000K


CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C


Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

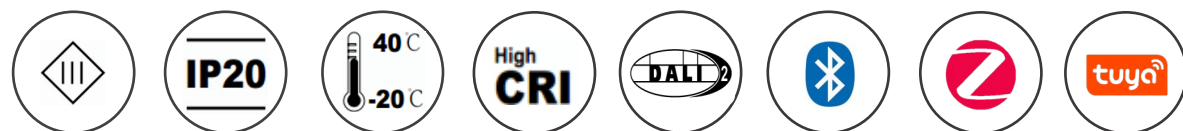



# M20

Magnetic LED Diffused Linear

new

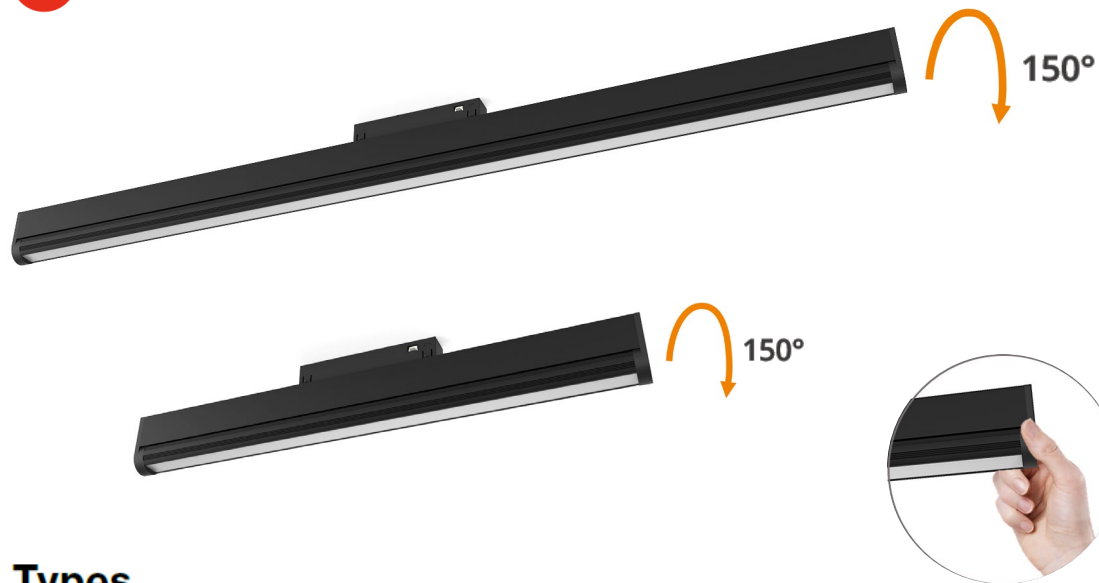

## Types

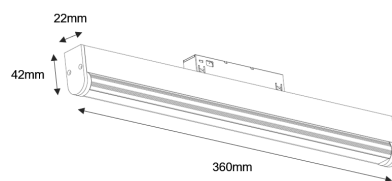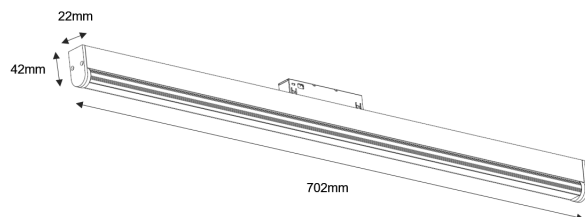

## ◆DFR360 ◆DFR700

| Code   | Power | Size (mm) | Colours                                                                                                                                                                 |
|--------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DFR360 | 10W   | 360*22*42 |   |
| DFR700 | 20W   | 702*22*42 | ( default black )                                                                                                                                                       |

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K


CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C



Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee






# M20

Magnetic LED Spot Linear

new

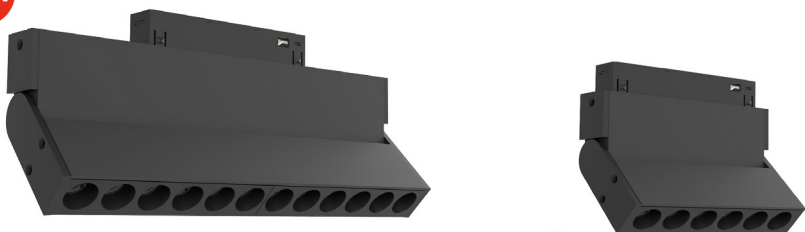



Types

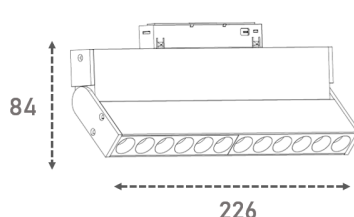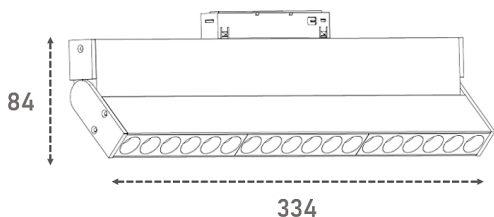

## ◆FD6X ◆FD12X◆FD18X

| Code  | Power | Size (mm) | Colours                                                                                                                                                                 |
|-------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FD6X  | 6W    | 118*22*84 |   |
| FD12X | 12W   | 226*22*84 | ( default black )                                                                                                                                                       |
| FD18X | 18W   | 334*22*84 |                                                                                                                                                                         |

Beam angle : ■ 24° □ 36°  
 CCT :  3000K  4000K  5000K  3000-5000K  
 CRI : ≥ 92  
 Input Voltage : 48VDC  
 Structure : ■ Adjustable □ Fixed  
 Ambient Temperature : -20°C ~ +40°C  
 Dimm/Control : □ 0-10V □ Dali □ Bluetooth □ Zigbee









# M20

Magnetic LED Diffused Linear

new

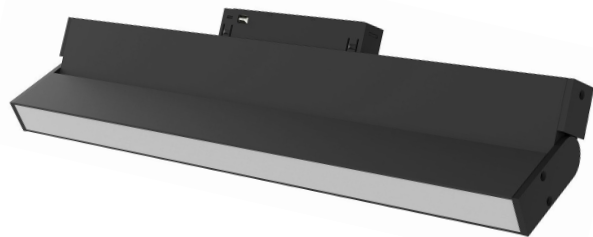

Types

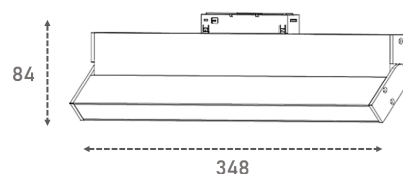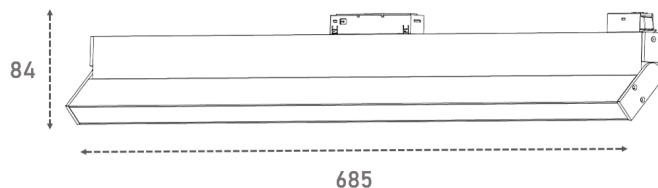

## ◆FD340X ◆FD680X

| Code   | Power | Size (mm) | Colours                                                                                                                                                                 |
|--------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FD340X | 12W   | 334*22*84 |   |
| FD680X | 24W   | 685*22*84 | ( default black )                                                                                                                                                       |

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed


Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee




# M20

Magnetic LED Diffused Linear

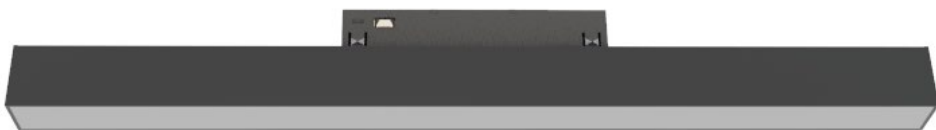

## Types

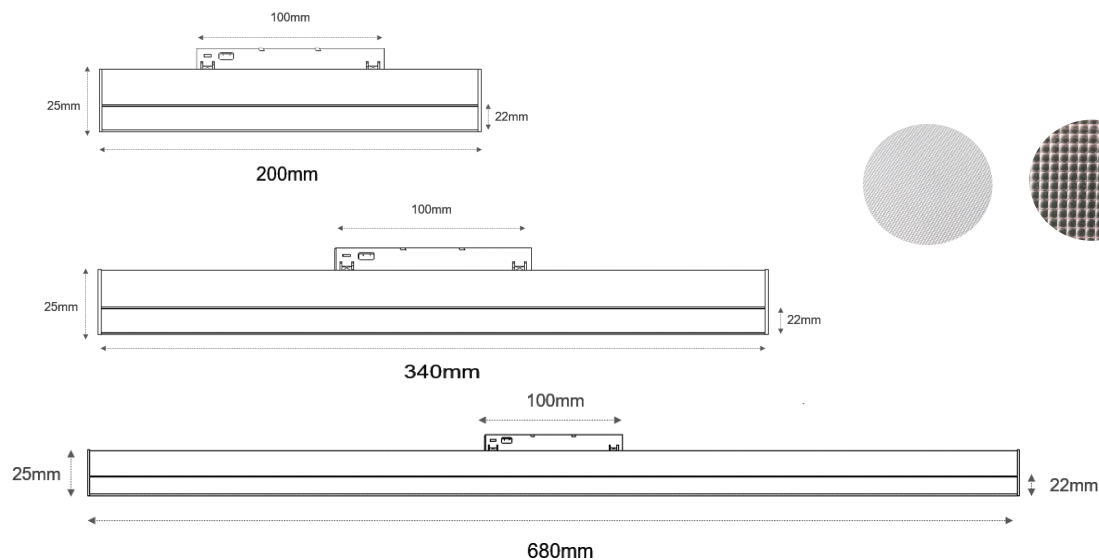

## ◆DF200 ◆DF340 ◆DF680

| Code  | Power | Size (mm) | Colours                                                                                                                                                                 |
|-------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DF200 | 6W    | 200*22*25 |   |
| DF340 | 12W   | 340*22*25 | ( default black )                                                                                                                                                       |
| DF680 | 24W   | 680*22*25 |                                                                                                                                                                         |

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee





# M20

Magnetic LED Spot Linear



## Types

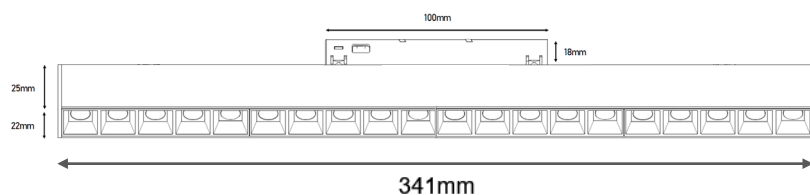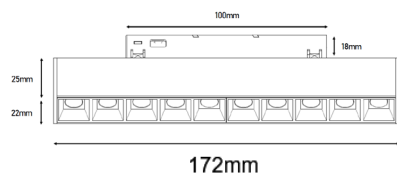

## ◆LB10 ◆LB20

| Code | Power | Size (mm) | Colours                                                                                                                                                                 |
|------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LB10 | 10W   | 172*22*25 |   |
| LB20 | 20W   | 341*22*25 | ( default black )                                                                                                                                                       |

Beam angle : 30°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee





# M20

Magnetic LED Spot Linear



## Types

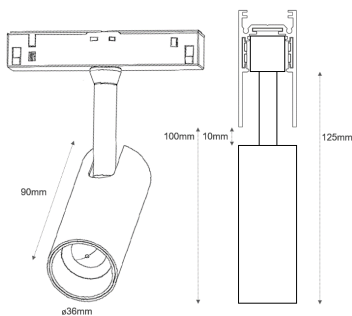

## ◆TL5 ◆TL7

| Code | Power | Size (mm)  | Colours                                                                                                                                                                                                                                                     |
|------|-------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TL5  | 5W    | ø36*90*125 |    |
| TL7  | 7W    | ø36*90*125 | ( default black )                                                                                                                                                                                                                                           |

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee





# M20

Magnetic LED Spot Linear



## Types

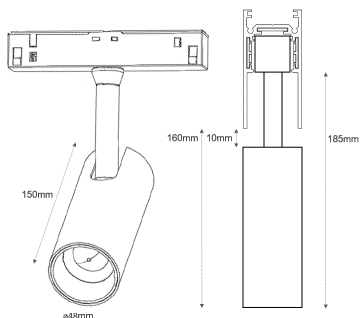

## ◆TL9 ◆TL12

| Code | Power | Size (mm)   | Colours                                                                                                                                                                                                                                                     |
|------|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TL9  | 9W    | ø48*150*185 |    |
| TL12 | 12W   | ø48*150*185 | ( default black )                                                                                                                                                                                                                                           |

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed


Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee





# M20

Magnetic LED Spot Linear



## Types

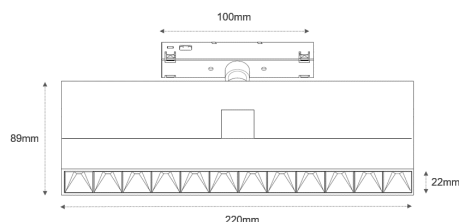

## ◆FD6 ◆FD12

| Code | Power | Size (mm) | Colours                                                                                                                                                                 |
|------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FD6  | 6W    | 110*22*89 |   |
| FD12 | 12W   | 220*22*89 | ( default black )                                                                                                                                                       |

Beam angle : 30°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed




Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee





# M20

Magnetic LED Diffused Linear

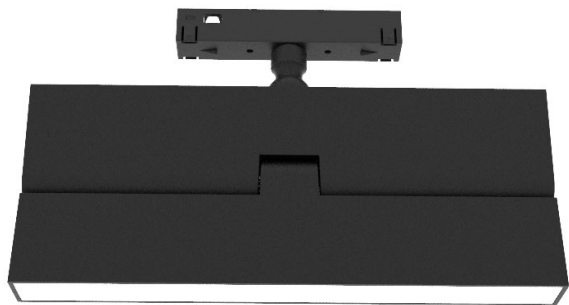

## Types

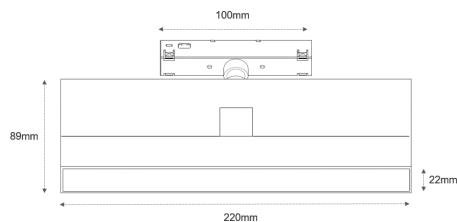

## ◆FD6D ◆FD12D

| Code  | Power | Size (mm) | Colours                                                                                                                                                                 |
|-------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FD6D  | 6W    | 110*22*89 |   |
| FD12D | 12W   | 220*22*89 | ( default black )                                                                                                                                                       |

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee








# M20

Magnetic LED Spot Linear



## Types



## ◆RS6 ◆RS9

| Code | Power | Size (mm) | Colours                                                                             |
|------|-------|-----------|-------------------------------------------------------------------------------------|
| RS6  | 12W   | ø90*36    |  |
| RS9  | 18W   | ø116*36   |                                                                                     |

Beam angle : 30°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee



# M20


---

# M35

Magnetic LED Spot Linear



Types



## ◆TB9W

| Code | Power | Size (mm) | Colours                                                                                                                                                                 |
|------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TB9W | 9W    | ø39*290   |   |
|      |       |           | ( default black )                                                                                                                                                       |

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee




# M20 M35

Magnetic LED Spot Linear



Types



## ◆HG9W

| Code | Power | Size (mm) | Colours                                                                                                                                                                 |
|------|-------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HG9W | 9W    | ø54*290   |   |
|      |       |           | ( default black )                                                                                                                                                       |

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee






# M20 M35

Magnetic LED Diffused Linear



Types



## ◆MN25 ◆MN30 ◆MN35

| Code | Power | Size (mm) |
|------|-------|-----------|
| MN25 | 24W   | ø250      |
| MN30 | 24W   | ø300      |
| MN35 | 24W   | ø350      |

Beam angle : 340°

CCT :  3000K  4000K



CRI : >80

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee



# M35

COMMERCIAL USE

48V MAGNETIC TRACK

—SERIES—






## 35TRACK SERIE

### TC35


Installation: recessed

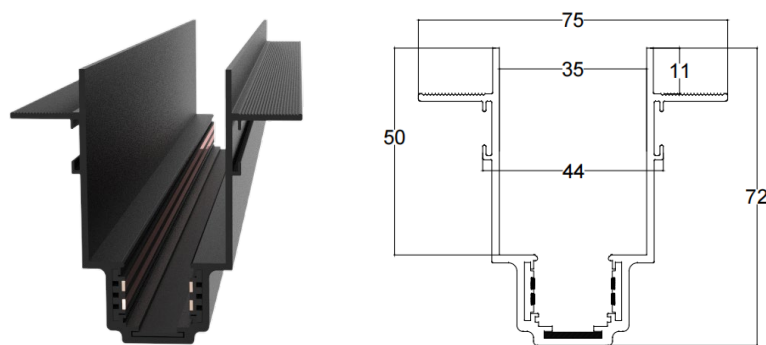

| Thickness | Weight |
|-----------|--------|
| 1.8mm     | 1.41kg |

### TC35L


Installation: recessed

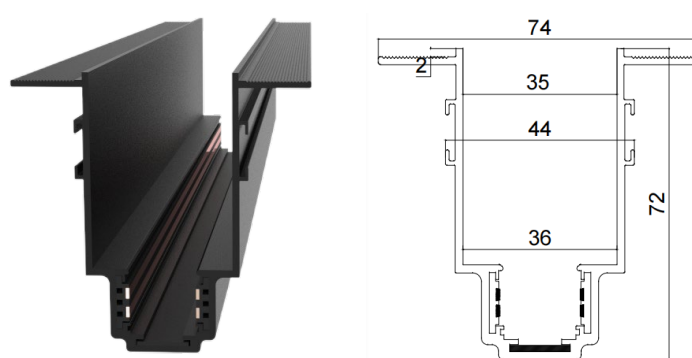

| Thickness | Weight |
|-----------|--------|
| 1.8mm     | 1.41kg |

### TH35


Installation: surface/suspended

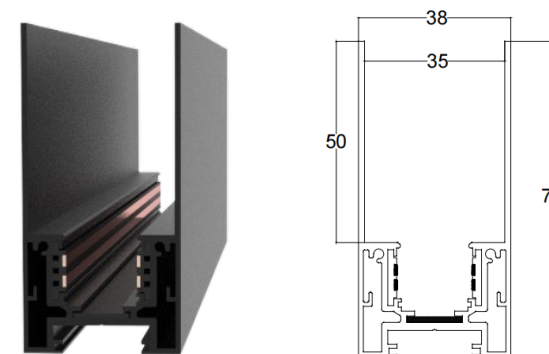

| Thickness | Weight |
|-----------|--------|
| 1.8mm     | 1.45kg |

## SM TRACK SERIE

Installation: surface/suspended  
suit for all M20/M35 lamps

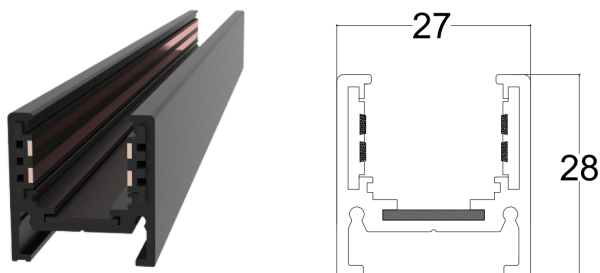

| Thickness | Weight |
|-----------|--------|
| 1.8mm     | 0.7kg  |

Standard  
Length


1000mm  
1500mm  
2000mm  
3000mm

# M35

Magnetic LED Diffused Linear



## Types

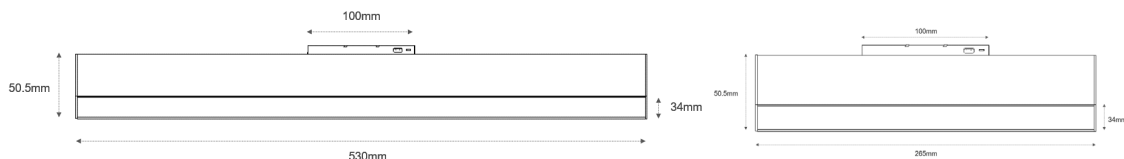

## ◆DF265 ◆DF530

| Code  | Power | Size (mm)   | Colours                                                                                                                                                                 |
|-------|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DF265 | 12W   | 265*34*50.5 |   |
| DF530 | 24W   | 530*34*50.5 | ( default black )                                                                                                                                                       |

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C


Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee






# M35

Magnetic LED Spot Linear

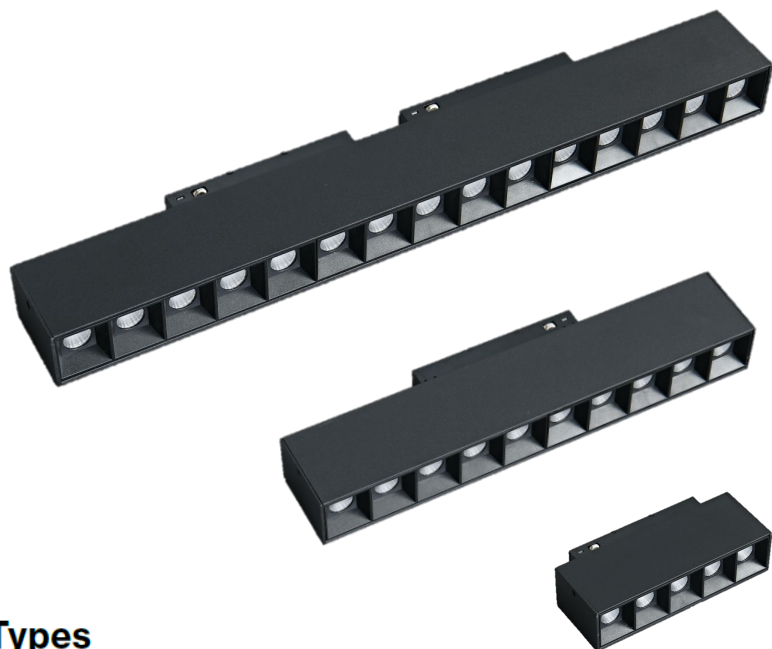

Types

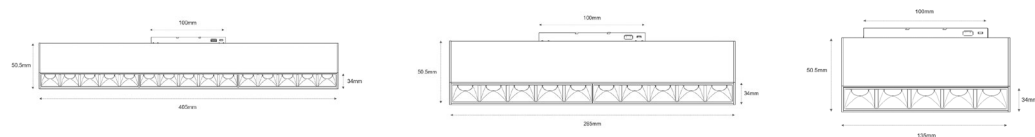

## ◆LB5 ◆LB10 ◆LB15

| Code | Power | Size (mm)   | Colours                                                                                                                                                                                      |
|------|-------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LB5  | 10W   | 135*34*50.5 |  <br>( default black ) |
| LB10 | 20W   | 270*34*50.5 |                                                                                                                                                                                              |
| LB15 | 30W   | 405*34*50.5 |                                                                                                                                                                                              |

Beam angle : ☐ 15° ☒ 30° ☐ 45°

CCT :  3000K  4000K  5000K  3000-5000K



CRI :  $\geq 92$

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee




# M35

Magnetic LED Spot Linear



## Types

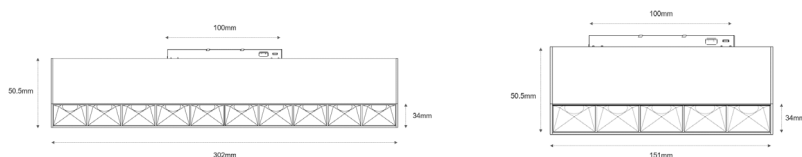

## ◆SL5 ◆SL10

| Code | Power | Size (mm)   | Colours                                                                                                                                                                 |
|------|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LB5  | 10W   | 151*34*50.5 |   |
| LB10 | 20W   | 302*34*50.5 | ( default black )                                                                                                                                                       |

Beam angle : ■ 24°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed


Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee





# M35

Magnetic LED Diffused Linear



## Types



## ◆FD5 ◆FD10

| Code | Power | Size (mm)  | Colours                                                                                                                                                                 |
|------|-------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FD5  | 10W   | 136*34*140 |   |
| FD10 | 20W   | 270*34*140 | ( default black )                                                                                                                                                       |

Beam angle : ☐ 15° ☒ 30° ☐ 45°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee





# M35

Magnetic LED Spot Linear



## Types

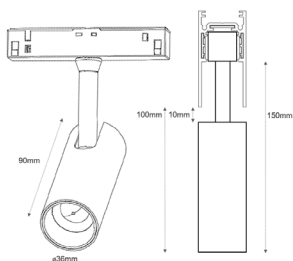

## ◆TL5 ◆TL7

| Code | Power | Size (mm)  | Colours                                                                                                                                                                                                                                                     |
|------|-------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TL5  | 5W    | ø36*90*150 |    |
| TL7  | 7W    | ø36*90*150 | ( default black )                                                                                                                                                                                                                                           |

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K



CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed


Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee




# M35

Magnetic LED Spot Linear



## Types



## ◆TL9 ◆TL12

| Code | Power | Size (mm)   | Colours                                                                                                                                                                                                                                                     |
|------|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TL9  | 9W    | ø48*150*205 |    |
| TL12 | 12W   | ø48*150*205 | ( default black )                                                                                                                                                                                                                                           |

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

