

MODEL : GB-10

HYBRID POWER STATION



Design Standards

GB® is a new range of secure integrated hybrid power station. With diesel generator, Battery storage and Hybrid solar Inverter in one secure unit for option.

GB® is mainly developed for lower emission, Reduce the dependence on Main Power and decrease the consumption cost.

Benefits

- Integrated installation, convenient storage and transportation;
- High return on investment and quick return;
- Simple operation and easy maintenance;
- Power and Capacity can be expanded, meet different user needs;
- Accept customer customization, suitable for various scenarios;

Warranty


Battery Performance: 2000 cycles(80% DOD) or 2 years after manufacture;

• Generator: 18 months after manufacture or 1500 hours running time;




General Specification

Model	GB-10
System Rated Output Power	10 kVA
Rated Output Voltage	400V/230V@50Hz/60Hz,3ph. (According to customer requirements)
Min.Battery Storage Capacity	10 kWh
Max.Battery Storage Capacity	25 kWh
Output Terminals	Copper terminals & CEE 16A/5P Socket
Loading Dimension(W*D*H)	2450*1150*2150mm
Net.Weight	2000kg
Loading Capacity of 40'HC	8 units
Discharge Temperature Range	-20°C~50°C



GENERATOR
RATED POWER: 7kW
With **LOW CONSUMPTION**
DOWN TO **2.6 L/H~!!**

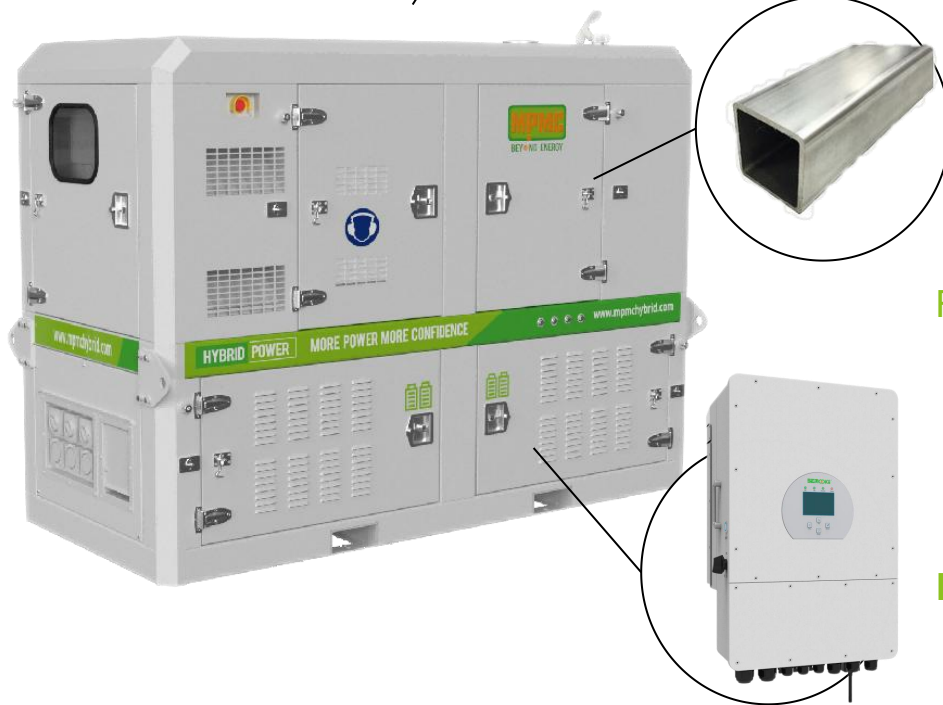

**HIGH STRENGTH
METAL FRAME**

COFFIDENCE IN
FACING **WIND & RAIN
& SNOW**

INTELLIGENT INVERTER

ONE PIECE FOR
**SOLAR & BATTERY
& GRID
& GENERATOR**

**Fits the practical
application & guaranteed
by high-quality
manufacturing
technology**



Generator Set

Prime Power	9 kVA/7.2 kW
Rated Voltage	400V@50HZ
Engine to Ref.	403D-11G(Perkins)
Emission	NA<19kW
Fuel Consumption	2.6 L/h@100% load
Fuel Type	Diesel(Nature Gas Engine for option)
Fuel Tank Capacity	36 hours
Base Functions	Automatic Start-up / Alarm / Automatic Stop / Emergency Stop / Load Management

Energy storage battery

Cell Type	LFP(LiFePO4)
Pack Model	MF51100D
Pack Capacity	5 kWh
Pack Rated Voltage	51.2 VDC
Discharge Depth	90%
Charger/Discharge Current	97.7 A(1.0C)
Battery Rack Voltage	43.2V~59V
Rated Cycle Life	≥2000 (80% DOD)


Hybrid Inverter System

Solar Controller	MPPT*2
AC Voltage Range	380~415Vac
Max.PV Input Power	13000W
Max.PV Current	26A*2
Max.Charge/Discharge Current	210A
Max.Conversion Efficiency	97.6%
Rated Output Power	10kVA(0.8leading~0.8lagging)
Certification	IEC 61727;IEC 62116;IEC 60068;IEC 61683;NRS097-2-1;IEC 62109;IEC 61000

Options

Engine	Alternator	Fuel System	Hybrid Power Station
Water Jacket Preheater	PMG excitation	12 / 24 hour base tank	Deepsea, ComAp, Smartgen etc. controller
Oil Preheater	Space heater	Bunded fuel tank	Trailer
Oil manual pump	Winding temperature measuring	External fuel tank	Tools with the machine
		Automatic fuel feeding	
		Switch between external tank and base tank (three-way valve)	

Basic Logic

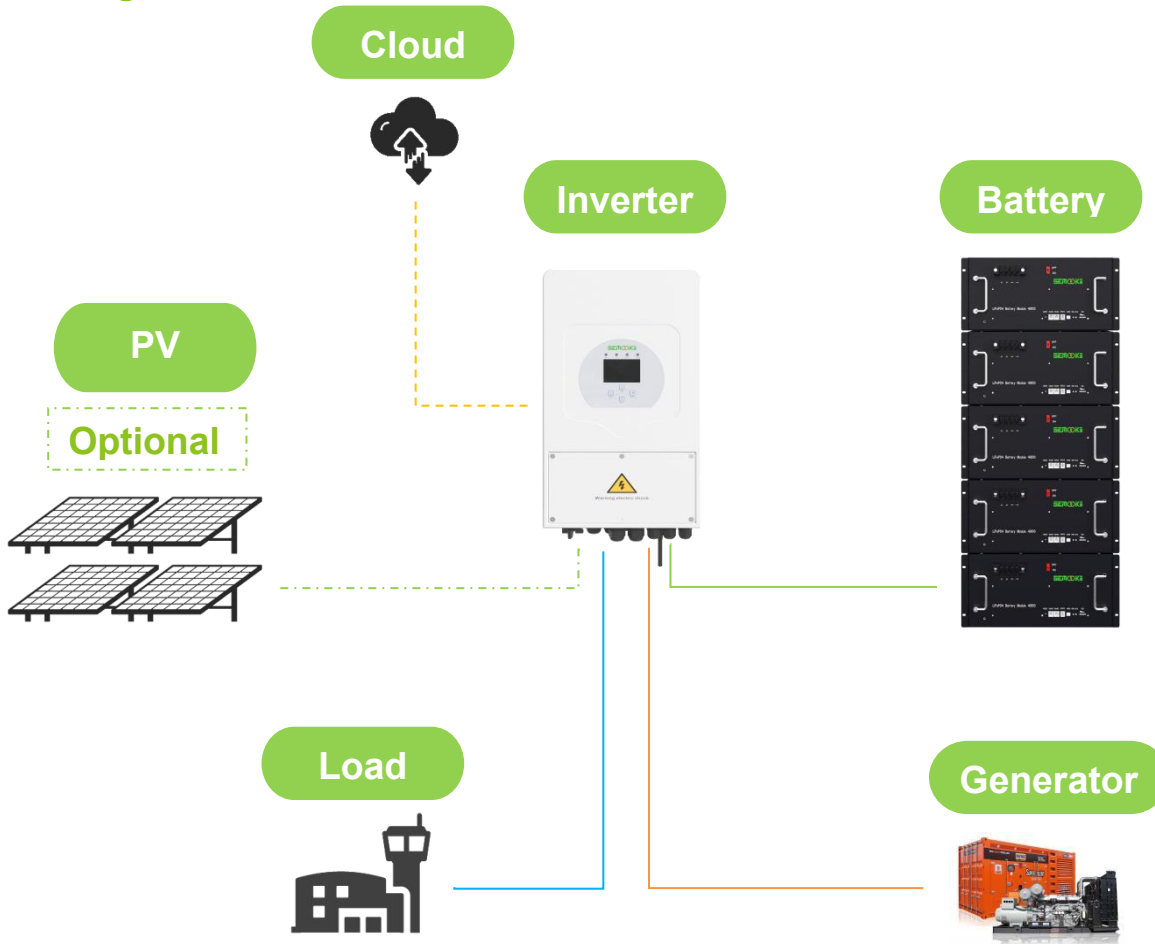

Power Priority	Highest	Secondary	Back Up
Functions	PV (Optional) Take load/charge	Battery Take load	Generator Take load/charge



MPMC POWERTECH CORP.
sales@mpmc-china.com | www.mpmc-china.com

Photographs are for illustrative purposes only and may not reflect final specification.

Follow us

- <https://www.facebook.com/mpmcgroup>
- <https://www.linkedin.com/company/mpmcpowertech/>
- <https://www.youtube.com/user/MPMCGenerator>

All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.