



## HSL-1440B SOLAR LIGHTING TOWERS

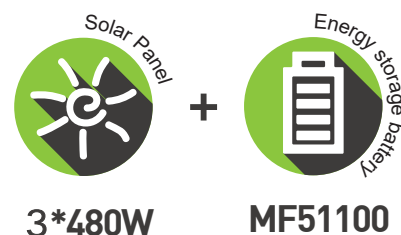


The solar light towers take the advantages of solar renewable energy and LED light systems on the road. Ideal for special events, construction sites, security and any other application where on-demand lighting is desired. This system provides cost-effective bright white LED lighting without all of the disadvantages inherent to diesel lighting systems – high operating costs (diesel fuel, maintenance, labor) as well as carbon emissions, noise, fumes and light pollution.

4\*150W-DC48V 9m Isolux curve

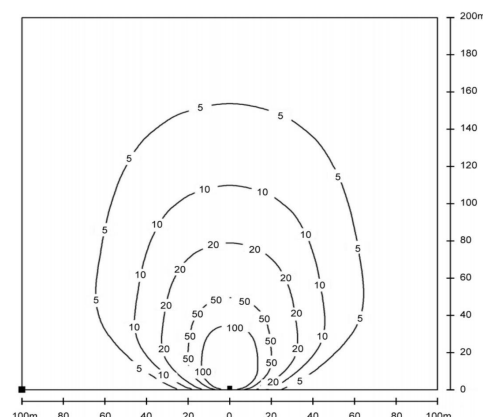

### ✓ Product characteristics

- Higher power efficiency
- Longer running hours
- Larger area coverage
- Sturdy and durable
- Max height 9m

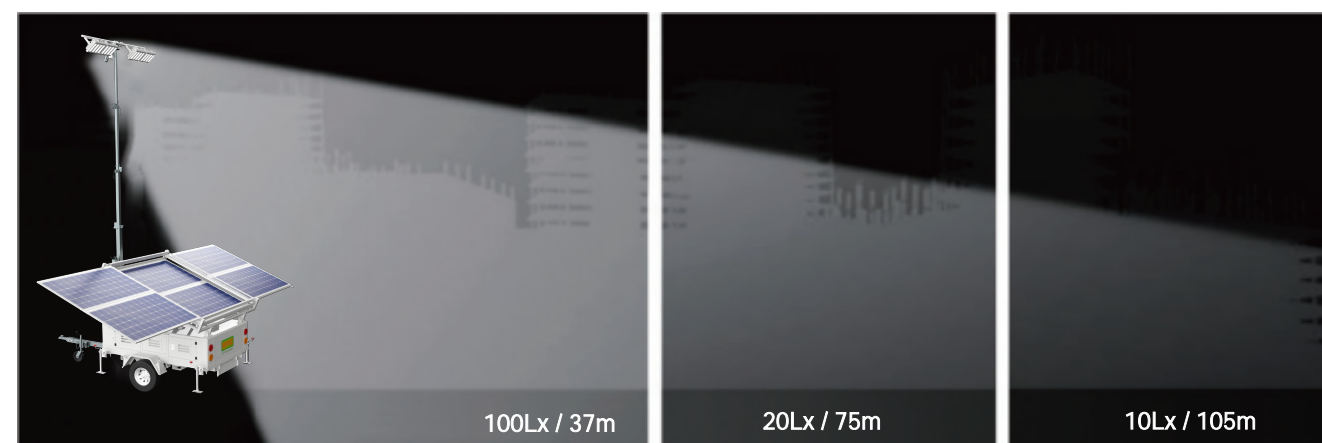

[www.mpmchybrid.com](http://www.mpmchybrid.com)

## Specification

Lamp	
Type	LED
Rated power	150 W
Quantity	4
Luminous efficiency	210 Lm/W
Luminous Flux of Lamp Array	126000 Lm
Total Irradiation Area (Min≥ 5lux, 7.2m Height)	16000 m <sup>2</sup>
Solar panel	
Pmax	480 W
Quantity	3 pcs.
Peak Solar Charge Speed	1.4kw/h
Battery	
Battery model	MF51100
Battery capacity	5.12 kWh
Quantity	3
Maximum quantity	3
Trailer	
Type	Off-road
Axle type	Single axle
Braking mode	Parking hand break + Overrun device
Maximal Moving Speed	25 km/h
Lifting type	Vertical
Lighting tower	
Lifting system	Manual
Vertical Rotation Angle	22~90 deg.
Lifting type	Vertical
Extended height	7.2m
Loading Dimensions(L*W*H)	2282*1450*2554mm
Expanding Dimensions(L*W*H)	3325*3260*7200mm
Net Weight	1180kg
Loading Units	7 sets/ 40HQ

## Option

- ☐ 7.2m & Electric
- ☐ 7.2m & Hydraulic
- ☐ 9m & Hydraulic
- ☐ Automatic control system
- ☐ WIFI
- ☐ Video camera
- ☐ On-road trailer



**MPMC POWERTECH CORP.**  
sales@mpmc-china.com | www.mpmc-china.com

Photographs are for illustrative purposes only and may not reflect final configuration.

Follow us

- <https://www.facebook.com/mpmcgroup>
- <https://www.linkedin.com/company/mpmcpowertech/>
- <https://www.youtube.com/user/MPMCGenerator>

All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.