


# MLT4KD-2000LS-2

Powered by Kubota




8unit / 40 'HC. CONTAINER

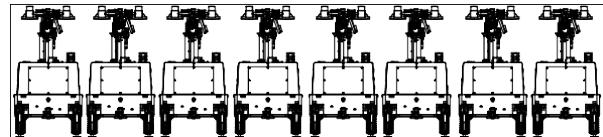

## ✓ Highlights

- Less fuel consumption. Longer run-time
- Simple control system
- High efficiency
- Sturdy and durable
- Max height 9.5m



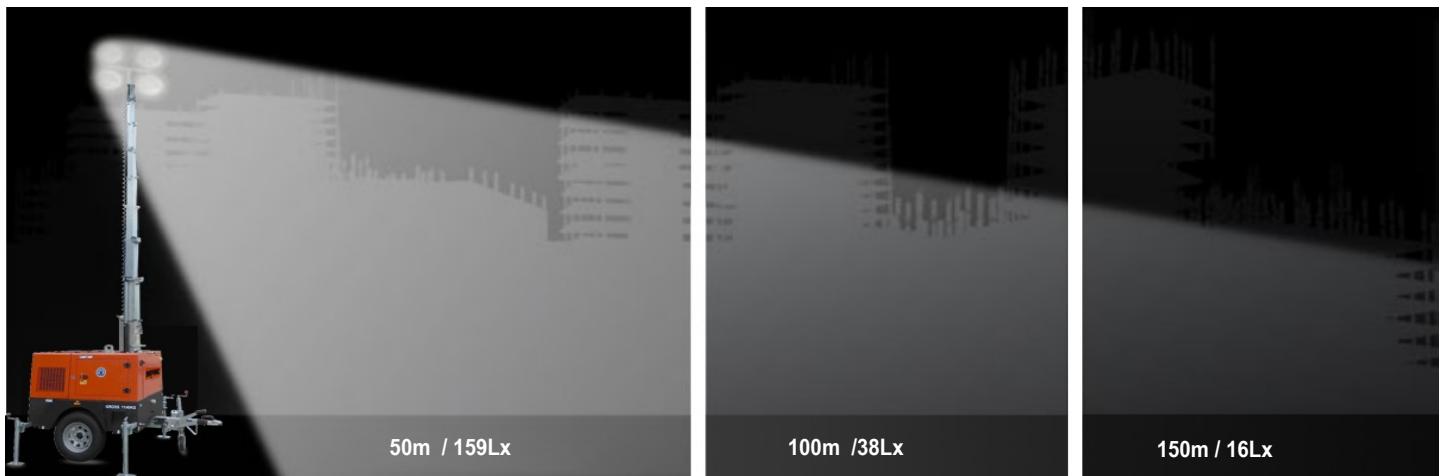

**Lighting Tower Technical Data**

Power Package Rated Power	6kW
Number & Power of Lamp	4×500W
Rated Frequency / Speed	60Hz /1800 rpm
Rated Voltage	AC 240V
Noise	75dB(A) @7M
Mast-Maximum Height	9.5m
Mast Lifting & Extension	Hydraulic Operation
Fuel level gauge	Electronic
Tower leg type	Manual
AUX. Power output	16A/3P Socket
Rotation angle range of light	355°
Wind resistance grade	100km/h
Recommended use environment	Level ground

**Lamp**

Number×Power	4×500W
Lamp type	LED
Protection Glass	IP54
Luminous Efficiency	170 lm/W
Color Temperature	5700±300 K
Voltage	AC 240V
Lamp Service Life	50000hrs


**Control System**

Controller Model	MALC404
------------------	---------

**Dimension and Weight**

Max Overall Dimension(L×W×H)	2278x2364x9500mm
Container loading Dimension (L×W×H)	2278x1564x2463mm
Tank Capacity / Running Hr.	100L / 52hrs.
Weight	1350kg
The loading capacity(40'HC)	8 sets

Note: Specifications and illustrations are subject to revision without notice.

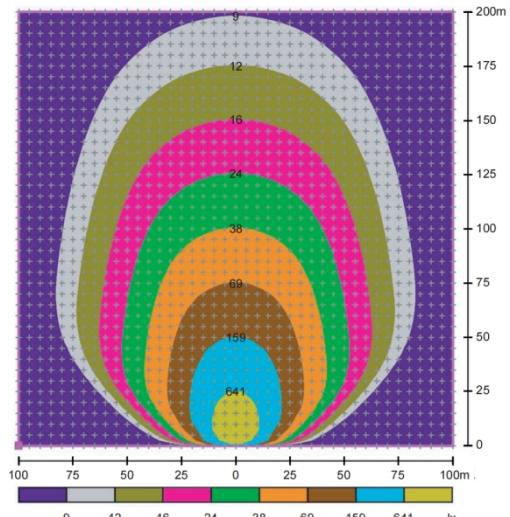

**Environmental Conditions**

- Ambient temperature: +5°C~40°C
- Altitude: ≤1000m

**Note:** Please contact us if operating environmental conditions required do not go with the guidance.

**Factory Inspection**

- Complete design and quality inspection
- 30 mins full load test
- Function testing
- Protection testing

**Painting Process**

- MPMC has the most advanced automatic spraying / powder coating production line, and is equipped with various sandblasting equipment to ensure higher quality.
- Canopy painting: HenKel pretreatment process and world famous brand AkzoNobel powder.
- Base Frame painting: Sandblasting process and AkzoNobel powder(Hempel paint is optional).



## Engine Specifications

Engine Model	Z482-EF02
Manufacturer	Kubota
Emission	EPA T4F
Number of Cylinders	2
Cycle	4 Stroke
Aspiration	Naturally
Prime Power / Speed (Gross)	8.1kW / 3600rpm
Lube-oil Capability	2.5L
Fuel consumption	0.96L/h (@100% Brightness)
Starter motor/ Alternator	12V 0.8kW

- Heavy duty diesel engine
- Anti-vibration mount
- Replaceable fuel filter, oil filter & air filter
- Cooling radiator and fan
- Starter battery (with lead acid) including rack and cables
- Flexible fuel connection hoses
- Exhaust silencer and bellows
- Operation manuals and circuit diagram document

## Alternator Specifications

Alternator Model	KT06-2
Manufacturer	DGOL
Rated Output Power	6kVA
Alternator Type	Brushless
Rated Voltage	AC 240V
Rated Speed	3600 rpm
IP Protection	IP21
Insulation Grade	H

## OPTIONS

<input type="checkbox"/> Jacket water heater	<input type="checkbox"/> Manual pump
<input type="checkbox"/> Lub-oil heater	<input type="checkbox"/> Smartgen controller
<input type="checkbox"/> ABB/Schneider MCB	<input type="checkbox"/> Sockets
<input type="checkbox"/> Battery charger	<input type="checkbox"/> Larger fuel tank

