




D5

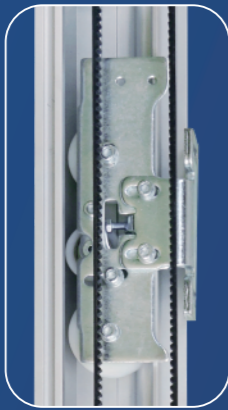

ACCESSORIES

 <p>D5 Controller</p>	 <p>D5 Motor</p>
 <p>D5 Idle Pulley</p>	 <p>D5 Hangers</p>
 <p>D5 Power Cable</p>	 <p>D5 Belt Bracket</p>
 <p>D5 Stopper</p>	 <p>D9 Floor Guide</p>
 <p>D5 Remote Control</p>	 <p>Microwave Sensor</p>
 <p>Belt</p>	

TECHNICAL DATA

Door form: single door / double door

Loading weight: $\leq 1 \times 120\text{kg} / \leq 2 \times 100\text{kg}$

Door width: 600-1800mm/1000-3000mm

Power supply: $220\text{V} \pm 10\%, 50/60\text{Hz}$

Rated power: 65W

Opening speed: 175-440mm/S (adjustable)

Closing speed: 175-440mm/S (adjustable)

Temperature range: $-20 \sim +50^\circ\text{C}$

Humidity range: <relative humidity 85%

FEATURES

Microcomputer control system, drive motor, control door body to operate according to the set mode; controller with 12V, 24V power supply, no need to add transformer extra. Built-in security protection beam, double door interlock and more other interfaces.

Brushless DC motor, surface matte treatment, sturdy and durable; with safety protection circuit device, even if it is frequently opened and closed, it can achieve long-term trouble-free operation.

The guide rail height is only 8cm, the installation space is infinitely utilized, and the rubber silent shock absorbing bar is added to make the operation more stable and quiet; the S5M belt is used to reduce the contact area and reduce the running noise.

The Z4-class super-mute shaft is used to match the imported nylon wheels with large diameter, which is more anti-off and quiet.

Suitable for office buildings, storefronts, banks, restaurants, hotels, shopping centers, laboratories, hospitals and other places.

SECTIONAL VIEW

