




DSH-250

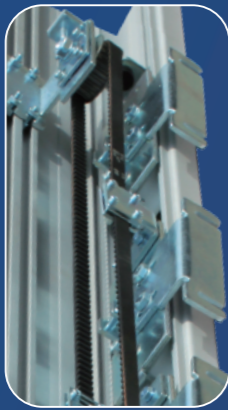

ACCESSORIES

 <p>250 Controller</p>	 <p>250 Motor</p>
 <p>250 Idle Pulley</p>	 <p>250 Hangers</p>
 <p>250 Power Cable</p>	 <p>250 Belt Bracket</p>
 <p>250 Cable holder</p>	 <p>250 Floor Guide</p>
 <p>250 Remote Control</p>	 <p>250 Stopper</p>
 <p>Belt</p>	 <p>Microwave Sensor</p>

TECHNICAL DATA

Door form: single door / double door
 Loading weight: $\leq 1 \times 250\text{kg} / \leq 2 \times 200\text{kg}$
 Clean opening width: 1000-2800mm/1800-3800mm
 Power supply: AC 110~220V $\pm 10\%$, 50/60Hz
 Power consumption: <100W
 Opening speed: 200-460mm/S (adjustable)
 Closing speed: 200-460mm/S (adjustable)
 Open time: 1-9S (adjustable)
 Closed force F: >100N
 Manual force: <100N
 Humidity range: -20 ~ +50°C

FEATURES

Intelligent control system, various parameters can be flexibly adjusted by manual or remote control according to the selected controller. Low-noise power unit, motor, worm gear and reducer integrated.

It adopts modern design, applies high-power brushless motor and new mechanical components that are trusted by the world. The hanging parts are made of imported high-strength nylon, and the load capacity of the unit reaches 2×200Kg.

The electric lock function is safe and reliable.

The control unit can be connected with building fire center, when fire, the door can be hold open or hold closed for safety.

It is suitable for all kinds of large-channel, industrial workshops, etc. It runs smoothly, is easy to install and easy to maintain.

SECTIONAL VIEW

