



苏鑫管夹
SUSEN CLAMP

船用管夹
Marine clamp

产品画册
Catalogue

至诚服务

全球客户

Sincere service

Global Customers



SUSEN CLAMP

夾管鑿茅

向安

乙未年秋月
凌文強

至城服
務全球
客戶

向安

乙未年秋月於南京
凌文強

企业简介

Company Profile

江苏苏鑫管夹制造有限公司位于江苏省阜宁经济开发区衡山路，注册资本 500 万元，生产及行政配套用房 6000 平方米，固定资产 2500 万。拥有数控全自动 200-4000 克注塑机、激光切割机、高性能 160-260T 全自动冲压生产线、激光焊接机、400T、200T 四柱压力机、数控立钻、压铸机、线切割、美国伊诺斯光谱仪、数显式万能试验机、盐雾试验机等生产和检测设备 150 台套。是专业从事液压管道附件研发、制造的企业，已 20 年的管夹制造经验。公司主要生产全系列塑料管夹、铝合金管夹、钢制管夹、船用管夹、U 型管夹、扁钢管夹等 8 大类 8800 多种规格型号，拥有年产 600 万件各类管夹的生产制造能力。产品符合相关国际标准和国家重型机械标准。长期以来为冶金、船舶、海洋石油平台、重型机械、工程机械、机床、电力、造纸、液压系统等提供优质配套产品，深受客户欢迎。

苏鑫管夹经过多年的发展，已成为液压行业主要的管道附件供应商。在所有工业制造领域里，苏鑫管夹代表着管道的快速安装以及清楚分明的管道布局，苏鑫管夹也是液压管道安装上最经济的产品之一。几乎涵盖了全部领域的管道的安装和固定。成熟丰富的经营管理和不断进取的员工团队，多条灵活的管夹生产线和大量的产品库存，使得我们能够向客户提供优质的产品与服务。

苏鑫管夹一直以“至诚服务、全球客户”的经营理念，致力于打造行业最专业、客户最满意的液压管道附件全球供应商。公司通过 ISO9001 质量管理体系认证，“苏鑫管夹”中英文商标已通过国家工商总局注册。

苏鑫管夹在国内长期为太原钢铁、宝武钢铁、中国一重、徐工集团、福田雷萨重机、比亚迪工业、招商局重工、中远海运重工等国内外大型钢铁、船舶、海洋石油平台、轨道交通、重型机械、液压机械、润滑、造纸等行业提供大量配套产品。苏鑫管夹已成功进入国际市场多年，在国际上已与众多知名公司合作，产品出口美国、意大利、泰国、南非、新加坡、伊朗、马来西亚、澳大利亚、台湾等 30 多个国家和地区。

船用系列管夹主要产品有尼龙、玻璃钢(GRE)、法兰托架、管子吊架、尼龙阻燃管夹、海油平台 4130 系列管夹、耐高温碳纤维、U 型包四氟、镶氟、硫化橡胶、铜管夹等。现已应用在 GJ46、GJ50、BK、BF、CMHI-129、139、138、143、146、158、944、936、281、282、MV29、30、31 等项目中。玻璃钢(GRE)管夹在中远、友联等众多船厂脱硫洗涤塔项目中广泛应用。

Jiangsu Susen Clamps Manufacturing Co., Ltd. is located at Hengshan Rd., Funing Economic Development Zone, Jiansu Province, with a registered capital of 5 million, and the workshops and administrative houses covering an area of 6000square meters, as well as the fixed assets of 25 million. The company owns 150 sets of production and testing equipment including CNC automatic 200-4000 grams injection molding machine, laser cutting machine, high-performance 160-260t automatic stamping production line, laser welding machine, 400T, 200T four-column press, CNC vertical driller, die casting machine, wire cutting machine, American Innov-x spectrometer, digital display type universal tester and salt spraying tester. Susen Clamp is the company specialized in hydraulic pipeline accessories R&D and manufacture with a twenty-year producing experience. The main products are 8 types with more than 8600 kinds of specifictions, including full series plastic pipe clamps, aluminum alloy pipe clamps, steel pipe clamps, marine pipe clamps and U type pipe clamps, etc, with the production capacity for various types of pipe clamp with an annual output of 6 million pieces. The products comply with the relative international standards and national standards for heavy machinery. Susen Clamp has provided high quality products to metallurgy, shipbuilding, offshore oil platform, heavy machinery, engineering machinery, machine tools, power, paper making and hydraulic systems for a long period of time and gotten high compliments from the customers.

After years of development, Susen Clamp has already become the main supplier of pipeline accessories in hydraulic industry. Susen Clamp represents the rapid installation and clear layout of the pipeline, who is also one of the most economical products for hydraulic pipeline installation in all the industrial manufacturing fields, covering almost all areas of pipeline installation and fixaiton. With mature and rich management and progressive team, plenty of flexible pipe clamp production lines and a large number of products in stock, we can provide customers with high quality products and services.

With the operation concept of "Sincere Service, Global Customers", Susen Clamp has committed to being the most professional, the most favorable hydraulic pipeline accessories suppliers worldwide. The company has already obtained the IS9001 Quality Management System Certification. The trademark "Susen Clamp" both in Chinese and English has been registered by the State Administration of Industry and Commerce.

Susen Clamp has provided a large number of products to TISCO, Liuzhou Iron and Steel, Baosteel, Ma Steel, XCMG, China Merchants Heavy Industry, CFHI, CNEG, SMS Group, and BYD, etc, these large iron and steel, shipbuilding, offshore oil platform, rail transit, heavy machinery, hydraulic machinery, lubrication, paper making and other industries in China. Susen Clamp has successfully entered into the international market for many years, and cooperated with many well-known international companies. The product we produced has exported to more than 30 countries and regions, like the United States, Italy, Thailand, South Africa, Singapore, Iran, Malaysia, Australia, and Taiwan, etc.

The main product of marine series pipe clamp includes the nylon, glass reinforced epoxy (GRE), flange bracket, pipe hanger, nylon flame retardant pipe clamp, CNOOC 4130 series pipe clamp, high temperature resistant carbon fiber, U-type package tetrafluoride, embedded fluorine, vulcanized rubber, copper pipe clamp and so on, which have been applied in GJ46, GJ50, BK, BF, cmhi-129, 139, 138, 143, 146, 158, 944, 936, 281, 282, MV29, 30, 31 and other projects. Glass fiber reinforced epoxy (GRE) pipe clamp are widely used in COSCO, Youlian and many other shipyard desulfurization scrubber projects.



大厅



会议室





样品展厅



销售中心



接待室

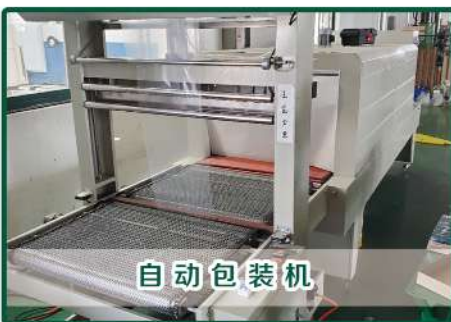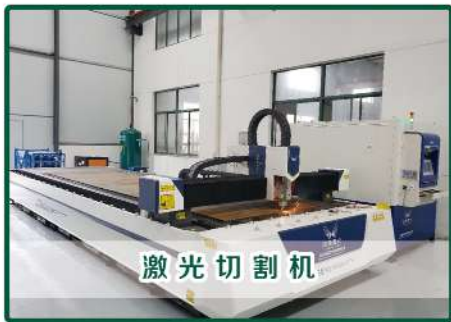

车间

PRODUCTION WORKSHOP

苏鑫管夹

ISO9001:2008 质量管理体系认证企业
IOS9001:2008 quality management system certification enterprises



整体底板生产线



光谱仪



五金仓库



管夹体仓库



钢材库



模具车间



下料车间



成品仓库



检测实验室




万能试验机



盐雾试验机



双头钻攻组合机床

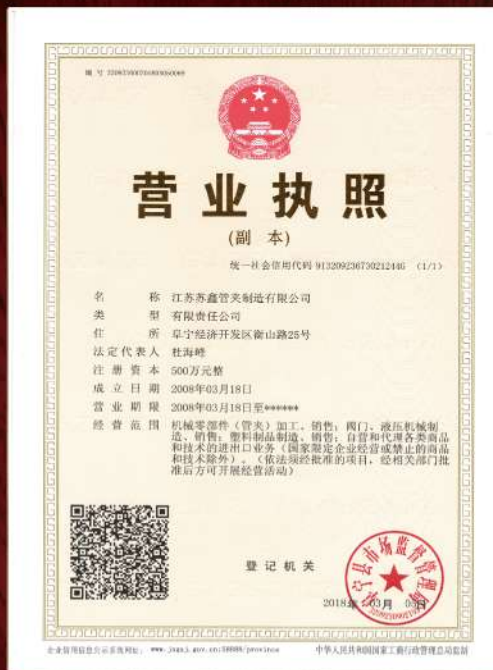


苏鑫管夹


ISO9001:2008 质量管理体系认证企业


IOS9001:2008 quality management system certification enterprises





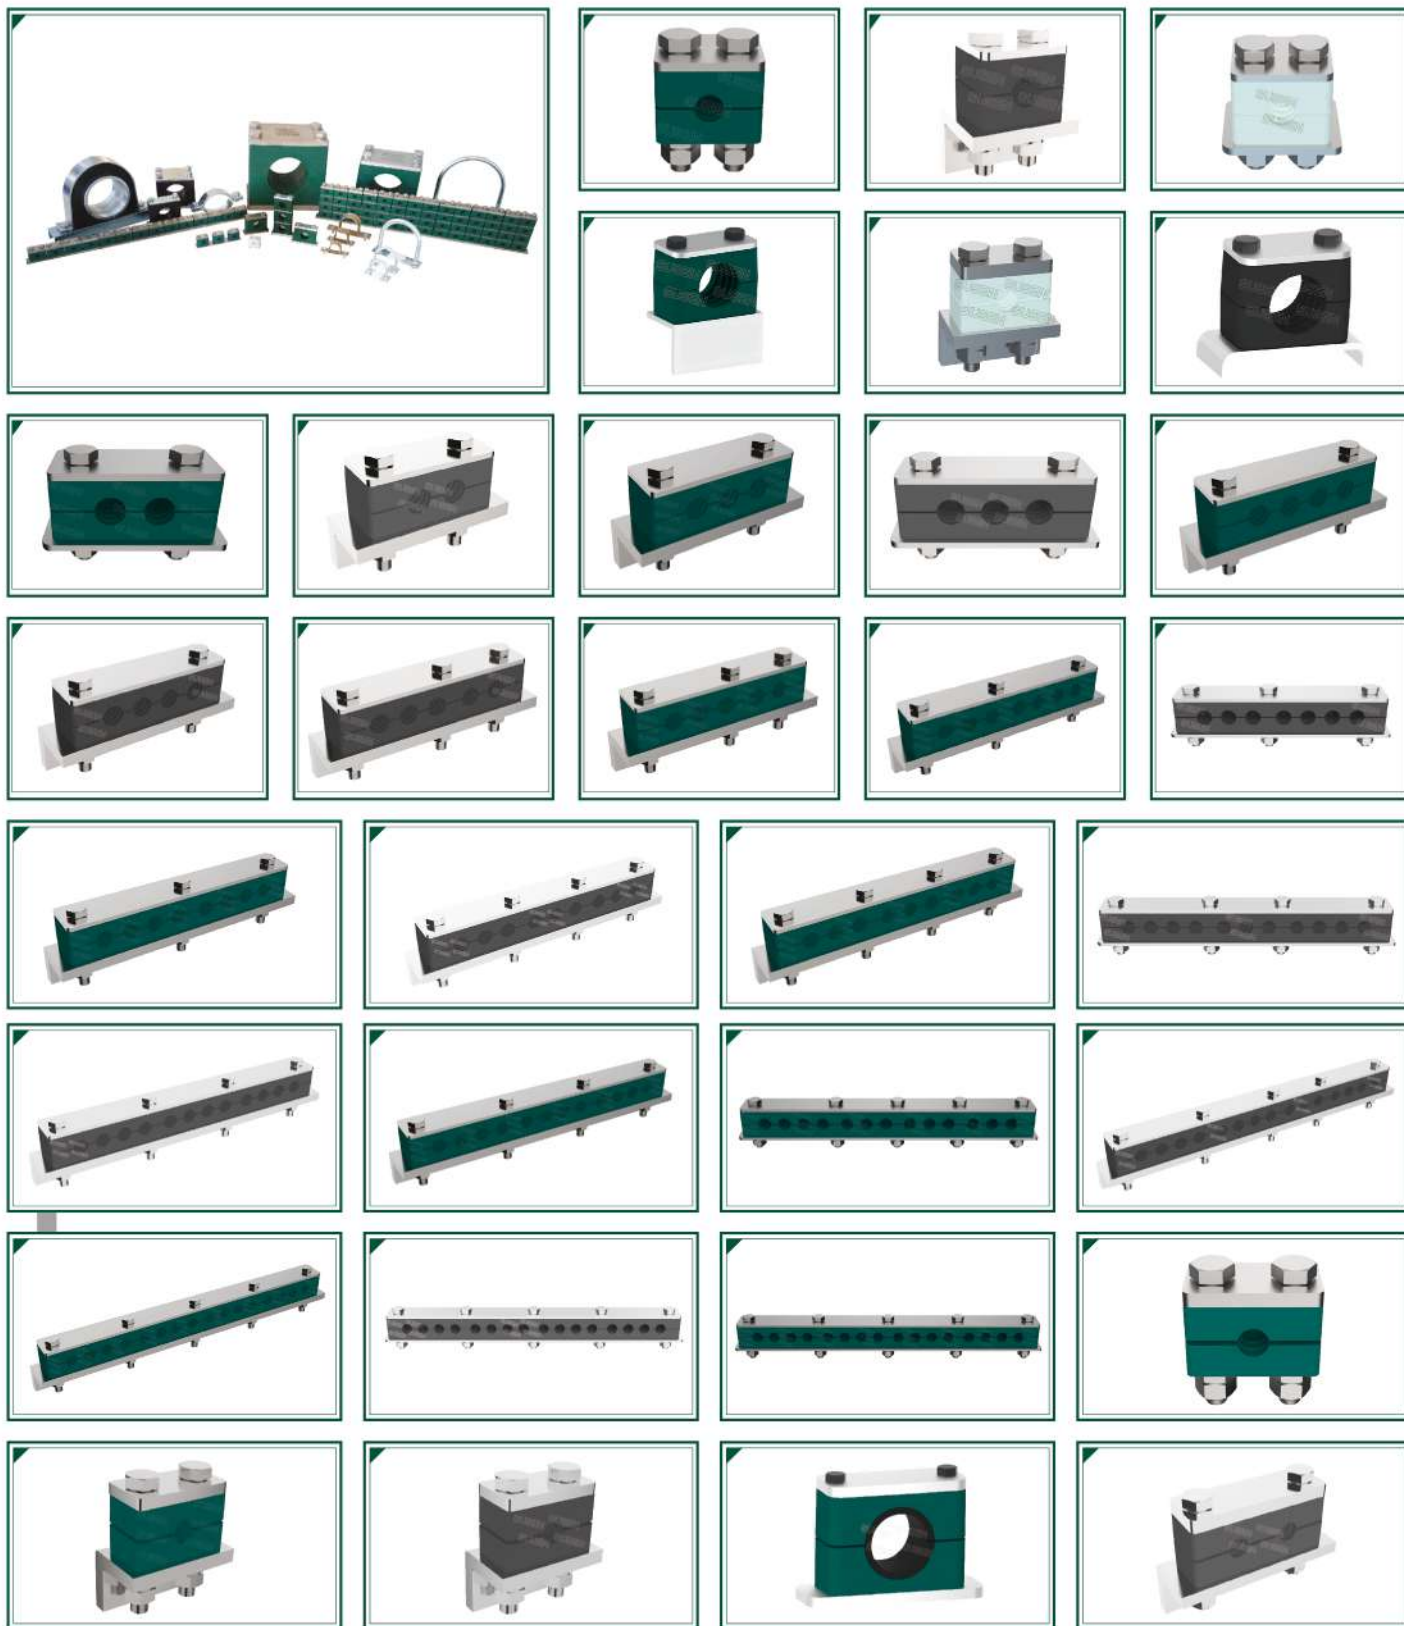

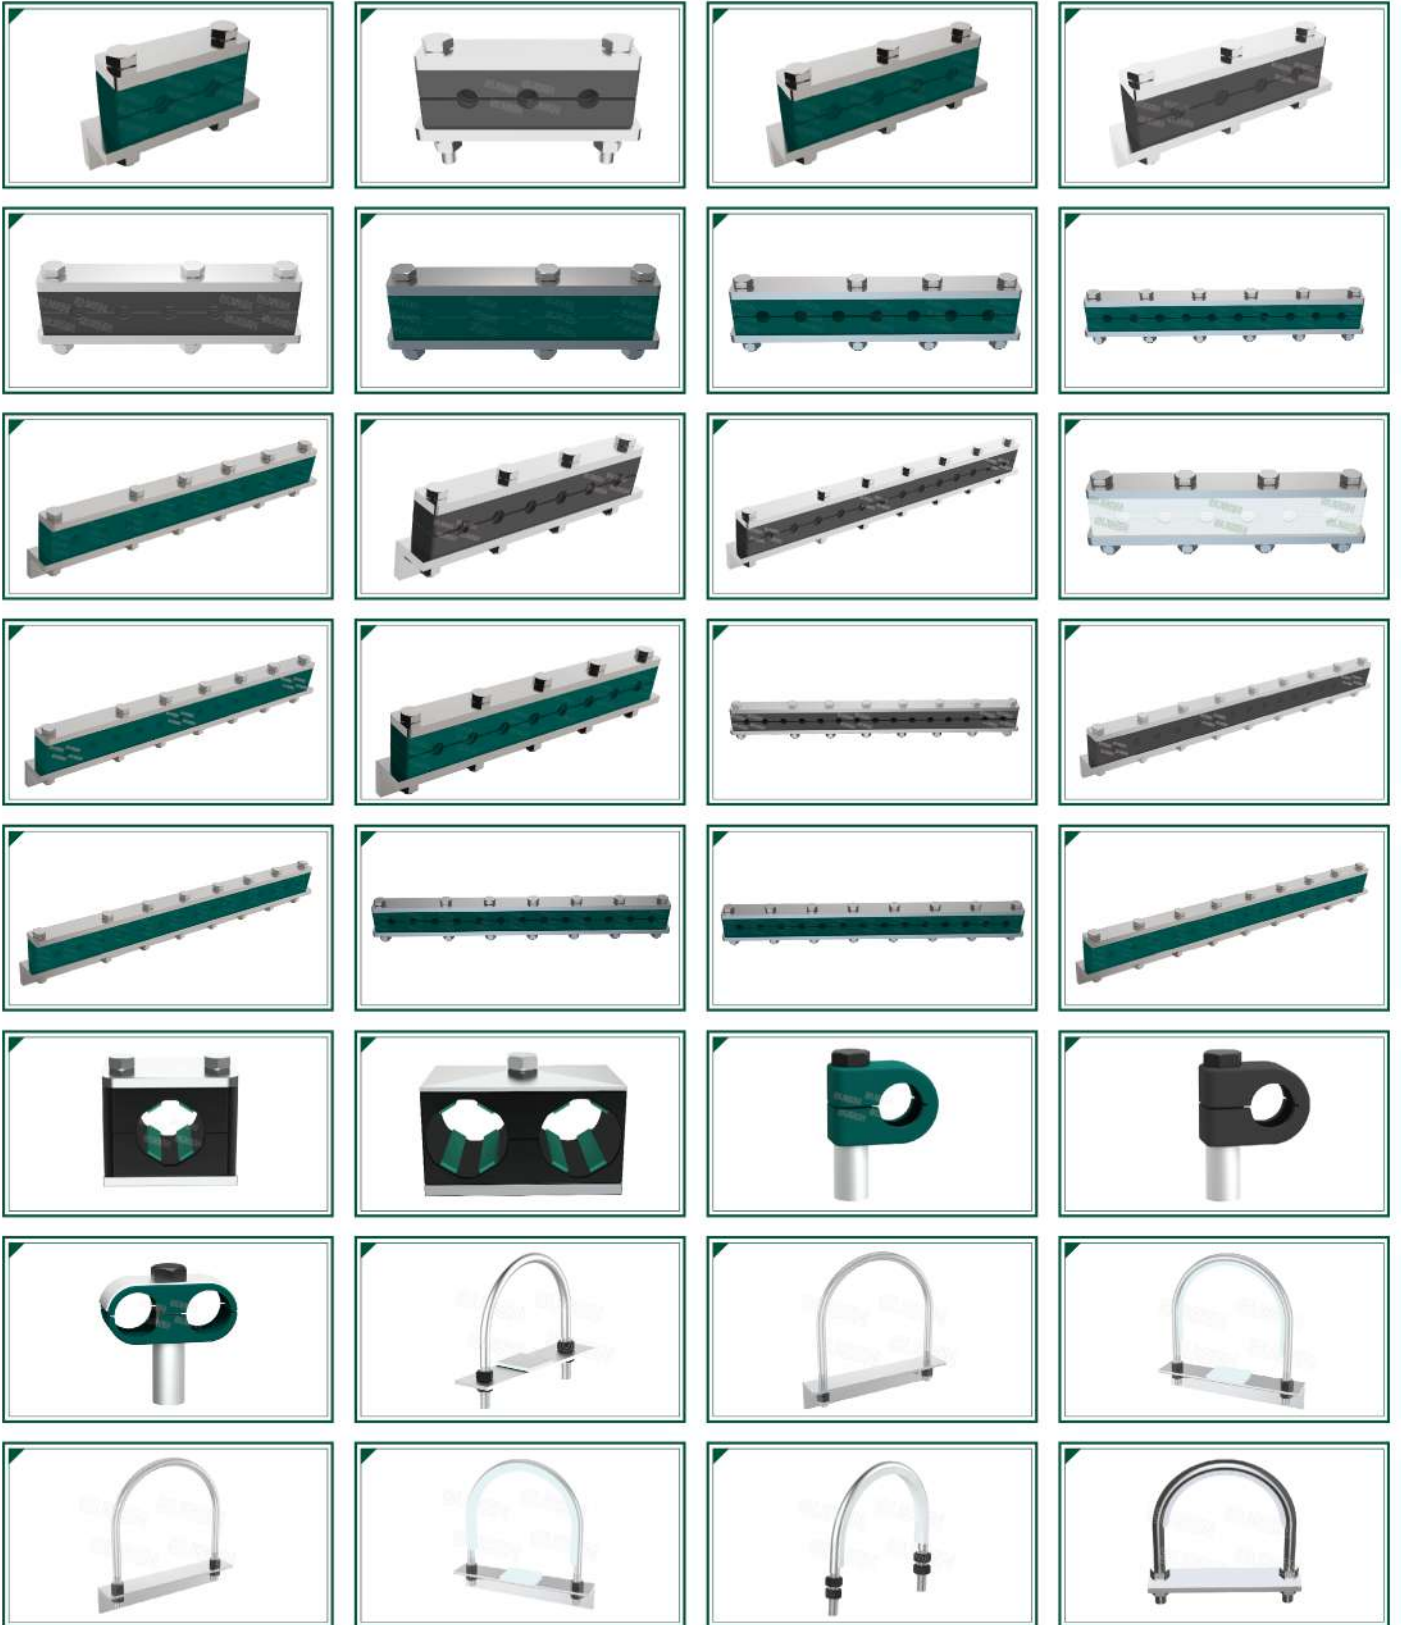

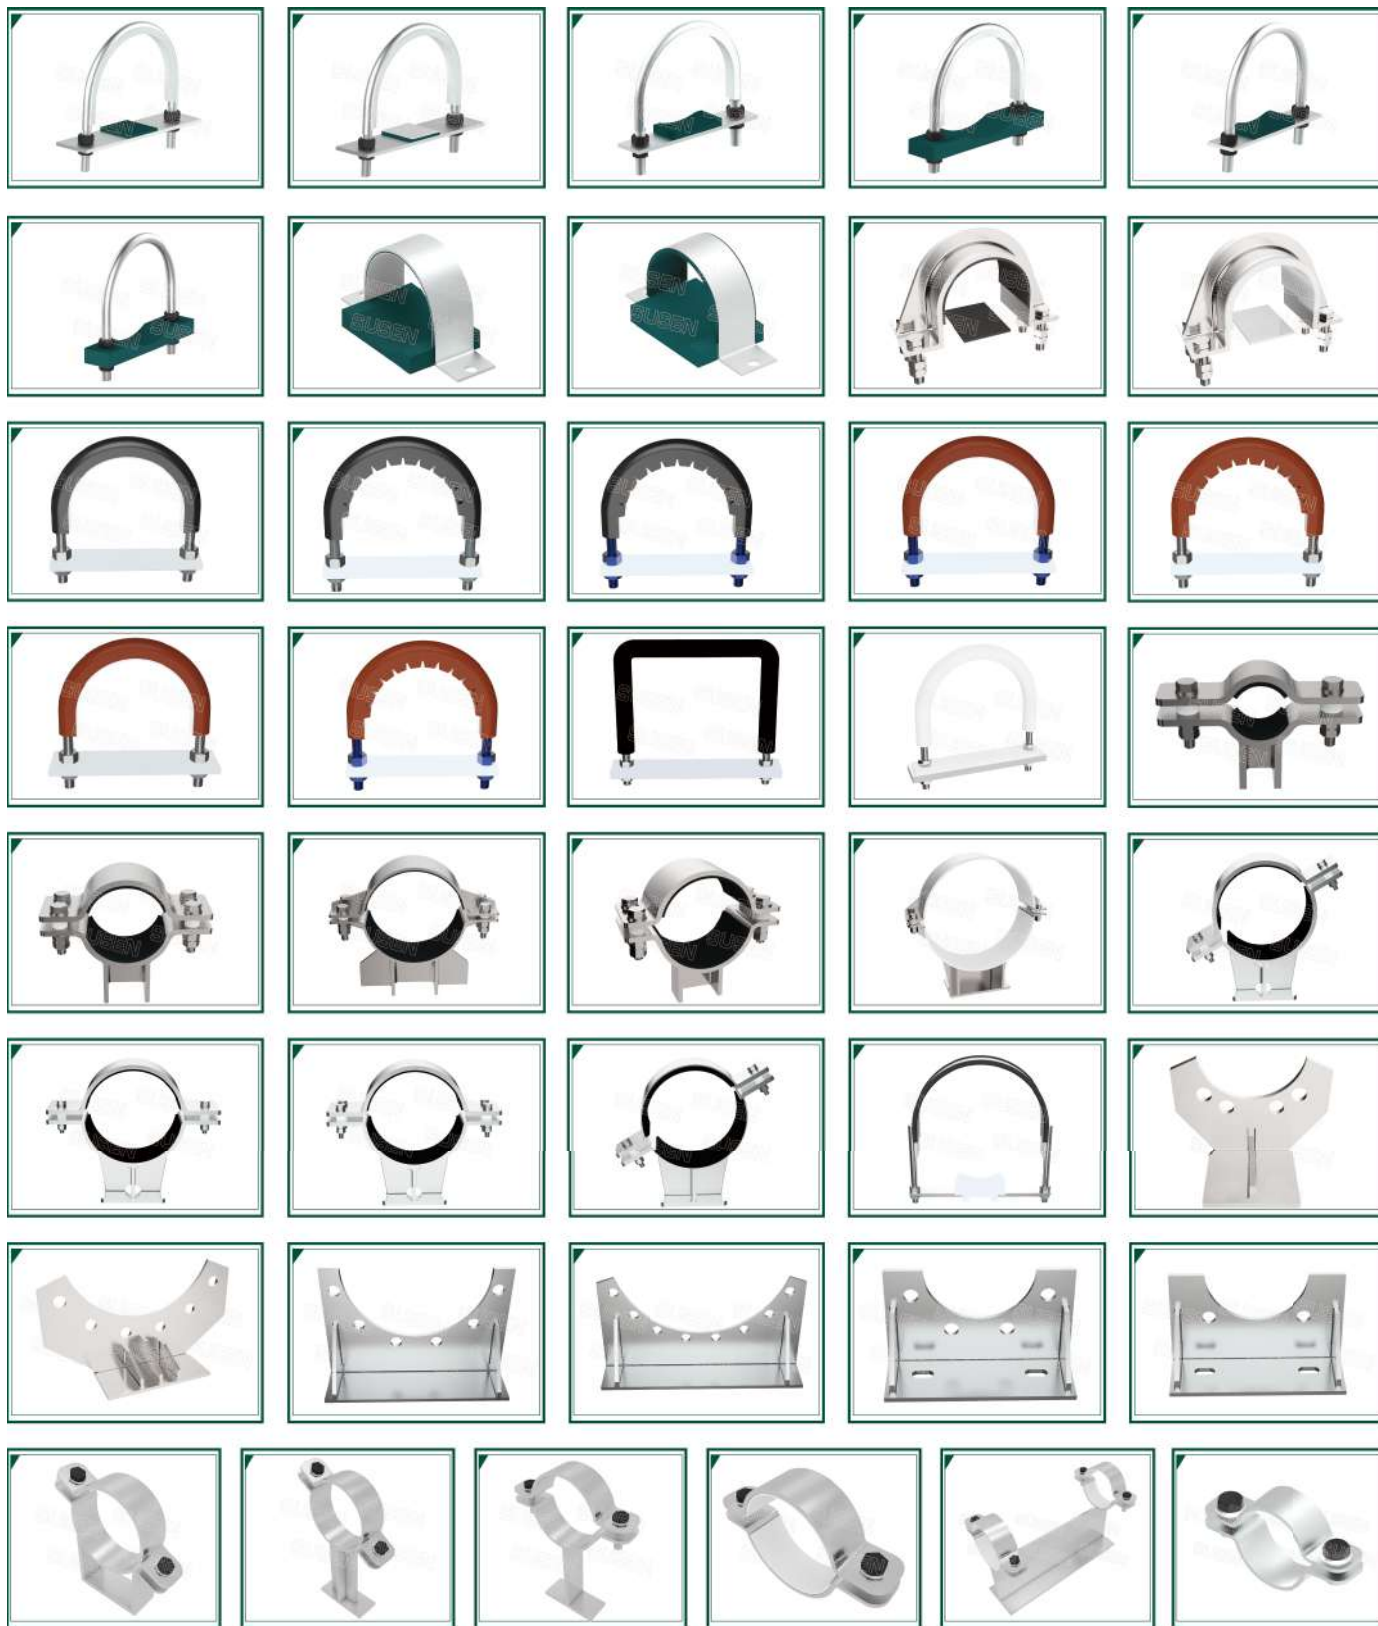

目录

CONTENTS

管夹说明 Instructions for Pipe Clamps	1-2
SXLC*单联轻型系列 SXLC* Light Single Series	3
SXL*F轻型防腐（防海水）系列管夹 SXL*F Light Anti-corrosion (Sea Water Proof) Series Pipe Clamps	4
SXLC*轻型2-16联管夹 SXLC* Light 2-16 Pipe Clamps	5-12
SXHC*重型单联系列管夹 SXHC* Heavy Single Series Pipe Clamps	13
SXH*G船用重型并联管夹 SXH*G Heavy Parallel Pipe Clamps for Ships	14
SXHC*重型2-16联管夹 SXHC* Heavy 2-16 Pipe Clamps	15-22
SXT*F双联防腐（防海水）系列管夹 SXT*F Twin Anti-corrosion (Sea Water Proof) Series Pipe Clamps	23
TC、TD型管子吊架 TC and TD Type Pipe Hangers	24
SXB*3小型单孔管夹 SXB*3 Small Single-hole Pipe Clamps	25
SXB*4小型双孔管夹 SXB*4 Small Twin-hole Pipe Clamps	26
Pa型管子吊架 Pa Type Pipe Hangers	27
Pb型管子吊架 Pb Type Pipe Hangers	28
Va型管子吊架 Va Type Pipe Hangers	29
Vb型管子吊架 Vb Type Pipe Hangers	30
SXUA型橡胶硫化U型管夹 SXUA Type Rubber Vulcanization U-Pipe Clamps	31
SXUB型橡胶硫化U型管夹 SXUB Type Rubber Vulcanization U-Pipe Clamps	32
SXUC型塑料垫块U型管夹 SXUC Type Plastic Washer U-Pipe Clamps	33
SXUD型塑料垫块U型管夹 SXUD Type Plastic Washer U-Pipe Clamps	34
SXUE型四氟套管U型管夹 SXUE Type PTFE Sleeve U-Pipe Clamps	35
SXUF型橡胶套管方型管夹 SXUF Type Rubber Sleeve Square Pipe Clamps	36
SXGJ-A型玻璃钢（GRE）管夹 SXGJ-A Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps	37-38
SXGJ-A型法兰托架 SXGJ-A Type Flange Brackets	39
SXGJ-B型玻璃钢（GRE）管夹 SXGJ-B Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps	40-41
SXGJ-B型法兰托架 SXGJ-B Type Flange Brackets	42
SXGJ-C型玻璃钢（GRE）管夹 SXGJ-C Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps	43-44
SXGJ-C型法兰托架 SXGJ-C Type Flange Brackets	45
海洋工程/船用铜管夹 Copper Pipe Clamps for Marine works/Ships	46

管夹组合材料造型指南

GUIDE FOR CHOOSING CLAMP MATERIALS

苏鑫船舶、海工用管夹符合以下制造标准:

Susen marine and oceaneering clamp is accord with the following manufacturing standards:

符合 DIN3015、JB/T3780-2006、JB/ZQ4008-2006、中远、大船、招商局重工、海油工程、外高桥等相关的企业标准;

DIN3015, JB/T3780-2006, JB/ZQ4008-2006, Cosco Shipping, DSIC, China Merchants Industry, Offshore Oil Engineering, Waigaoqiao and other related enterprise standards;

管夹体内表面分类

Classifications of the clamp's internal surface

1、内表面带筋: 具有减振、搞冲击作用, 可以吸收轴向的力, 上、下管夹体中间的夹管安装间隙可以产生偏压。

Internal surface with reinforcement: with the function of shock absorption and anti-impaction, and can absorb the axial force. The pinch installation gap in the middle of the upper and lower pipe clamps can generate a bias voltage.

2、内表面光滑: 适用于软管、电缆等固定。

Smooth inner surface: suitable for hose, cable and other to fix

管夹体材料选用

Material of pipe clamps

1、普通型塑料管夹体: PP

Common plastic pipe clamp: PP

● 适用于工作温度在 -30°C — $+90^{\circ}\text{C}$

Suitable for working temperature: -30°C to $+90^{\circ}\text{C}$

● 适用于臭氧、紫外线及油、矿物油等其它油类;

Suitable for ozone, ultraviolet, oil, mineral oil and other oils;

2、常用型尼龙管夹体: PA6/PA66

Common nylon pipe clamp: PA6/PA66

● 适用于工作温度在 -40°C — $+120^{\circ}\text{C}$

Suitable for working temperature: -40°C --- $+120^{\circ}\text{C}$

● 适用于弱酸、弱碱、臭氧、紫外线及油、矿物油等其它油类;

Suitable for weak acids, weak bases, ozone, ultraviolet, oil, mineral oils and other oils;

● 适应海水、雨、雪、砂、水等环境;

Adapt to seawater, rain, snow, sand, water and other environments;

3、特殊型尼龙管夹体: PA 增强阻燃型

Special-type nylon pipe clamp: PA enhanced flame retardant

● 适用于工作温度在 -50°C — $+150^{\circ}\text{C}$, 耐高、低温性能优于 PA6/PA66

Suitable for working temperature: -50°C to $+150^{\circ}\text{C}$, and it is better at resisting high and low temperature than PA6/PA66

● 抗冲击材料, 高阻燃防火等级, 符合 UL94-V0

Impact-resistant material, high flame retardant fire rating, and is accord with UL94-V0

● 适用于弱酸、弱碱、臭氧、紫外线及油、矿物油等其它油类;

Suitable for weak acids, weak bases, ozone, ultraviolet, oil, mineral oils and other oils;

● 适应海水、雨、雪、砂、水、腐蚀性等环境;

Adapt to seawater, rain, snow, sand, water, corrosive and other environments;

4、耐高温型管夹体: 特氟龙 (PTFE) 和碳纤维 (CF)

High temperature resistant pipe clamp: Teflon (PTFE) and carbon fiber (CF)

● 特氟龙 (PTFE) 材料适用于工作温度在 -50°C — $+120^{\circ}\text{C}$, 耐高、低温性能优于 PA66

Teflon (PTFE) material is suitable for working temperatures: -50°C to $+120^{\circ}\text{C}$, and it is better at resisting high and low temperature than

PA66;



- 碳纤维 (CF) 材料适用于工作温度在-150℃—+3500℃, 耐高、低温性能优于特氟龙 (PTFE)

Carbon fiber (CF) material is suitable for working temperature: -150 ° C to +3500 ° C, and it is better at resisting high and low temperature than Teflon (PTFE)

- 抗冲击材料, 高阻燃防火等级, 符合 UL94-V0

Impact-resistant material, high flame retardant fire rating, and is accord with UL94-V0

- 适用于弱酸、弱碱、臭氧、紫外线及油、矿物油等其它油类;

Suitable for weak acids, weak bases, ozone, ultraviolet, oil, mineral oils and other oils;

- 适应海水、雨、雪、砂、水、腐蚀性等环境;

Adapt to seawater, rain, snow, sand, water, corrosive and other environments;

5、防腐 (防海水) 型管夹体

Anti-corrosion (seawater-proof) pipe clamp

防腐蚀 (防海水) 管夹体, 带排水槽, 采用耐腐蚀材料制成。管夹体设计时采用横向方式, 通过泄漏夹持固定管道。两侧均采用高弧面结构, 防止液体在管道中储存, 彻底解决纵向管道与管夹体之间的积水和腐蚀问题, 并从材料和结构上共同防止管道表面的腐蚀。

The anti-corrosion (seawater-proof) pipe clamp with drainage channel, is made of anti-corrosive materials. A transverse format is adopted in the design of pipe clamp, where the anti-leakage clamp holder is used to fix the pipeline. The high-arc structure is adopted on both sides to prevent liquid storage in the pipeline, thoroughly solving the problems of water accumulation and corrosion between the longitudinal pipeline and the pipe clamp, and preventing the corrosion of the pipeline surface from both material and structure.

▣ 金属件类型

Type of metal parts

螺栓、螺母、盖板、保险板材料

Material of bolts, nuts, cover plates and insurance plates

1、碳钢: 管夹所选用的螺栓、螺母、盖板和保险板的材料均为碳钢镀锌或热浸镀锌;

Carbon steel: The bolts, nuts, cover plates and insurance plates used for pipe clamps are all made of galvanized carbon steel or hot dip galvanizing;

- 适用于通用性的工作环境;

Suitable for general work environments;

- 根据管路压力选用螺栓等级为, 中低压 4.8 级, 高压 8.8 级;

According to the pipeline pressure, the bolt grade is selected: the medium and low pressure is 4.8, and the high pressure is 8.8

2、SUS304 不锈钢: 管夹所选用的螺栓、螺母、盖板和保险板的材料均为 SUS304 不锈钢

SUS304 stainless steel: The bolts, nuts, cover plates and insurance plates used for pipe clamps are made of SUS304 stainless steel.

- 适用于使用性较强工作环境;

Suitable for use in a strong working environment;

- 根据管路压力选用螺栓等级为, 中低压 A2-70, 高压 A2-80;

According to the pipeline pressure, the bolt grade is selected: medium and low pressure A2-70, high pressure A2-80;

3、SUS316L 不锈钢: 管夹所选用的螺栓、螺母、盖板和保险板的材料均为 SUS316L 不锈钢

SUS316L stainless steel: The bolts, nuts, cover plates and insurance plates used for pipe clamps are made of SUS316L stainless steel.

- 适用于要求较高的工作环境, 表面经过酸洗、钝化防腐处理延长使用寿命;


Applicable to the high-demand working environment, the surface is pickled, passivated and treated to prolong the service life;

- 根据管路压力选用螺栓等级为, 中低压 A4-70, 高压 A4-80; other environments;

According to the pipeline pressure, the bolt grade is selected: medium and low pressure A4-70, high pressure A4-80;

SXLC* 单联轻型系列 SXLC* Light Single Series

外 (内) 六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

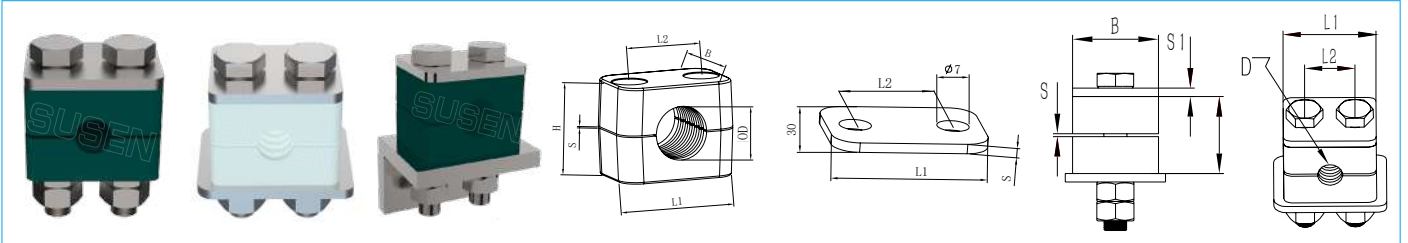




系列 series	订货号 order code	管外径 D pipe O.D.	英寸 内径 Inch I.D	英寸外 径 Inch O.D.	管夹体 Clamp body					盖板 cover plate				螺栓 bolt
					L1	L2	H	S	B	L1	L2	S	B	
L1	SXLC*-106	6			37	20	27	0.4	30	37	20	3	30	M6x55
	SXLC*-108	8		5/16										
	SXLC*-109.5	9.5		3/8										
	SXLC*-110	10	1/8											
	SXLC*-112	12												
L2	SXLC*-212.7	12.7		1/2	42	26	33	0.6	30	42	26	3	30	M6x60
	SXLC*-213.5	13.5	1/4											
	SXLC*-214	14												
	SXLC*-215	15												
	SXLC*-216	16		5/8										
	SXLC*-217.2	17.2	3/8											
L3	SXLC*-218	18			50	33	36	0.6	30	50	33	3	30	M6x70
	SXLC*-319	19		3/4										
	SXLC*-320	20												
	SXLC*-321.3	21.3	1/2											
	SXLC*-322	22		7/8										
L4	SXLC*-325	25		1	59	40	42	0.6	30	59	40	3	30	M6x75
	SXLC*-426.9	26.9	3/4											
	SXLC*-428	28												
L5	SXLC*-430	30			71	52	58	0.8	30	71	52	3	30	M6x80
	SXLC*-532	32		1, 1/4										
	SXLC*-533.7	33.7	1											
	SXLC*-535	35												
	SXLC*-538	38		1, 1/2										
	SXLC*-540	40												
L6	SXLC*-542	42	1, 1/4		86	66	66	0.8	30	86	66	3	30	M6x90
	SXLC*-644.5	44.5		1, 3/4										
	SXLC*-648.3	48.3	1, 1/2											
L7	SXLC*-650.8	50.8		2	121	94	93	0.8	30	121	94	5	30	M6x126
	SXLC*-757.2	57.2		2, 1/4										
	SXLC*-760.3	60.3	2											
	SXLC*-763.5	63.5		2, 1/2										
	SXLC*-770	70		2, 3/4										
	SXLC*-773	73												
L8	SXLC*-776.1	76.1	2, 1/2	3	147	120	118	0.8	30	147	120	5	30	M6x140
	SXLC*-888.9	88.9	3											
	SXLC*-8102	102		4										

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXL*F 轻型防腐（防海水）系列管夹 **SXL*F Light Anti-corrosion (Sea Water Proof)**

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供）Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)


特殊材料 Special materials

苏鑫管夹防腐管夹体已通过国标防火标准测试和验证。
The anti-corrosion pipe clamp from Susen Clamp Company has passed the test and verification of national fire protection standard.

根据用户要求可提供其它外径尺寸和其它安装形式，详细信息请垂询我司。

we can provide other outside diameters, sizes and other installation forms according to user demands. Please contact us for details.



防腐管夹体
Anti-corrosion
pipe clamp



(ACE) 材质的橡胶条
(ACE) rubber strip



聚丙烯 /PP



聚酰胺 /PA

系列 series	订货号 order code	管外径 D pipe O.D.	英寸 内径 Inch I.D.	英寸外 径 Inch O.D.	管夹体 Clamp body					盖板 cover plate			焊接底板 Welded base plate					螺栓 bolt
					L1	L2	H	S	B	L1	L2	S	L1	L2	S	H	D	
L1	SXL*F-106	6			37	20	27	0.4	30	37	20	3	37	20	3	6.5	12	M6x30
	SXL*F-108	8		5/16														
	SXL*F-110	10	1/8															
	SXL*F-112	12																
L2	SXL*F-212.7	12.7		1/2	42	26	33	0.6	30	42	26	3	42	26	3	6.5	12	M6x35
	SXL*F-215	15																
	SXL*F-216	16		5/8														
	SXL*F-217.2	17.2	3/8															
	SXL*F-218	18																
L3	SXL*F-319	19		3/4	50	33	36	0.6	30	50	33	3	50	33	3	6.5	12	M6x40
	SXL*F-320	20																
	SXL*F-321.3	21.3	1/2															
	SXL*F-322	22		7/8														
	SXL*F-325	25		1														
L4	SXL*F-426.9	26.9	3/4		59	40	42	0.6	30	59	40	3	60	40	3	6.5	12	M6x45
	SXL*F-428	28																
	SXL*F-430	30																
L5	SXL*F-532	32		1 1/4	71	52	58	0.8	30	71	52	3	71	52	3	6.5	12	M6x60
	SXL*F-533.7	33.7	1															
	SXL*F-538	38		1 1/2														
	SXL*F-540	40																
	SXL*F-542	42	1 1/4															
L6	SXL*F-644.5	44.5		1 3/4	86	66	66	0.8	30	86	66	3	88	66	3	6.5	12	M6x70
	SXL*F-648.3	48.3	1 1/2															
	SXL*F-650.8	50.8		2														
L7	SXL*F-760.3	60.3	2		121	94	93	0.8	30	121	94	5	122	94	5	6.5	12	M6x100
	SXL*F-763.5	63.5		2 1/2														
	SXL*F-773	73																
	SXL*F-776.1	76.1	2 1/2	3														



如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*2 轻型二联管夹

SXLC*2 light double-connected pipe clamp

外(内)六角螺栓+盖板+管夹体+焊接底板或角钢/支架(船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)





系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*2-106	6	70	45	20	27	0.6	30	70	45	30	3	M8X50
	SXLC*2-108	8											
	SXLC*2-109.5	9.5											
	SXLC*2-110	10											
	SXLC*2-112.7	12.7											
	SXLC*2-114	14											
	SXLC*2-116	16											
	SXLC*2-117	17.2											
	SXLC*2-118	18											
	SXLC*2-119	19											

SXLC*3 轻型三联管夹

SXLC*3 light triple-connected pipe clamp

外(内)六角螺栓+盖板+管夹体+焊接底板或角钢/支架(船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)



系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*3-106	6	90	65	20	27	0.6	30	90	65	30	3	M8X50
	SXLC*3-108	8											
	SXLC*3-109.5	9.5											
	SXLC*3-110	10											
	SXLC*3-112.7	12.7											
	SXLC*3-114	14											
	SXLC*3-116	16											
	SXLC*3-117	17.2											
	SXLC*3-118	18											
	SXLC*3-119	19											

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*4 轻型四联管夹 SXLC*4 light quadruple-connected pipe clamp


外(内)六角螺栓+盖板+管夹体+焊接底板或角钢/支架(船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)



系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*4-106	6	110	85	20	27	0.6	30	110	85	30	3	M8X50
	SXLC*4-108	8											
	SXLC*4-109.5	9.5											
	SXLC*4-110	10											
	SXLC*4-112.7	12.7											
	SXLC*4-114	14											
	SXLC*4-116	16											
	SXLC*4-117	17.2											
	SXLC*4-118	18											
	SXLC*4-119	19											

SXLC*5 轻型五联管夹 SXLC*5 light quintuplet-connected pipe clamp

外(内)六角螺栓+盖板+管夹体+焊接底板或角钢/支架(船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

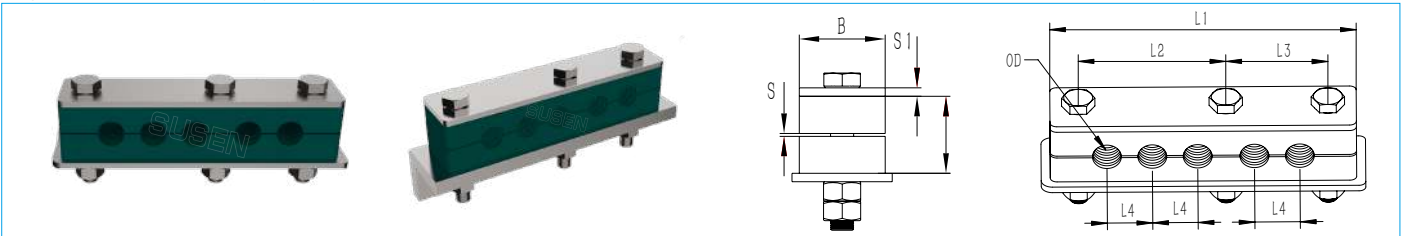

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
L1	SXLC*5-106	6	135	65	K5	20	27	0.6	30	135	65	45	30	3	M8X50
	SXLC*5-108	8													
	SXLC*5-109.5	9.5													
	SXLC*5-110	10													
	SXLC*5-112.7	12.7													
	SXLC*5-114	14													
	SXLC*5-116	16													
	SXLC*5-117	17.2													
	SXLC*5-118	18													
	SXLC*5-119	19													



如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms or materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*6 轻型六联管夹

SXLC*6 light six-connected pipe clamp

外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

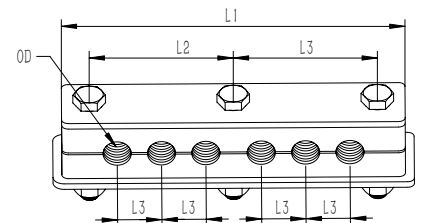



系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*6-106	6	155	65	20	27	0.6	30	155	65	30	3	M8X50
	SXLC*6-108	8											
	SXLC*6-109.5	9.5											
	SXLC*6-110	10											
	SXLC*6-112.7	12.7											
	SXLC*6-114	14											
	SXLC*6-116	16											
	SXLC*6-117	17.2											
	SXLC*6-118	18											
	SXLC*6-119	19											

SXLC*7 轻型七联管夹

SXLC*7 light seven-connected pipe clamp

外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

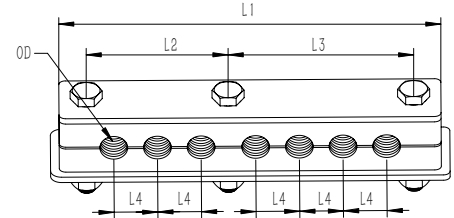


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
L1	SXLC*7-106	6	175	65	85	20	27	0.6	30	175	65	85	30	3	M8X50
	SXLC*7-108	8													
	SXLC*7-109.5	9.5													
	SXLC*7-110	10													
	SXLC*7-112.7	12.7													
	SXLC*7-114	14													
	SXLC*7-116	16													
	SXLC*7-117	17.2													
	SXLC*7-118	18													
	SXLC*7-119	19													

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*8 轻型八联管夹 SXLC*8 light eight-connected pipe clamp


外(内)六角螺栓+盖板+管夹体+焊接底板或角钢/支架(船厂提供) Outer(inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

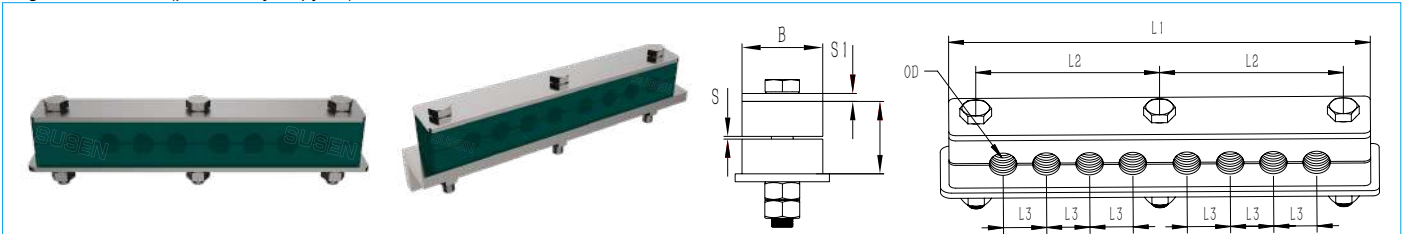

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*8-106	6	195	85	20	27	0.6	30	195	85	30	3	M8X50
	SXLC*8-108	8											
	SXLC*8-109.5	9.5											
	SXLC*8-110	10											
	SXLC*8-112.7	12.7											
	SXLC*8-114	14											
	SXLC*8-116	16											
	SXLC*8-117	17.2											
	SXLC*8-118	18											
	SXLC*8-119	19											

SXLC*9 轻型九联管夹 SXLC*9 light nine-connected pipe clamp

外(内)六角螺栓+盖板+管夹体+焊接底板或角钢/支架(船厂提供) Outer(inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

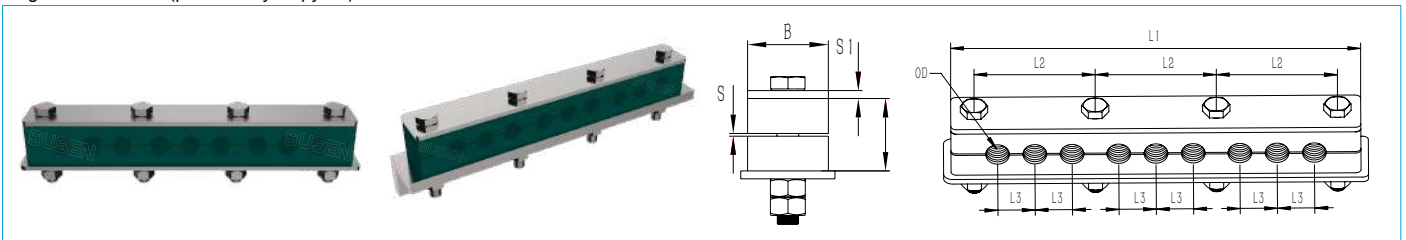


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*9-106	6	220	85	20	27	0.6	30	220	85	30	3	M8X50
	SXLC*9-108	8											
	SXLC*9-109.5	9.5											
	SXLC*9-110	10											
	SXLC*9-112.7	12.7											
	SXLC*9-114	14											
	SXLC*9-116	16											
	SXLC*9-117	17.2											
	SXLC*9-118	18											
	SXLC*9-119	19											

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*10 轻型十联管夹 SXLC*10 light ten-connected pipe clamp


外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

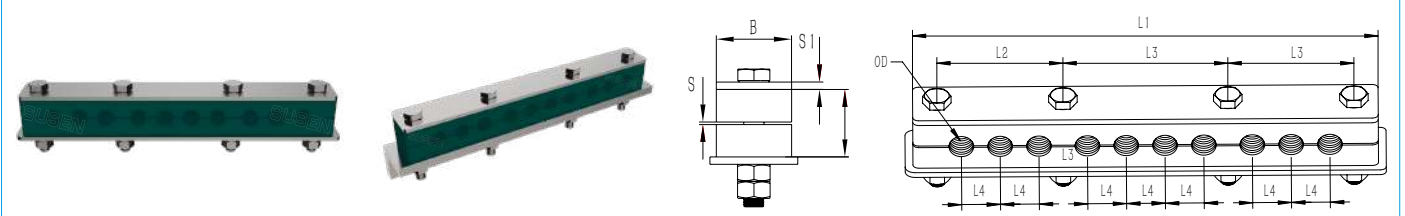

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
L1	SXLC*10-106	6	240	65	85	20	27	0.6	30	240	65	65	30	3	M8X50
	SXLC*10-108	8													
	SXLC*10-109.5	9.5													
	SXLC*10-110	10													
	SXLC*10-112.7	12.7													
	SXLC*10-114	14													
	SXLC*10-116	16													
	SXLC*10-117	17.2													
	SXLC*10-118	18													
	SXLC*10-119	19													

SXLC*11 轻型十一联管夹 SXLC*11 light eleven-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

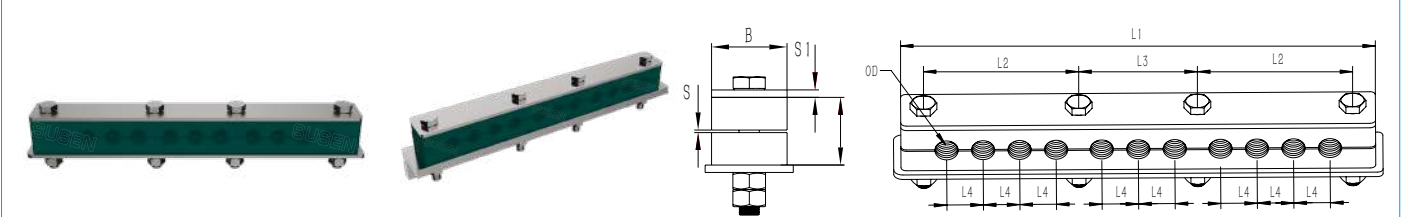


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
L1	SXLC*11-106	6	265	85	65	20	27	0.6	30	265	85	65	30	3	M8X50
	SXLC*11-108	8													
	SXLC*11-109.5	9.5													
	SXLC*11-110	10													
	SXLC*11-112.7	12.7													
	SXLC*11-114	14													
	SXLC*11-116	16													
	SXLC*11-117	17.2													
	SXLC*11-118	18													
	SXLC*11-119	19													

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*12 轻型十二联管夹 SXLC*12 light twelve-connected pipe clamp


外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

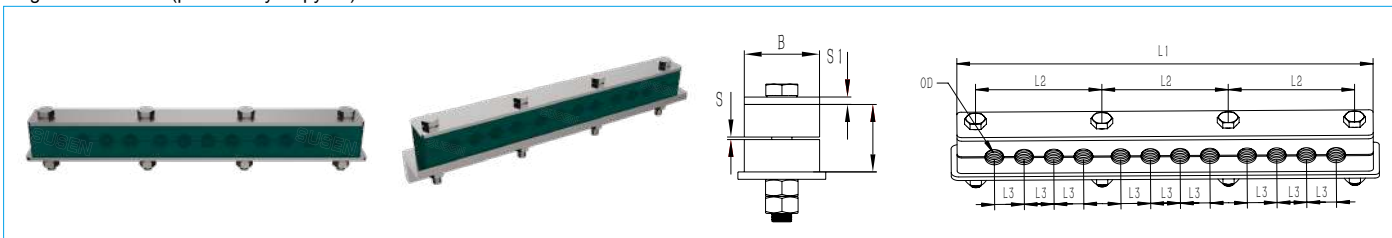

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*12-106	6	285	85	20	27	0.6	30	280	85	30	3	M8X50
	SXLC*12-108	8											
	SXLC*12-109.5	9.5											
	SXLC*12-110	10											
	SXLC*12-112.7	12.7											
	SXLC*12-114	14											
	SXLC*12-116	16											
	SXLC*12-117	17.2											
	SXLC*12-118	18											
	SXLC*12-119	19											

SXLC*13 轻型十三联管夹 SXLC*13 light thirteen-connected pipe clamp

外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

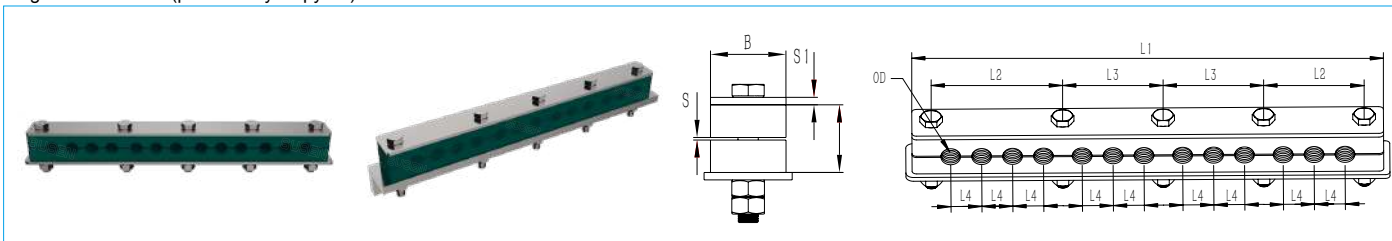


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
L1	SXLC*13-106	6	305	85	65	20	27	0.6	30	305	85	65	30	3	M8X50
	SXLC*13-108	8													
	SXLC*13-109.5	9.5													
	SXLC*13-110	10													
	SXLC*13-112.7	12.7													
	SXLC*13-114	14													
	SXLC*13-116	16													
	SXLC*13-117	17.2													
	SXLC*13-118	18													
	SXLC*13-119	19													

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*14 轻型十四联管夹 SXLC*14 light fourteen-connected pipe clamp


外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

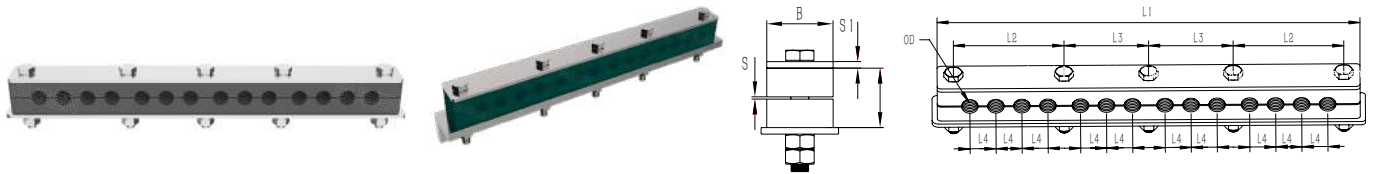

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
L1	SXLC*14-106	6	325	85	65	20	27	0.6	30	325	85	65	30	3	M8X50
	SXLC*14-108	8													
	SXLC*14-109.5	9.5													
	SXLC*14-110	10													
	SXLC*14-112.7	12.7													
	SXLC*14-114	14													
	SXLC*14-116	16													
	SXLC*14-117	17.2													
	SXLC*14-118	18													
	SXLC*14-119	19													

SXLC*15 轻型十五联管夹 SXLC*15 light fifteen-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

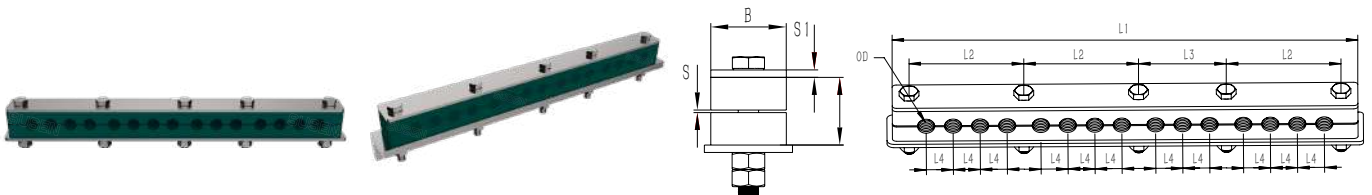


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
L1	SXLC*15-106	6	345	85	65	20	27	0.6	30	345	85	65	30	3	M8X50
	SXLC*15-108	8													
	SXLC*15-109.5	9.5													
	SXLC*15-110	10													
	SXLC*15-112.7	12.7													
	SXLC*15-114	14													
	SXLC*15-116	16													
	SXLC*15-117	17.2													
	SXLC*15-118	18													
	SXLC*15-119	19													

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-1

SXLC*16 轻型十六联管夹 SXLC*16 light sixteen-connected pipe clamp

外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

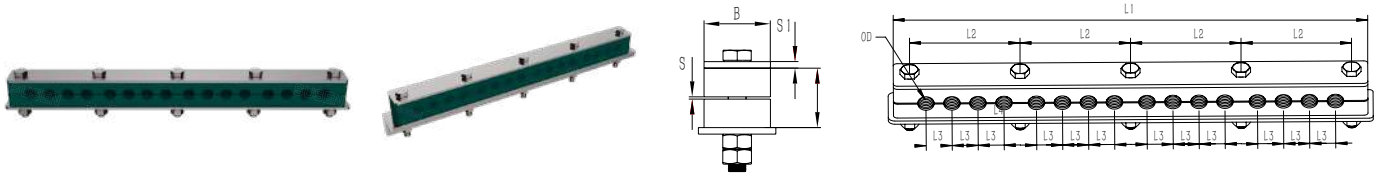

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
L1	SXLC*16-106	6	365	85	20	27	0.6	30	365	85	30	3	M8X50
	SXLC*16-108	8											
	SXLC*16-109.5	9.5											
	SXLC*16-110	10											
	SXLC*16-112.7	12.7											
	SXLC*16-114	14											
	SXLC*16-116	16											
	SXLC*16-117	17.2											
	SXLC*16-118	18											
	SXLC*16-119	19											

SXLC*15 轻型多联多层管夹 SXLC*15 light fifteen-connected pipe clamp

轻型系列多联多层管夹, 可提供 2 联-16 联, 用叠加式螺栓和防松板依次叠加, 最多可以叠加 5 层, 盖、底板均采用激光切割, 带 R 角无毛刺, 金属件材质 Q235\304\316L 可选, 碳钢的表面处理一般为热浸锌。


Light series of multi-split and multi-layer pipe clamp are suitable for 2 splits to 16 splits. They superimpose with superimposed bolts and check plates, with a max layer of 5 layers. Covers and base plates are cut by laser, accompanied by radius and no burr. Q235\304\316L are optional for metal materials. Surface treatment for carbon steel generally is hot-dip galvanizing.



SXHC* 重型单联系列管夹

SXHC* Heavy Single Series Pipe Clamps

外 (内) 六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

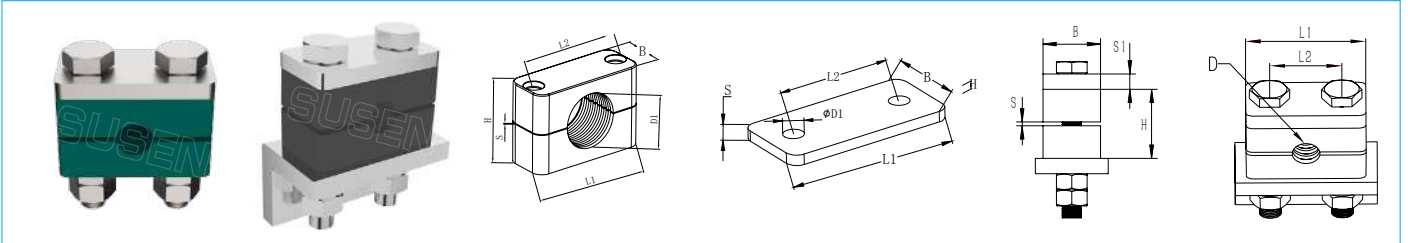

系列 series	订货号 order code	管外径 pipe O.D.D1	英寸内径 Inch I.D.	英寸外径 Inch O.D.	管夹体 Clamp body					盖板 cover plate					螺栓 bolt
					L1	L2	H	S	B	L1	L2	S	B	D1	
H1	SXHC*1-106	6			55	33	32	2	30	55	33	8	30	11	M10×45
	SXHC*1-108	8													
	SXHC*1-109.5	9.5		3/8											
	SXHC*1-110	10	1/8												
	SXHC*1-112.7	12.7		1/2											
	SXHC*1-113.5	13.5	1/4												
	SXHC*1-114	14													
	SXHC*1-115	15													
	SXHC*1-116	16		5/8											
	SXHC*1-117.2	17.2	3/8												
H2	SXHC*1-118	18			70	45	48	2	30	70	45	8	30	11	M10×60
	SXHC*1-218	18													
	SXHC*1-219	19		3/4											
	SXHC*1-220	20													
	SXHC*1-221.3	21.3	1/2												
	SXHC*1-222	22		7/8											
	SXHC*1-225	25		1											
	SXHC*1-226.9	26.9	3/4												
H3	SXHC*1-228	28			85	60	60	2	30	85	60	8	30	11	M10×70
	SXHC*1-230	30													
	SXHC*1-330	30													
	SXHC*1-332	32		1 1/4											
	SXHC*1-33.7	33.7	1												
	SXHC*1-335	35													
H4	SXHC*1-338	38		1 1/2	115	90	89	3	45	115	90	10	45	14	M12×100
	SXHC*1-340	40													
	SXHC*1-342	42	1 1/4												
	SXHC*1-442	42	1 1/4												
	SXHC*1-444.5	44.5		1 3/4											
	SXHC*1-448.3	48.3	1 1/2												
	SXHC*1-450.8	50.8		2											
	SXHC*1-455	55													
	SXHC*1-457	57		2 1/4											
	SXHC*1-460.3	60.3	2												
H5	SXHC*1-463.5	63.5		2 1/2	150	122	120	3.5	60	150	122	10	60	18	M16×130
	SXHC*1-465	65													
	SXHC*1-470	70													
	SXHC*1-570	70													
	SXHC*1-575	75													
	SXHC*1-576.1	76.1	2 1/2	3											
H6	SXHC*1-580	80			205	168	167	4	80	205	168	14	80	22	M20×190
	SXHC*1-582.5	82.5		3 1/4											
	SXHC*1-588.9	88.9	3												
	SXHC*1-688.9	88.9	3												
	SXHC*1-6100	100													
	SXHC*1-6102	102	3 1/2												
	SXHC*1-6108	108		4 1/4											
	SXHC*1-6114	114	4												
	SXHC*1-6127	127		5	205	168	167	4	80	205	168	14	80	22	M20×190
	SXHC*1-6133	133		5 1/4											


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXH*G 船用重型并联管夹

SXH*G Heavy Parallel Pipe Clamps for Ships

外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

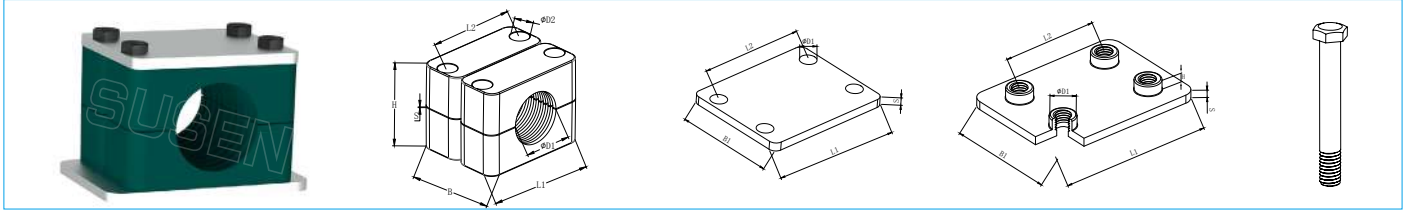

系列 series	订货号 order code	管外径 pipe O.D.D1	英寸内径 Inch I.D.	英寸外径 Inch O.D.	管夹体 Clamp body					盖板 cover plate					双联焊接底板 twin welded base plate					螺栓 bolt	
					L1	L2	H	S	B	L1	L2	S	B	D1	L1	L2	B	S	H		D1
H4	SXH*G6-442	42	11/4		115	90	89	3	90	115	90	8	45	14	140	90	90	10	8	20	M12×100
	SXH*G6-444.5	44.5		13/4																	
	SXH*G6-448.3	48.3	11/2																		
	SXH*G6-450.8	50.8		2																	
	SXH*G6-455	55																			
	SXH*G6-457	57		21/4																	
	SXH*G6-460.3	60.3	2																		
	SXH*G6-463.5	63.5		21/2																	
	SXH*G6-465	65																			
	SXH*G6-470	70																			
H5	SXH*G6-570	70			150	122	120	3	120	150	122	8	60	18	180	122	120	10	12	24	M16×130
	SXH*G6-575	75																			
	SXH*G6-576.1	76.1	21/2	3																	
	SXH*G6-580	80																			
	SXH*G6-582.5	82.5		31/4																	
	SXH*G6-588.9	88.9	3																		
H6	SXH*G6-688.9	88.9	3		205	168	167	4	160	205	168	12	80	22	225	168	160	15	18	30	M20×190
	SXH*G6-6100	100																			
	SXH*G6-6102	102	31/2																		
	SXH*G6-6108	108		41/4																	
	SXH*G6-6114	114	4																		
	SXH*G6-6127	127		5																	
	SXH*G6-6133	133		51/4																	
H7	SXH*G6-7133	133		51/4	250	205	200	4	180	250	205	12	90	26	270	205	180	15	21	30	M24×220
	SXH*G6-7140	140	5																		
	SXH*G6-7152	152		6																	
	SXH*G6-7159	159		61/4																	
	SXH*G6-7165	165		61/4																	
	SXH*G6-7168	168	5																		
H8	SXH*G6-8168	168	6		336	265	270	5	240	336	265	20	120	35	340	265	240	25	21	35	M30×300
	SXH*G6-8177.8	177.8		7																	
	SXH*G6-8193.7	193.7		78/5																	
	SXH*G6-8216	216		81/2																	
	SXH*G6-8219	219	8																		
H9	SXH*G6-9219	219	8		470	395	410	8	320	470	395	25	160	26	520	395	320	30	38	40	M30×450
	SXH*G6-9273	273	10																		
	SXH*G6-9324	324	12																		



如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXHC*2 重型二联管夹

SXHC*2 heavy double-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)





系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
H1	SXHC*2-106	6	92	70	35	36	1	30	92	70	30	8	M10X70
	SXHC*2-108	8											
	SXHC*2-109.5	9.5											
	SXHC*2-110	10											
	SXHC*2-112.7	12.7											
	SXLC*6-114	14											
	SXHC*2-116	16											
	SXLC*6-117	17.2											
	SXHC*2-118	18											
	SXHC*2-119	19											

SXHC*3 重型三联管夹

SXHC*3 heavy triple-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)




系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
H1	SXHC*3-106	6	127	105	35	36	1	30	127	105	30	8	M10X70
	SXHC*3-108	8											
	SXHC*3-109.5	9.5											
	SXHC*3-110	10											
	SXHC*3-112.7	12.7											
	SXHC*3-114	14											
	SXHC*3-116	16											
	SXHC*3-117	17.2											
	SXHC*3-118	18											
	SXHC*3-119	19											

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标（Comply to DIN standard）:DIN3015-2

SXHC*4 重型四联管夹 SXHC*4 heavy quadruple-connected pipe clamp


外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

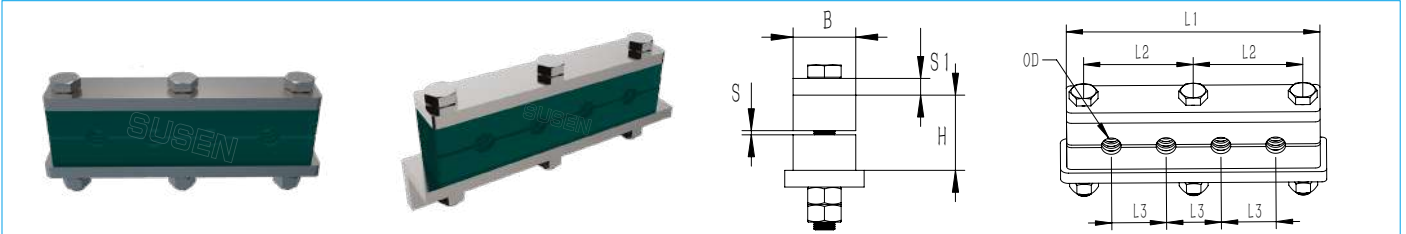

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
H1	SXHC*4-106	6	162	70	35	36	1	30	162	70	30	8	M10X70
	SXHC*4-108	8											
	SXHC*4-109.5	9.5											
	SXHC*4-110	10											
	SXHC*4-112.7	12.7											
	SXHC*4-114	14											
	SXHC*4-116	16											
	SXHC*4-117	17.2											
	SXHC*4-118	18											
	SXHC*4-119	19											

SXHC*5 重型五联管夹 SXHC*5 heavy quintuplet-connected pipe clamp

外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

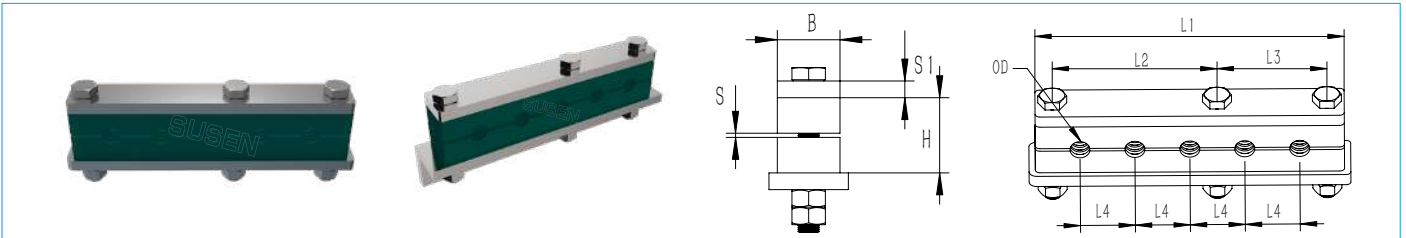

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
H1	SXHC*5-106	6	197	105	70	35	36	1	30	197	105	70	70	8	M10X70
	SXHC*5-108	8													
	SXHC*5-109.5	9.5													
	SXHC*5-110	10													
	SXHC*5-112.7	12.7													
	SXHC*5-114	14													
	SXHC*5-116	16													
	SXHC*5-117	17.2													
	SXHC*5-118	18													
	SXHC*5-119	19													




如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXHC*6 重型六联管夹

SXHC*6 heavy six-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

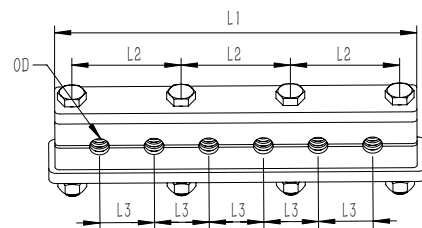



系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
H1	SXHC*6-106	6	232	70	35	36	1	30	232	70	30	8	M10X70
	SXHC*6-108	8											
	SXHC*6-109.5	9.5											
	SXHC*6-110	10											
	SXHC*6-112.7	12.7											
	SXLC*6-114	14											
	SXHC*6-116	16											
	SXHC*6-117	17.2											
	SXHC*6-118	18											
	SXHC*6-119	19											

SXHC*7 重型七联管夹

SXHC*7 heavy seven-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

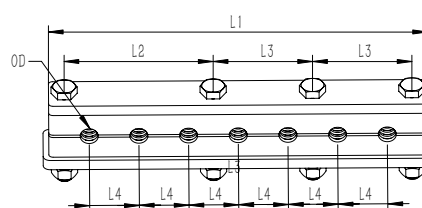


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate				螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	B	S	
H1	SXHC*7-106	6	267	105	70	35	36	1	30	267	105	70	8	M10X70
	SXHC*7-108	8												
	SXHC*7-109.5	9.5												
	SXHC*7-110	10												
	SXHC*7-112.7	12.7												
	SXHC*7-114	14												
	SXHC*7-116	16												
	SXHC*7-117	17.2												
	SXHC*7-118	18												
	SXHC*7-119	19												

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXHC*8 重型八联管夹 SXHC*8 heavy eight-connected pipe clamp


外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

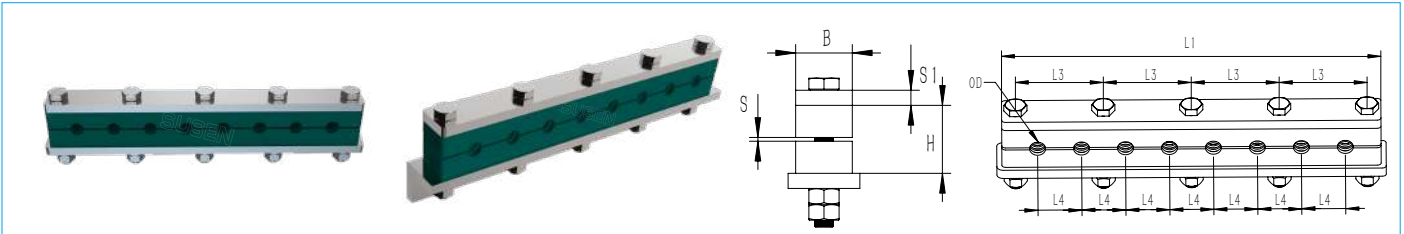

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L3	L4	H	S	B	L1	L3	B	S	
H1	SXHC*8-106	6	302	70	35	36	1	30	302	70	30	8	M10X70
	SXHC*8-108	8											
	SXHC*8-109.5	9.5											
	SXHC*8-110	10											
	SXHC*8-112.7	12.7											
	SXHC*8-114	14											
	SXHC*8-116	16											
	SXHC*8-117	17.2											
	SXHC*8-118	18											
	SXHC*8-119	19											

SXHC*9 重型九联管夹 SXHC*9 heavy nine-connected pipe clamp

外(内)六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架 (船厂提供) Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

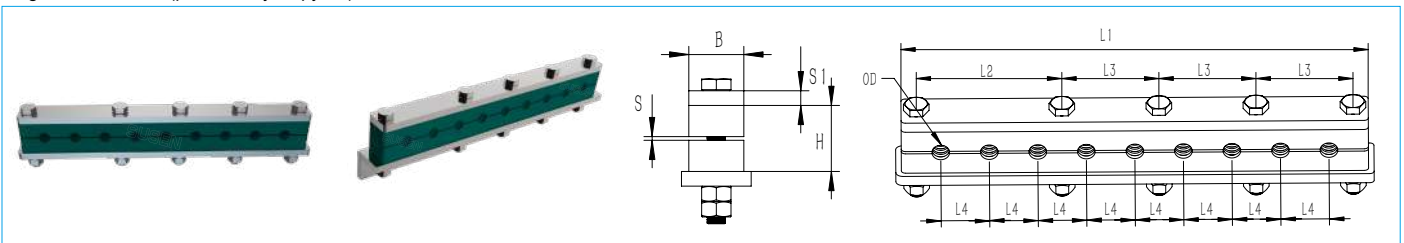

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
H1	SXHC*9-106	6	337	105	70	35	36	1	30	337	105	70	30	8	M10X70
	SXHC*9-108	8													
	SXHC*9-109.5	9.5													
	SXHC*9-110	10													
	SXHC*9-112.7	12.7													
	SXHC*9-114	14													
	SXHC*9-116	16													
	SXHC*9-117	17.2													
	SXHC*9-118	18													
	SXHC*9-119	19													


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXHC*10 重型十联管夹

SXHC*10 heavy ten-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

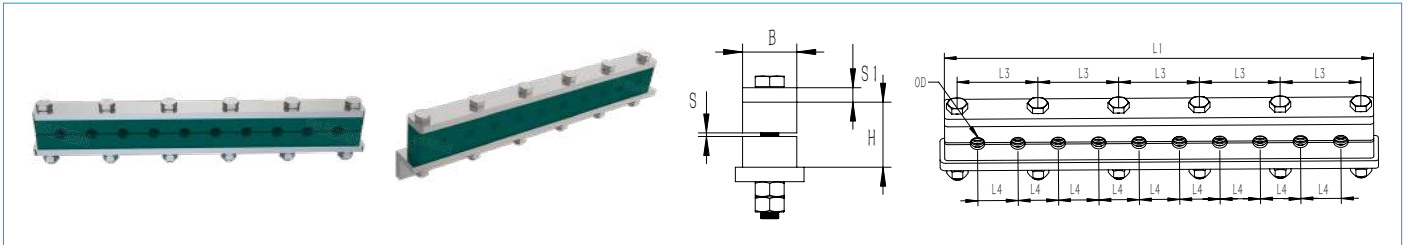


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L3	L4	H	S	B	L1	L3	B	S	
H1	SXHC*10-106	6	372	70	35	36	1	30	372	70	30	8	M10X70
	SXHC*10-108	8											
	SXHC*10-109.5	9.5											
	SXHC*10-110	10											
	SXHC*10-112.7	12.7											
	SXLC*10-114	14											
	SXHC*10-116	16											
	SXHC*10-117	17.2											
	SXHC*10-118	18											
	SXHC*10-119	19											

SXHC*11 重型十一联管夹

SXHC*11 heavy eleven-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

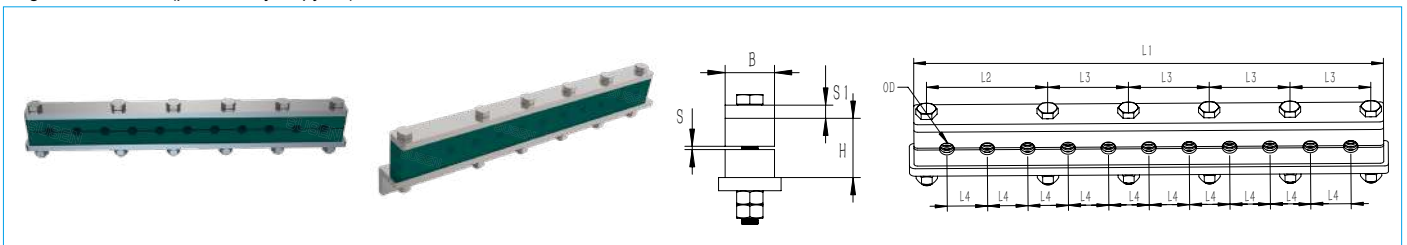

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
H1	SXHC*11-106	6	407	105	70	35	36	1	30	407	105	70	30	8	M10X70
	SXHC*11-108	8													
	SXHC*11-109.5	9.5													
	SXHC*11-110	10													
	SXHC*11-112.7	12.7													
	SXHC*11-114	14													
	SXHC*11-116	16													
	SXHC*11-117	17.2													
	SXHC*11-118	18													
	SXHC*11-119	19													


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXHC*12 重型十二联管夹

SXHC*12 heavy twelve-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供）Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

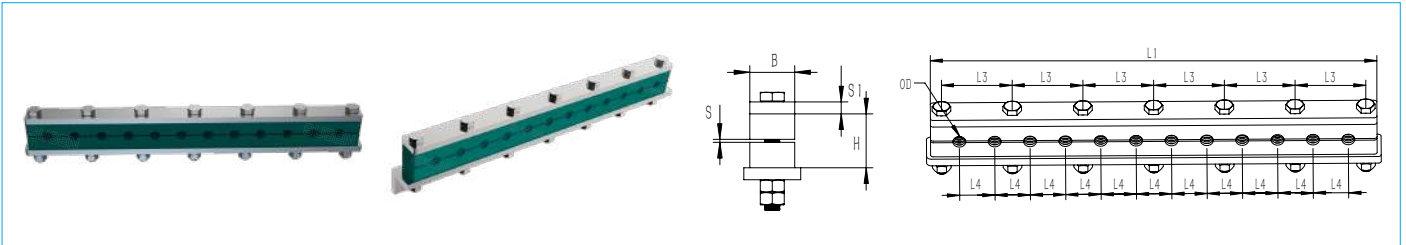


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L2	L3	H	S	B	L1	L2	B	S	
H1	SXHC*12-106	6	442	70	35	36	1	30	442	70	30	8	M10X70
	SXHC*12-108	8											
	SXHC*12-109.5	9.5											
	SXHC*12-110	10											
	SXHC*12-112.7	12.7											
	SXHC*12-114	14											
	SXHC*12-116	16											
	SXHC*12-117	17.2											
	SXHC*12-118	18											
	SXHC*12-119	19											

SXHC*13 重型十三联管夹

SXHC*13 heavy thirteen-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供）Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

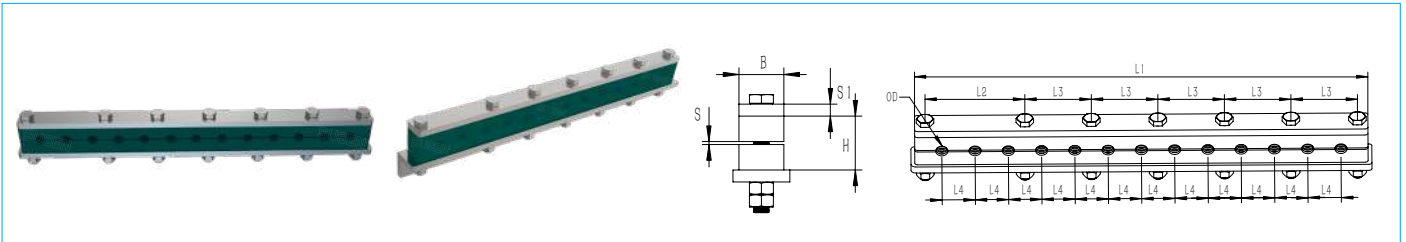

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
H1	SXHC*13-106	6	477	105	70	35	36	1	30	477	105	70	30	8	M10X70
	SXHC*13-108	8													
	SXHC*13-109.5	9.5													
	SXHC*13-110	10													
	SXHC*13-112.7	12.7													
	SXHC*13-114	14													
	SXHC*13-116	16													
	SXHC*13-117	17.2													
	SXHC*13-118	18													
	SXHC*13-119	19													


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXHC*14 重型十四联管夹

SXHC*14 heavy fourteen-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

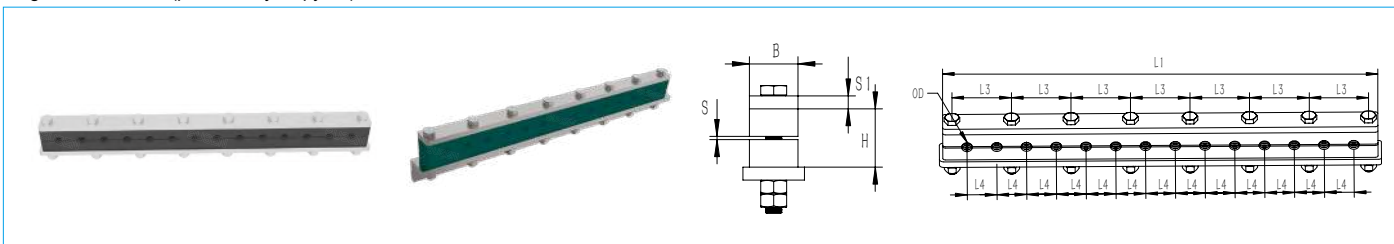


系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L3	L4	H	S	B	L1	L3	B	S	
H1	SXHC*14-106	6	512	70	35	36	1	30	512	70	30	8	M10X70
	SXHC*14-108	8											
	SXHC*14-109.5	9.5											
	SXHC*14-110	10											
	SXHC*14-112.7	12.7											
	SXLC*14-114	14											
	SXHC*14-116	16											
	SXHC*14-117	17.2											
	SXHC*14-118	18											
	SXHC*14-119	19											

SXHC*15 重型十五联管夹

SXHC*15 heavy fifteen-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供） Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

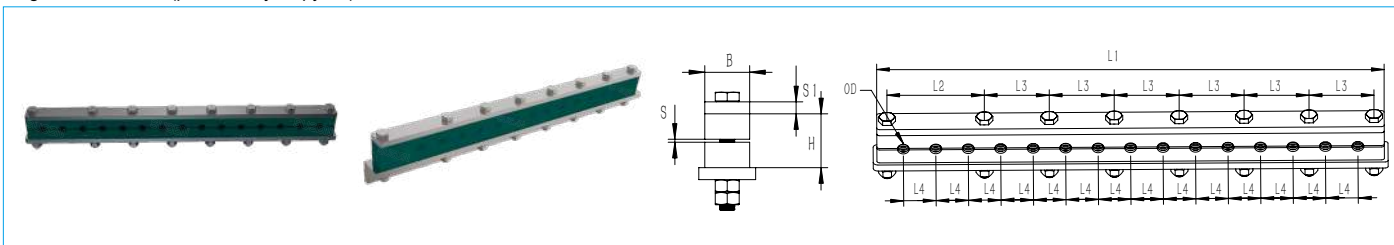

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body							盖板 cover plate					螺栓 bolt
			L1	L2	L3	L4	H	S	B	L1	L2	L3	B	S	
H1	SXHC*15-106	6	547	105	70	35	36	1	30	547	105	70	30	8	M10X70
	SXHC*15-108	8													
	SXHC*15-109.5	9.5													
	SXHC*15-110	10													
	SXHC*15-112.7	12.7													
	SXHC*15-114	14													
	SXHC*15-116	16													
	SXHC*15-117	17.2													
	SXHC*15-118	18													
	SXHC*15-119	19													


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-2

SXHC*16 重型十六联管夹

SXHC*16 heavy sixteen-connected pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供）Outer (inner) hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket (provided by shipyard)

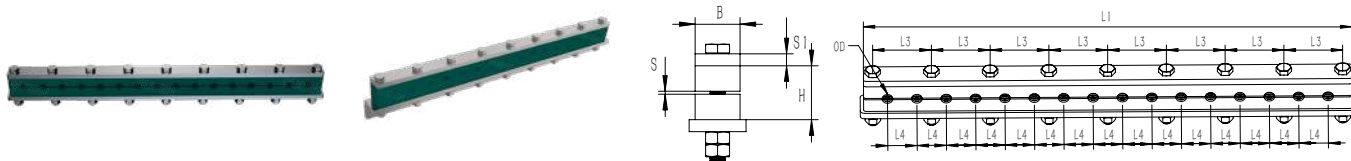

系列 size	订货号 order code	管外径 OD pipe OD	管夹体 Clamp body						盖板 cover plate				螺栓 bolt
			L1	L3	L4	H	S	B	L1	L3	B	S	
H1	SXHC*16-106	6	582	70	35	36	1	30	582	70	30	8	M10X70
	SXHC*16-108	8											
	SXHC*16-109.5	9.5											
	SXHC*16-110	10											
	SXHC*16-112.7	12.7											
	SXHC*16-114	14											
	SXHC*16-116	16											
	SXHC*16-117	17.2											
	SXHC*16-118	18											
	SXHC*16-119	19											

SXHC* 重型多层多联管夹

SXHC* heavy fifteen-connected pipe clamp




重型系列多联多层管夹，可提供 2 联-16 联，用叠加式螺栓和防松板依次叠加，最多可以叠加 5 层，盖、底板均采用激光切割，带 R 角无毛刺，金属件材质 Q235\304\316L 可选，碳钢的表面处理一般为热浸锌。

Heavy series of multi-split and multi-layer pipe clamp are suitable for 2 splits to 16 splits. They superimpose with superimposed bolts and check plates, with a max layer of 5 layers. Covers and base plates are cut by laser, accompanied by radius and no burr. Q235\304\316L are optional for metal materials. Surface treatment for carbon steel generally is hot-dip galvanizing.



SXT*F- 双联防腐（防海水）系列管夹 SXT*F-double-connected antiseptic(anti-seawater) pipe clamp

外（内）六角螺栓 + 盖板 + 管夹体 + 焊接底板或角钢 / 支架（船厂提供）Outer（inner）hexagon bolt + cover plate + pipe clamp + welded bottom plate or angle steel/bracket（provided by shipyard）



特殊材料 Special materials

苏鑫管夹防腐管夹体已通过国标防火标准测试和验证。
The anti-corrosion pipe clamp from Susen Clamp Company has passed the test and verification of national fire protection standard.

根据用户要求可提供其它外径尺寸和其它安装形式，详细信息请垂询我司。


we can provide other outside diameters, sizes and other installation forms according to user demands. Please contact us for details.



防腐管夹体
Anti-corrosion pipe clamp



(ACE) 材质的橡胶条
(ACE) rubber strip



聚丙烯 /PP



聚酰胺 /PA


系列 series	订货号 order code	管外径 pipe O.D. D1/D2	英寸内径 inch I.D.	英寸内径 inch O.D.	管夹体 Clamp body					盖板 cover plate				焊接底板 Welded base plate					螺栓 bolt
					L1	L2	H	S	B	L	H	S	D	L	S	H	D	G	
T1	SXT*F-106	6/6																	
	SXT*F-108	8/8		1/4															
	SXT*F-110	10/10	G1/8	3/8	36	20	27	0.8	30	36	7	3	7	37	3	6	12	M6	M6×35
	SXT*F-112	12/12																	
T2	SXT*F-212.7	12.7/12.7		1/2															
	SXT*F-215	15/15																	
	SXT*F-216	16/16		5/8	53	29	27	0.8	30	53	7	3	9	55	5	6	14	M8	M8×35
	SXT*F-217.2	17.2/17.2	G3/8																
T3	SXT*F-319	19/19		3/4															
	SXT*F-320	20/20																	
	SXT*F-321.3	21.3/21.3			67	36	37	0.8	30	67	7	3	9	70	5	6	14	M8	M8×45
	SXT*F-322	22/22	G1/2																
	SXT*F-325	25/25																	
T4	SXT*F-426.9	26.9/26.9	G3/4																
	SXT*F-428	28/28			80	45	40	0.8	30	80	7	3	9	85	5	6	14	M8	M8×50
	SXT*F-430	30/30																	
T5	SXT*F-532	32/32	G1																
	SXT*F-533.7	33.7/33.7																	
	SXT*F-535	35/35		1 1/4	106	56	53	0.8	30	106	7	3	9	110	5	6	14	M8	M8×60
	SXT*F-538	38/38																	
	SXT*F-540	40/40	G1 1/4	1 1/2															
	SXT*F-542	42/42																	

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

符合德标 (Comply to DIN standard) :DIN3015-3

TC、TD 型管子吊架 TC and TD Type Pipe Hangers

TC 型管子吊架结构和基本尺寸
Structure and basic size of TC type pipe hanger

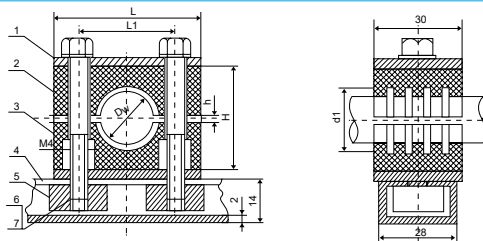


1- 压板; 2- 上本体; 3- 下本体; 4- 导轨; 5- 螺母; 6- 螺栓; 7- 垫圈
1-Pressing plate; 2-Upper body;3-Lower body;4- Rail; 5-Nut; 6-Bolt; 7-Washer

TC 型管子吊架基本尺寸
Basic size of TC type pipe hanger

适用管子外径 Dw Applicable of pipe O.D. Dw	结构尺寸 Structure and Size					重量 kg Weight kg	
	d1	L	L1	H	h		
8	10	40	24	26	20	0.19	
10	12					0.20	
12	14					0.21	
14	16	46	30	32	2.5	0.21	
16	18					0.25	
18	20					0.26	
20	22	50	34	35		0.27	
22	24					0.28	
25	27					0.30	
28	30	56	40	42	3.0	0.31	
30	32					0.32	
35	37					0.37	
38	40	65	50	52		0.40	
注：所列重量不包括导轨、螺栓重量。Note: The weight does not include the weight of rail and bolt.							

TD 型管子吊架结构和基本尺寸
Structure and basic size of TD type pipe hanger

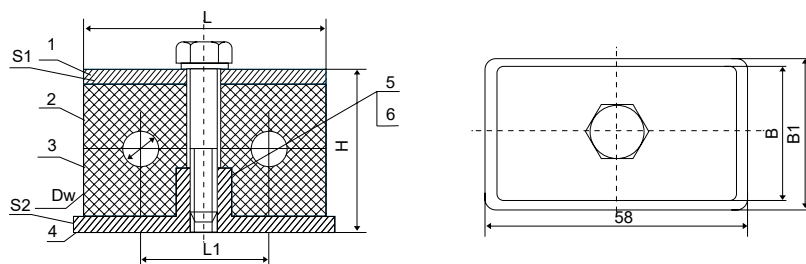

TD 型管子吊架基本尺寸
Basic size of TD type pipe hanger

适用管子外径 Dw OD of Applicable Pipe Dw	结构尺寸 Structure and Size						
	L	L1	H	B	B1	S1	S2
6	56	28	32	30	32	3	3
8							
10							
12							
14							
16							
18							



如果使用不同的形式或不同的材料要求，请在订货时说明
Please specify when ordering if different forms or materials are required.

SXB*3 小型单孔管夹

SXB*3 Small Single-hole Pipe Clamps

压缩空气管路、船舶、车辆、机械制造、电缆、软管、测量和控制设备机床等使用。

It can be used for compressed air pipeline, ships, vehicles, machine manufacturing, cables, hoses, measuring and control equipment and machine tools, etc.

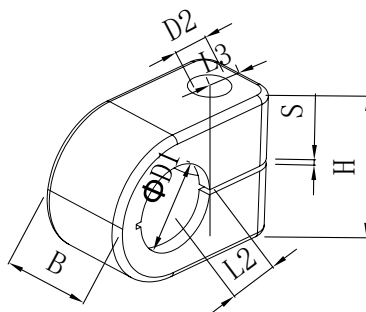



系列 series	订货号 order code	管外径 pipe O.D.D1	英寸内径 I.D.,inch	英寸外径 Inch O.D.	L1	L2	L3	B	H	D2
1	SXB*3-106	06			22	9	7	14.5	13.5	7
	SXB*3-106.4	06.4		1/4						
	SXB*3-108	08								
2	SXB*3-208	08		3/8	27	11	7	14.5	18.5	7
	SXB*3-209.5	09.5								
	SXB*3-210	10	1/8							
	SXB*3-212	12		1/2						
	SXB*3-212.7	12.7								
3	SXB*3-310	10	1/8		33	15	7	14.5	23.5	7
	SXB*3-312	12								
	SXB*3-312.7	12.7		1/2						
	SXB*3-313.5	13.5	1/4							
	SXB*3-314	14								
	SXB*3-315	15								
	SXB*3-316	16		5/8						
4	SXB*3-414	14			40	19	7	14.5	30.5	7
	SXB*3-415	15								
	SXB*3-416	16		5/8						
	SXB*3-417.2-417.2	17.2								
	SXB*3-418	18	3/8							
	SXB*3-419	19		3/4						
	SXB*3-420	20								
	SXB*3-421.3-421.3	21.3								
	SXB*3-422	22	1/2	1						

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXB*4 小型双孔管夹**SXB*4 Small Twin-hole Pipe Clamps**

压缩空气管路、船舶、车辆、机械制造、电缆、软管、测量和控制设备机床等使用。

It can be used for compressed air pipeline, ships, vehicles, machine manufacturing, cables, hoses, measuring and control equipment and machine tools, etc.

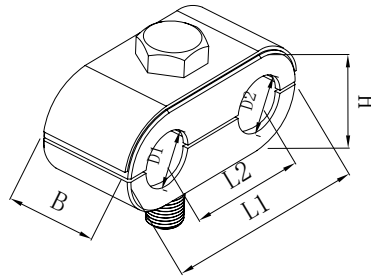

系列 series	订货号 order code	管外径 pipe O.D.D1	英寸内径 I.D.,inch	英寸外径 Inch O.D.	L1	L2	B	H
1	SXB*4-106	06			32	18	14.5	13.5
	SXB*4-106.4/106.4	06.4		1/4				
	SXB*4-108	08						
2	SXB*4-208	08		3/8	41	22	14.5	18.5
	SXB*4-209.5	09.5						
	SXB*4-210	10	1/8					
	SXB*4-212	12		1/2				
	SXB*4-212.7	12.7						
3	SXB*4-310	10	1/8		54	30	14.5	23.5
	SXB*4-312	12						
	SXB*4-312.7	12.7		1/2				
	SXB*4-313.5	13.5	1/4					
	SXB*4-314	14						
	SXB*4-315	15						
4	SXB*4-316	16		5/8	70	38	14.5	30.5
	SXB*4-414	14						
	SXB*4-415	15						
	SXB*4-416	16		5/8				
	SXB*4-417.2/417.2	17.2						
	SXB*4-418	18	3/8					
	SXB*4-419	19		3/4				
	SXB*4-420	20						
	SXB*4-421.3/421.3	21.3						
	SXB*4-422	22	1/2	1				


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

Pa 型管子吊架

Pa Type Pipe Hangers

本产品适用于船舶管路系统，具有抗震动，无轴向伸缩钢管或不锈钢管的管子吊架。

This product is suitable for the Ship Pipeline System, hangers of non-axial telescopic steel pipes or stainless steel pipes, which can resist vibration.

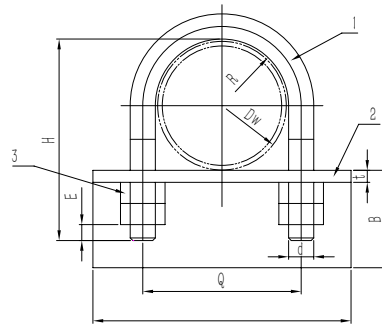

说明:

1-- U 型螺栓
U-bolt

2-- 角钢支架
Angle iron support

3-- 螺母
Nut

公称 直径 DN	钢管 外径 DW	U 型螺栓 U-bolt				角钢支架 Angle iron support		
		R	H	Q	d	B	Lmin	t
10	17	10	42	28	M8	40	78	5
15	22	12	51	34	M10		86	
20	27	15	57	40			92	
25	34	18	63	46			99	
32	32	23	72	56			107	
40	42	26	78	62		50	113	
50	48	32	90	74			125	
65	60	40	111	92	M12		154	
80	76	46	124	104			167	
100	89	59	160	134	M16	63	204	6
125	114	72	186	160			230	
150	140	85	213	186			258	
200	168	111	275	242	M20	80	324	8
250	219	137	328	294			378	
300	273	163	392	350	M24	90	454	10
350	325	181	425	386			484	
400	355.6	207	477	438			536	
450	406.4	233	539	496	M30	100	622	
500	457	259	590	548			675	
550	508	284	641	598			725	
600	559	310	676	656	M36	125	805	12
650	610	335	726	706			855	
700	711	361	778	758			910	
750	762	387	860	810			960	
800	813	413	921	868	M42		1033	
850	864	439	972	920			1085	
900	914	464	1022	970			1135	
950	965	490	1074	1022			1187	
1000	1016	515	1124	1072			1253	


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

Pb 型管子吊架

Pb Type Pipe Hangers

本产品适用于船舶管路系统，具有抗震动，无轴向伸缩钢管或不锈钢管的管子吊架。

This product is suitable for the Ship Pipeline System, hangers of non-axial telescopic steel pipes or stainless steel pipes, which can resist vibration.

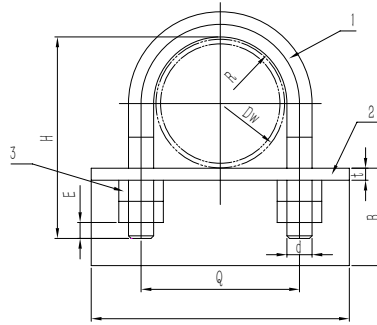

说明:

- 1-- U 型螺栓
U-bolt
- 2-- 角钢支架
Angle iron support
- 3-- 螺母
Nut


公称 直径 DN	钢管 外径 DW	U 型螺栓 U-bolt				角钢支架 Angle iron support		
		R	H	Q	d	B	Lmin	t
32	42	23	60	56	M10	40	107	5
40	48	26	66	62		50	113	
50	60	32	78	74			125	
65	76	40	96	104	M12		154	
80	89	59	122	134			167	
100	114	59	145	134	M16	63	204	6
125	140	72	171	160			230	
150	168	85	198	186			258	
200	219	111	257	242	M20	80	324	8
250	273	137	310	294			378	
300	325	163	370	350	M24	90	454	10
350	355.6	181	403	386			484	
400	406.4	207	455	438			536	
450	457	233	513	496	M30	100	622	
500	508	259	564	548			675	
550	559	284	615	598			725	
600	610	310	669	656	M36	125	805	12
650	660	335	719	706			855	
700	711	361	770	758			910	
750	762	387	829	810			960	
800	813	413	887	868	M42		1033	
850	864	439	928	920			1085	
900	914	464	988	970			1136	
950	965	490	1040	1022			1187	
1000	1016	515	1090	1072			1253	

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

Va 型管子吊架

Va Type Pipe Hangers

本产品适用于船舶管路系统中特涂钢管以及防止因摩擦起火，允许轴向伸缩的钢管或不锈钢管的管子吊架。
This product is suitable for tank-coated steel pipes in the Ship Pipeline System and it prevents fire from friction and allows hangers of axial telescopic steel pipes or stainless steel pipes.

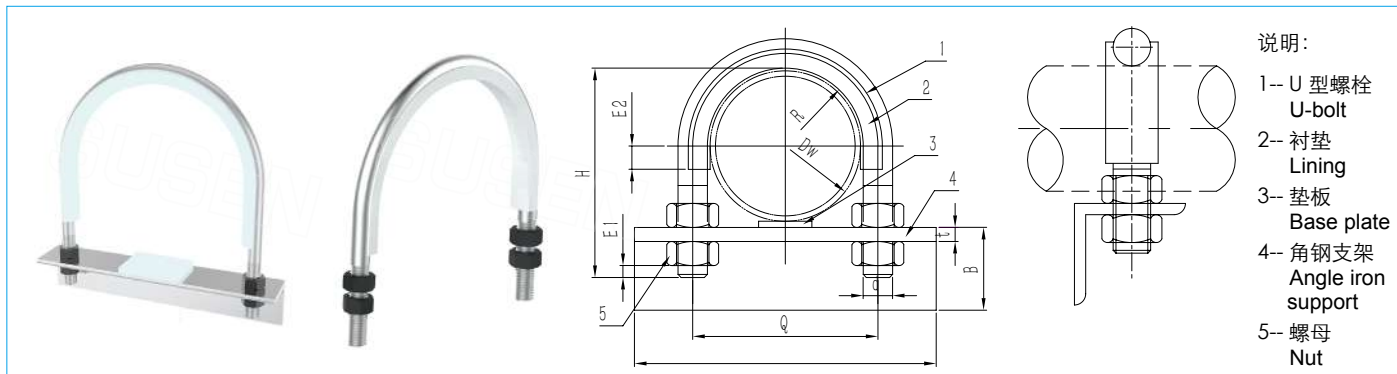


公称 直径 DN	钢管 外径 DW	U 型螺栓 U-bolt					角钢支架 Angle iron support			
		R	H	Q	d	E2	B	Lmin	t	
32	42	25	66	60	M10	5	50	107	5	
40	48	28	72	66				113		
50	60	34	85	78				125		
65	76	42	105	96	M12	154				
80	32	49	116	110		167				
100	89	62	150	140	M16	8	63	204	6	
125	114	75	175	166				230		
150	168	88	202	192				258		
200	219	114	260	248	M20		80	324	8	
250	273	140	315	300				378		
300	325	167	375	358	M24	90	454	10		
350	355.6	185	405	394			484			
400	406.4	211	456	446			536			
450	457	237	515	504	M30		10		100	622
500	508	263	560	556						675
550	559	288	615	606		725				
600	610	314	675	658		805				

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

Vb 型管子吊架 Vb Type Pipe Hangers

本产品适用于船舶管路系统中特涂钢管以及防止因摩擦起火，允许轴向伸缩的钢管或不锈钢管的管子吊架。
This product is suitable for tank-coated steel pipes in the Ship Pipeline System and it prevents fire from friction and allows hangers of axial telescopic steel pipes or stainless steel pipes.

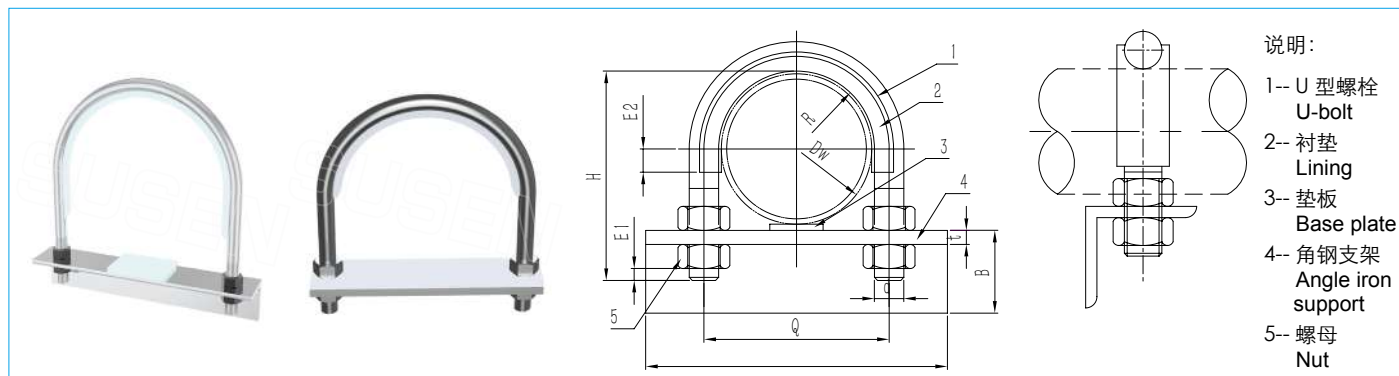

钢管 外径 DW	U 型螺栓 U-bolt					角钢支架 Angle iron support		
	R	H	Q	d	E2	B	Lmin	t
38	22	63	56	M10	5	40	98	6
45	26	70	62				105	
55	31	85	74	M12	8	50	125	
58	32	87	76				130	
70	38	99	88				140	
76	41	105	94				150	
85	46	115	104				155	
90	48	119	108				160	
105	56	140	128				190	
110	58	144	132	195				
130	69	165	154	M16		63	215	
135	71	170	158				220	
155	82	192	180				240	
160	84	197	184				245	
210	109	252	238	M20		80	305	8
220	114	262	248				320	
260	134	302	288				360	
280	144	322	308				380	
310	159	357	342	M24		90	435	10
320	164	367	352				445	
360	184	407	392				485	


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXUA 型橡胶硫化 U 型管夹


SXUA Type Rubber Vulcanization U-Pipe Clamps

本产品适用于钢管、铜镍管支架用，能减小震动，防止管路磨损、腐蚀、不同材质电化学反应，并且允许管路因热胀冷缩轴向串动。

This product is suitable for the supports of steel pipes and copper nickel pipes, which can reduce vibration and prevent the abrasion or corrosion or electrochemical reaction of different materials in the pipelines, and it allows the axial endplay caused by thermal expansion and contraction of the pipelines.

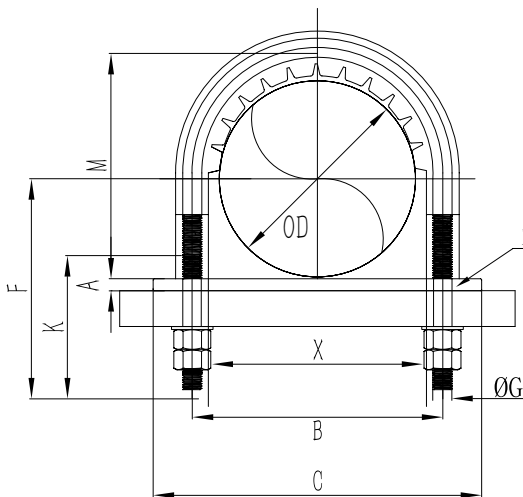

宽Wide=D

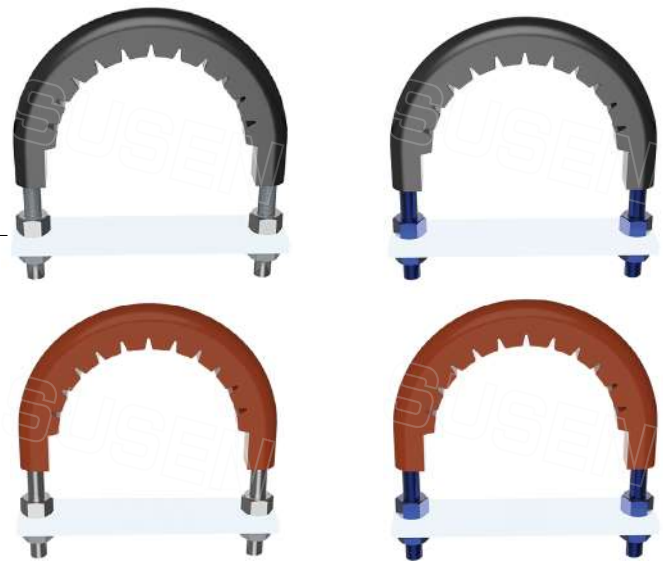

1、U 型螺栓、螺母的材质为 316L 或 A193-B7
U-bolts and nuts are made of 316L or A193-B7.

2、表面处理方式为特氟龙 (PTFE) 涂层或热浸锌;
The Teflon coating (PTFE) and hot-dip galvanizing are adopted in surface treatment;

3、U 型管夹护套部分为三元乙丙或氯丁橡胶，颜色为黑色、红色可选！
Sheath for U-type pipe clamp is made of ethylene propylene diene monomer (EPDM) or neoprene. Black and red are optional!

4、下垫块为特氟龙 (PTFE)，厚度为 10MM
the bottom lining is made of Teflon (PTFE), with a thickness of 10MM.

5、工作温度：-50℃—150℃
Operating temperature: -50℃ —150℃ .

PIPE SIZE (NPS)	零件号 PART NO OD	A	B	C	D	F	G	K	M	X
1/2	21	10	37	60	25	60	6	57	29	21
3/4	27	10	43	68	25	65	6	60	35	27
1	34	10	50	72	25	65	6	60	42	34
1-1/2	49	10	75	98	25	80	10	70	62	49
2	61	10	87	110	25	90	10	75	74	61
3	89	10	115	140	25	100	12	75	102	89
4	115	10	141	166	25	110	12	75	128	115
6	168	10	210	246	50	180	16	120	189	168


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXUB 型橡胶硫化 U 型管夹

SXUB Type Rubber Vulcanization U-Pipe Clamps

本产品适用于钢管、铜镍管支架用，能减小震动，防止管路磨损、腐蚀、不同材质电化学反应，并且允许管路因热胀冷缩轴向串动。

This product is suitable for the supports of steel pipes and copper nickel pipes, which can reduce vibration and prevent the abrasion or corrosion or electrochemical reaction of different materials in the pipelines, and it allows the axial endplay caused by thermal expansion and contraction of the pipelines.

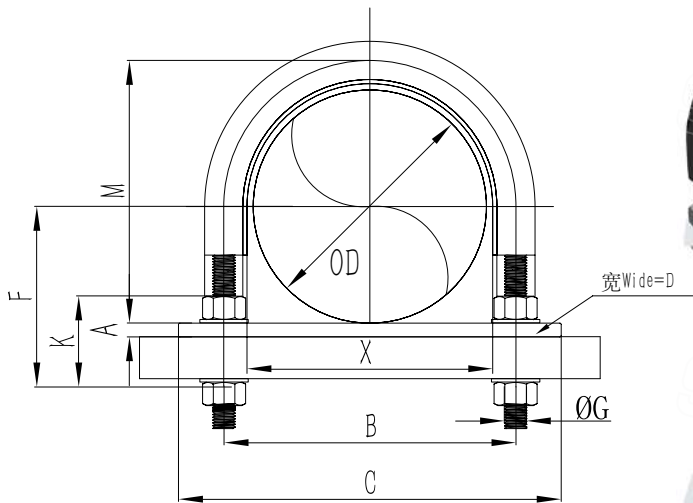

1、U 型螺栓、螺母的材质为 316L 或 A193-B7
U-bolts and nuts are made of 316L or A193-B7.

2、表面处理方式为特氟龙 (PTFE) 涂层或热浸锌;
The Teflon coating (PTFE) and hot-dip galvanizing are adopted in surface treatment;

3、U 型管夹护套部分为三元乙丙或氯丁橡胶，颜色为黑色、红色可选！
Sheath for U-type pipe clamp is made of ethylene propylene diene monomer (EPDM) or neoprene. Black and red are optional!

4、内衬垫为特氟龙 (PTFE)，厚度为 1MM，下垫块为特氟龙 (PTFE)，厚度为 10MM
The inner lining is made of Teflon (PTFE), with a thickness of 1MM; the bottom lining is made of Teflon (PTFE), with a thickness of 10MM.

5、工作温度：-50℃—150℃
Operating temperature: -50℃ —150℃ .



PIPE SIZE (NPS)	零件号 PART NO OD	A	B	C	D	F	G	K	M	X
1/2	21	10	37	60	25	60	6	57	29	21
3/4	27	10	43	68	25	65	6	60	35	27
1	34	10	50	72	25	65	6	60	42	34
1-1/2	49	10	75	98	25	80	10	70	62	49
2	61	10	87	110	25	90	10	75	74	61
3	89	10	115	140	25	100	12	75	102	89
4	115	10	141	166	25	110	12	75	128	115
6	168	10	210	246	50	180	16	120	189	168

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXUC 型塑料垫块 U 型管夹

SXUC Type Plastic Washer U-Pipe Clamps

本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。This product is used as the fixed pipeline clamp in the mechanical hydraulic systems like metallurgy, petroleum, chemical industry, automobile, shipping, and electricity which use oil, water and gas as media.

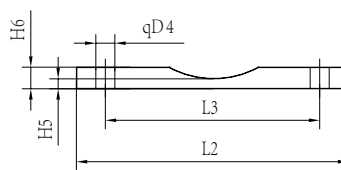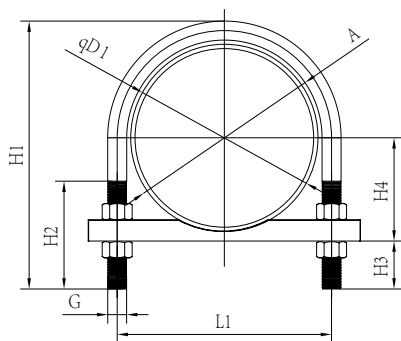

塑料垫板 RUL



特氟龙 PTFE

尼龙 PA

聚丙烯 PP


DN	管径 ADΦD1		元钢箍 RB						塑料垫块 RUL						
			A	L1	H1	H2	H3	H4	G	L2	L3	B	H5	H6	ΦD4
20	25		30	40	73.5	46	30	17.5	M10	75	40	30	5	12	11
	26.9	3/4						18.5							
25	30		38	48	81	50		20		80	48				
	33.7	1						22							
32	38		46	56	89			24		90	56				
	42.4	1 1/4						26.2							
40	44.5		52	62	100	55	35	27.2	95	62	35	15	14		
	48.3	1 1/2						29							
50	57		64	76	118	63	39	33.5	M12	110				76	
	60.3	2						35.2							
65	76.1	2 1/2	82	94	135	77		43	M12	135	94				
80	88.9	3	94	106	152	82		54.5		145	106	40	10	20	18
100	108		120	136	190	105	47	M16	190	136					
	114.3	4									64	67	220	164	
125	133		148	164	217				76.5	250	192	50			
	139.7	5							80				270	218	
150	159		176	192	247				91.5	315	248				
	175	168.3							6				96		
200	193.7		202	218	273	125	55	M20	370	302	60	15	30	26	
	216		228	248	311										120
250	219.1	8							121.5	370					302
	267		145.5	420	352										
300	273	10	282						302	364					148.5
	318			174											
350	323.9	12	332	352	418	145	63	M24	480	402					
	355.6	14									193	540	452		
400	368		378	402	475				199	640	554				
	406.4	16							218						
500	419		428	452	526				224.5						
	508								530	554	627	269			
521		276													

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXUD 型塑料垫块 U 型管夹 SXUD Type Plastic Washer U-Pipe Clamps

应用于：液压管道的 U 型螺栓和塑料基座

Applicable for: U-stud and plastic foundation support of hydraulic pipelines

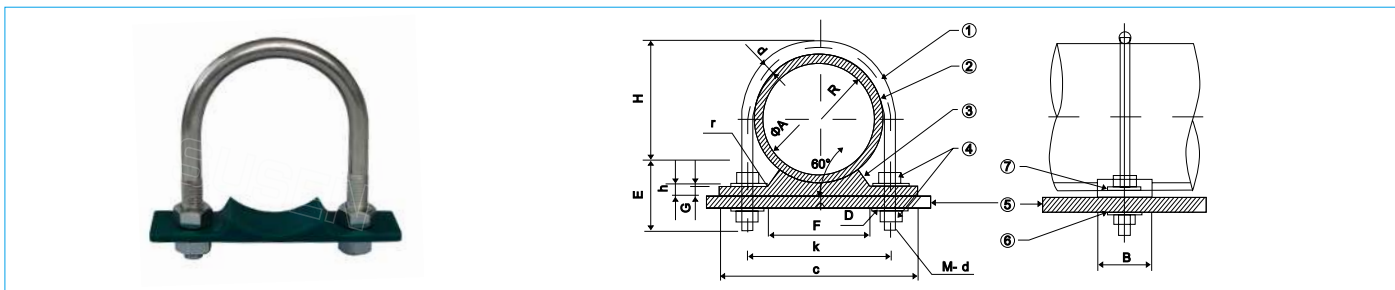

尺寸表

Size Table

单位 :mm

Unit:mm

管道 Pipe		R	d	E	H	C	B	K	F	G	h	r	M-d	D
标称直径 Nominal Diameter	外径 O.D.													
65A	76.3	40	12	45	60	135	35	92	60	4	6	5	M12	15
80A	89.1	46	12	45	75	145	40	104	70	4	6	10	M12	15
100A	114.3	59	16	60	90	190	40	134	85	4	6	10	M16	19
125A	139.8	72	16	60	120	220	40	160	100	4	6	10	M16	19
150A	165.2	85	16	60	145	250	50	186	120	4	6	20	M16	19
200A	216.3	111	20	70	190	315	50	242	170	4	6	20	M20	23

编号 No.	说明 Description	尺寸 Size	材料 Material	数量 Quantity	重量 (Kg) Weight(kg)	涂漆部分(M ²) Painting part (M ²)	备注 Remarks
1	U 型螺栓 U-bolt	-	SS400 (SS41)	4	-	-	镀锌 Galvanizing
2	液压管 Hydraulic Pipe	参考尺寸表	STPG370	-	-	-	
3	塑料基座 Plastic foundation support		聚丙烯	1	-	-	
4	六角螺母 Hexagon Nut		SS400 (SS41)	4	-	-	镀锌 Galvanizing
5	转交支杆 Strut		SS400 (SS41)	-	-	-	造船厂供应 Supplier by shipyard
6	弹簧垫圈 Spring Washer		SWRM17	2	-	-	镀锌 Galvanizing
7	平垫圈 Flat Washer		SS400 (SS41)	2	-	-	镀锌 Galvanizing


如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXUE 型四氟套管 U 型管夹

SXUE Type PTFE Sleeve U-Pipe Clamps

本产品适用于钢管、铜镍管支架用，能减小震动，防止管路磨损、腐蚀、不同材质电化学反应，主要用于大直径碳钢（CS）、不锈钢（SS）双相不锈钢（DSS）材质管路。

This product is suitable for the supports of steel pipes and copper nickel pipes, which can reduce vibration and prevent the abrasion or corrosion or abrasion or electrochemical reaction of different materials in the pipelines, and it is mainly used for pipelines that are made of carbon steel with large diameter (CS), stainless steel (SS) and duplex stainless steel (DSS).

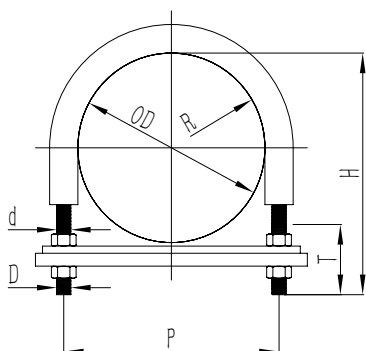

NO	NAME	MATERIAL/TREATMENT
1	U-BOLT	A193-B7/Hot Dipped Galvanized
2	NUT	A194-2H/Hot Dipped Galvanized
3	SLIDING PAD	TEFLON (THK.15MM)E
4	SLEEVE	SLEEVE(THK.3MM)

- 1、U 型管夹外护套为特氟龙套管，管壁厚为 3mm；
Outer sheath for U-type pipe clamp is Teflon casing, with a wall thickness of 3mm.
- 2、下垫块为特氟龙（PTFE），厚度为 15MM；
Bottom lining is made of Teflon (PTFE), with a thickness of 15MM.

- 3、U 型螺栓、螺母的材质为 316L 或 A193-B7；
U-bolts and nuts are made of 316L or A193-B7.
- 4、螺母的材质为 316L 或 A194-2H；
Nuts are made of 316L or A194-2H.


PIPE		B	D	d	P	H	T
NB	OD						
2.5"	73	38	M12	12	94	126	70
8"	219	112.5	M20	24	251	284	91
10"	273	139.5			305	338	
12"	324	165	M24	24	360	393	102
14"	356	181			392	426	
16"	406	206			442	476	
18"	457	231.5	M30	30	499	532	115
20"	508	257			550	584	
22"	559	282.5			601	635	
24"	610	308	M36	36	658	695	130
26"	660	333			708	744	
28"	711	358.5			759	796	
30"	762	384			810	847	
36"	914	460	M42	42	968	1000	141

如果使用不同的形式或其他要求在订货时说明 / please specify when ordering if different forms on materials are required

SXUF 型橡胶套管方型管夹 SXUF Type Rubber Sleeve Square Pipe Clamps

本产品适用于船舶管路系统，具有抗震动，无轴向伸缩钢管或不锈钢管的管子吊架；

This product is suitable for the Ship Pipeline System, hangers of non-axial telescopic steel pipes or stainless steel pipes, which can resist vibration;

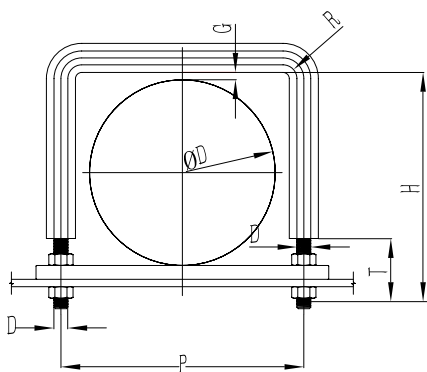

S.N.	PART	MATERIAL
1	SQ-BOLT	A193 B7 HDP
2	NUT	A194 2H HDP
3	SLIDING PAD	TEFLON (THK.10MM)
4	SLEEVE	NEOPRENE STRIP(THK.3MM)NOTE 1

1、管夹护套部分为三元乙丙或氯丁橡胶，颜色为黑色、红色可选！
pipe clamp is made of ethylene propylene diene monomer (EPDM) or neoprene. Black and red are optional!

2、下垫块为特氟龙（PTFE），厚度为 10MM；
the bottom lining is made of Teflon (PTFE), with a thickness of 10MM.

3、U 型螺栓、螺母的材质为 316L 或 A193-B7；
U-bolts and nuts are made of 316L or A193-B7.


PIPE	G	D	d	R	Q	P	H	T
OD								
114.3	3	M16	16	16	11	158	167	92
141.3					11	185	194	
168.3					11	213	221	
219.3	3	M20	20	20	11	268	280	113
273					11	323	334	
323.8					11	376	388	
355.6	3	M24	24	30	11	408	421	130
406.4					11	458	473	
457.2					11	515	532	
508	5	M30	30	40	11	566	583	132
558.8					11	617	633	
609.6					11	674	693	
660.4	5	M36	36	50	11	724	743	1142
711.2					11	776	794	
762					11	826	845	
914	5	M42	42	60	11	984	1000	162

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-A 型玻璃钢（GRE）管夹 SXGJ-A Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢（GRE）管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

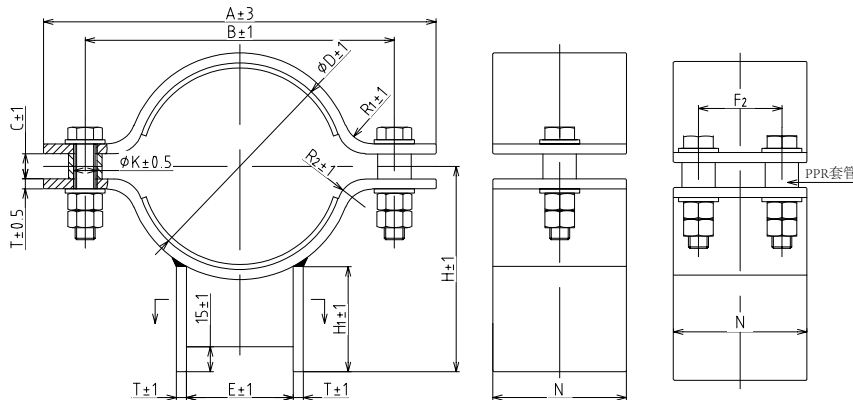

1、橡胶内衬垫为丁腈橡胶，宽度=N，厚度=3MM；

The material of rubber inner gasket is butyl rubber, width = N, thickness = 3MM;

2、管夹材质为 Q235，激光切割下料，表面为热镀锌处理；表面平整、无焊渣去毛刺；

The material of the is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.

3、螺栓为碳钢或不锈钢，螺栓等级 4.8/8.8 可选；



The material of the bolt is carbon steel or stainless steel, with the option of bolt grade 4.8/8.8.

4、所有焊接处均为满焊；不小于 6mm 的连续焊缝；

All welded parts are fully welded; with the continuous welds of no less than 6mm;

5、所有单位均为 mm，无特殊说明，公差为 ±3mm；

All units are mm. if there are no special instructions, the tolerance is within ± 3mm;

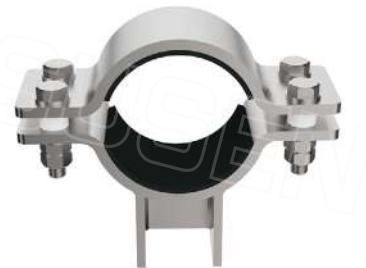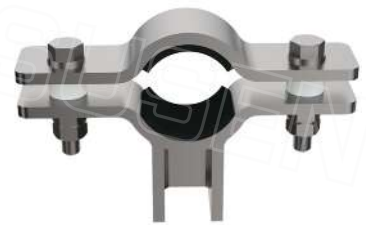



管道通径		D	A	B	N	T	C	R1	R2	M	K	H	E	H1	F2
IN	DW														
1"	25	43	140	100	30	5	10	7.5	12.5	M8X45	10	64	30	42	
1.5"	40	59	150	110	40	5	10	8	13	M8X45	10	68	40	42	
2"	50	70	160	120	50	5	10	8.5	13.5	M10X50	12	75	40	40	
2.5"	65	87	180	140	60	6	10	9	15	M10X50	12	93	50	35	50
3"	80	99	190	150	60	6	15	11	17	M10X55	12	110	60	35	63
4"	100	124	235	185	80	6	15	11	17	M12X60	14	123	64	50	63
5"	125	151	280	230	80	8	15	8.5	16.5	M12X65	14	152	85	50	80
6"	150	179	310	260	80	8	15	10.5	18.5	M12X65	14	166	92	50	80

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-A 型玻璃钢 (GRE) 管夹 SXGJ-A Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢 (GRE) 管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

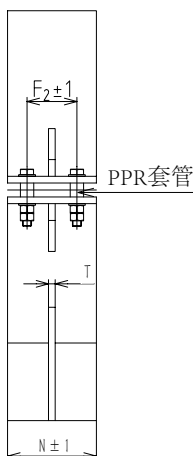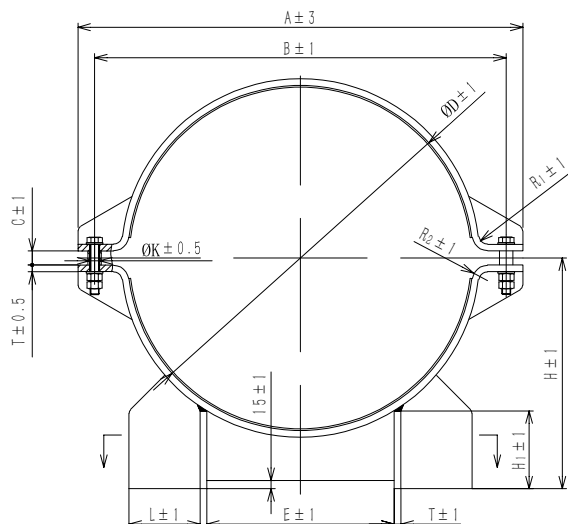

- 1、橡胶内衬垫为丁腈橡胶，宽度 =N，厚度 =3MM；
The material of rubber inner gasket is butyl rubber, width = N, thickness = 3MM;
- 2、管夹材质为 Q235，激光切割下料，表面为热镀锌处理；表面平整、无焊渣去毛刺；
The material of the is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.

- 3、螺栓为碳钢或不锈钢，螺栓等级 4.8/8.8 可选；
The material of the bolt is carbon steel or stainless steel, with the option of bolt grade 4.8/8.8.
- 4、所有焊接处均为满焊；不小于 6mm 的连续焊缝；
All welded parts are fully welded; with the continuous welds of no less than 6mm;
- 5、所有单位均为 mm，无特殊说明，公差为 ±3mm；
All units are mm, if there are no special instructions, the tolerance is within ±3mm;




管道通径	D	A	B	N	T	C	R1	R2	M	L	K	H	E	F2	H1
8"	231	390	330	100	8	15	10.5	18.5	M16X75	92	18	209	116	60	100
10"	289	450	390	100	10	20	10.5	20.5	M16X85	90	18	235	150	60	100
12"	341	500	440	120	10	20	11.5	21.5	M16X85	90	18	238	174	60	100
14"	368	530	470	120	10	20	12	22	M16X85	90	18	269	191	60	100
16"	419	580	520	140	10	20	12.5	22.5	M16X85	115	18	312	230	80	125
18"	469	630	570	140	10	20	12.5	22.5	M16X85	115	18	325	281	80	125
20"	519	680	620	160	12	25	16	28	M16X85	113	18	355	288	90	125
22"	570	730	670	160	12	25	16	28	M16X95	113	18	378	310	90	125
24"	621	800	740	160	12	25	16	28	M16X95	128	18	415	337	90	140
26"	696	870	810	180	12	25	16	28	M16X95	128	18	440	398	100	140
28"	749	940	870	180	14	30	30	34	M20X110	146	22	470	468	100	160
30"	802	1010	940	180	14	30	20	34	M20X110	146	22	495	490	100	160
32"	854	1080	1010	200	14	30	20	34	M20X110	166	22	535	523	110	180
36"	960	1220	1140	200	18	30	25	43	M24X130	182	27	590	619	110	200
40"	1065	1330	1250	220	18	30	25	43	M24X130	202	27	650	687	120	220
44"	1171	1440	1360	240	18	30	25	43	M24X130	232	27	410	781	130	250

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-A 型法兰托架 SXGJ-A Type Flange Brackets

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢（GRE）管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

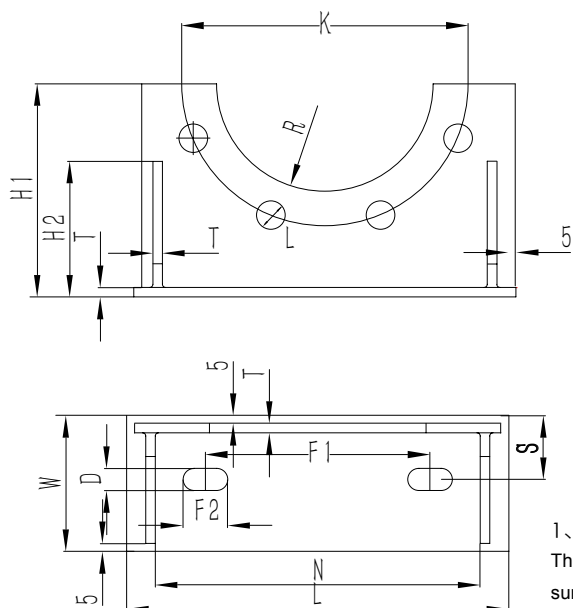

1、材质为 Q235，激光切割下料，表面为热镀锌处理；表面平整、无焊渣去毛刺；
The material of the is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.

2、所有焊接处均为满焊；不小于 6mm 的连续焊缝；
All welded parts are fully welded; with the continuous welds of no less than 6mm;


公称尺寸		L	W	H1	H2	N	T	F1	S	D	F2	K	L	孔数 /n	R
寸	DN														
1	25	135	50	70	35	95	5	40	27.5	12	18	85	14	2	27
1.5	40	180	50	85	40	140	5	70	27.5	18	18	110	18	2	35
2	50	195	50	90	45	155	5	80	27.5	18	18	125	18	2	41
2.5	65	205	60	100	50	165	6	80	33	18	24	145	18	2	49
3	80	220	75	110	70	180	6	100	40.5	18	24	160	18	4	55
4	100	240	75	135	80	200	6	110	40.5	18	28	180	18	4	68
5	125	270	90	145	80	215	8	120	49	18	36	210	18	4	80
6	150	305	90	165	85	240	8	140	49	18	36	240	22	4	95
8	200	360	110	195	110	295	8	190	59	18	40	295	22	4	120
10	250	415	110	230	130	325	10	220	60	18	40	350	22	6	150
12	300	465	110	265	130	375	10	270	60	22	40	400	22	6	175
14	350	525	110	300	140	435	10	330	60	22	40	460	22	8	200
16	400	585	135	330	160	495	10	395	72.5	22	44	515	26	8	225
18	450	635	135	360	185	555	10	440	72.5	27	40	565	26	10	255
20	500	690	135	395	200	595	12	480	73.5	27	54	620	26	10	275
24	600	800	150	465	250	705	12	590	81	27	54	725	30	10	330

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-B 型玻璃钢 (GRE) 管夹 SXGJ-B Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢 (GRE) 管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

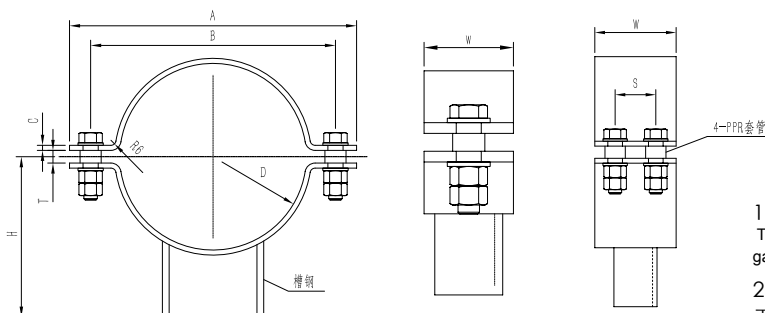

1、固定式内衬垫为丁晴橡胶，滑动式为特氟龙 (PTFE) 带折边垫片；
The fixed inner liner is butadiene rubber, and the sliding one is teflon belt flanged gasket;

2、管夹材质为 Q235, 激光切割下料, 表面为热镀锌处理; 表面平整、无焊渣去毛刺;
The material of the is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.

3、螺栓为碳钢或不锈钢, 螺栓等级 4.8/8.8 可选;
The material of the bolt is carbon steel or stainless steel, with the option of bolt grade 4.8/8.8.

4、所有焊接处均为满焊; 不小于 6mm 的连续焊缝;
All welded parts are fully welded; with the continuous welds of no less than 6mm;

5、所有单位均为 mm, 无特殊说明, 公差为 ± 3 mm;
All units are mm. if there are no special instructions, the tolerance is within ± 3 mm;



管道通径		D	A	B	C	S	W	T	H	槽钢 Channel steel	M
IN	DN										
1	25	44	110	85	5		40	5	60		M10X40
1.5	40	59	125	100	10		50	5	70		M10X45
2	50	69	145	115	10		50	6	80		M12X45
2.5	65	84	160	130	10	35	70	6	90	50X37X4.5	M12X55
3	80	99	180	145	10	35	70	6	100	50X37X4.5	M12X55
4	100	119	200	165	12	45	80	6	115	63X40X4.8	M12X55
5	125	146	235	200	12	45	80	6	140	80X43X5	M12X55
6	150	172	260	225	12	45	80	6	150	100X48X5.3	M12X55
8	200	228	340	290	15	50	100	6	190	120X53X5.5	M12X70
10	250	282	400	350	15	60	120	8	225	160X65X8.5	M12X75
12	300	336	460	408	15	60	120	8	250	200X75X9	M12X75
14	350	387	530	480	15	70	120	10	280	220X79X9	M12X75
16	400	445	590	540	15	70	120	10	310	250X80X9	M16X75
18	450	499	640	590	20	80	140	12	340	280X84X9.5	M16X85
20	500	553	690	642	25	100	160	12	375	320X90X10	M16X90
24	600	661	808	758	25	100	180	12	440	400X100X5.3	M16X90



如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-B 型玻璃钢（GRE）管夹

SXGJ-B Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢（GRE）管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

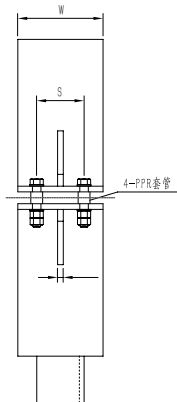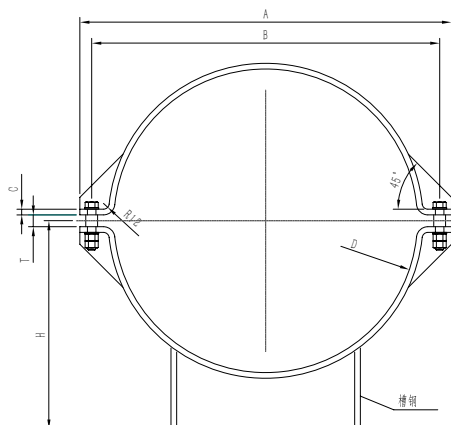

- 1、固定式内衬垫为丁晴橡胶，滑动式为特氟龙 (PTFE) 带折边垫片；
The fixed inner liner is butadiene rubber, and the sliding one is teflon belt flanged gasket;
- 2、管夹材质为 Q235，激光切割下料，表面为热镀锌处理，表面平整、无焊渣去毛刺；
The material of the is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.
- 3、螺栓为碳钢或不锈钢，螺栓等级 4.8/8.8 可选；
The material of the bolt is carbon steel or stainless steel, with the option of bolt grade 4.8/8.8.
- 4、所有焊接处均为满焊；不小于 6mm 的连续焊缝；
All welded parts are fully welded; with the continuous welds of no less than 6mm;
- 5、所有单位均为 mm，无特殊说明，公差为 $\pm 3\text{mm}$ ；
All units are mm. if there are no special instructions, the tolerance is within $\pm 3\text{mm}$;






管道通径		D	A	B	C	S	W	T	H	槽钢 Channel steel	M
IN	DN										
1	25	44	110	85	5		40	5	60		M10X40
1.5	40	59	125	100	10		50	5	70		M10X45
2	50	69	145	115	10		50	6	80		M12X45
2.5	65	84	160	130	10	35	70	6	90	50X37X4.5	M12X55
3	80	99	180	145	10	35	70	6	100	50X37X4.5	M12X55
4	100	119	200	165	12	45	80	6	115	63X40X4.8	M12X55
5	125	146	235	200	12	45	80	6	140	80X43X5	M12X55
6	150	172	260	225	12	45	80	6	150	100X48X5.3	M12X55
8	200	228	340	290	15	50	100	6	190	120X53X5.5	M12X70
10	250	282	400	350	15	60	120	8	225	160X65X8.5	M12X75
12	300	336	460	408	15	60	120	8	250	200X75X9	M12X75
14	350	387	530	480	15	70	120	10	280	220X79X9	M12X75
16	400	445	590	540	15	70	120	10	310	250X80X9	M16X75
18	450	499	640	590	20	80	140	12	340	280X84X9.5	M16X85
20	500	553	690	642	25	100	160	12	375	320X90X10	M16X90
24	600	661	808	758	25	100	180	12	440	400X100X5.3	M16X90

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-B 型法兰托架 SXGJ-B Type Flange Brackets

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢（GRE）管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

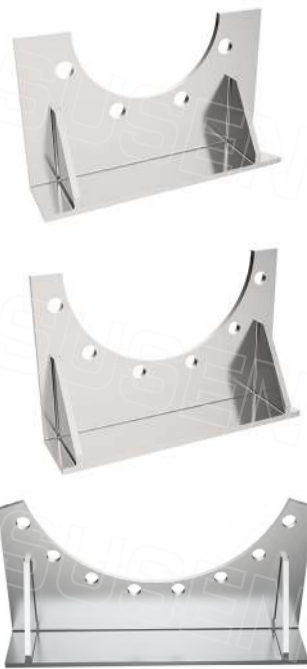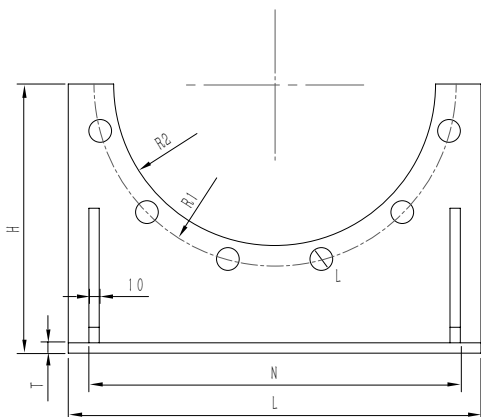

- 1、材质为 Q235，激光切割下料，表面为热镀锌处理；表面平整、无焊渣去毛刺；
The material of the is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.
- 2、所有焊接处均为满焊；不小于 6mm 的连续焊缝；
All welded parts are fully welded; with the continuous welds of no less than 6mm;


公称尺寸		L	W	H1	H2	N	T	W2	R1	Ø	孔数	2
寸	DN											
1	25	135	50	70	35	95	5	40	85	14	2	27
1.5	40	180	50	85	40	140	5	70	110	18	2	35
2	50	195	50	90	45	155	5	80	125	18	2	41
2.5	65	205	60	100	50	165	6	80	145	18	2	49
3	80	220	75	110	70	180	6	100	160	18	4	55
4	100	240	75	135	80	200	6	110	180	18	4	68
5	125	270	90	145	80	215	8	120	210	18	4	80
6	150	305	90	165	85	240	8	140	240	22	4	95
8	200	360	110	195	110	295	8	190	295	22	4	120
10	250	415	110	230	130	325	10	220	350	22	6	150
12	300	465	110	265	130	375	10	270	400	22	6	175
14	350	525	110	300	140	435	10	330	460	22	8	200
16	400	585	135	330	160	495	10	395	515	26	8	225
18	450	635	135	360	185	555	10	440	565	26	10	255
20	500	690	135	395	200	595	12	480	620	26	10	275
24	600	800	150	465	250	705	12	590	725	30	10	330

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-C 型玻璃钢 (GRE) 管夹 SXGJ-C Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢 (GRE) 管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

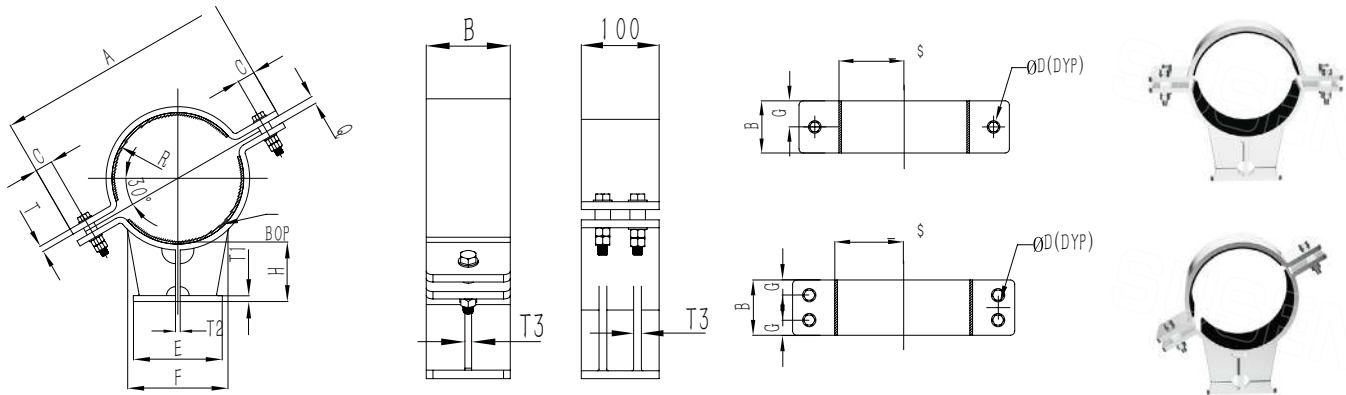

1、橡胶内衬垫为丁腈橡胶，宽度 = N，厚度 = 3MM；

The material of rubber inner gasket is butyl rubber, width = N, thickness = 3MM;

2、管夹材质为 Q235，激光切割下料，表面为热镀锌处理；表面平整、无焊渣去毛刺；
The material of the pipe clamp is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.

3、螺栓为碳钢或不锈钢，螺栓等级 4.8/8.8 可选；

The material of the bolt is carbon steel or stainless steel, with the option of bolt grade 4.8/8.8.

4、所有焊接处均为满焊；不小于 6mm 的连续焊缝；

All welded parts are fully welded; with the continuous welds of no less than 6mm;

5、所有单位均为 mm，无特殊说明，公差为 ±3mm；

All units are mm, if there are no special instructions, the tolerance is within ±3mm;


管道通径		管外径	DIMENSIONS																BOLT SIZE
IN	MM	R(EF)	A	B	C	D	E	F	G	H	L	Q	R	T	T1	T2	T3	THK	
2	50	59.3	200	100	20	12	150	50	50	100	102	8	34	6	6	6	6	14	M10X50
3	80	87.9	250	100	25	12	150	50	50	100	102	8	48	6	6	6	6	14	M10X60
4	100	111.7	270	100	25	14	150	90	50	100	102	13	60	6	6	6	6	14	M12X70
6	150	167.3	350	100	30	14	150	130	50	100	102	13	88	10	10	10	10	14	M12X70
8	200	218.7	400	100	30	14	150	170	50	100	102	13	114	10	10	10	10	14	M12X70
10	250	274.6	460	120	35	16	150	200	60	100	102	15	142	12	12	12	12	14	M14X80
12	300	327.2	520	140	35	16	200	200	35	150	102	15	168	12	12	12	12	14	M14X80
14	350	359.1	550	160	35	18	200	200	35	150	102	15	184	12	12	12	12	14	M16X85
16	400	410	600	60	35	18	200	200	35	150	102	15	209	12	12	12	12	14	M16X85
18	450	451.5	660	160	35	18	200	230	40	150	152	15	230	15	15	15	12	16	M16X90
20	500	501.4	720	200	40	22	200	250	40	150	152	15	255	15	15	15	12	16	M20X100
22	550	551.5	770	200	40	22	200	250	40	150	152	15	280	15	15	15	12	16	M20X100
24	600	601.3	820	220	40	22	200	300	40	150	152	15	305	15	15	15	12	16	M20X100
26	650	675	920	220	40	27	250	400	50	200	152	18	342	18	18	18	12	16	M24X120
28	700	726.7	1000	220	50	33	250	400	50	200	152	18	368	18	18	18	12	16	M30X130
30	750	778.5	1060	250	50	33	250	400	50	200	152	18	394	18	18	18	12	16	M30X130
32	800	830.1	1110	250	50	33	300	400	50	200	152	18	420	18	18	18	12	16	M30X130
36	900	933.3	1210	250	50	33	300	400	50	200	152	18	471	18	18	18	12	16	M30X130
40	1000	1037.2	1310	250	50	33	300	400	50	200	152	18	523	18	18	18	12	16	M30X130

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-C 型玻璃钢 (GRE) 管夹 SXGJ-C Type Glassfiber Reinforced Epoxy (GRE) Pipe Clamps

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢 (GRE) 管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

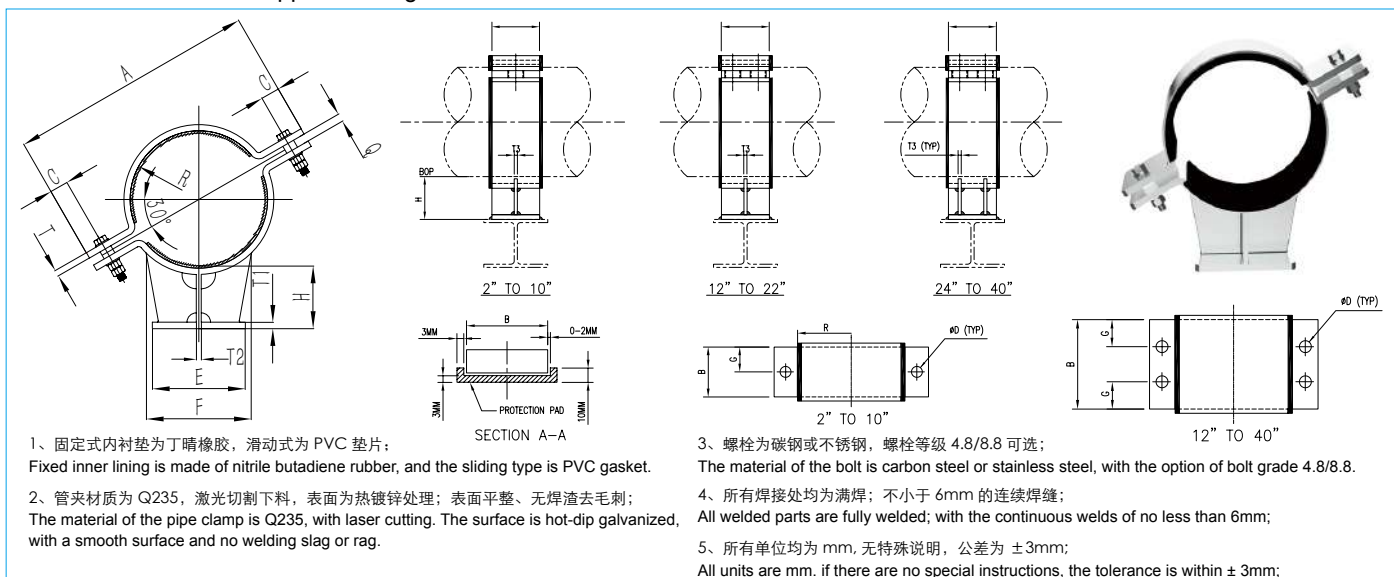


管道通径		管外径	DIMENSIONS																BOLT SIZE
IN	MM	R(EF)	A	B	C	D	E	F	G	H	L	Q	R	T	T1	T2	T3	THK	
2	50	59.3	200	100	20	12	150	50	50	100	102	8	34	6	6	6	6	14	M10X50
3	80	87.9	250	100	25	12	150	50	50	100	102	8	48	6	6	6	6	14	M10X60
4	100	111.7	270	100	25	14	150	90	50	100	102	13	60	6	6	6	6	14	M12X70
6	150	167.3	350	100	30	14	150	130	50	100	102	13	88	10	10	10	10	14	M12X70
8	200	218.7	400	100	30	14	150	170	50	100	102	13	114	10	10	10	10	14	M12X70
10	250	274.6	460	120	35	16	150	200	60	100	102	15	142	12	12	12	12	14	M14X80
12	300	327.2	520	140	35	16	200	200	35	150	102	15	168	12	12	12	12	14	M14X80
14	350	359.1	550	160	35	18	200	200	35	150	102	15	184	12	12	12	12	14	M16X85
16	400	410	600	60	35	18	200	200	35	150	102	15	209	12	12	12	12	14	M16X85
18	450	451.5	660	160	35	18	200	230	40	150	152	15	230	15	15	15	12	16	M16X90
20	500	501.4	720	200	40	22	200	250	40	150	152	15	255	15	15	15	12	16	M20X100
22	550	551.5	770	200	40	22	200	250	40	150	152	15	280	15	15	15	12	16	M20X100
24	600	601.3	820	220	40	22	200	300	40	150	152	15	305	15	15	15	12	16	M20X100
26	650	675	920	220	40	27	250	400	50	200	152	18	342	18	18	18	12	16	M24X120
28	700	726.7	1000	220	50	33	250	400	50	200	152	18	368	18	18	18	12	16	M30X130
30	750	778.5	1060	250	50	33	250	400	50	200	152	18	394	18	18	18	12	16	M30X130
32	800	830.1	1110	250	50	33	300	400	50	200	152	18	420	18	18	18	12	16	M30X130
36	900	933.3	1210	250	50	33	300	400	50	200	152	18	471	18	18	18	12	16	M30X130
40	1000	1037.2	1310	250	50	33	300	400	50	200	152	18	523	18	18	18	12	16	M30X130

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

SXGJ-C 型法兰托架 SXGJ-C Type Flange Brackets

本产品适用于船舶及海洋平台领域的脱硫洗涤塔、压载、防火供水、盐水、冷却水、船底污水等管线的玻璃钢（GRE）管道的固定用。法兰托架用于法兰安装的支撑用

This product is suitable for the fixing of glass fiber reinforced plastic (GRE) pipelines for pipelines such as desulfurization washing towers, ballast, fire water supply, brine, cooling water and bilge sewage in the field of marine and offshore platforms. Flange bracket is used for the support of flange installment.

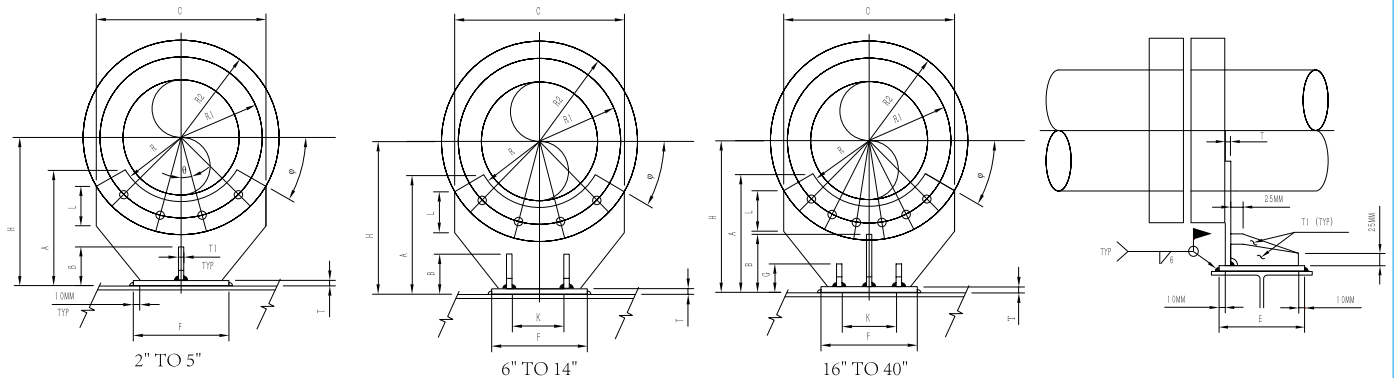

1、材质为 Q235，激光切割下料，表面为热镀锌处理；表面平整、无焊渣去毛刺；

The material of the is Q235, with laser cutting. The surface is hot-dip galvanized, with a smooth surface and no welding slag or rag.

2、所有焊接处均为满焊；不小于 6mm 的连续焊缝；

All welded parts are fully welded; with the continuous welds of no less than 6mm;



管道通径		管外径	NO. OF HOLES	DIMENSIONS																
IN	MM	R(EF)	NO. OF HOLES	A	B	C	D	E	F	G	H	K	L	R	R1	R2	T	T1	θ	φ
2	50	61.9	2	131	70	134	21	150	150	-	150	-	35	40	60	77	6	6	45°	30°
3	80	90.5	2	143	75	167	21	150	150	-	170	-	45	55	76	95	6	6	45°	30°
4	100	115.9	4	178	75	227	21	150	150	-	190	-	65	70	95	115	6	6	22.5°	10°
5	125	142.6	4	186	75	251	25	150	150	-	200	-	75	85	108	127	10	10	22.5°	10°
6	150	169.7	4	203	80	276	25	150	200	-	220	80	85	100	121	140	10	10	22.5°	10°
8	200	221.3	4	229	80	339	25	150	200	-	250	80	90	125	149	172	10	10	22.5°	10°
10	250	278.4	4	194	80	335	29	150	200	-	280	100	95	150	181	204	12	10	15°	35°
12	300	331.8	4	217	80	397	29	200	250	-	320	100	100	180	216	242	12	10	15°	35°
14	350	357.1	4	242	80	438	31	200	250	-	350	100	120	190	238	267	12	10	15°	35°
16	400	407.9	6	296	90	553	31	200	300	60	380	200	150	220	270	299	12	10	11.25°	22.5°
18	450	458.5	6	309	90	588	35	250	300	60	400	200	160	240	289	318	15	10	11.25°	22.5°
20	500	509.6	8	349	100	666	35	250	350	60	430	250	180	265	318	350	15	10	9°	18°
22	550	560.5	8	358	100	714	38	200	350	60	450	250	180	300	346	375	15	10	9°	18°
24	600	611.3	8	390	105	775	38	200	400	60	490	300	190	325	374	407	18	10	9°	18°
26	650	686.5	8	333	105	754	38	250	400	60	510	300	190	355	403	435	18	10	7.5°	30°
28	700	739.1	10	380	105	842	38	250	450	60	540	350	200	380	432	464	18	10	6.43°	25°
30	750	791.9	10	397	110	894	38	250	500	60	570	400	200	410	457	493	18	10	6.43°	25°
32	800	844.7	10	427	110	963	44	250	500	60	610	400	220	435	489	531	18	10	6.43°	25°
36	900	946.8	12	475	110	1081	44	250	500	60	660	400	230	485	543	585	18	10	5.63°	22.5°

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

海洋工程 / 船用铜管夹

Copper Pipe Clamps for Marine works/Ships

范围





Range

该标准用于铜管卡 CS-1

This standard is applicable for copper pipe clamp CS-1.

应用于: 除氟利昂管意以外的铜管


Applicable for: copper pipes except Freon pipes

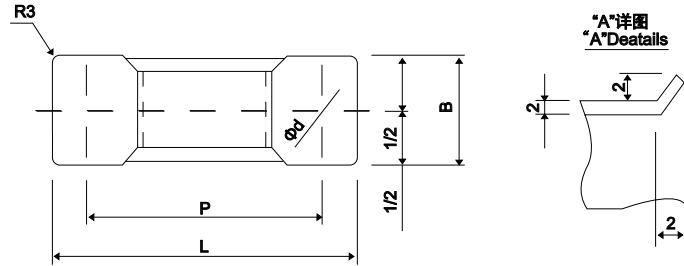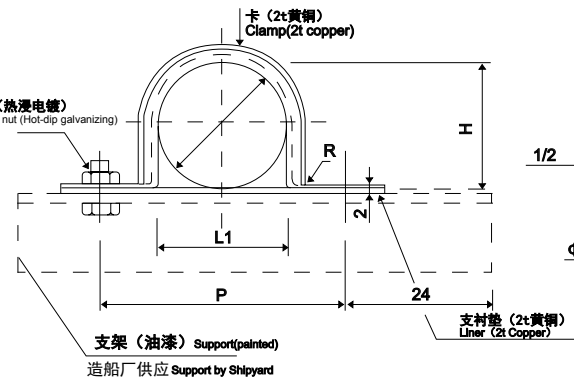*A*详图
*A*Details六角螺栓和螺母 (热浸电镀)
Hexagon socket screw and nut (Hot-dip galvanizing)

尺寸 Size

管道 Pipe		尺寸 Size							螺栓 Bolt	
内径 I.D.	外径 O.D.	L	P	H	L1	B	d	R	内径 I.D.	长度 Length
6A	10	70	46	10	10	25	9	2	M8	20
8A	12	70	46	12	12	25	9	2	M8	20
10A	15	70	46	15	15	25	9	2	M8	20
15A	20	70	46	20	20	25	9	3	M8	20
20A	20	85	62	25	25	25	9	3	M8	20
25A	30	85	62	30	30	25	9	3	M8	20
32A	35	100	74	35	35	25	9	3	M8	20
40A	45	100	74	45	45	32	9	3	M8	20
50A	55	125	92	55	55	32	12	3	M10	25

如果使用不同的形式或其他要求请在订货时说明 / please specify when ordering if different forms on materials are required

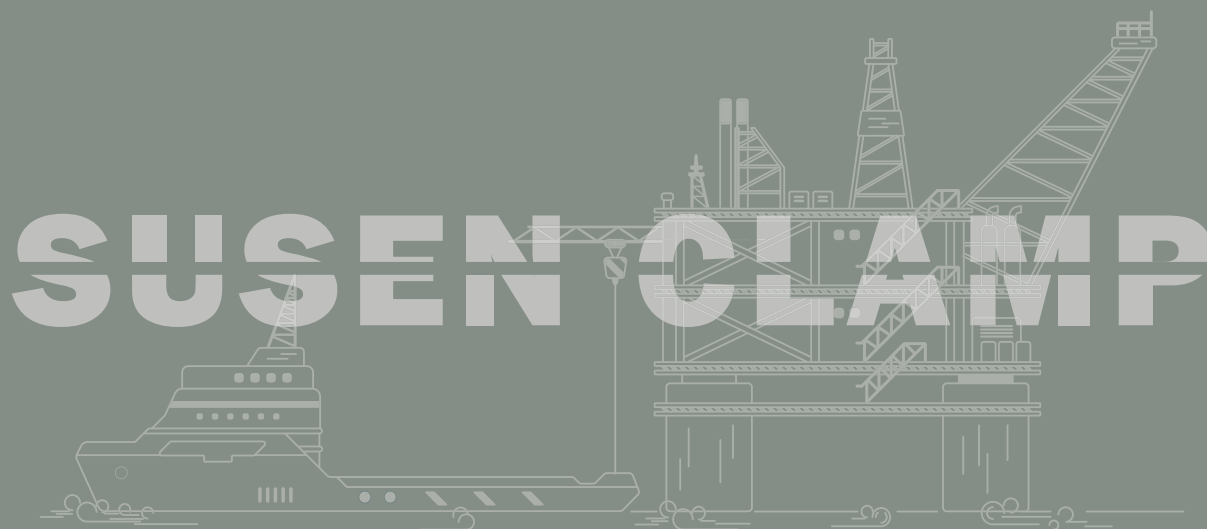

江苏苏鑫管夹制造有限公司

Jiangsu Susen Clamps Manufacturing Co., Ltd.

地 址：江苏省阜宁县经济开发区衡山路 25 号

24 小时服务热线：13914655988

电 话：+86-515-87578999 / 87230308

传 真：+86-515-87202198 / 87236490

技术咨询电话：+86-515-87578999

联 系 人：杜海峰

手 机：13914655988

网 址：www.ycsxgj.com

邮 箱：dhf@ycsxgj.com

Q Q：493269609

International Trade Department

Address: 25# Hengshan Rd., Jiangsu province Funing
Economic Development Zone

Phone: +86-515-89711229

Fax: +86-515-8236490

Mobile: 15371130896

E-mail: sale2@ycsxgj.com

Web site: www.ycsxgj.com

Alibaba url: <https://jssxgj.en.alibaba.com>