



铝门窗滑动系统

The all series solution provider of
Commercial home furnishing roller

商业家居滑轮全系列解决方案提供商

OPK产品专利

OPK PRODUCT PATENT

金属外壳阻尼器

带阻尼器的壁柜门下滑动轮组合件
一种可用蜗轮蜗杆进行升降调节的上吊挂滑轮组件

弹力暗铰链

可调节的壁柜门上导轮组件

滑动下班门、窗用吊夹板

可直接调节的壁柜门导轮组件

折叠移动门用可调高度的活页组件

能调节高度的推拉门用上、下滚动轮组件

带调节螺钉和U形弹片的铰链

壁柜门用方便调节的上运转轮

一种缓冲器

可调节的移动门用下滚动轮

多功能家具型材

缓冲器的拔动件

缓冲器的阻尼轮固定结构

新型缓冲器

一种阻尼器

带毛刷的上吊挂滑轮组件

家具门用的滑轮调节结构

用蜗轮蜗杆进行升降调节的上吊挂滑轮组件

带弹簧调节装置的平趟门用轨道滑动架

封闭式阻尼器

柜窗用带弹性夹座的滑动轮

柜窗用带直角连接件的上、下框座

吊趟门上吊挂滑轮用吊轮限位器

金属外壳阻尼器

挂趟门内、外门用下滑动凸轮组合装置

挂趟门用可调节内、外门页间距及门和门缝大小的可伸缩调节装置

带升降调节装置和减震装置的挂趟门内、外门上挂件

带阻尼器的推拉门防跳结构

挂趟门内、外门用下滑动凸轮组合装置

挂趟门用可调节内、外门页间距及门和门缝大小的可伸缩调节装置

带升降调节装置和减震装置的挂趟门内、外门上挂件

带阻尼器的推拉门防跳结构

吊挂门用带缓冲器的长座吊轮

在铝门上应用的防跳限位上轮

带弹力支架的平趟门下轨

推拉木门下滑动轮用盒形外夹套

带阻尼器的壁柜门下滑动轮组合件

铝趟门吊轮组件

"可协助挂起壁柜门用阻尼器拨动钩的拨动件"

在壁柜门页上、下横上装配的滑动轮组合件

上吊滑轮(带毛刷1001型)

绿色凹槽轮(有筋型)

绿色凹槽轮(无筋型)

绿色圆柱轮

绿色V型轮

绿色圆凸轮(鼓形)

绿色圆凸轮(带筋型)

包装套盒(带阻尼平趟门用)

包装盒(挂趟门系统外门配件用)

包装盒(带阻尼壁柜门上、下轮用)

包装盒(移门轮用)

橱窗玻璃门用(包装盒)

下轮架(轻轨1号)

衣柜调节支架脚

壁柜门双轮下轮(HX-2号)

壁柜轮(可换调节螺钉的位置)

竖框(品字形盒形本体)

metal shelled damper

sliding cabinet door bottom roller fittings with damper

"sliding & hanging roller fittings with adjusting worm gear"

hinge with spring

adjustable sliding cabinet door top roller fittings

aluminum sliding door hanging roller fittings

adjustable sliding cabinet door roller fittings

adjustable loose leaf fittings for folding door

adjustable top and bottom roller fittings for double acting door

hinge with adjustable screw and U-shaped spring chip

adjustable top roller for cabinet

damper

adjustable sliding door bottom roller

multifunction furniture profile

locating part on damper

fixed roller structure of damper

damper - new type

damper

top hanging roller fittings with brush

adjustable sliding furniture door roller structure

sliding & hanging roller fittings with adjusting worm gear

sliding frame for spring adjusted in-line sliding door track

close type damper

window and cabinet door roller with spring chip clamp mount

top and bottom frame mount with right-angled connector

stopper for hanging & sliding door roller

metal shelled damper

bottom convex roller fittings for inner and outer hanging sliding doors

retractable regulating device used to adjust inner and outer door panel gap and crack of hanging door

top fittings for inner & outer hanging door with up & down movement-regulating and shock-absorbing device

anti-jump structure for sliding door with damper

bottom convex roller fittings for inner and outer sliding doors

retractable regulating device used to adjust inner and outer door panel gap and crack of hanging door

top fittings for inner & outer hanging door with up & down movement-regulating and shock-absorbing device

anti-jump structure for sliding door with damper

hanging roller with damper for sliding & hanging door

top roller with anti-jump stopper for aluminum door

bottom track for sliding door with spring supporter

box-shaped clamp sleeve for sliding wood door bottom roller

bottom roller fittings for wardrobe door with damper

aluminum sliding door hanging roller fittings

locating part on wardrobe damper

sliding roller fittings for wardrobe door top and bottom frame

top hanging roller with brush NO.1001

green concave roller

green concave roller

green cylinder roller

green V-shaped roller

green round convex roller

green round convex roller

packing box for sliding door fittings

packing box for outer hanging door fittings

packing box for top and bottom wardrobe door roller with damper

packing box for sliding door

cabinet glass door

bottom roller rack (Light-rail roller 1)

adjustable wardrobe supporter holder

furniture door bottom roller (No. HX-2)

furniture roller (position for adjusting screw)

vertical frame (box-shaped profile)



专利维权,正在行动! Patent Right Protection

专利研发

作为国内五金滑轮行业的龙头企业，我们始终坚持以产品研发为导向，投入巨大的人力、财力、物力进行技术创新与产品升级，不断引入新结构、新材料、新技术，强调技术创新培育和成果转化，现已获得一百多项国家和国际专利。

资深法律团队维权

我司特委托资深法律团队常年从事专利维权活动，据查有部分厂商恶意抄袭我司产品，如缓冲壁柜轮、缓冲吊轮、08款明轮以及专利调节上轮、吊轮限位功能、上下可调合页等，扰乱市场秩序，严重侵犯我司权益，对我司后续产品的技术创新造成严重影响。目前已对高要金利、南海盐步、中山小榄等地共十余家侵权厂家提起维权诉讼，最低赔偿50万。

专利法

根据《中华人民共和国专利法》规定，任何单位或个人制造、销售、使用未经授权专利产品均属违法行为，可作为第一被告被起诉。望有关厂商严肃对待法律，停止生产、销售和使用侵权产品。否则，我公司将采取一切必要手段维护法律赋予的正当权益，追究侵权人责任。

Patented R & D

As the industry's leading enterprise in China, we always adhere to the concept of product development orientation. With enormous human, financial and material resources invested for technical innovation and product upgrading, we constantly introduce new structures, new materials, new technologies, and always commit ourself to technical innovation and achievements transformation. Now we have observed more than 100 national and international patents.

specially commissioned senior legal team for patent right safeguarding

Our specially commissioned senior team engages in patent-right protection activity all year round. According to the investigation, some manufacturers intended to copy our products, such as sliding soft-closing door roller, soft closing hanging roller, visible roller# 08, patented adjustable top roller, hanging roller with patented function and adjustable hinges, etc.. All these serious infringements of our rights disturb the market order, and cause serious impact to our technological innovation. Currently more than 10 manufacturers concerned in Kinley Gaoyao, Yanbu Nanhai, Xiaolan Zhongshan and other places were prosecuted and heavily fined because of infringements of our patented rights.

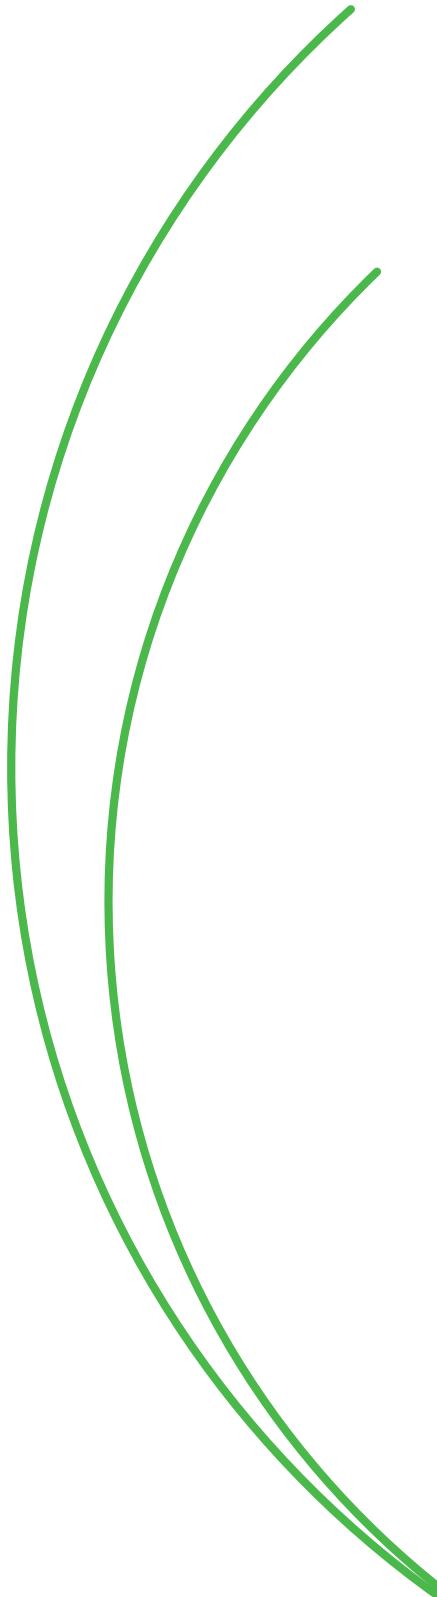
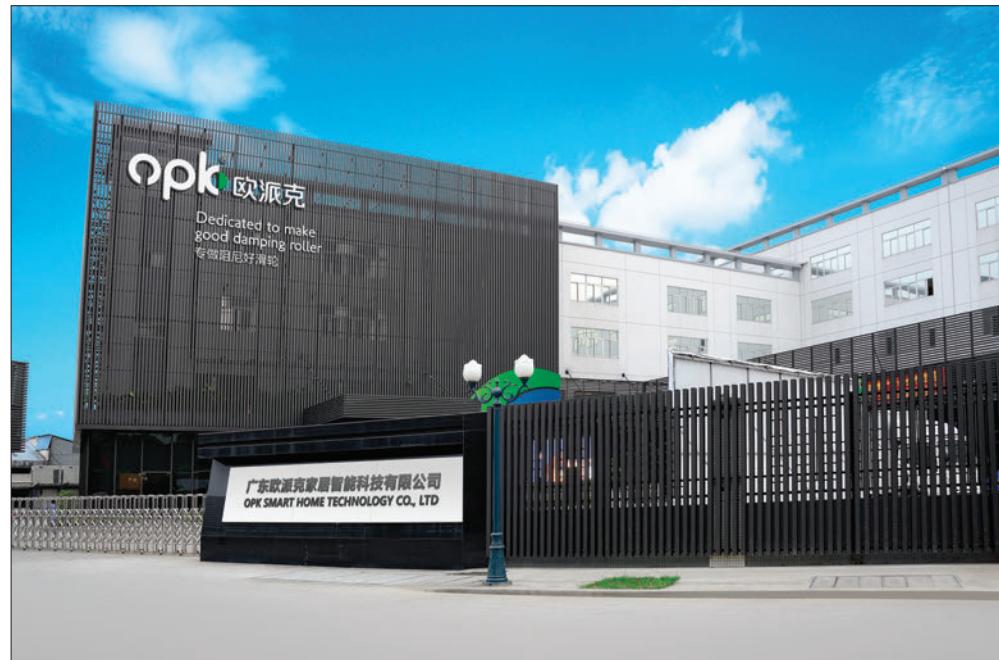
Patent Law

In accordance with the Patent Law of the People's Republic of China, any unauthorized use, sale or manufacturing of patented products is illegal. Any unit or individual who violates the law may be prosecuted as first-mentioned defendant. We strongly request all manufacturers concerned to comply with the law, stop unauthorized production, sale and use of the patented product. Otherwise, we will take all necessary legal action to safeguard our legitimate rights and interests.



好滑轮·好静音

SUPERIOR ROLLERS SO QUIET



总公司简介 COMPANY PROFILE

广东欧派克家居智能科技有限公司创建于1996年,总部位于中国著名五金之乡----中山市小榄镇。凭借良好的企业信誉、优质的产品质量和扎实的服务,欧派克不断发展壮大,现已成为拥有千余名员工、50000平米建筑厂房的规模化、技术型企业。欧派克与国内外众多知名结成了良好的战略合作伙伴关系共生共荣,成为引领和推动行业发展的骨干之一,产品畅销国内外,在客户和消费者中享有良好的声誉。欧派克坚持专业、专注的发展理念,二十多年来始终致力于家居滑轮行业的发展,在该领域做专,做精,做细,做强,已拥有国际、国内专利几百项,实现了生产规模化、产品系列化、管理现代化,奠定了在业内的核心领导地位,成为公认的中国家居阻尼滑轮专家。承载商业家居移动梦想,践行欧标滑轮阻尼世家!

作为滑轮领域、五金配件产品行业的龙头企业,欧派克始终明确以创新为企业发展的基石和根本动力,基于对行业本质的深刻理解和未来需求的仔细分析,公司成立了以专业的研发队伍为核心的OPK品牌部并创办滑轮研究院,与华南理工大学、广东工业大学及其他研究机构展开深度合作,建立产学研合作基地,及研究生工作站。创建德国分公司融入欧美高端市场。主要开发、生产和销售OPK品牌的全系家居阻尼滑轮,目前以家具阻尼滑轮系列、中空门窗阻尼滑轮系列、木门装饰工程阻尼滑轮系列、淋浴房阻尼滑轮系列以及重型门阻尼滑轮系列产品为核心,拥有专业化、多样化的全系阻尼滑轮产品。OPK目前已推出多款智能型、自动化、感应式、电动系列家居滑轮,将产品集美化、保护、稳定、科技于一身,实现产品创新的可持续发展,竭尽所能为客户提供有竞争力的专业产品和独到的解决方案。

欧派克正以进取的姿态进入崭新的互联网+及智能制造发展阶段,我们将始终坚持诚实正直的经营理念,秉承严谨科学的工作态度,发扬工匠精神,不断提高阻尼滑轮科技化、时尚性、智能化、国际化标准,为用户创造更大价值,我们愿与海内外家居行业的伙伴们一起携手共进,共创美好未来!

欧派克,专做阻尼好滑轮,滑轮梦想家和践行者!

OPK Smart Home Technolodgy Co.,Ltd was founded in 1996 and headquartered in the well-known hardware priducts base-Xiaolan Town, Zhongshan City of China. With good reputation, high quality products and great service, OPK keeps on uninterrupted growth and development. And now it becomes a large-scaled, technology-oriented enterprise with fifty thousand square meters working plants and more than 1000 employees. Meanwhile, as one of the backbone of the industry, OPK signed strategic win-win cooperation with many domestic and international well-known enterprises, leads and promotes the development of the industry,sells high quality products at home and aboard, gains high reputation from customers and consumers. OPK adheres to the concept of being professional and concentrated. OPK is always dedicated to the development of household furniture sliding industry, and with professional technology and devoted attitude, OPK has achieved hundreds of patents, and realized large scale production, product seriation and management modernization. Now it is recognized as sliding expert and becomes leading company in this industry. OPK will carry your dreams of beautiful homes; will be the family of soft closing sliding system and implementers of European quality standard.

As the leader manufacturer of sliding hardware industry, Innovation is the cornerstone and the fundamental driving force of OPK. Based on deep understanding of the nature of the industry and a careful analysis of future needs, OPK established OPK Brand and Roller Institute, in which powerful R&D team acted as the core. What's more, OPK has deeper cooperation with South China University of Technology, Guangdong University of Technology and other Research Institutes. Set up Industry Academia Research and Graduate Workstation. Found Branch Company in Germany and integrated into Europe and America high-end marketing. OPK mainly develop, produce and sell all series of household furniture sliding industry. By now, the core products include furniture soft closing sliding system, hollow door soft closing sliding system, wooden door decoration engineering soft closing sliding system, Shower room soft closing sliding mechanism and heavy door soft closing sliding system. OPK products have the advantages of specialization, diversification with complete products range. Products of intelligent, automatic and electrical have been launched, integrated beauty, security, stability and technology. Realized the sustainable development of the innovative products and try all our best to provide competitive professional products and unique solutions.

OPK is entering a new stage of internet and intelligent manufacturing development. We will always adhere to the business philosophy of integrity and strict scientific attitude. OPK is constantly improving the satisfaction of the sliding damping roller including the fashion sense, intelligence and international standard, carry forward the spirit of craftsman, devote to make more value for the customer, and building the core competence of the new brand. We are willing to work with home and abroad partners together for a better future. OPK dedicated to make good sliding damping roller, dreamer and pioneer of sliding hardware.



好滑轮·好静音

SUPERIOR ROLLERS SO QUIET



欧洲公司简介 COMPANY PROFILE

欧派克欧洲公司是广东欧派克家居智能科技有限公司的全资子公司，总部位于德国，主要从事高端家居滑轮产品系统的研发、生产与销售。

为实现公司“立足中国、定位全球”的发展战略，欧派克高瞻远瞩，系统布局，建厂德国，积极融入欧洲高端产业链。通过吸收欧洲先进的理念、技术、工艺、人才及产业标准，并同中国公司相辅相成，取长补短，从而实现产业升级，并获取创新发展的新动力！

欧洲公司以德国总部为中心，借助欧洲的优势资源，扎根欧洲，并以此为新的战略支点，占领家居滑轮领域至高点，从而实现公司全球发展战略。

未来，欧派克欧洲子公司继续秉承中国母公司专业专注的发展理念，并借助吸收德国的先进设计与制造工艺，致力于将家居滑轮产业做精做强，并为全球客户提供更优全系家居滑动门系统解决方案。

把产品做到极致，是我们的责任！

OPK Europe is a wholly-owned subsidiary of OPK Smart Home Technology Co.,Ltd., which specializes in the R&D, production and sales of high-end household roller product systems.

In order to achieve the development strategy of “based in China, positioning the world”, OPK stands on a higher plane and is more farsighted, starts the business in Horb, Germany, and actively enters the high-end Europe market. By absorbing European advanced concepts, technology, talent and industry standards, OPK Europe and OPK China learn from each other to achieve industrial upgrading and gain the new power of development and innovation. With local resource advantages, OPK Europe plans to root deeply in Europe. With this strategy, OPK Europe would be able to stand out from the sliding roller industry and achieve the goal of global development strategy.

OPK Europe will follow the basic development strategy of OPK China, and with advanced technology and design from Europe, OPK dedicates to produce the best products, and therefore OPK concentrates on providing the best sliding roller system solutions to all customers.

Our responsibility is to provide the best products!

下承重系列
BOTTOM LOAD-BEARING SERIES

01-52



01

不锈钢轨道
STAINLESS STEEL TRACK



25

驱逐9号对开联动门
QUZHU ROLLER 9 OPEN LINGKAGE DOORS



03

中空1号下滑轮系列
HOLLOW DOOR ROLLER 1 SERIES



27

驱逐9号-01
QUZHU ROLLER 9-01



05

普通框滑轮
ORDINARY FRAME ROLLER SERIES



31

驱逐9号-02
QUZHU ROLLER 9-02



06

窄框滑轮系列
NARROW FRAME PULLEY SERIES



33

中空5号-03对开连动门(极窄)
HOLLOW 5-03 OPEN LINKAGE DOORS (MINIMALISM)



07

旗舰号隔断门系列
FLAGSHIP PARTITION DOOR SERIES



37

中空5号-01连动门(极窄)
HOLLOW 5-01 LINKAGE DOORS (MINIMALISM)



11

驱逐3号
QUZHU ROLLER 3



43

中空5号-02连动门(窄框)
HOLLOW 5-02 LINKAGE DOORS (NARROW BOX)



17

驱逐4号
QUZHU ROLLER 4



49

中空6号无轨平移门
HOLLOW 6 INVISIBLE SLIDING DOOR



21

驱逐4号-04
QUZHU ROLLER 4-04

上承重系列 UPPER LOAD-BEARING SERIES

53-84



55

神舟5号吊滑轮(极窄)
SPACESHIP 5 HANGGING SLIDING ROLLER(MINIMALISM)



66

神舟5号对开联动(极窄)
SPACESHIP 5 OPEN LINKAGE (MINIMALISM)



56

神舟11号-A吊滑轮(极窄)
SPACESHIP 11-A HANGGING SLIDING ROLLER(MINIMALISM)



67

神舟15号联动门(极窄)
SPACESHIP 15 LINKAGE HANGING SLIDING ROLLER (MINIMALSM)



57

神舟15号吊滑轮(极窄)
SPACESHIP 15 HANGGING SLIDING ROLLER(MINIMALISM)



69

天宫6号联动门(极窄)
TIANGONG 6 LINKAGE HANGING SLIDING ROLLER (MINIMALSM)



59

驱逐6号
QUZHU ROLLER 6



71

驱逐10号联动门(极窄)
QUZHU 10 LINKAGE HANGING SLIDING ROLLER (MINIMALSM)



61

亮剑4号
LIANGJIAN 4




77

极窄自由折叠
SLIM FRAMED FOLDING SYSTEM

智能系列 INTELLIGENT SERIES

85-110



85

磁悬浮中空门系列
E-HOLLOWDOOR SYSTEM



89

磁悬浮智能吊滑轮系列
E-SPACE HANGING SLIDING DOOR SYSTEM

中空门滑轮系列

HOLLOW DOOR ROLLER SERIES

产品特点:

- 滑轮采用进口高端材料，承重大，强度高，耐磨性强
- 轴承均采用新型材料，手感顺畅，低噪音，间隙小
- 应用范围：中空玻璃门，重型门


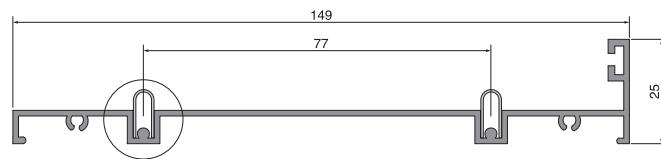
Product features:

- Rollers with increased loading capacity, great intensity, abrasion resistance feature, as well as imported high-end material.
- Ballbearings with special material ensures smooth noiseless and secure movement.
- Application: Hollow glass door, Heavy doors.


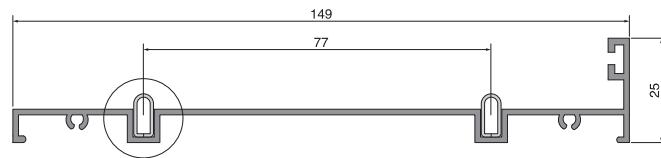


不锈钢轨道
Stainless Steel Track



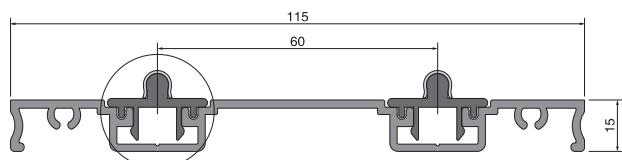
1#轨道
Track 1#



2#轨道
Track 2#



3#轨道
Track 3#



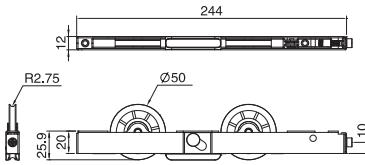
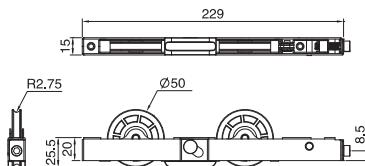
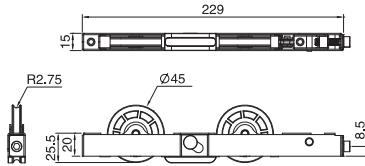
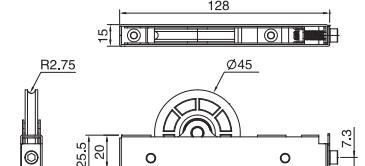
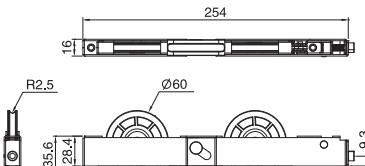
中空1号下滑轮系列

HOLLOW DOOR ROLLER 1 SERIES

中空 1号 1523单轮 <small>HOLLOW DOOR ROLLER-1-1523 SINGLE ROLLER</small>	CN12245A (胶轮) POM Roller ≤80kg	主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors 专利产品 仿冒必究		
	CN12245E (胶轮) POM Roller ≤70kg	主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors 专利产品 仿冒必究		
中空 1号 1523双轮 <small>HOLLOW DOOR ROLLER-1-1523 DOUBLE ROLLER</small>	CN12285B (胶轮) POM Roller ≤100kg	主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors 专利产品 仿冒必究		
	CN12285E (胶轮) POM Roller ≤90kg	主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors 专利产品 仿冒必究		
中空 1号 1532 <small>HOLLOW DOOR ROLLER-1-1532</small>	CJ212234A (胶轮) POM Roller ≤80kg	主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors 专利产品 仿冒必究		
	CN12286B (胶轮) POM Roller ≤120kg	主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors 专利产品 仿冒必究		
中空 1号 1532 <small>HOLLOW DOOR ROLLER-1-1532</small>	CJ212237A (胶轮) POM Roller ≤140kg	主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors 专利产品 仿冒必究		

中空1号下滑轮系列

HOLLOW DOOR ROLLER 1 SERIES

中空1号 1220 <small>HOLLOW DOOR ROLLER-1-1220</small>	CN12287B (胶轮) POM Roller 	<p>主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors</p> <p>专利产品 仿冒必究</p>		
中空1号 1520 <small>HOLLOW DOOR ROLLER-1-1520</small>	CN12288B (胶轮) POM Roller 	<p>主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors</p> <p>专利产品 仿冒必究</p>		
中空1号 1520 <small>HOLLOW DOOR ROLLER-1-1520</small>	CJ212235A (胶轮) POM Roller 	<p>主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors</p> <p>专利产品 仿冒必究</p>		
中空1号 1520单轮 <small>HOLLOW DOOR ROLLER-1-1520 SINGLE ROLLER</small>	CJ212233A (胶轮) POM Roller 	<p>主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors</p> <p>专利产品 仿冒必究</p>		
中空1号 1628 <small>HOLLOW DOOR ROLLER-1-1628</small>	CN12289B (胶轮) POM Roller 	<p>主要材质: 304不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 304 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors</p> <p>专利产品 仿冒必究</p>		

普通框滑轮系列

ORDINARY FRAME ROLLER SERIES

CJ212664A (滚镍) Roll nickel	主要材质: Q195 进口改性POM 适用范围: 各式铝框门 Main material: Q195 Imported high-end POM Application: All kinds of aluminium doors		
CJ212666A (滚镍) Roll nickel	主要材质: Q195 进口改性POM 适用范围: 各式铝框门 Main material: Q195 Imported high-end POM Application: All kinds of aluminium doors		
CN21246E 钉固2号 (1520)	主要材质: 201不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors		
CN21244E 钉固2号 (1523)	主要材质: 201不锈钢 进口改性POM 适用范围: 各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application: All kinds of aluminium doors		

窄框滑轮系列

NARROW FRAME PULLEY SERIES

CB030272-001 固套调节极短上轮 (1813)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CB030273-001 固套调节极短上轮 (1517)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CB030274-001 固套调节极短上轮 (1524)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CA380001-002 自由旋固3号1813双轮 (香槟金)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CA380002-002 自由旋固3号1813四轮 (香槟金)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CA270008-006 自由旋固3号1813双轮 (宝石绿)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CA380002-003 自由旋固3号1813四轮 (宝石绿)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CA270008-007 自由旋固4号1813双轮 (墨绿)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		
CA380002-006 自由旋固4号1813四轮 (墨绿)	主要材质:201不锈钢 进口改性POM 适用范围:各式铝框门 Main material: 201 Stainless Steel Imported high-end POM Application:All kinds of aluminium doors		

旗舰号隔断门系列

FLAGSHIP PARTITION SERIES

革命性产品 上下同步阻尼 无售后之忧

- 同步阻尼，革命性产品
- 全球独有结构，国际发明专利
- 无售后之忧，阻尼效果前所未有的
- 移门阻尼中的终极产品

- Up and down sliding roller with simultaneous damping function-revolutionary product
- Global unique design; International patents
- No after-sales worries,The damping effect is unprecedented
- Achieved best results among all current soft closing sliding-door systems

产品特点：

- 革命性的设计，产品结构与滑轮工程力学完美结合，外形产品美观、独特。
- 上下同步阻尼，缓冲制动效果明显，不跳动，滑动平稳顺畅、静音。
- 承重性能强，最大可承受 100KG。
- 颠覆传统滑轮安装方式，安装便捷准确，调试简单。
- 多种组合搭配方式，满足多种效果需求。

Product Features:

- Creative design, pretty and unique appearance, perfect combination of product structure and engineering.
- Up and down sliding roller with simultaneous damping function; Anti-jump and obvious soft-closing buffer effect; Smooth, steady and silent movement.
- Great load-bearing performance; Maximum weight capacity: 100 kgs.
- Innovative, convenient and accurate installation means; Easy to adjust.
- Diversified assembling combination and installation means for choice.





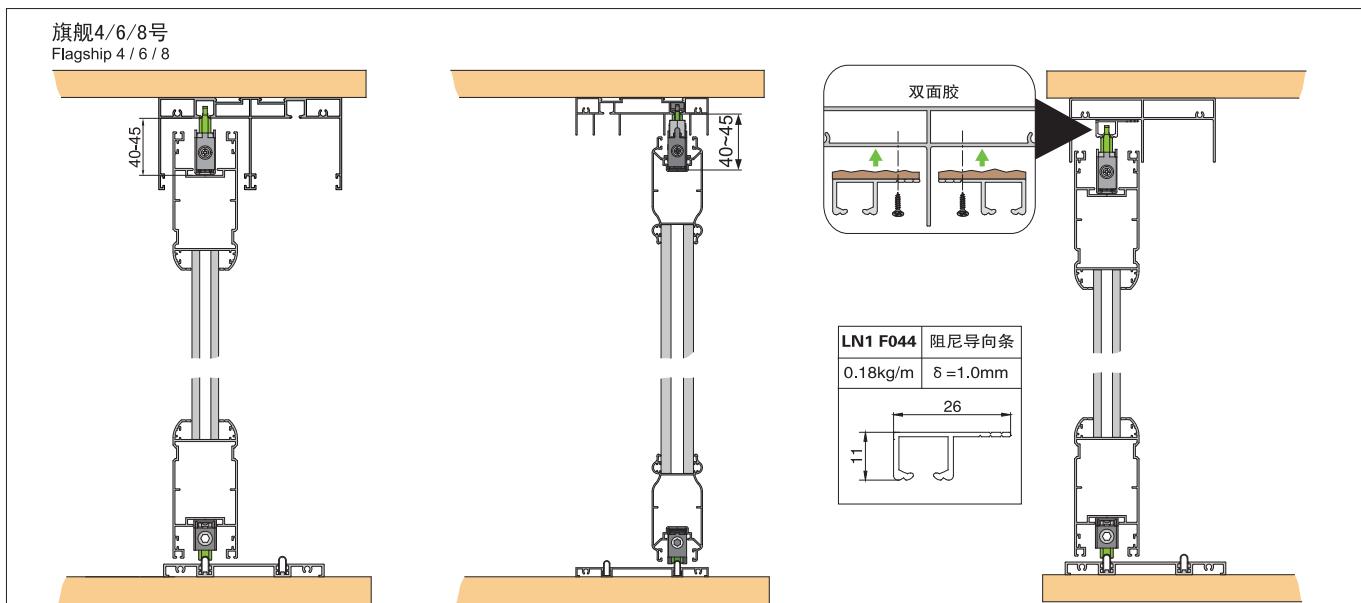
旗舰号隔断门配件说明

FLAGSHIP PARTITION ACCESSORIES OPTIONS

旗舰4号-01 Flagship 4-01		CN212265C	重型 Heavy-duty 50-80kg		
		CN212265A	轻型 Light-duty 25-50kg		
		CN212265B	轻柔型 Softly-duty 5-25kg		
旗舰6号 Flagship 6		CN21238A	轻柔型 Softly-duty 5-25kg		
		CN21238B	轻型 Light-duty 25-50kg		
		CN21238C	重型 Heavy-duty 50-80kg		
旗舰8号 Flagship 8		CN212235A	重型 Heavy-duty 50-80kg		
		CN212235B	轻型 Light-duty 25-50kg		
CN21208A 旗舰4号03上轮 FLAGSHIP ROLLER 4 03 UPPER ROLLER			CN21219A 旗舰4号06上轮 FLAGSHIP ROLLER 4 06 UPPER ROLLER		
CN21217A 旗舰4号05下轮 FLAGSHIP ROLLER 4 05 UNDER ROLLER			CN21210A 旗舰4号04上下轮 FLAGSHIP ROLLER 4 04 UPPER/UNDER ROLLER		
旗舰4号固定件(15) FLAGSHIP ROLLER 4 FASTENER(15mm)	PNC25024CW11		旗舰4号固定件(16) FLAGSHIP ROLLER 4 FASTENER(16mm)	PNC25025CW11	

安装参数介绍

INSTALLATION PARAMETER INTRODUCED



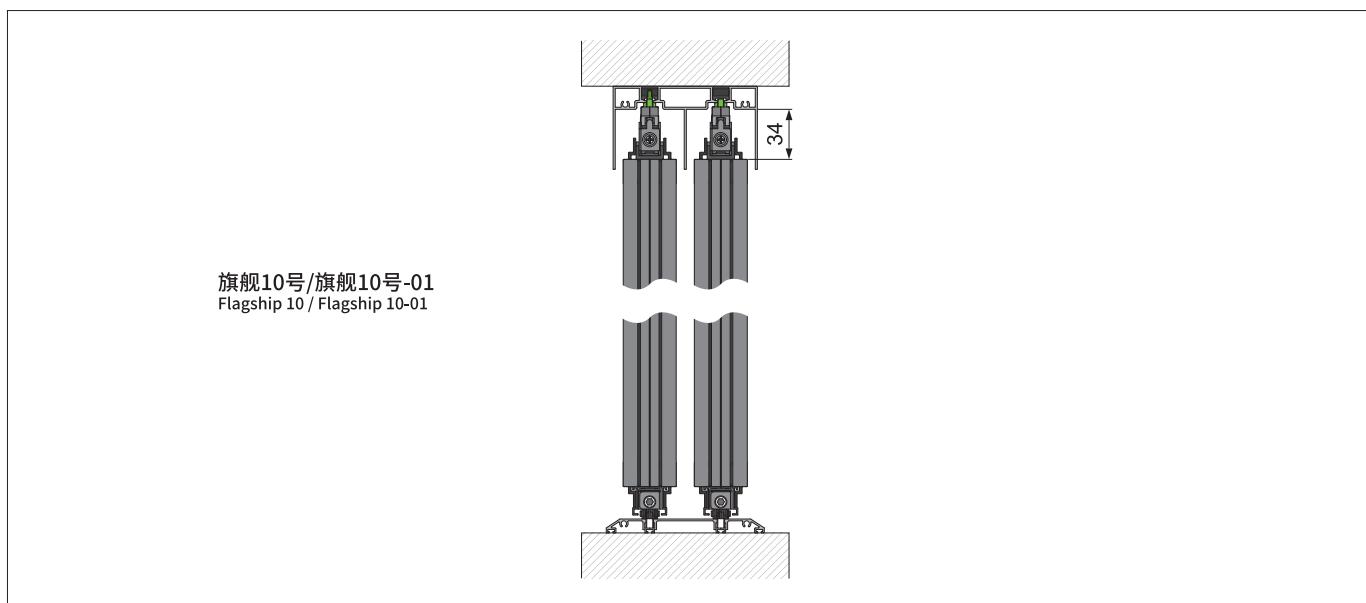
旗舰10号隔断门配件说明

FLAGSHIP 10 PARTITION ACCESSORIES OPTIONS

旗舰10号 Flagship 10		CN212247A	轻型 Light-duty	25-50kg
		CN212266C	重型 Heavy-duty	50-80kg
旗舰10号-01 Flagship 10-01		CJ122586A	轻型 Light-duty	25-50kg
		CN122586C	重型 Heavy-duty	50-80kg
旗舰10号单轮 Flagship 10 Singular Wheel		TN944A		
紧定件 Fixing Part	TN830A		垫块 Cushion	PNS03066
固定件(15mm) Fixing Part(15mm)	TN724A		固定件(18mm) Fixing Part(18mm)	PNC03160

安装参数介绍

INSTALLATION PARAMETER INTRODUCED



驱逐3号

QUZHU ROLLER 3

此产品有五项专利技术

- 专利一：自动挂钩装置
- 专利二：挡件宽度可调装置
- 专利三：挡件自动定位功能
- 专利四：挡件高度可调功能
- 专利五：阻尼力度调节功能

产品特点：

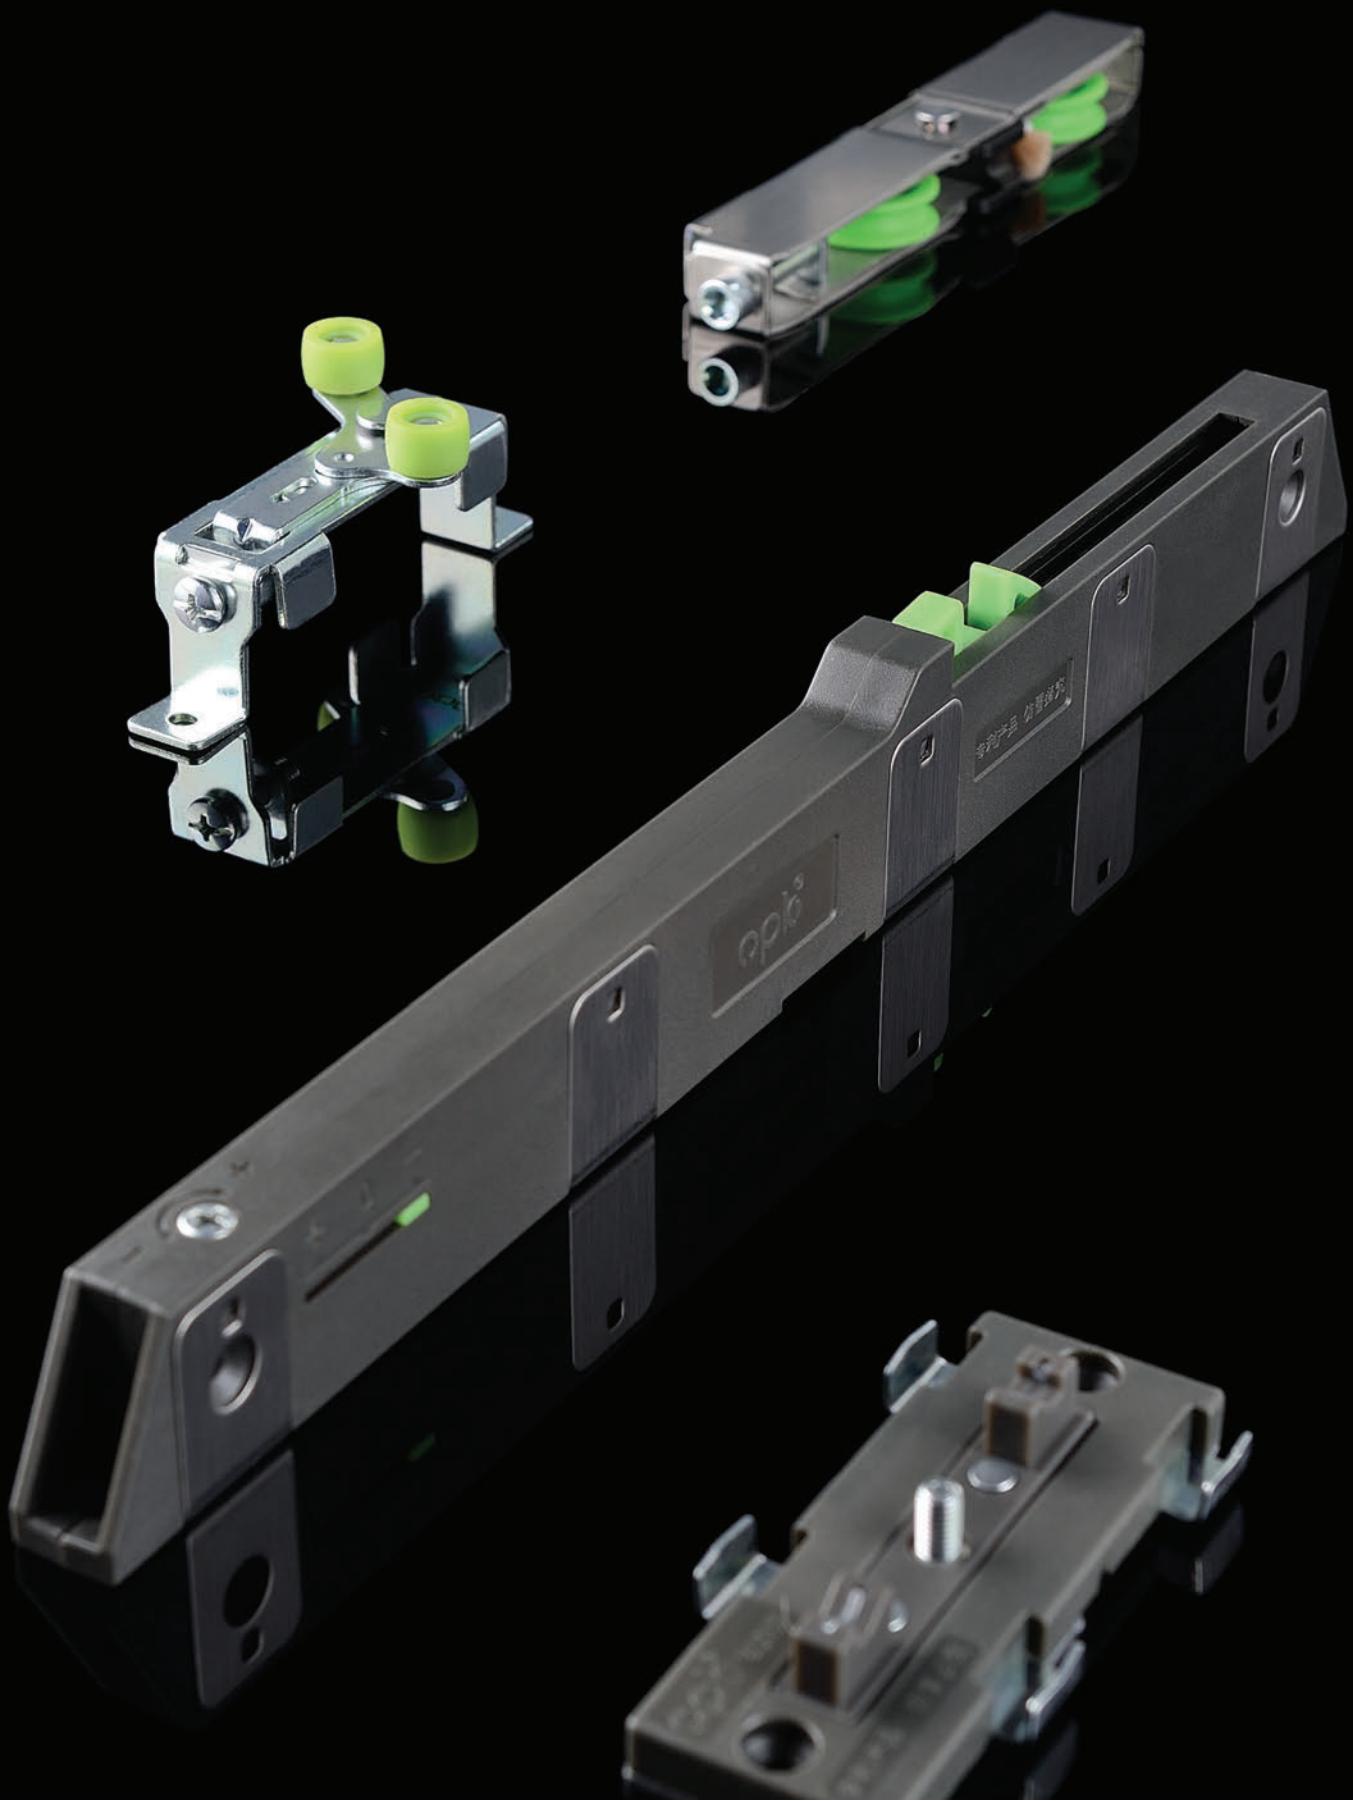
- **自动挂钩功能：**产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能。
- **挡件宽度可调装置：**根据不同轮距大小的轨道，调节相应的宽度。
- **阻尼力度调节功能：**根据门板重量和现场安装情况，调节合适的阻尼力度。
- **挡件自动定位功能：**挡件无需量尺寸，推动门扇即可精准定位。
- **挡件高度可调功能：**挡件高度可调节，解决地板不平所带来的安装困难的问题。
- **阻尼器：**超长阻尼管结构设计，阻尼效果更明显。
- **外壳复合设计：**采用不锈钢夹子包裹，增强产品整体强度。
- **外观设计：**缓冲器阻尼表面无螺丝处理，美观大方。
- **安装方便：**此款产品于中心限位阻尼，不分左右，安装时非常方便。

Five patent technologies

- Patent I : Auto-hanging hook device
- Patent II : Stopper width adjustable
- Patent III: Stopper automatic positioning function
- Patent IV: Stopper height adjustable function
- Patent V: Damping force adjusting function

Product features:

- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Stopper width adjustable:** Stopper width can be adjustable according to the different roller distance of the track.
- **Damping force adjusting function:** Adjust the suitable damping force according to the door weight and the installation situation.
- **Stopper automatic positioning function:** the stopper no need measure the size, push the door to find stopper's location precisely.
- **Stopper height adjustable function:** the stopper can adjust the height, to solve the difficult installation problem case from floor uneven.
- **Dampers:** Use super long sole damper structure design, damping effect is more obvious.
- **Enclosure composition design:** Use stainless steel enclosure, effectively increased the strength .
- **Appearance design:** With no any screw in the surface, the dampers looks neat and gogeous.
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.





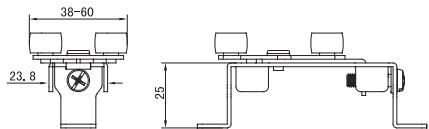
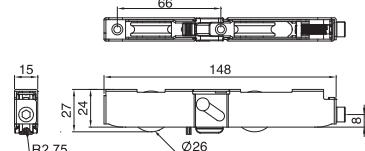
驱逐3号配件说明



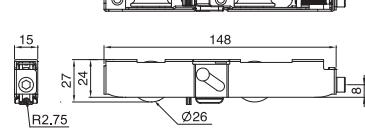
QUZHU ROLLER 3 ACCESSORIES OPTION

25-50kg
轻型

50-80kg
重型

单阻尼门宽≥600mm
双阻尼门宽≥900mm

调节宽度(40-48) Adjustable Width (40-48)		轻型 Light-duty CJ212571B 重型 Heavy-duty CJ212571A	
阻尼器 Dampers CJ212423B 轻型 Light-duty CJ212423A 重型 Heavy-duty		1个/套 1pcs/set	
TJ054A 阻尼限位件(40-48) Damp stopper		1个/套 1pcs/set	
CJ212295A 上轮 (38-60) Top wheel (38-60)		2个/套 2pcs/set	
CJ212273E 驱逐2号-01 Quzhu roller2-01		2个/套 2pcs/set	

调节宽度(40-48) Adjustable Width (40-48)		轻型 Light-duty CJ212572B 重型 Heavy-duty CJ212572A	
阻尼器 Dampers CJ212423B 轻型 Light-duty CJ212423A 重型 Heavy-duty		1个/套 1pcs/set	
TJ054A 阻尼限位件(40-48) Damp stopper		1个/套 1pcs/set	
CJ212295A 上轮 (38-60) Top wheel (38-60)		2个/套 2pcs/set	
CJ212273F 驱逐2号-02 Quzhu roller2-01		2个/套 2pcs/set	

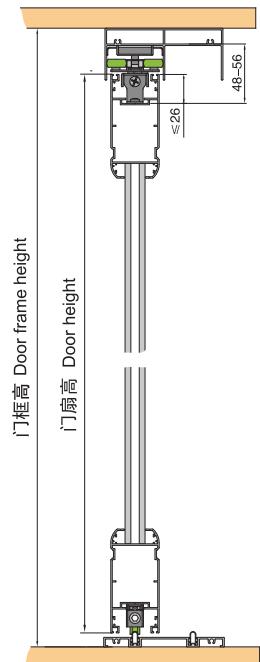
驱逐3号配件说明

QUZHU ROLLER 3 ACCESSORIES OPTION

25-50kg 轻型	50-80kg 重型
---------------	---------------

单阻尼门宽≥600mm
双阻尼门宽≥900mm

调节宽度(40-48) Adjustable Width (40-48)	轻型 Light-duty CJ212529B 重型 Heavy-duty CJ212529A		
阻尼器 Dampers CJ212423B 轻型 Light-duty CJ212423A 重型 Heavy-duty		1个/套 1pcs/set	
TJ054A 阻尼限位件(40-48) Damp stopper		1个/套 1pcs/set	
CJ212295A 上轮 (38-60) Top wheel (38-60)		2个/套 2pcs/set	

门扇参数
DOOR PARAMETERS门板尺寸计算公式
Door size count门扇高=门框高-60 (供参考)
Door height=Door frame height-60mm (For reference)



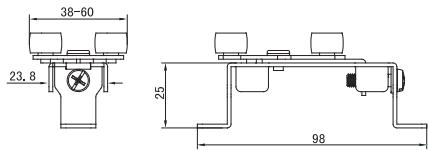
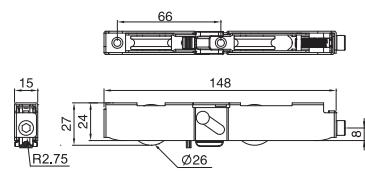
驱逐3号配件说明



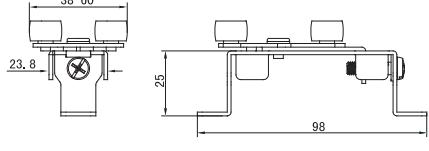
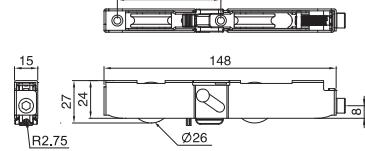
QUZHU ROLLER 3 ACCESSORIES OPTION

25-50kg
轻型

50-80kg
重型

单阻尼门宽≥600mm
双阻尼门宽≥900mm

调节宽度(49-57) Adjustable Width (49-57)		轻型 Light-duty CJ212573B 重型 Heavy-duty CJ212573A	
阻尼器 Dampers CJ212423B 轻型 Light-duty CJ212423A 重型 Heavy-duty		1个/套 1pcs/set	
TJ054B 阻尼限位件(49-57) Damp stopper		1个/套 1pcs/set	
CJ212295A 上轮 (38-60) Top wheel (38-60)		2个/套 2pcs/set	
CJ212273E 驱逐2号-01 Quzhu roller2-01		2个/套 2pcs/set	

调节宽度(49-57) Adjustable Width (49-57)		轻型 Light-duty CJ212574B 重型 Heavy-duty CJ212574A	
阻尼器 Dampers CJ212423B 轻型 Light-duty CJ212423A 重型 Heavy-duty		1个/套 1pcs/set	
TJ054B 阻尼限位件(49-57) Damp stopper		1个/套 1pcs/set	
CJ212295A 上轮 (38-60) Top wheel (38-60)		2个/套 2pcs/set	
CJ212273F 驱逐2号-02 Quzhu roller2-01		2个/套 2pcs/set	

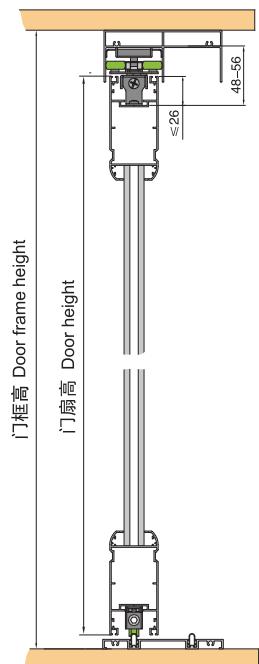
驱逐3号配件说明

QUZHU ROLLER 3 ACCESSORIES OPTION

25-50kg 轻型	50-80kg 重型
---------------	---------------

单阻尼门宽≥600mm
双阻尼门宽≥900mm

调节宽度(49-57) Adjustable Width (49-57)	轻型 Light-duty CJ212532B 重型 Heavy-duty CJ212532A		
阻尼器 Dampers CJ212423B 轻型 Light-duty CJ212423A 重型 Heavy-duty		1个/套 1pcs/set	
TJ054B 阻尼限位件(49-57) Damp stopper		1个/套 1pcs/set	
CJ212295A 上轮 (38-60) Top wheel (38-60)		2个/套 2pcs/set	

门扇参数
DOOR PARAMETERS门板尺寸计算公式
Door size count门扇高=门框高-60 (供参考)
Door height=Door frame height-60mm (For reference)

驱逐4号

QUZHU ROLLER 4

此产品有三项专利技术

专利一：自动挂钩装置

专利二：轮距可调节专利设计

专利三：挡件高度可调功能

产品特点：

- **自动挂钩功能：**产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能。
- **挡件高度可调功能：**挡件高度可调节，解决地板不平所带来的安装困难的问题。
- **阻尼器：**加强阻尼管结构设计，阻尼效果更明显。
- **外壳设计：**采用不锈钢包裹，增强产品整体强度。
- **安装方便：**此款产品于中心限位阻尼，不分左右，安装时非常方便。

Three patent technologies

Patent I : Auto-hanging hook device

Patent II : Roller distance adjustable patented design

Patent III: Stopper height adjustable function

Product features:



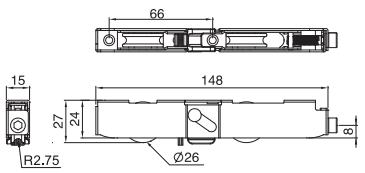
- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Stopper automatic positioning function:** the stopper no need measure the size, push the door to find stopper's location precisely.
- **Stopper height adjustable function:** the stopper can adjust the height, to solve the difficult installation problem case from floor uneven.
- **Dampers:** Use super long sole damper structure design, damping effect is more obvious.
- **Enclosure composition design:** Use stainless steel enclosure, effectively increased the strength .
- **Easy installation:** It is provided with central spacing damping mechanism, No left or right identification, which is more convenient for installation.



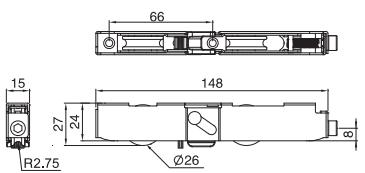


驱逐4号配件说明

QUZHU ROLLER 4 ACCESSORIES OPTION

25-50kg
轻型50-80kg
重型单阻尼门宽≥600mm
双阻尼门宽≥750mm

调节宽度(14-24) Adjustable Width (14-24)		轻型 Light-duty CJ212604B 重型 Heavy-duty CJ212604A	
阻尼器 Dampers TD115B 轻型 Light-duty TD115A 重型 Heavy-duty			2个/套 2pcs/set 
TJ076A 阻尼限位件 Damp stopper			2个/套 2pcs/set 
CJ212273E 驱逐2号-01 Quzhu roller2-01			2个/套 2pcs/set 

调节宽度(14-24) Adjustable Width (14-24)		轻型 Light-duty CJ212605B 重型 Heavy-duty CJ212605A	
阻尼器 Dampers TD115B 轻型 Light-duty TD115A 重型 Heavy-duty			1个/套 1pcs/set 
TJ076A 阻尼限位件 Damp stopper			1个/套 1pcs/set 
CJ212291A 上轮 Top wheel			1个/套 1pcs/set 
CJ212273E 驱逐2号-01 Quzhu roller2-01			2个/套 2pcs/set 

驱逐4号配件说明

QUZHU ROLLER 4 ACCESSORIES OPTION

25-50kg 轻型	50-80kg 重型
---------------	---------------

单阻尼门宽≥600mm
双阻尼门宽≥750mm

调节宽度(14-24) Adjustable Width (14-24)		轻型 Light-duty CJ212606B 重型 Heavy-duty CJ212606A					
阻尼器 Dampers	<table border="1"> <tr> <td>TD115B</td><td>轻型 Light-duty</td> </tr> <tr> <td>TD115A</td><td>重型 Heavy-duty</td> </tr> </table>	TD115B	轻型 Light-duty	TD115A	重型 Heavy-duty		2个/套 2pcs/set
TD115B	轻型 Light-duty						
TD115A	重型 Heavy-duty						
TJ076A 阻尼限位件 Damp stopper			2个/套 2pcs/set 				
CJ212301A 中空2号-1513 Hollow door roller2-1513			2个/套 2pcs/set 				



调节宽度(14-24) Adjustable Width (14-24)		轻型 Light-duty CJ212607B 重型 Heavy-duty CJ212607A					
阻尼器 Dampers	<table border="1"> <tr> <td>TD115B</td><td>轻型 Light-duty</td> </tr> <tr> <td>TD115A</td><td>重型 Heavy-duty</td> </tr> </table>	TD115B	轻型 Light-duty	TD115A	重型 Heavy-duty		1个/套 1pcs/set
TD115B	轻型 Light-duty						
TD115A	重型 Heavy-duty						
TJ076A 阻尼限位件 Damp stopper			1个/套 1pcs/set 				
CJ212291G 上轮 Top wheel			1个/套 1pcs/set 				
CJ212301A 中空2号-1513 Hollow door roller2-1513			2个/套 2pcs/set 				

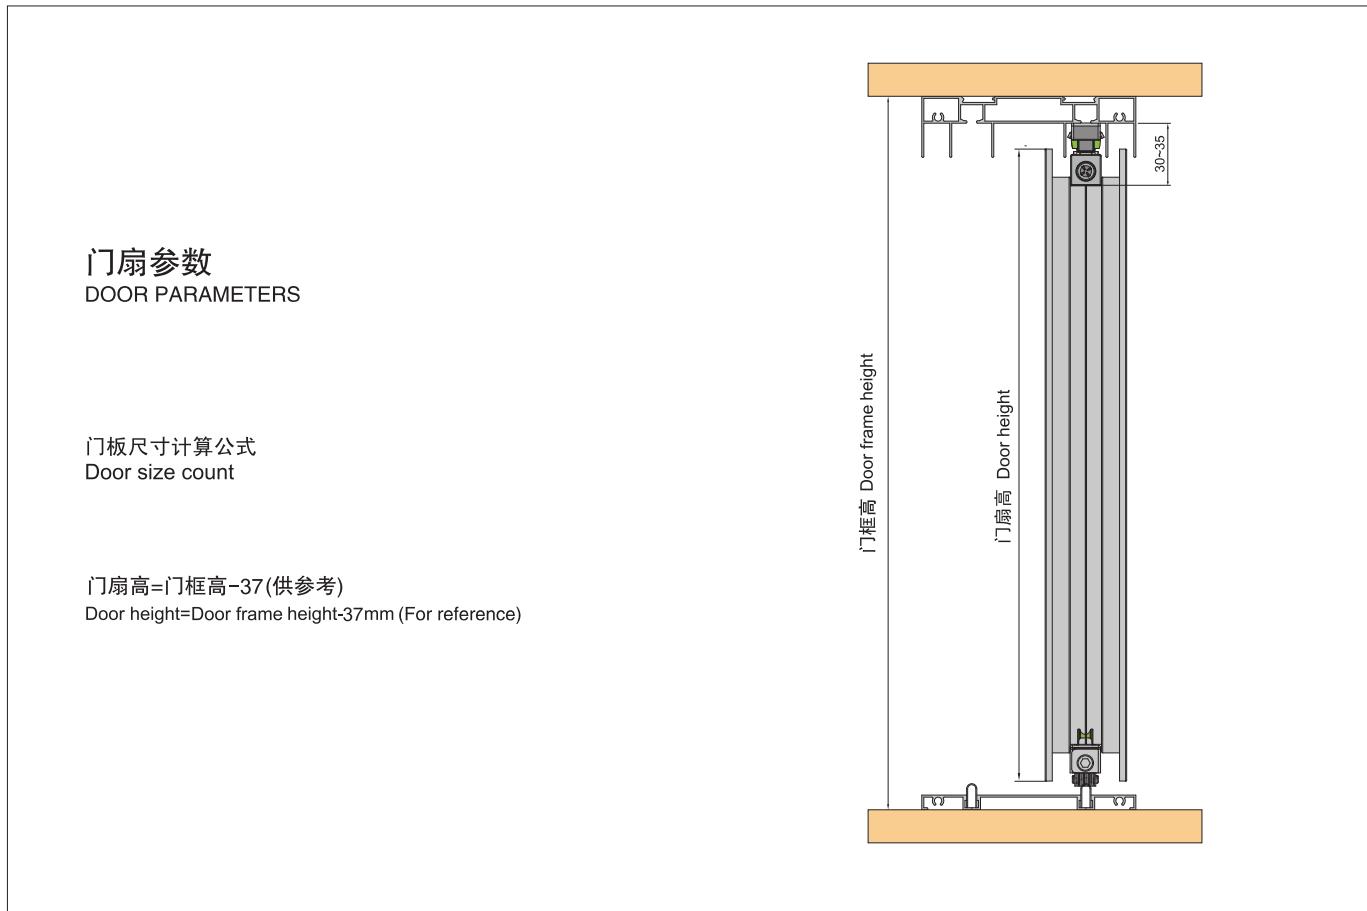
驱逐4号配件说明

QUZHU ROLLER 4 ACCESSORIES OPTION

25-50kg 轻型	50-80kg 重型
---------------	---------------

单阻尼门宽≥600mm
双阻尼门宽≥750mm

调节宽度(14-24) Adjustable Width (14-24)	轻型 Light-duty CJ212608B 重型 Heavy-duty CJ212608A		
阻尼器 Dampers TD115B 轻型 Light-duty TD115A 重型 Heavy-duty		1个/套 1pcs/set	
TJ076A 阻尼限位件 Damp stopper		1个/套 1pcs/set	



驱逐4号-04(极窄)

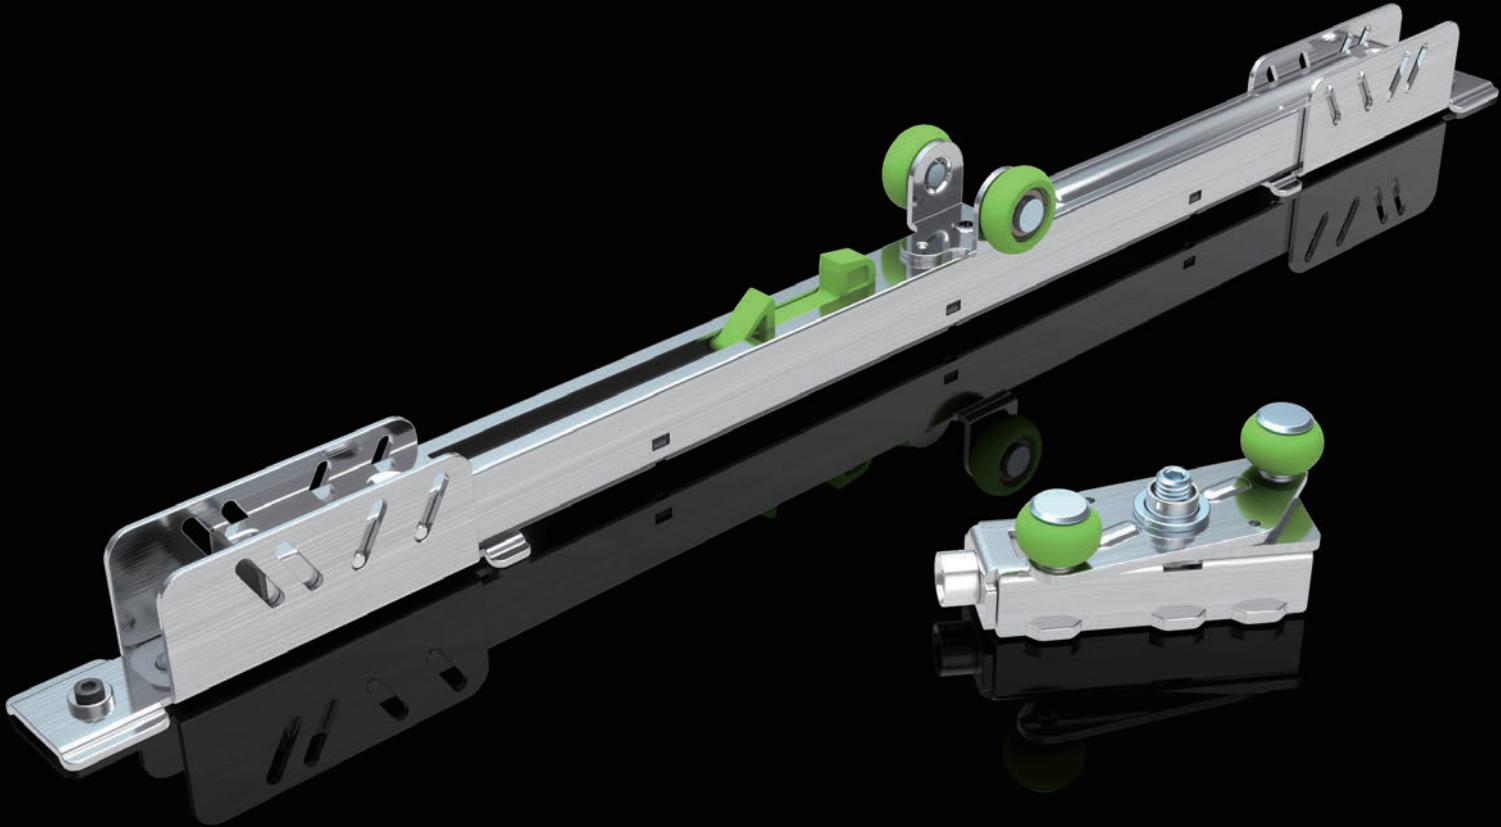
QUZHU ROLLER 4-04 (MINIMALISM)

产品特点:

- **自动挂钩功能:**产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能。
- **阻尼器:**加强阻尼管结构设计，阻尼效果更明显。
- **外壳设计:**采用不锈钢包裹，增强产品整体强度。
- **安装方便:**此款产品于中心限位阻尼，不分左右，安装时非常方便。
- **高度差浮动设计:**解决门扇跳动和门扇自然下沉导致无缓冲的问题。
- **免钉螺丝结构:**顶丝固定，省时省力不破坏型材主体。


Product Features:

- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Stopper height adjustable function:** the stopper can adjust the height, to solve the difficult installation problem case from floor uneven.
- **Dampers:** Use super long sole damper structure design, damping effect is more obvious.
- **Enclosure composition design:** Use stainless steel enclosure, effectively increased the strength.
- **Easy installation:** It is provided with central spacing damping mechanism No left or right identification, which is more convenient for installation.
- **Design for adjusting height automatically:** Solving the problem of soft-closing being out of work caused by door-jumping and door-sinking.
- **Structure without screwing:** Fixed by screws on the top of accessories, without destroying the main body of profiles when saving time and efforts



驱逐4号-04单阻尼套装 (适用于单扇门)


QUZHU ROLLER 4-04 SINGLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
无下轮 No bottom wheel		轻型 Light-duty	25-50	≥550	CA120005-065
		重型 Heavy-duty	50-80	≥550	CA120005-064

配件描述 Fitting Description			轻型 Light-duty	重型 Heavy-duty
阻尼器 Dampers		轻型 Light-duty	TD172A	1
		重型 Heavy-duty	TD172C	-
阻尼限位件(50~58) Damper Stopper		TD174C		1
极短上轮(36-61) Top Wheel		CJ212709C		2

驱逐4号-04单阻尼套装 (适用于单扇门)


QUZHU ROLLER 4-04 SINGLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
无下轮 No bottom wheel		轻型 Light-duty	25-50	≥550	CA120005-067
		重型 Heavy-duty	50-80	≥550	CA120005-068

配件描述 Fitting Description			轻型 Light-duty	重型 Heavy-duty
阻尼器 Dampers		轻型 Light-duty	TD172A	1
		重型 Heavy-duty	TD172C	-
阻尼限位件(38~46) Damper Stopper		TD174A		1
极短上轮(36-61) Top Wheel		CJ212709C		2

驱逐4号-04单阻尼套装 (适用于单扇门)


QUZHU ROLLER 4-04 SINGLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
带下轮 There are bottom wheel		轻型 Light-duty	25-50	≥550	CA120005-074
		重型 Heavy-duty	50-80	≥550	CA120005-073

配件描述 Fitting Description			轻型 Light-duty	重型 Heavy-duty
阻尼器 Dampers		轻型 Light-duty	TD172A	1
		重型 Heavy-duty	TD172C	-
阻尼限位件(50~58) Damper Stopper		TD174C	-	1
极短上轮(36-61) Top Wheel		CJ212709C	-	2
自由旋固3号1813双轮 Free XuanGu 3 Double Wheel 1813		CA380001-002	-	2

驱逐4号-04单阻尼套装 (适用于单扇门)


QUZHU ROLLER 4-04 SINGLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
无下轮 No bottom wheel		轻型 Light-duty	25-50	≥550	CA120005-075
		重型 Heavy-duty	50-80	≥550	CA120005-076

配件描述 Fitting Description			轻型 Light-duty	重型 Heavy-duty
阻尼器 Dampers		轻型 Light-duty	TD172A	1
		重型 Heavy-duty	TD172C	-
阻尼限位件(38~46) Damper Stopper		TD174A	-	1
极短上轮(36-61) Top Wheel		CJ212709C	-	2
自由旋固3号1813双轮 Free XuanGu 3 Double Wheel 1813		CA380001-002	-	2

驱逐4号-04双阻尼套装(适用于单扇门)

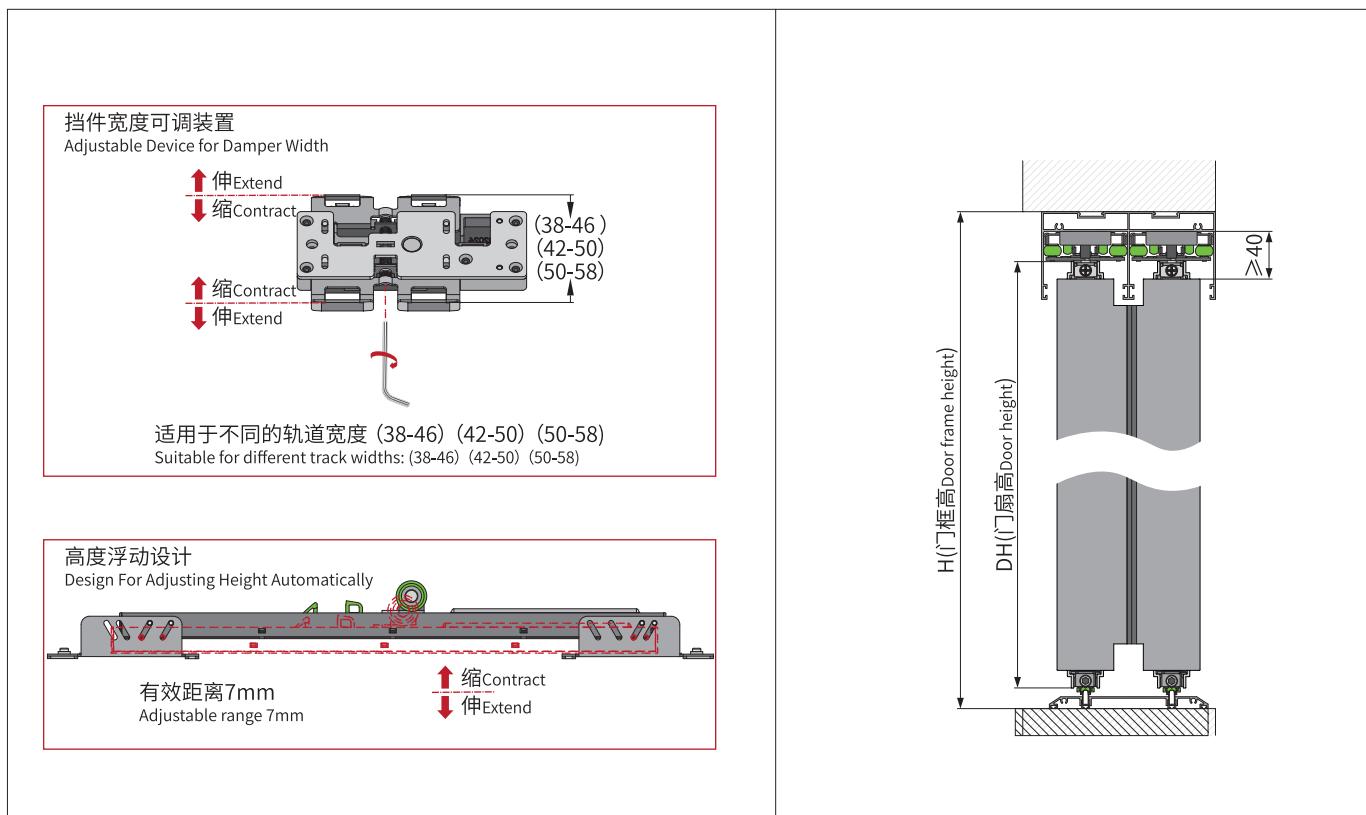
QUZHU ROLLER 4-04 DOUBLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
无下轮 No bottom wheel		轻型 Light-duty	25-50	≥950	CA120005-063
		重型 Heavy-duty	50-80	≥950	CA120005-062

配件描述 Fitting Description				轻型 Light-duty	重型 Heavy-duty
阻尼器 Dampers		轻型 Light-duty	TD172A	2	-
		重型 Heavy-duty	TD172C	-	2
阻尼限位件(50~58) Damper Stopper		TD174C		2	
极短上轮(36-61) Top Wheel		CJ212709C		2	

安装参数介绍

INSTALLATION PARAMETER INTRODUCED



驱逐9号对开联动门

QUZHU ROLLER 9 OPEN LINKAGE DOORS

产品特点：

- 上轮调节专利设计：上轮轮距可调，防止门板前后晃动。
- 软硬复合防脱胶专利设计：软硬复合小滑轮，不脱落、不开胶。
- 钣金制造：采用欧标高精度自动冲压模，保证配件公差最小化，使用中不会发出异响。
- 安装方便：连动系统主体结构简单，适应多种框型，安装简便。
- 采用反向联动设计，只需牵动其中一扇门，另一扇也相对移动


Product Features:

- **Upper roller adjustable patented design:** Upper roller distance adjustable, to prevent the door shaking back and forth.
- **Soft and hard composite anti-off patented design:** Soft and hard composite small roller, roller will never fall off or split.
- **Appeancsheet metal manufacturing:** Use European standard high precision automatic stamping die, to ensure the minimize parts tolerance, and ensure mute when running.
- **Easy installation:** Linkage system with simple main part, suitable for different door frame, easy installation.
- Reverse linkage design, push one door, the other door also moves together



驱逐9号对开联动门无阻尼套装

QUZHU ROLLER 9 OPEN LINKAGE DOORS COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
对开联动 Open Linkage		≤60	≥300	CA120010-059

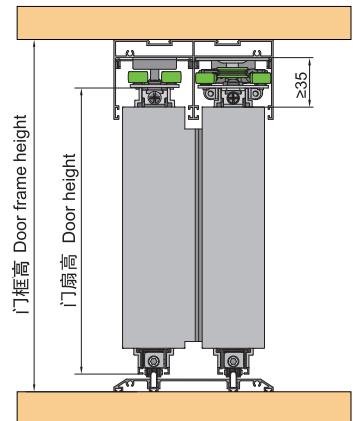
标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置 Standard Configuration
可调上轮 Top Wheel		CJ212631A	4
对开绕线轮 Winding Roller		TN746A	2
对开钢丝连接件B Steel Wire Connector B		TN747B	1
对开钢丝连接件A Steel Wire Connector A		TN747A	1
钢丝 Steel Wire	 10m	637657	1

门扇参数

DOOR PARAMETERS



驱逐9号-01联动门（极窄）

QUZHU ROLLER 9-01(MINIMALISM)

此产品有三项专利技术

专利一:上轮调节专利设计

专利二:软硬复合防脱胶专利设计

专利三:二合一调节专利设计

产品特点:

- **上轮调节专利设计:**上轮轮距可调, 防止门板前后晃动。
- **软硬复合防脱胶专利设计:**软硬复合小滑轮, 不脱落、不开胶。
- **二合一调节专利设计:**皮带调节与轮距调节二合一设计, 同时调节轮距和皮带松紧, 调节更方便。
- **安装方便:**联动系统主体结构简单, 适应多种框型, 安装简便。

Three patent technologies

Patent I :Upper roller adjustable patented design

Patent II :Soft and hard composite anti-off patented designdevice

Patent III :Two in one adjustment patented design


Product Features:

- **Upper roller adjustable patented design:**Upper roller distance adjustable, to prevent the door shaking back and forth.
- **Soft and hard composite anti-off patented design:**Soft and hard composite small roller, roller will never fall off or split.
- **Two in one adjustment patented design:** Belt adjustment and roller distance adjustment two in one design; adjust the roller distance and tension of belt at the same time, easy to adjust.
- **Easy installation:** Linkage system with simple main part, suitable for different door frame, easy installation.



驱逐9号-01无阻尼套装(无下轮)

QUZHU ROLLER 9-01 DOUBLE DAMPER COMPLETE SET (No Bottom Wheel)

产品描述 Product Description		门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
三联动 Synchronized System of Three Doors		≤60	≥400	CA120010-045
四联动 Synchronized System of Four Doors		≤60	≥400	CA120010-046


标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			三联动 Synchronized System of Three Doors	四联动 Synchronized System of Four Doors
顶丝调节上轮 (35-62) Top Wheel		CJ212706A	4	4
中扇调节上轮 Adjustable top roller for middle panel		TN826A	2	4
同步带 Belt	 6.3m	139902	1	2
三联动配件包 Accessories Bags for Synchronized System of Three Doors	 [x2] [x2] [x2] [x2]	TN821A	1	-
四联动配件包 Accessories Bags for Synchronized System of Four Doors	 [x4] [x4] [x4] [x4]	TN821B	-	1


驱逐9号-01无阻尼套装(带下轮)

QUZHU ROLLER 9-01 DOUBLE DAMPER COMPLETE SET (There Are Bottom Wheel)

产品描述 Product Description		门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
三联动 Synchronized System of Three Doors		≤60	≥400	CA120010-057
四联动 Synchronized System of Four Doors		≤60	≥400	CA120010-063

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			三联动 Synchronized System of Three Doors	四联动 Synchronized System of Four Doors
顶丝调节上轮 (35-62) Top Wheel		CJ212706A	4	4
中扇调节上轮 Adjustable top edller for middle panel		TN826A	2	4
同步带 Belt	 6.3m	139902	1	2
自由旋固3号1813双轮 Free XuanGu 3 Double Wheel 1813		CA380001-002	6	8
三联动配件包 Accessories Bags for Synchronized System of Three Doors	 [x2] [x2] [x2] [x2]	TN821A	1	-
四联动配件包 Accessories Bags for Synchronized System of Four Doors	 [x4] [x4] [x4] [x4]	TN821B	-	1

驱逐9号-02联动门（中窄）

QUZHU ROLLER 9-02(MEDIUM SLIM FRAME)

此产品有三项专利技术

专利一:上轮调节专利设计

专利二:软硬复合防脱胶专利设计

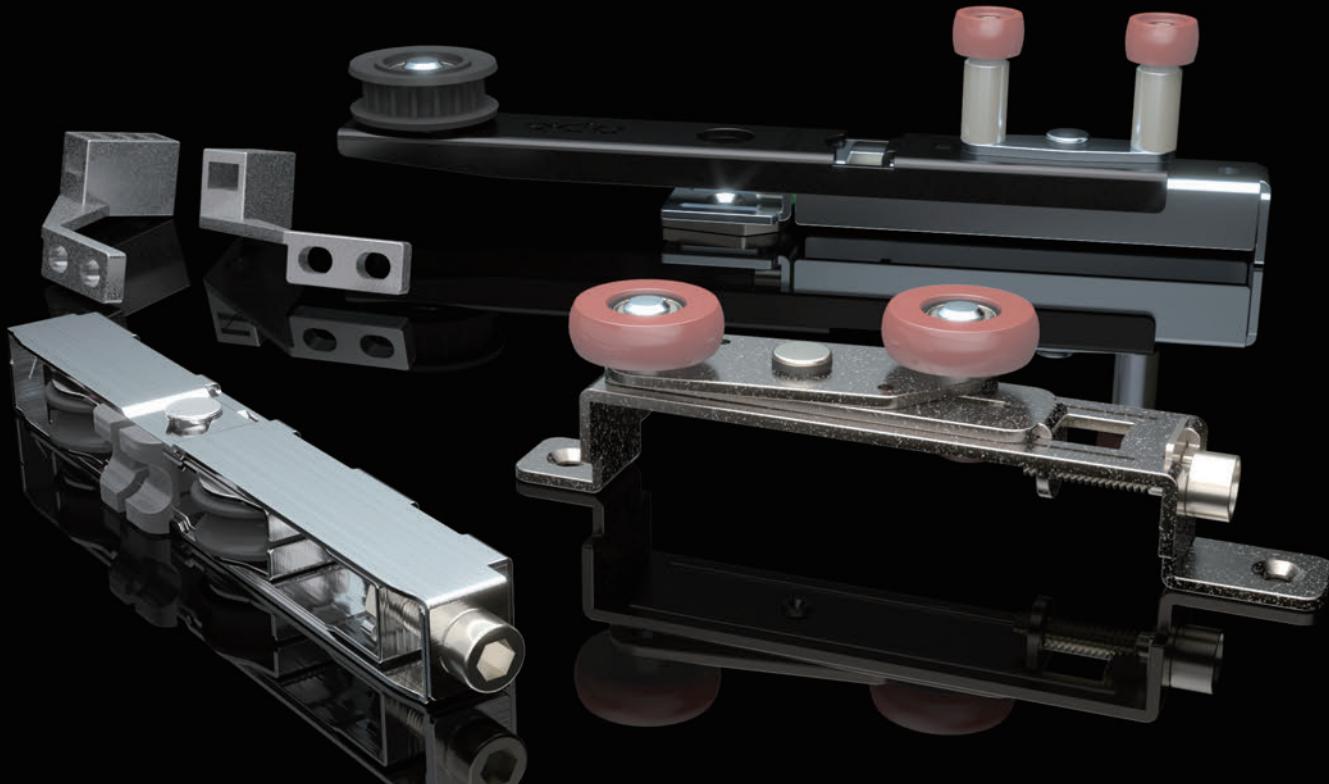
专利三:二合一调节专利设计

产品特点:

- **上轮调节专利设计:**上轮轮距可调, 防止门板前后晃动。
- **软硬复合防脱胶专利设计:**软硬复合小滑轮, 不脱落、不开胶。
- **二合一调节专利设计:**皮带调节与轮距调节二合一设计, 同时调节轮距和皮带松紧, 调节更方便。
- **安装方便:**联动系统主体结构简单, 适应多种框型, 安装简便。

Product Features:

- **Upper roller adjustable patented design:**Upper roller distance adjustable, to prevent the door shaking back and forth.
- **Soft and hard composite anti-off patented design:**Soft and hard composite small roller, roller will never fall off or split.
- **Two in one adjustment patented design:** Belt adjustment and roller distance adjustment two in one design; adjust the roller distance and tension of belt at the same time, easy to adjust.
- **Easy installation:** Linkage system with simple main part, suitable for different door frame, easy installation.



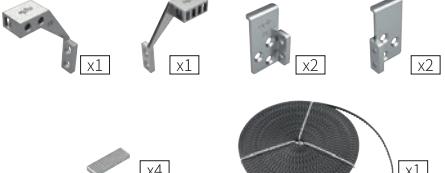
驱逐9号-02无阻尼套装

QUZHU ROLLER 9-02 DOUBLE DAMPER COMPLETE SET

产品描述 Product Description		门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
三联动 Synchronized System of Three Doors		≤60	≥400	CA120010-062

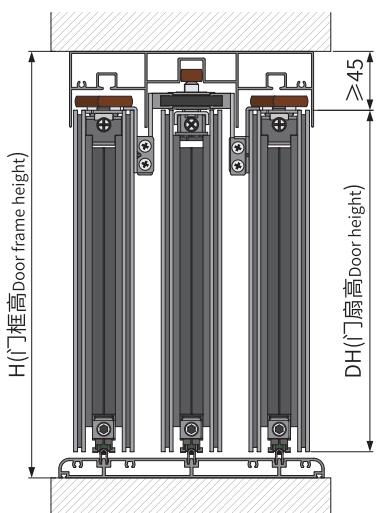
标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			三联动 Synchronized System of Three Doors
可调上轮 Top Wheel		CJ212632D	4
中扇调节上轮 Adjustable top eoller for middle panel		TJ064P	2
钉固3号1517双轮 DingGu 3 Double Wheel 1517		CJ212695A	6
配件包 Accessories Package		TJ185A	1

安装参数介绍

INSTALLATION PARAMETER INTRODUCED



中空5号-03对开联动门(极窄)

HOLLOW 5-03 OPEN LINKAGE DOORS(MINIMALISM)

此产品有四项专利技术

- 专利一：自动挂钩装置
- 专利二：挡件宽度可调装置
- 专利三：挡件自动定位功能
- 专利四：挡件高度可调功能

Four patent technologies

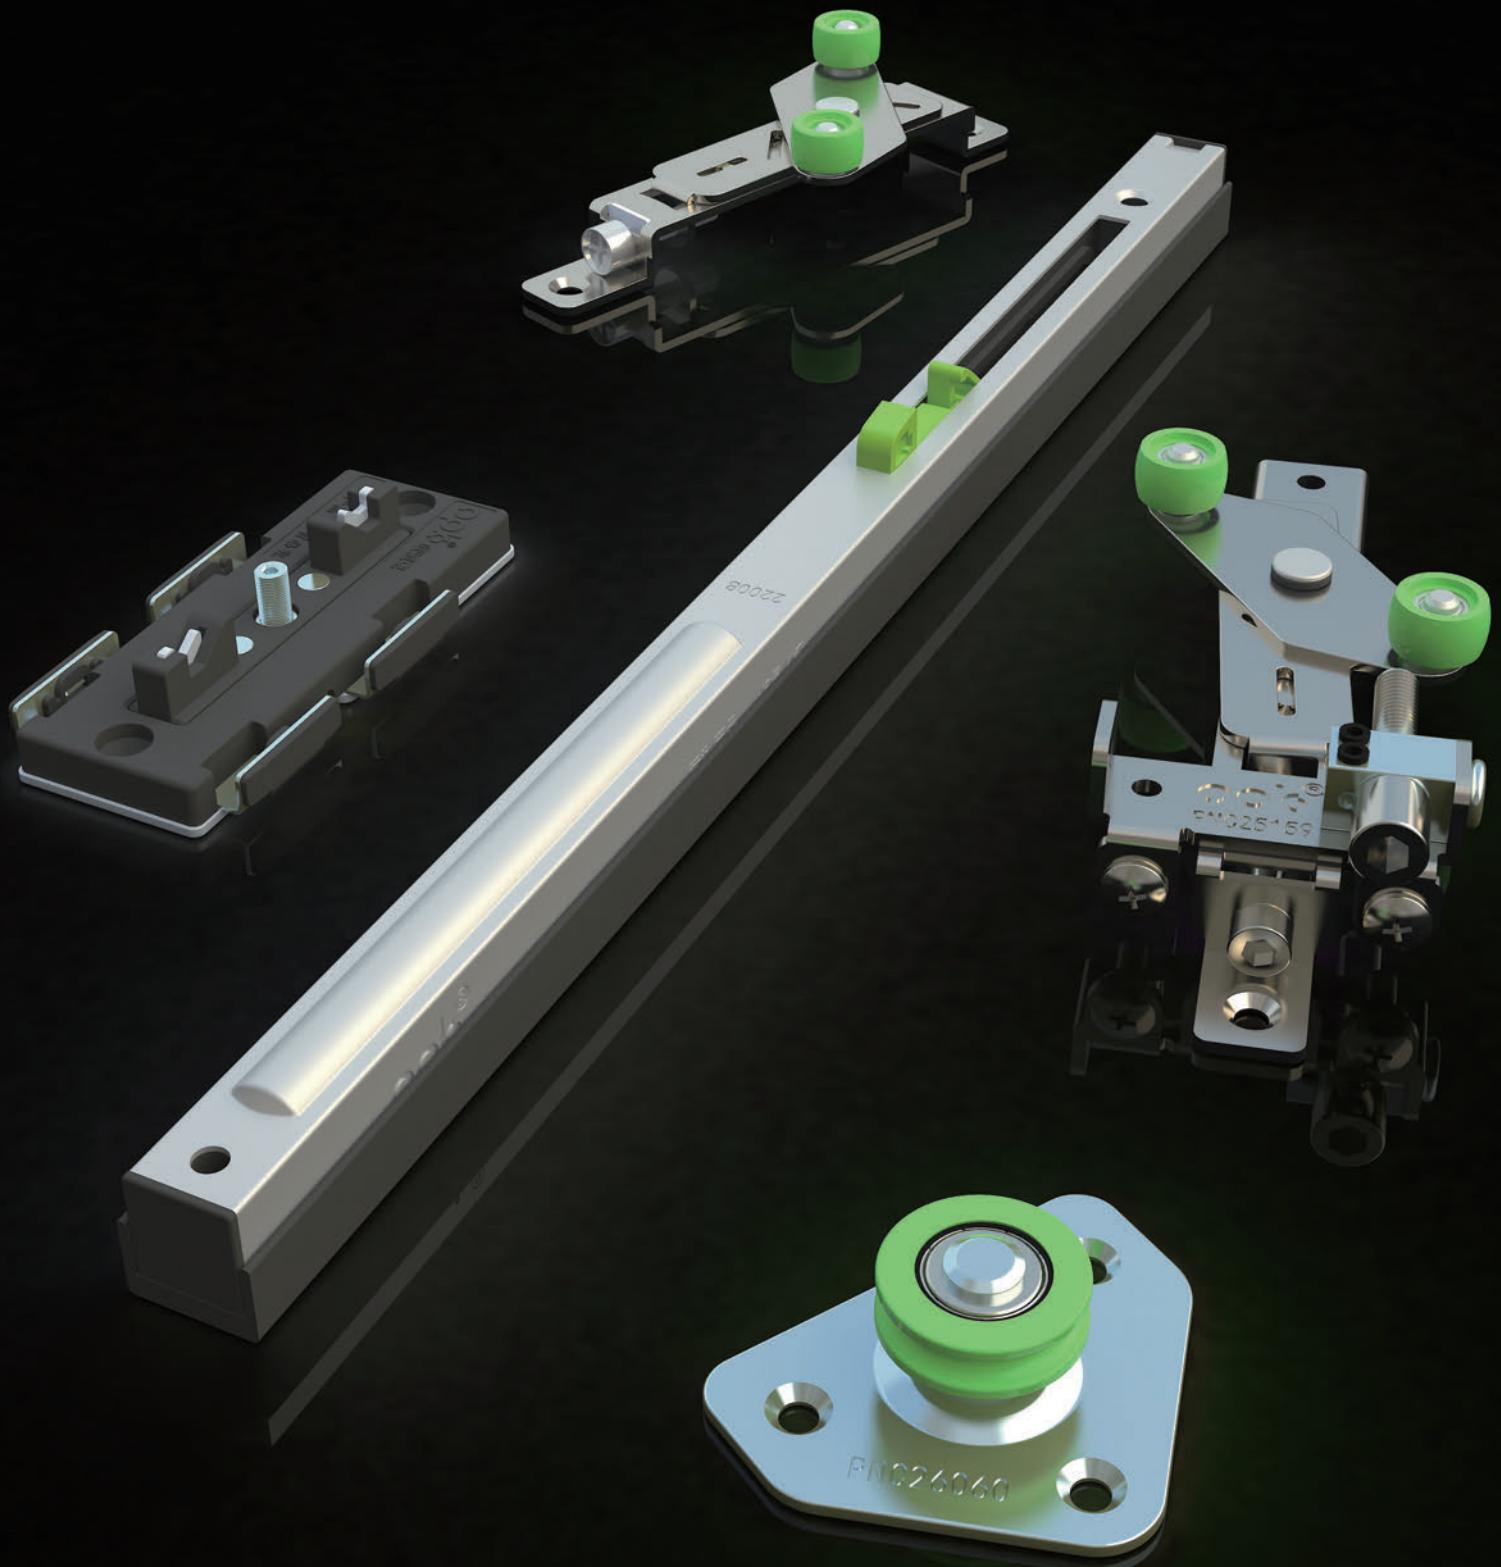
- Patent I : Auto-hanging hook device
- Patent II : Stopper width adjustable
- Patent III: Stopper automatic positioning function
- Patent IV: Stopper height adjustable function

产品特点：

- **自动挂钩功能：**产品安装后无须担心会出现脱钩现象，此款产品具有自动挂钩功能。
- **挡件宽度可调装置：**根据不同轮距大小的轨道，调节相应的宽度。
- **挡件自动定位功能：**挡件无需量尺寸，推动门扇即可精准定位。
- **挡件高度可调功能：**挡件高度可调节，解决地板不平所带来的安装困难的问题。

Product features:

- **Auto-hanging hook function:** No need to worry the unhook issue after installation.
- **Stopper width adjustable:** Stopper width can be adjustable according to the different roller distance of the track
- **Stopper automatic positioning function:** the stopper no need measure the size, push the door to find stopper's location precisely.
- **Stopper height adjustable function:** the stopper can adjust the height, to solve the difficult installation problem case from floor uneven.




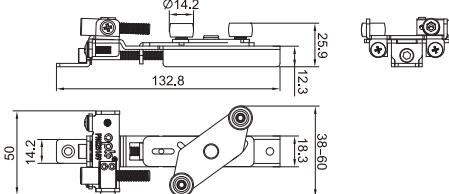


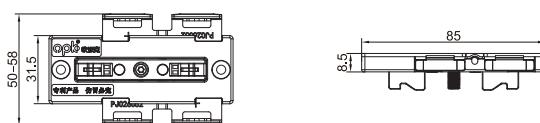
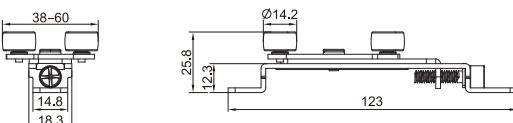


中空5号-03对开连动门双阻尼套装(极窄)

HOLLOW 5-03 OPEN LINKAGE DOORS DOUBLE DAMPING SUIT(MINIMALISM)

50-80kg

重型

双阻尼门宽≥600mm

调节宽度(50-58) Adjustable Width (50-58)		CJ212749A
TD127A 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL		x2 
TD128A 绕线轮 Winding roller		x2 
TD115D 阻尼器 Dampers		x2 
TJ093D 阻尼限位件(50-58) Damp stopper (50-58)		x2 
CJ212631A 上轮 (38-60) Top wheel (38-60)		x2 
CJ212301D 中空2号-1513 Hollow door roller2-1513		x4 
PNQ99007 包塑钢线 Steel wire		x2

中空5号-03对开连动门无阻尼套装(极窄)

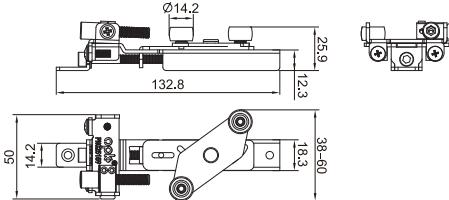




HOLLOW 5-03 OPEN LINKAGE DOORS UNDAMPED SUIT(MINIMALISM)


无阻尼门宽≥400mm

调节宽度(50-58)

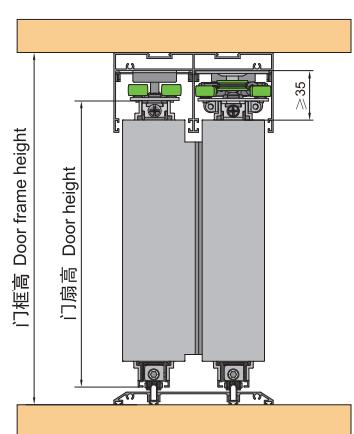
Adjustable Width (50-58)

CJ212748A

TD127A 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL		x2	
TD128A 绕线轮 Winding roller		x2	
CJ212631A 上轮 (38-60) Top wheel (38-60)		x2	
CJ212301D 中空2号-1513 Hollow door roller2-1513		x4	
PNQ99007 包塑钢丝 Steel wire		x2	

门扇参数
DOOR PARAMETERS

适用门扇型材参考
Applicable door profile reference



中空5号-01联动门(极窄)

HOLLOW 5-01 LINKAGE DOORS (MINIMALISM)

此产品有三项专利技术

专利一：上轮调节专利设计

专利二：软硬复合防脱胶专利设计

专利三：二合一调节专利设计

产品特点：

- **上轮调节专利设计：**上轮轮距可调，防止门板前后晃动。
- **软硬复合防脱胶专利设计：**软硬复合小滑轮，不脱落、不开胶。
- **二合一调节专利设计：**皮带调节与轮距调节二合一设计,同时调节轮距和皮带松紧，调节更方便。
- **钣金制造：**采用欧标高精度自动冲压模,保证配件公差最小化,使用中不会发出异响。
- **安装方便：**连动系统主体结构简单，适应多种框型，安装简便。

Three patent technologies

Patent I : Upper roller adjustable patented design

Patent II : Soft and hard composite anti-off patented design

Patent III: Two in one adjustment patented design

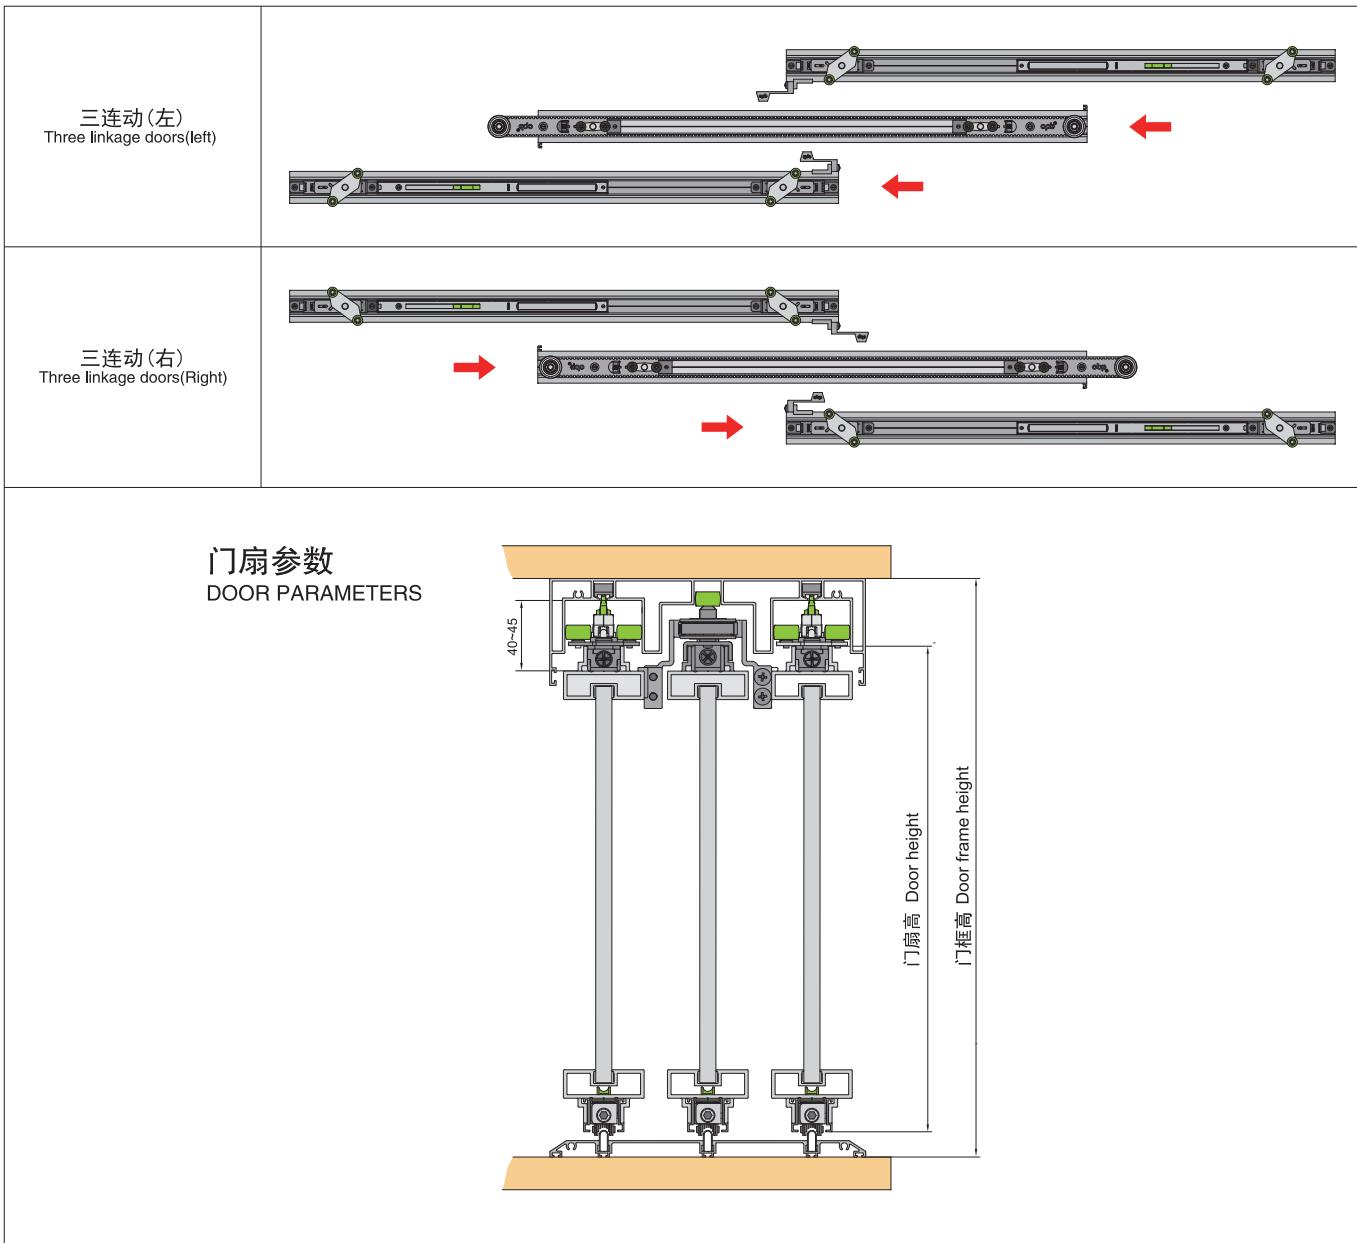
Product features:

- **Upper roller adjustable patented design:** Upper roller distance adjustable, to prevent the door shaking back and forth.
- **Soft and hard composite anti-off patented design:** Soft and hard composite small roller, roller will never fall off or split.
- **Two in one adjustment patented design:** Belt adjustment and roller distance adjustment two in one design; adjust the roller distance and tension of belt at the same time, easy to adjust.
- **Appearance metal manufacturing:** Use European standard high precision automatic stamping die, to ensure the minimize parts tolerance, and ensure mute when running.
- **Easy installation:** Linkage system with simple main part,suitable for different door frame, easy installation.



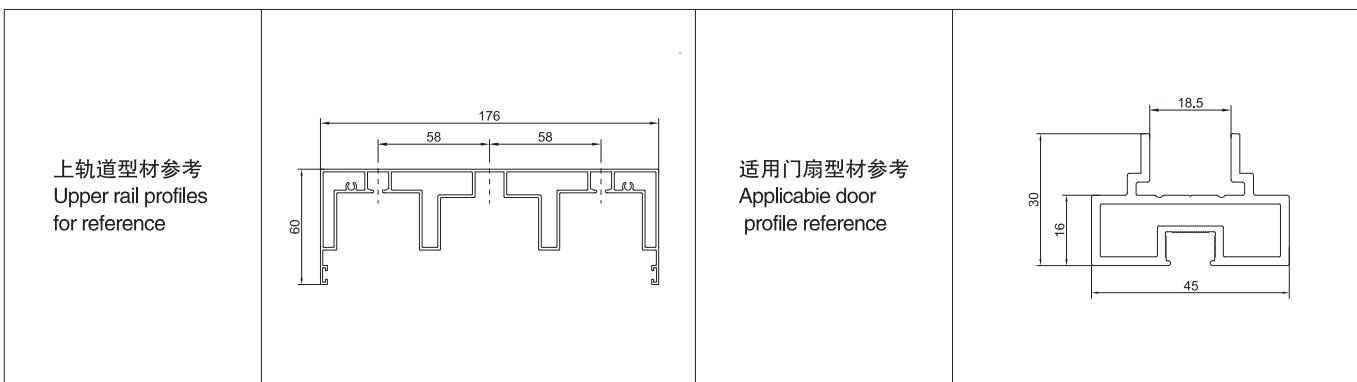
中空5号-01三联动(极窄)

HOLLOW 5-01 THREE LINKAGE DOORS UNDAMPED (MINIMALISM)



型材说明

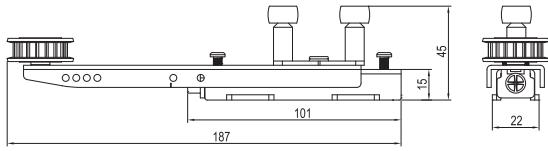
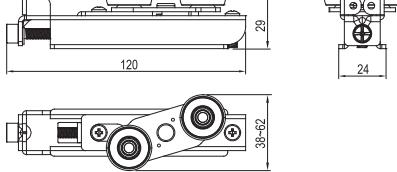

PROFILES INSTRUCTION



中空5号-01三联动无阻尼套装(极窄1635/1645)

HOLLOW 5-01 THREE LINKAGE DOORS UNDAMPED SUIT (MINIMALISM 1635/1645)

无阻尼门宽≥400mm

CN212255A			
TJ064E 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL	 x2		
TJ270A 上轮 (38-62) Top wheel (38-62)	 x4		
CA380002-003 自由旋固3号1813四轮 (宝石绿)	 x6		
TJ271A 三联动配件包 Three linkage doors accessories bag			
皮带夹(左) BELT CLIP (Left)	 x1	皮带夹(右) BELT CLIP (Right)	 x1
传动带 BELT	 x1	防滑片 WASHER	 x2

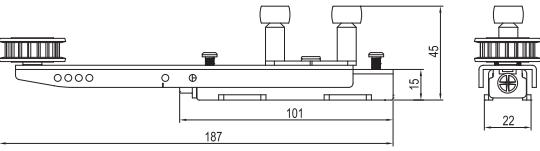

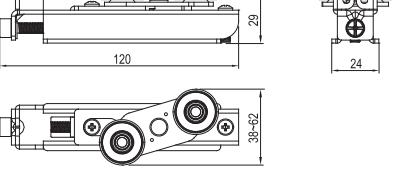


中空5号-01三联动单阻尼套装(极窄1635/1645)

HOLLOW 5-01 THREE LINKAGE DOORS SINGLE DAMPING SUIT (MINIMALISM 1635/1645)

50-80kg

重型

单阻尼门宽≥680mm

CN212256A			
TJ064E 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL		x2	
CN21211A 阻尼器 Dampers		x2	
TJ270A 上轮 (38-62) Top wheel (38-62)		x4	
CA380002-003 自由旋固3号1813四轮 (宝石绿)		x6	
TJ271A 三联动配件包 Three linkage doors accessories bag			
皮带夹(左) BELT CLIP (Left)		x1	
传动带 BELT		x1	

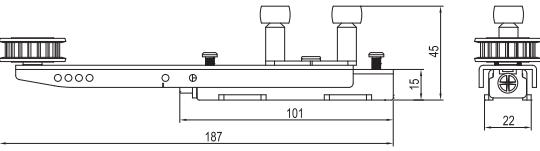

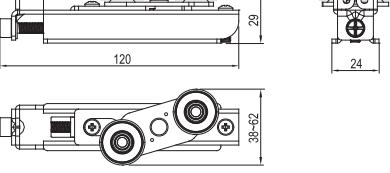

中空5号-01三联动双阻尼套装(极窄1635/1645)

HOLLOW 5-01 THREE LINKAGE DOORS DOUBLE DAMPING SUIT (MINIMALISM 1635/1645)

50-80kg

重型

双阻尼门宽≥750mm

CN212257A			
TJ064E 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL	 x2		
CN212235A 阻尼器 Dampers	 x2		
TJ270A 上轮 (38-62) Top wheel (38-62)	 x2		
CA380002-003 自由旋固3号1813四轮 (宝石绿)	 x6		
TJ271A 三联动配件包 Three linkage doors accessories bag			
皮带夹(左) BELT CLIP (Left)	 x1	皮带夹(右) BELT CLIP (Right)	 x1
传动带 BELT	 x1	防滑片 WASHER	 x2

中空5号-02联动门(窄框)

HOLLOW 5-02 LINKAGE DOORS(NARROW BOX)

此产品有三项专利技术

专利一：上轮调节专利设计

专利二：软硬复合防脱胶专利设计

专利三：二合一调节专利设计

产品特点：

- **上轮调节专利设计：**上轮轮距可调，防止门板前后晃动。
- **软硬复合防脱胶专利设计：**软硬复合小滑轮，不脱落、不开胶。
- **二合一调节专利设计：**皮带调节与轮距调节二合一设计,同时调节轮距和皮带松紧，调节更方便。
- **钣金制造：**采用欧标高精度自动冲压模,保证配件公差最小化,使用中不会发出异响。
- **安装方便：**连动系统主体结构简单，适应多种框型，安装简便。

Three patent technologies

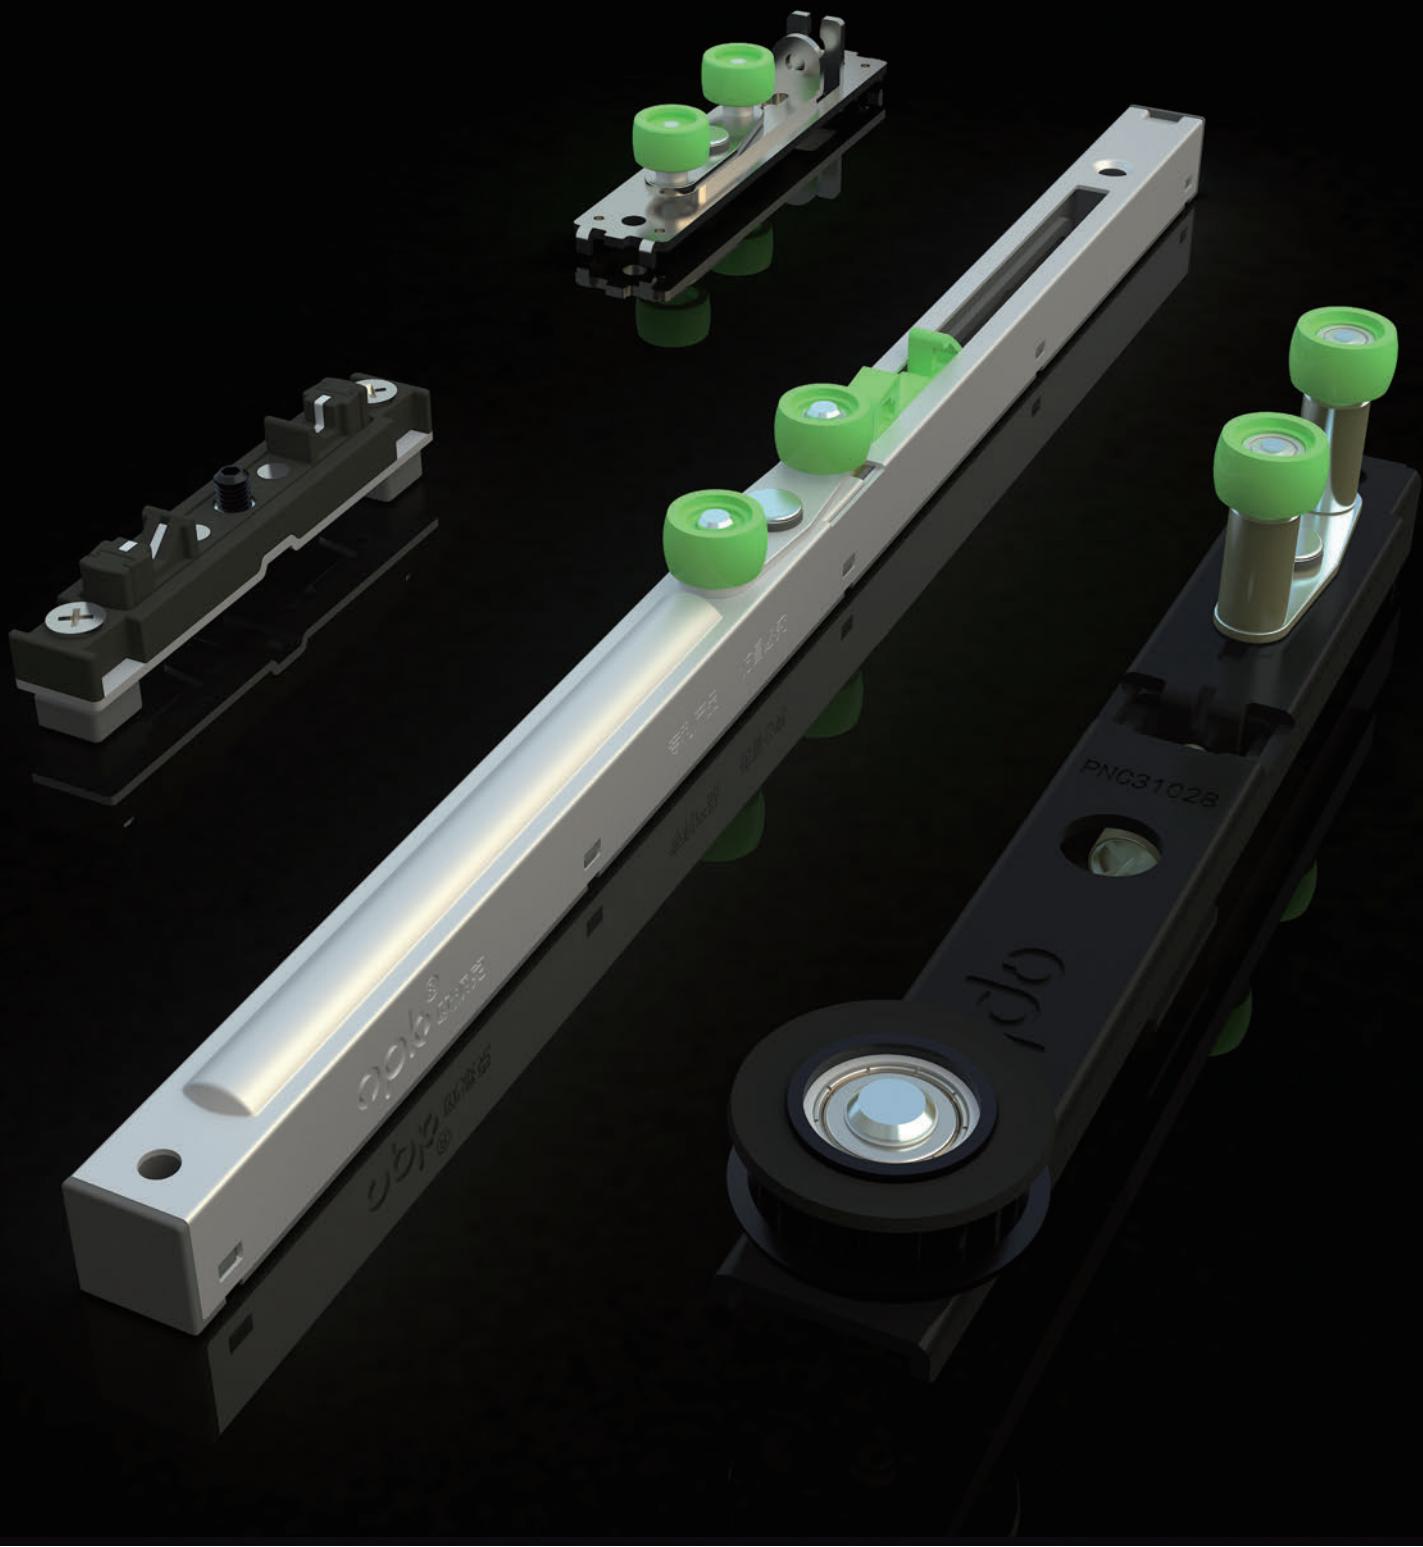
Patent I : Upper roller adjustable patented design

Patent II : Soft and hard composite anti-off patented design

Patent III: Two in one adjustment patented design

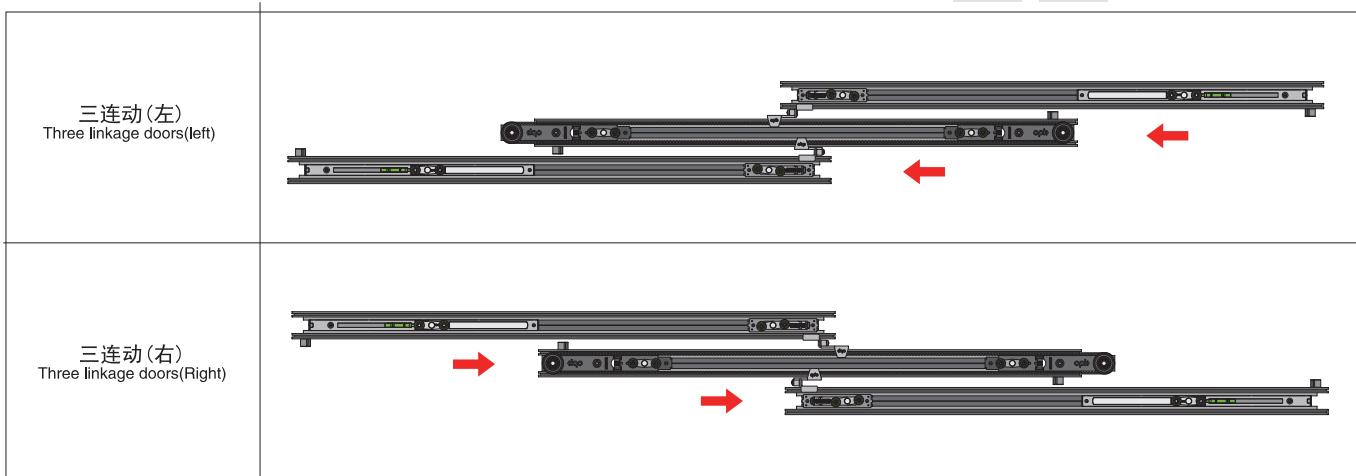
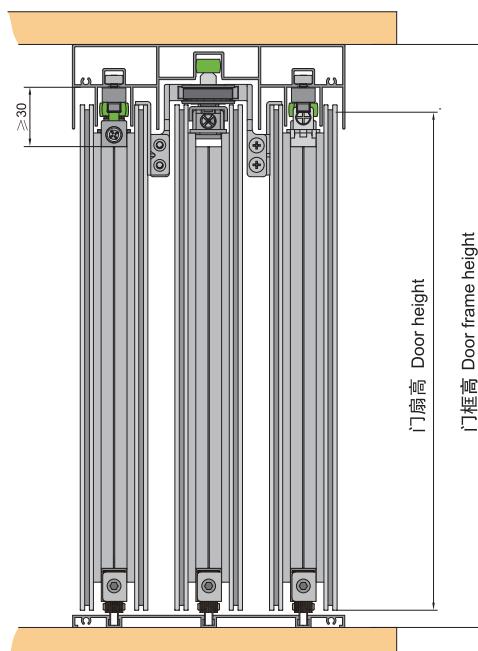
Product features:

- **Upper roller adjustable patented design:** Upper roller distance adjustable, to prevent the door shaking back and forth.
- **Soft and hard composite anti-off patented design:** Soft and hard composite small roller, roller will never fall off or split.
- **Two in one adjustment patented design:** Belt adjustment and roller distance adjustment two in one design; adjust the roller distance and tension of belt at the same time, easy to adjust.
- **Appearance sheet metal manufacturing:** Use European standard high precision automatic stamping die, to ensure the minimize parts tolerance, and ensure mute when running.
- **Easy installation:** Linkage system with simple main part,suitable for different door frame, easy installation.



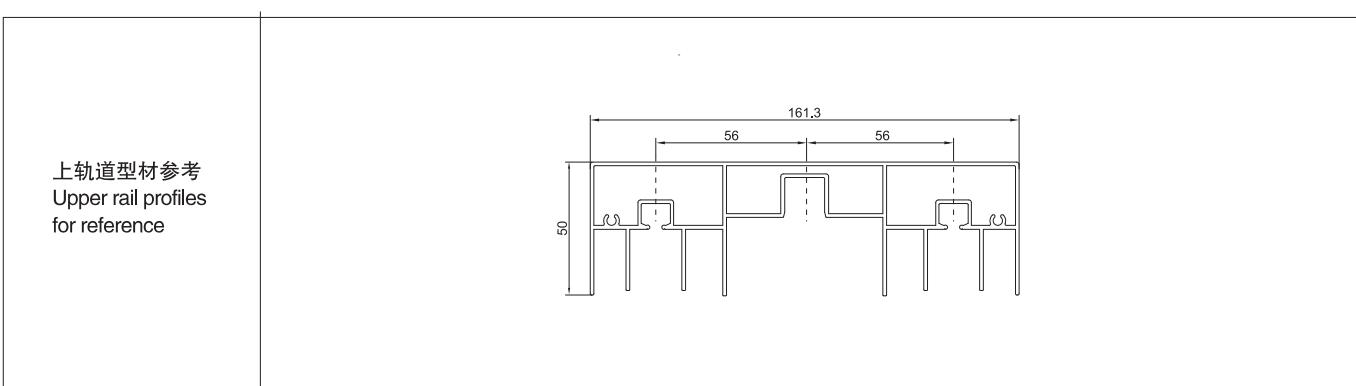
中空5号-02三连动门(窄框)

HOLLOW 5-02 THREE LINKAGE DOORS(NARROW BOX)

25-50kg
轻型50-80kg
重型单阻尼门宽≥600mm
双阻尼门宽≥750mm门扇参数
DOOR PARAMETERS

型材说明

PROFILES INSTRUCTION



中空5号-02连动门单阻尼套装(窄框)







HOLLOW 5-02 LINKAGE DOORS SINGLE DAMPING SUIT(NARROW BOX)

单阻尼门宽≥600mm
双阻尼门宽≥750mm

调节宽度(14-24)

Adjustable Width (14-24)

CN212213A

TJ064F 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL		x2	 
TD115A 阻尼器 Dampers		x2	
TJ076C 阻尼限位件 Damp stopper		x2	
CJ212291M 上轮 Top wheel		x2	
CJ212301D 中空2号-1513 Hollow door roller2-1513		x6	

三连动配件包
Three linkage doors accessories bag

皮带夹(左) BELT CLIP (Left)		x2	皮带夹(右) BELT CLIP (Right)		x2			
固定座(左) Fixture (Left)		x2	固定座(右) Fixture (Right)		x2			
防滑片 WASHER		x2	限位件 STOPPER		x4	传动带 BELT		x1

中空5号-02连动门双阻尼套装(窄框)

HOLLOW 5-02 LINKAGE DOORS DOUBLE DAMPING SUIT(NARROW BOX)

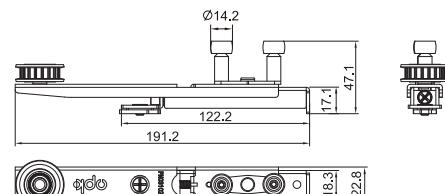


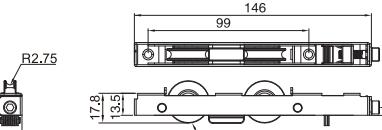


单阻尼门宽≥600mm
双阻尼门宽≥750mm


调节宽度(14-24)

Adjustable Width (14-24)

CN212214A

TJ064F 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL	 x2	
TD115A 阻尼器 Dampers	 x4	
TJ076C 阻尼限位件 Damp stopper	 x4	
CJ212301D 中空2号-1513 Hollow door roller2-1513	 x6	

三连动配件包
Three linkage doors accessories bag

皮带夹(左) BELT CLIP (Left)	 x2	皮带夹(右) BELT CLIP (Right)	 x2
固定座(左) Fixture (Left)	 x2	固定座(右) Fixture (Right)	 x2
防滑片 WASHER	 x2	限位件 STOPPER	 x4
		传动带 BELT	 x1

中空5号-02连动门无阻尼套装(窄框)

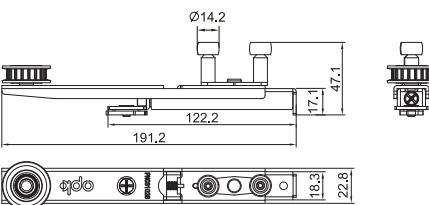

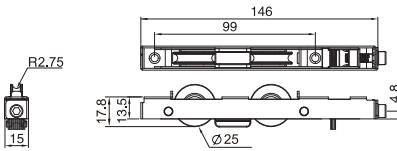
HOLLOW 5-02 LINKAGE DOORS UNDAMPED SUIT(NARROW BOX)

无阻尼门宽≥400mm

调节宽度(14-24)

Adjustable Width (14-24)

CN212212A

TJ064F 中扇调节上轮 ADJUSTABLE TOP ROLLER FOR MIDDLE PANEL	 [x2]	
CJ212291M 上轮 Top wheel	 [x4]	
CJ212301D 中空2号-1513 Hollow door roller2-1513	 [x6]	

三连动配件包
Three linkage doors accessories bag

皮带夹(左) BELT CLIP (Left)	 [x2]	皮带夹(右) BELT CLIP (Right)	 [x2]
固定座(左) Fixture (Left)	 [x2]	固定座(右) Fixture (Right)	 [x2]
防滑片 WASHER	 [x2]	限位件 STOPPER	 [x4]
		传动带 BELT	 [x1]

中空6号无轨平移门

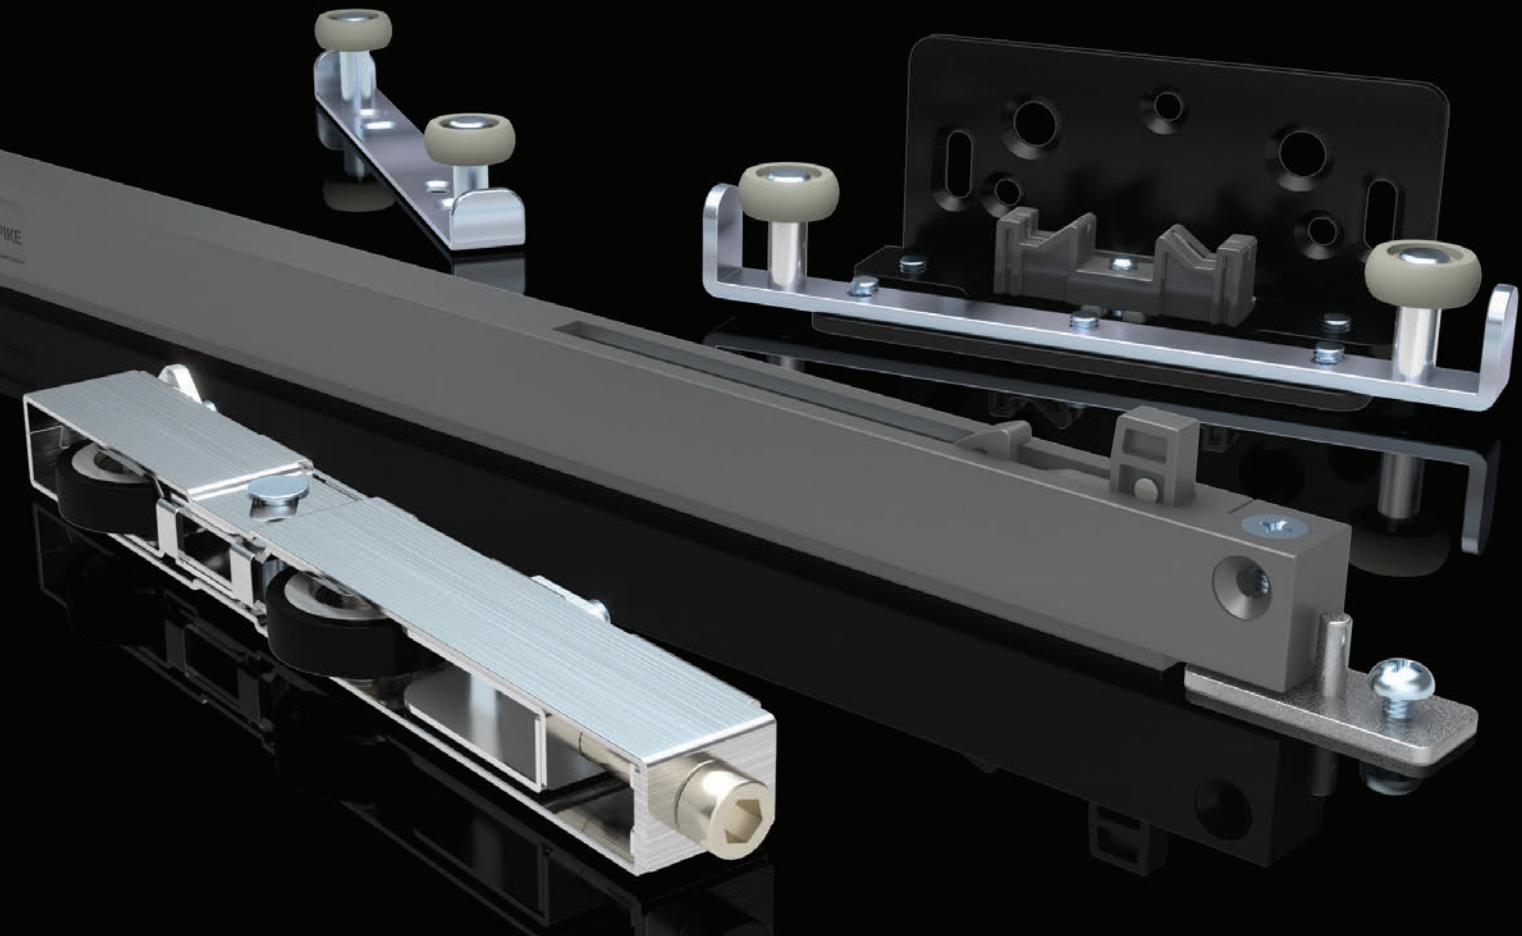
HOLLOW 6 INVISIBLE SLIDING DOOR

产品特点：

- 整体美观
- 没有上下轨
- 打扫更方便
- 安装简单

Product Features:


- No upper and bottom tracks
- Cleaning is more convenient
- Great appearance
- Easy installation






中空6号无轨平移门套装

HOLLOW 6 INVISIBLE SLIDING DOOR COMPLETE SET






产品描述 Product Description		门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
双阻尼 Double Damper		≤50	≥850	CN122597A

标准配置

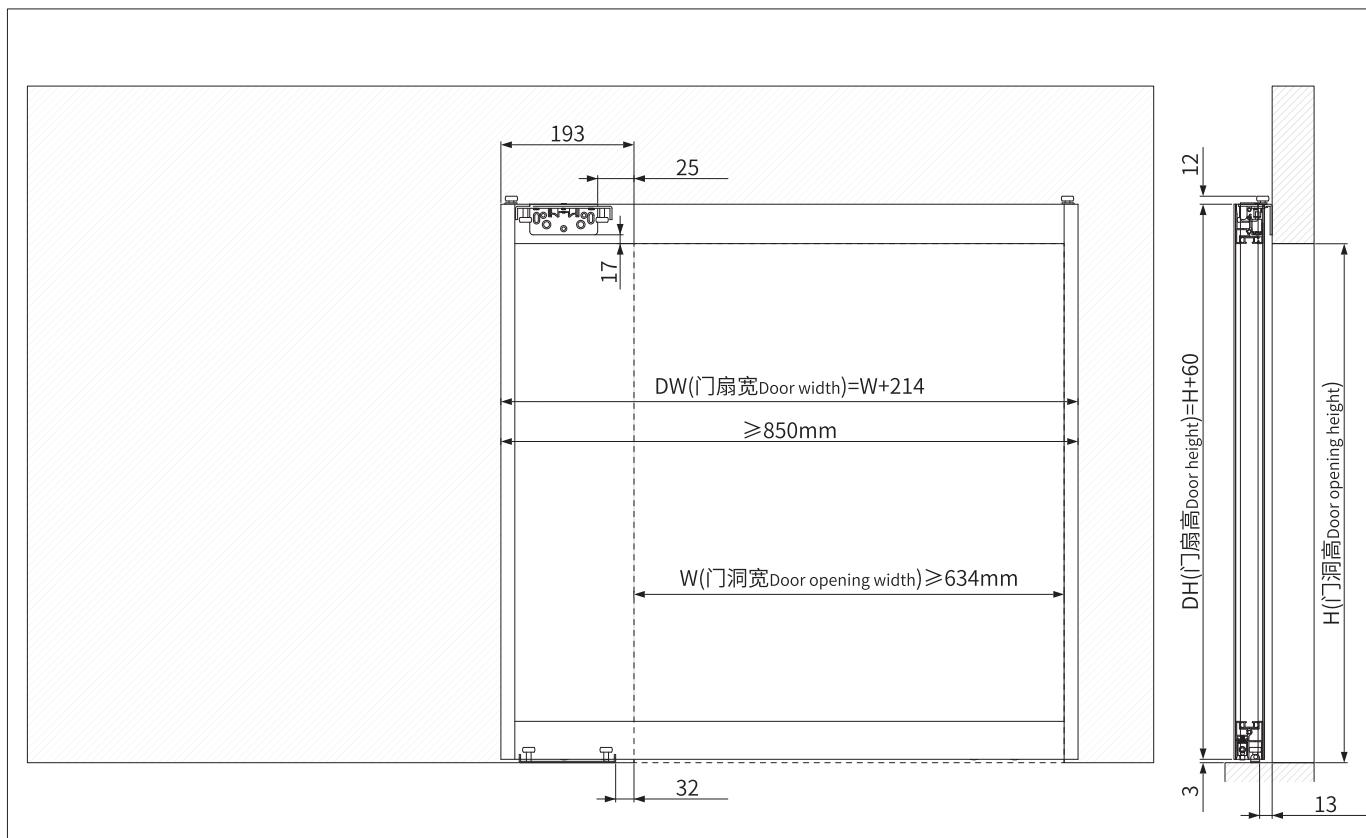
STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置 Standard Configuration
上轮 Top Wheel		TJ388A	1
缓冲器 Dampers		TD111B	2
下定位 Bottom Guiding Part		TJ274A	1
上顶轮-左 Top Guiding Roller-left		TJ272A	1
上顶轮-右 Top Guiding Roller-right		TJ273A	1
下滑轮 Bottom Roller		TJ276A	2
角码 Corner Angle		PJS03036	4
防碰件 Collision-proof Parts		TJ276A	4

型材说明 PROFILES INSTRUCTION

		
竖框 Vertical Frame	装饰盖 Decorative cover	玻璃转换条 Glass transition strip
		
上横 Upper Frame	下横 Bottom Frame	

安装参数介绍 INSTALLATION PARAMETER INTRODUCED



铝门吊滑轮

ALUMINIUM DOOR HANGING SLIDING ROLLER

产品特点：

- **门扇上下调节装置：**不用把门卸下来，用十字螺丝刀就可调节门的上升和下降。
- 滑动顺畅、平稳、静音，开启关闭均有缓冲效果。
- **可调限位装置：**方便调节限位力度、固定好后不易松动。
- **适用范围：**铝门、木门均可使用，安装调节方便。

Product features:

- **Door up & down adjusting device:** no need to unload door, but just use cross screwdriver to adjust door up & down.
- Smooth, steady and silent movement; Damping function exists while door opening and door closing.
- **Adjustable stopper device:** Adjustability for convenient operation; Secure and steady function during door sliding.
- **Application range:** aluminium door, wood door

此系列产品有三项专利技术

专利一：门扇上下调节装置

专利二：挂体外观造型

专利三：限位装置

Three Patent Technologies

Patent 1: Door panel up and down adjustable device

Patent 2: Structure design of hanging body


Patent 3: Stopper device





神舟5号单阻尼套装 (适用于单扇门)

SPACESHIP 5 SINGLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
单阻尼 Single Damper	 门扇高=门洞高-56mm Door height=Inner door height-56mm	轻型 Light-duty	≤30	≥520	CN212208A
		重型 Heavy-duty	≤50	≥520	CN212208C



标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description				标准配置(单扇门) Standard Configuration(Single Door)
阻尼上滑轮 Upper roller With Damper		轻型 Light-duty	643735	1
		重型 Heavy-duty	642086	
上滑轮 Upper roller		TN566A		1
阻尼限位件 Damper Stopper		634423		1
限位件 Stopper		TN074A		1
升降挂盒 Adjustable Hanging Plate		TN546A		2
固定件 Fixing Part		TN575A		2
下定位 Upper roller		TN358A		1


轨道型材

TRACK PROFILE

XNA038 上轨道 Under Track 0.58kg/m		XNA147 装饰盖 (选配) Decorative Cover (Optional) 0.30kg/m	
--	---	---	---

神舟11号-A套装 (适用于单扇门)

SPACESHIP 11-A COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
对向阻尼 Opposite Damper	 门扇高=门洞高-56mm Door height=Inner door height-56mm	轻型 Light-duty	30-50	≥600	CN122204A
		通用型 Normal	50-80	≥600	CN122204B



标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description				标准配置(单扇门) Standard Configuration(Single Door)
对向阻尼 Opposite Damper		轻型 Light-duty	TN565A	1
		通用型 Normal	TN565B	
上滑轮 Upper roller		TN566A	1	
阻尼限位件 Damper Stopper		634423	2	
升降挂盒 Adjustable Hanging Plate		TN546A	2	
固定件 Fixing Part		TN575A	2	
下定位 Upper roller		TN358A	1	


轨道型材

TRACK PROFILE

XNA038 上轨道 Under Track 0.58kg/m		XNA147 装饰盖 (选配) Decorative Cover (Optional) 0.30kg/m	
--	---	---	---

神舟15号顶装窄边框套装(适用于单扇门)



SPACESHIP 15 CEILING MOUNTING SLIM ALUMINUM FRAME COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
对向阻尼 Opposite Damper	 <p>门扇高=门洞高-56mm Door height=Inner door height-56mm</p>	轻型 Light-duty	20~60	≥640	CN122374A
		通用型 Normal	60~90	≥640	CN122374B
		重型 Heavy-duty	90~120	≥640	CN122374C


标准配置

STANDARD CONFIGURATION


配件描述 Fitting Description			轻型 Light-duty	通用型 Normal	重型 Heavy-duty
对向阻尼吊轮 Opposite Damper		轻型 Light-duty	TN700A	1	-
		通用型 Normal	TN700B	-	1
		重型 Heavy-duty	TN700C	-	1
上滑轮 Upper roller		TN699A		1	
限位件 Stopper		TG023A		2	
加长升降挂盒 Lengthened adjusted hanging bracket		TN676C		2	
下定位 Under Roller		TN358A		1	
固定件 Fixing Part		TN575A		2	
易拆轨道装饰盖 Easy disassemble decorative cover for track		PJS22085		1	



XNA094 上轨道 Under Track [0.8kg/m]		XNA078 装饰盖 (选配) Decorative Cover (Optional) [0.36kg/m]	
---	---	---	---

神舟15号-A 口袋窄边框门套装(适用于单扇门)**SPACESHIP 15-A POCKET SLIM ALUMINUM FRAME COMPLETE SET** (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
对向阻尼 Opposite Damper	 门扇高=门洞高-43mm Door height=Inner door height-43mm	轻型 Light-duty	20~60	≥560	CN122553A
		通用型 Normal	60~90	≥560	CN122553B


标准配置**STANDARD CONFIGURATION**

配件描述 Fitting Description			轻型 Light-duty	通用型 Normal
对向阻尼吊轮 Opposite Damper		轻型 Light-duty	TN872A	1
		通用型 Normal	TN872B	-
上滑轮 Upper roller		TN873A		1
阻尼限位件 Damper Stopper		CFA-180		1
长限位件 Long activator		TN475B		1
加长升降挂盒 Lengthened adjusted hanging bracket		TN676C		1
升降短挂盒 adjusted short hanging bracket		TN597C		1
下定位 Under Roller		TN602C		1
固定件 Fixing Part		TN575A		1
易拆卸轨道装饰盖 Easy disassemble decorative cover for track		PJS22085		1

TN809 上轨道 Upper track 1.01kg/m		XNA149 口袋门预装板 Upper Track Fixed Plate For Pocket Door 0.63kg/m	
---	---	--	---

驱逐6号单阻尼套装 (适用于单扇门)

QUZHU 6 SINGLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
单阻尼 Single Damper	 <p>门扇高=门洞高-56mm Door height=Inner door height-56mm</p>	重型 Heavy-duty	≤50	≥520	CJ212745C



标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration(Single Door)
阻尼上滑轮 Upper roller With Damper		TD126C	1
上滑轮 Upper roller		TD124A	1
阻尼限位件 Damper Stopper		CFA-180	1
限位件 Stopper		TN074B	1
升降挂盒 Adjustable Hanging Plate		TN546A	2
固定件 Fixing Part		TN575A	2
下定位 Upper roller		TN358A	1


轨道型材

TRACK PROFILE

XNA038 上轨道 Under Track 0.58kg/m		XNA147 装饰盖 (选配) Decorative Cover (Optional) 0.30kg/m	
--	---	---	---

驱逐6号对向阻尼套装(适用于单扇门)

QUZHU 6 OPPOSITE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
对向阻尼 Opposite Damper	 门扇高=门洞高-56mm Door height=Inner door height-56mm	通用型 Normal	50-80	≥600	CJ212744B



标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration(Single Door)
对向阻尼 Opposite Damper		TD125B	1
上滑轮 Upper roller		TD124A	1
阻尼限位件 Damper Stopper		CFA-180	2
升降挂盒 Adjustable Hanging Plate		TN546A	2
固定件 Fixing Part		TN575A	2
下定位 Upper roller		TN358A	1

轨道型材

TRACK PROFILE

XNA038 上轨道 Under Track 0.58kg/m		XNA147 装饰盖 (选配) Decorative Cover (Optional) 0.30kg/m	
--	---	---	---

亮剑4号

LIANGJIAN 4

产品特点：

- 对向缓冲功能；
- 自动挂钩设计，脱钩自动复位功能；
- 减震设计，采用进口定制改性工程塑料，有效缓解门板跳动；
- 采用高精级滑轮，滑动平稳、顺畅、静音。


Product Features:

- Collision damping function.
- Hook automatical hanging design, Auto-reset while unlock.
- Seismic mitigation design: Adopt imported customized modified engineering plastics, reduce door panel bounce efficiently.
- High precision grade roller, stable, smooth and quiet sliding.



亮剑4号无阻尼套装 (适用于单扇门)

LIANGJIAN 4 NO DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
无阻尼 No Damper	 <p>门扇高=门洞高-56mm Door height=Inner door height-56mm</p>	≤60	≥300	CA290004-003



标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置(单扇门) Standard Configuration(Single Door)
上滑轮 Upper roller		TJ292A	2
限位件 Stopper		TL103A	2
升降挂盒 Adjustable Hanging Plate		TN546A	2
固定件 Fixing Part		TN575A	2
下定位 Upper roller		TN358A	1


轨道型材

TRACK PROFILE

XNA094 上轨道 Under Track 0.8kg/m		XNA078 装饰盖 (选配) Decorative Cover (Optional) 0.36kg/m	
---	---	---	---

亮剑4号单阻尼套装 (适用于单扇门)

LIANGJIAN 4 SINGLE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
单阻尼 Single Damper	 门扇高=门洞高-56mm Door height=Inner door height-56mm	轻型 Light-duty	≤50	≥520	CA290004-015
		重型 Heavy-duty	≤60	≥520	CA290004-001



标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			轻型 Light-duty	重型 Heavy-duty
阻尼上滑轮 Upper roller With Damper		轻型 Light-duty	TJ311A	1
		重型 Heavy-duty	TJ291C	-
阻尼限位件 Damper Stopper			TN360B	1
上滑轮 Upper roller			TJ292A	1
限位件 Stopper			TL103A	1
升降挂盒 Adjustable Hanging Plate			TN546A	2
固定件 Fixing Part			TN575A	2
下定位 Upper roller			TN358A	1


轨道型材

TRACK PROFILE

XNA094 上轨道 Under Track [0.8kg/m]		XNA078 装饰盖 (选配) Decorative Cover (Optional) [0.36kg/m]	
---	---	---	---

亮剑4号对向阻尼套装(适用于单扇门)

LIANGJIAN 4 OPPOSITE DAMPER COMPLETE SET (Application to single door)

产品描述 Product Description		类型 Type	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
对向阻尼 Opposite Damper	 门扇高=门洞高-56mm Door height=Inner door height-56mm	轻型 Light-duty	≤50	≥600	CA290004-016
		通用型 Normal	≤80	≥600	CA290004-002



标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			轻型 Light-duty	通用型 Normal
对向阻尼 Opposite Damper		轻型 Light-duty	TJ312A	1
		通用型 Normal	TJ293B	-
阻尼限位件 Damper Stopper			TN360B	2
上滑轮 Upper roller			TJ292A	1
升降挂盒 Adjustable Hanging Plate			TN546A	2
固定件 Fixing Part			TN575A	2
下定位 Upper roller			TN358A	1

轨道型材

TRACK PROFILE

XNA094 上轨道 Under Track 0.8kg/m		XNA078 装饰盖 (选配) Decorative Cover (Optional) 0.36kg/m	
---	---	---	---

吊趟联动门系列

HANGING LINKAGE SLIDING DOOR SERIES

产品特点：

- 多扇门连动设计，多用于做空间隔断；
- 自动挂钩设计，脱钩自动复位功能；
- 减震设计采用进口定制改性工程塑料,有效缓解门板跳动；
- 采用高精度滑轮，滑动平稳、顺畅、静音。

此系列产品有三项专利技术

- 专利一：门扇上下调节装置
专利二：挂体外观造型
专利三：限位装置

Product Features:

- Multi-panel linkage design, usually used for space partition.
- Hook automatical hanging design, Auto-reset while unlock.
- Seismic mitigation design: Adopt imported customized modified engineering plastics, reduce door panel bounce efficiently.
- High precision grade roller, stable, smooth and quiet sliding.

Three Patent Technologies


- Patent 1: Door panel up and down adjustable device
Patent 2: Structure design of hanging body
Patent 3: Stopper device



神舟5号对开联动(极窄)

SPACESHIP 5 OPEN LINKAGE (MINIMALISM)



≤50kg
重型

产品描述 Product Description		类型 Type	门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
对开联动 Open linkage	 门扇高=门洞-56 Door height=Inner door height-56mm	重型 Heavy-duty	≤50	≥520	CG12300A

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			标准配置 Standard Configuration
阻尼上滑轮 Upper Roller With Damper		TN072A	2
上滑轮 Upper Roller		TN566A	2
阻尼限位件 Damper Stopper		TN171A	2
升降挂盒1 Up-down Hanging Plate 1		TN357C	2
下定位 Under Roller		TN358A	2
固定件 Fixing Part		TN575A	4
对开联动门绕线轮 Winding Roller		TL068A	2
升降挂盒2 Up-down Hanging Plate 2		TG048A	1
升降挂盒3 Up-down Hanging Plate 3		TG048B	1
钢丝 Steel Wire		PNQ99003AM38 5米(m)	1

XNA038 上轨道 Under Track [0.58kg/m]		XNA147 装饰盖 (选配) (Optional) [0.30kg/m]	
--	---	---	---

神舟15号联动门(极窄)

SPACESHIP 15 LINKAGE HANGING SLIDING ROLLER(MINIMALISM)

≤80kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door	 <p>门扇高=门洞- 72 Door height=Inner door height-72mm</p>	≤80	门宽=门洞宽/3+重合位(C)/3 Door Width = Doorway Width / 3 + Overlap a/3	CN122329A

标准配置


STANDARD CONFIGURATION

配件描述 Fitting Description			CN122329A (2+1)
对向阻尼吊轮 Opposite Damper		TN700B	1
阻尼限位件 Damper Stopper		TG023A	2
上滑轮 Upper Roller		TN699A	3
下滑轮 Under Roller		TN602D	1
升降挂盒1 Up-down Hanging Plate 1		TN357K	1
升降挂盒2 Up-down Hanging Plate 2		TN710A	1
绕线轮 (短) Reel (Short)		TN708A	1
绕线轮 (长) Reel (Length)		TN709A	1
连接下滑轮 Connected Bottom Roller		TN689A	1
固定门上定位 Fixed Door Up Guider		TN518C	2

≤60kg



神舟15号联动门(极窄)

SPACESHIP 15 LINKAGE HANGING SLIDING ROLLER(MINIMALISM)

配件描述 Fitting Description			CN122329A (2+1)
固定门下定位 Fixed Door Bottom Guider		TN518D	2
钢丝连接器 Steel Wire Connector		TN707A	1
钢丝固定件 Steel Wire Fixing Part		TN711A	1
固定件 Fixing Part		TN575A	4

轨道型材

TRACK PROFILE

XNA094 上轨道 Under Track		XNA078 装饰盖 Decorative Cover	
------------------------------	---	-----------------------------------	---

天宫6号(极窄)

TIANGONG 6 (MINIMALISM)

≤60kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door	 <p>门扇高=门洞-68 Door height=Inner door height-68mm</p>	≤60	门宽=门洞宽/3+重合位(C)/3 Door Width = Doorway Width / 3 + Overlap a/3	CN122275A

天宫6号标准配置

TIANGONG 6 STANDARD CONFIGURATION

配件描述 Fitting Description		CN122275A (2+1)	
阻尼上滑轮 Upper Roller With Damper		TN072A	2
阻尼限位件 Damper Stopper		TN566A	2
上滑轮 Upper Roller		TN171A	2
下滑轮 Under Roller		TN602A	1
升降挂盒1 Up-down Hanging Plate 1		TN601B	2
钢丝连动系统 Wire linkage system		TN618A	1
连接下滑轮 Connected Bottom Roller		TN582A	1
固定门上定位 Fixed Door Up Guider		TN518A	2
固定门下定位 Fixed Door Bottom Guider		TN518B	2

天宫6号标准配置

TIANGONG 6 STANDARD CONFIGURATION

≤60kg

配件描述 Fitting Description			CN122275A (2+1)
钢丝固定件 Steel Wire Fixing Part		TN468A	1
钢丝连接件 Steel Wire Connector		TN599A	1
固定件 Fixing Part		TN575A	2

型材说明

PROFILES INSTRUCTION

产品描述 Product Description	材质 Material	米重(kg/m) Weight (kg/m)	表面处理 Finished	长度(mm) Length (mm)	型号 Model
XJA096 上轨道 Upper Track	铝合金 Aluminium Alloy	0.84	香槟 Champagne	2000	XJA096BV00200
				3000	XJA096BV00300
				4000	XJA096BV00400
				6000	XJA096BV00600
XJA097 装饰盖 (选配) Decorative Cover (Optional)	铝合金 Aluminium Alloy	0.31	香槟 Champagne	2000	XJA097BV00200
				3000	XJA097BV00300
				4000	XJA097BV00400
				6000	XJA097BV00600

驱逐10号联动门(极窄1525)

QUZHU 10 (MINIMALISM)

≤60kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door		≤60	W=L/3+2C/3	CN212251A
3扇活动门+1扇固定门 3 Movable Door + 1 Fixed Door		≤60	W=L/4+3C/4	CN212252A

标准配置


STANDARD CONFIGURATION

配件描述 Fitting Description		CN212251A (2+1)	CN212252A (3+1)
阻尼上滑轮 Upper Roller With Damper		TN748C	2
阻尼限位件 Damper Stopper		TN171A	2
上滑轮 Upper Roller		TN749A	2
下滑轮 Under Roller		TN578A	1
绕线轮 (短) Reel (Short)		TN750A	1
绕线轮 (长) Reel (Length)		TN751A	1
升降挂盒1 Up-down Hanging Plate 1		TN728A	2
连接下滑轮 Connected Bottom Roller		TN739A	1
固定门上定位 Fixed Door Up Guiders		TN752A	2

驱逐10号联动门(极窄1525)



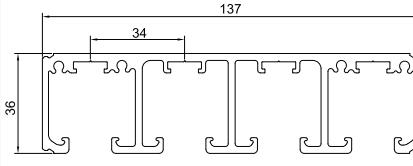



QUZHU 10 (MINIMALISM)

≤60kg

配件描述 Fitting Description			CN212251A (2+1)	CN212252A (3+1)
固定门下定位 Fixed Door Bottom Guider		TN740A	2	2
钢丝连接件 Steel Wire Connector		TN729A	1	-
钢丝连接件 Steel Wire Connector		TN730A	-	1

型材说明

PROFILES INSTRUCTION

上轨道型材参考 Upper rail profiles for reference		装饰盖 Decorative Cover	
上轨道型材参考 Upper rail profiles for reference		SK579 单玻光企 Vertical frame	
SK580 单玻勾企 Vertical frame		SK582 单玻上下方 Upper&bottom frame	

驱逐10号联动门(极窄1645)

QUZHU 10 (MINIMALISM)

≤60kg

产品描述 Product Description		门重(kg) Door Weight (kg)	门宽(mm) Door Width (mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door		≤60	W=L/3+2C/3	CJ212769A
3扇活动门+1扇固定门 3 Movable Door + 1 Fixed Door		≤60	W=L/4+3C/4	CJ212770A

标准配置


STANDARD CONFIGURATION

配件描述 Fitting Description		CJ212769A (2+1)	CJ212770A (3+1)
阻尼上滑轮 Upper Roller With Damper		TD126C	2
阻尼限位件 Damper Stopper		TN171A	2
上滑轮 Upper Roller		TD124A	2
下滑轮 Under Roller		TN602D	1
绕线轮 (短) Reel (Short)		TN685A	1
绕线轮 (长) Reel (Length)		TN686A	1
升降挂盒1 Up-down Hanging Plate 1		TN546G	1
升降挂盒2 Up-down Hanging Plate 2		TN687A	1
连接下滑轮 Connected Bottom Roller		TN689A	2

驱逐10号联动门(极窄1645)



QUZHU 10 (MINIMALISM)

≤60kg

配件描述 Fitting Description			CJ212769A (2+1)	CJ212770A (3+1)
固定门上定位 Fixed Door Up Guider		TN518C	2	2
固定门下定位 Fixed Door Bottom Guider		TN518D	2	2
钢丝连接件 Steel Wire Connector		TN682A	1	-
钢丝连接件 Steel Wire Connector		TN684A	-	1
固定件 Fixing Part		TN575A	4	6

型材说明

PROFILES INSTRUCTION

上轨道型材参考 Upper rail profiles for reference		
--	---	---

驱逐10号-02联动门套装(极窄)

QUZHU 10-02 LINKAGE DOOR COMPLETE SET (Minimalism)

产品描述 Product Description	门重(kg) Door Weight(kg)	门宽(mm) Door Width(mm)	套装型号 Set Model
2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door	≤60	≥600	CA120011-052

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description	CA120011-052 (2+1)	
阻尼上滑轮 Upper Roller With Damper	TD126C	2
阻尼限位件 Damper Stopper	TD171A	2
上滑轮 Upper Roller	TD124A	2
皮带联动系统 Belt Linkage System	TN945A	1
升降调节挂盒 Adjustable Up-down Hanging Plate	TN764A	1
易装连接挂盒 Easy-installed Connecting Plate	TN955A	1
连接下滑轮 Connected Bottom Roller	TN689A	1
下滑轮 Bottom Roller	TN602D	1
固定门上定位 Fixed Door Up Guider	TN518C	2
固定门下定位 Fixed Door Bottom Guider	TN518D	2

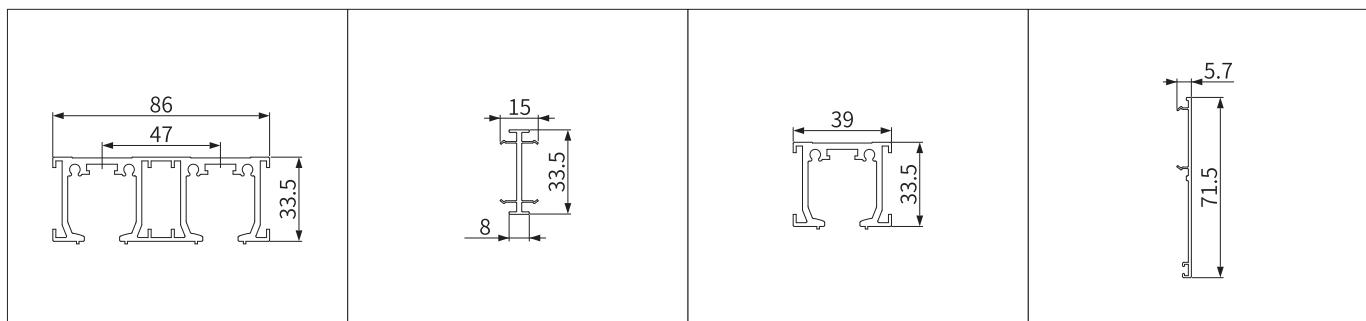
驱逐10号-02联动门套装(极窄)

QUZHU 10-02 LINKAGE DOOR COMPLETE SET (Minimalism)

配件描述 Fitting Description			CA120011-052 (2+1)
固定件 Fixing Part		TN575A	2
皮带 Belt		139902	1
配件包 Accessories Package		Z010939-001	1

轨道型材(仅供参考)

RACK PROFILE (For reference only)



极窄自由折叠

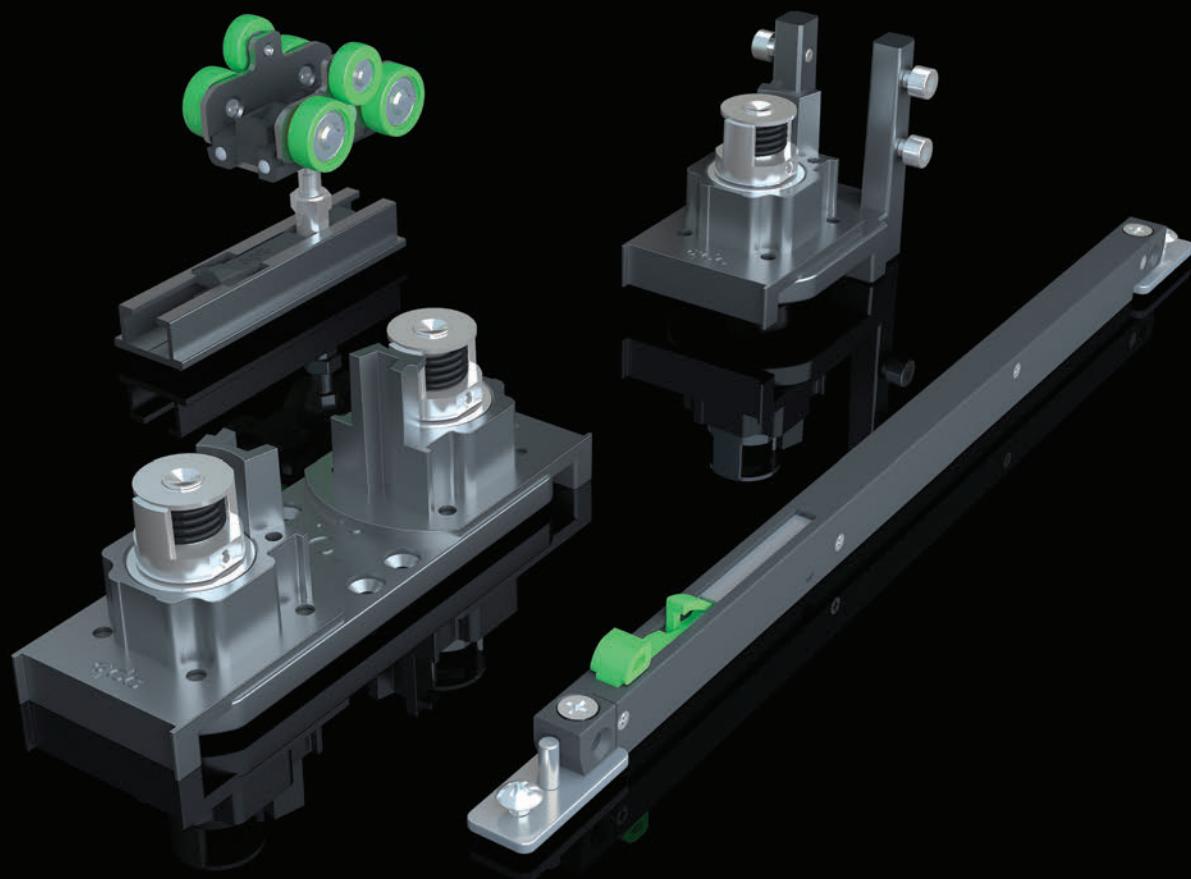
SLIM FRAMED FOLDING SYSTEM

产品特点：

- 全敞开式效果设计
- 超长缓冲设计，缓冲效果明显、安全、不夹手
- 无下轨设计，打扫清洁更方便
- 门扇数量没有限制，可多扇连续折叠
- 正反自由折叠，灵活通用

Product features:

- Fully open effect design
- Longer damping design, great damping effect, safety, no hand clipping
- No bottom track design, easier to clean
- There is no limit to the quantity of door panels, and multiple panels can be folded continuously
- Free folding front and back, flexible and versatile





极窄手动自由折叠配件说明

SLIM MANUAL FREE FOLDING ACCESSORIES INSTRUCTION

≤40kg

门宽：500~800mm

配件描述 Fitting Description			CJ212747A (1+1)	CJ212747B (1+2)	CJ212747C (1+3)	CJ212747E (1+4)	CJ212747F (1+5)
双向折叠门吊轮 Double-way folding door hanger		TJ131A	1	1	1	1	1
自由折叠门吊轮 Free folding door hanging sliding roller		TJ131B	-	1	2	3	4
双向折叠门双转轴 Two-way folding door with double rotating shaft		TJ133A	2	4	6	8	10
双向折叠门边转轴 Two-way folding door side shaft		TJ132A	2	2	2	2	2
反向加长缓冲器 Dampers		TL041B	1	1	1	1	1
转轴固定座垫块 Heel block		PJS25077AV38	6	10	14	18	22
自由折叠门限位件 Free-folding threshold element		TJ148A	1	-	-	-	-
反向短缓冲器 Dampers		TN058B	1	1	1	1	1

极窄电动自由折叠配件说明

SLIM ELECTRICAL FREE FOLDING ACCESSORIES INSTRUCTION





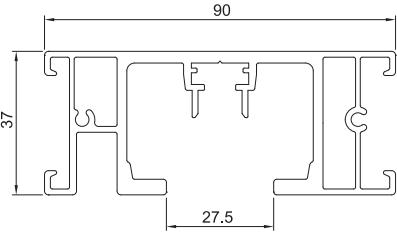

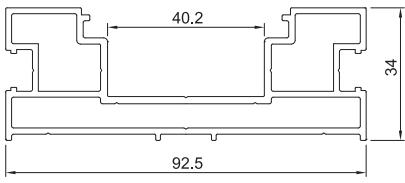
配件描述 Fitting Description			CJ212784A 电动自由折叠（左开门）	CJ212783A 电动自由折叠（右开门）	CJ112488A 电动自由折叠（对开）
控制电路 Control Electric Circuit		TJ278A	1	1	2
同步带 Synchronous Belt		PJD01222	1	1	2
主动扇导向轨-左 Active Fan Guide Rail-Left		PJD01224	1	-	1
主动扇导向轨-右 Active Fan Guide Rail-right		PJD01223	-	1	1
电机 Electric machine		TJ279A	1	1	2
主动轮 Capstan		TJ280A	1	1	2
下导向轮 Guiding roller		TJ281A	1	1	2
从动轮-左 Driven roller-left		TJ283A	1	-	1
从动轮-右 Driven roller-right		TJ282A	-	1	1
情景感应器（明装版） Situation sensor (surface edition)		TJ118A	1	1	2
遥控器C型 Remote control type C		TE061A	1	1	2

订购说明：请注明套装型号以及数量，如需要一套“1+1极窄电动自由折叠左开门”下单方式为：“CJ212747A+CJ212784A x1套”

Purchase instructions: please specify the product model and order quantity, e.g. a set of "1+1" slim electric free folding left door, the ordering method is: "CJ212747A+CJ212784A x1 set"

极窄自由折叠窄边框材料

SLIM FRAMED FOLDING SYSTEM NARROW BORDER MATERIAL

产品描述 Product Description		材质 Material	表面处理 Finished	长度(mm) Length (mm)	型号 Model
上方插件 Top Horizontal frame		铝合金 Aluminium Alloy	肌肤黑 Black	6000	XJA287
上下方 Upper&Bottom frame		铝合金 Aluminium Alloy	肌肤黑 Black	6000	XJA288
中转轴 Middle Horizontal frame		铝合金 Aluminium Alloy	肌肤黑 Black	6000	XJA289
竖框 Vertical frame		铝合金 Aluminium Alloy	肌肤黑 Black	4800	XJA290
上轨 Top track		铝合金 Aluminium Alloy	肌肤黑 Black	6000	XJA291
上轨扣板 Decorative profile for up track		铝合金 Aluminium Alloy	肌肤黑 Black	6000	XJA292
边封 Side profile		铝合金 Aluminium Alloy	肌肤黑 Black	5200	XJA293

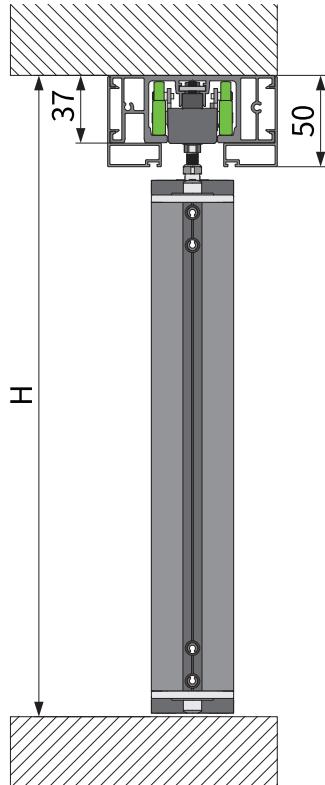
极窄自由折叠窄边框材料

SLIM FRAMED FOLDING SYSTEM NARROW BORDER MATERIAL

产品描述 Product Description		材质 Material	表面处理 Finished	长度(mm) Length (mm)	型号 Model
边封扣板 Decorative profile for side profile		铝合金 Aluminium Alloy	肌肤黑 Black	5200	XJA294
边封扣盖 Decorative cover for side profile		铝合金 Aluminium Alloy	肌肤黑 Black	5200	XJA295
单玻转换框 Glass transition strip		铝合金 Aluminium Alloy	肌肤黑 Black	4800	XJA296
收口 Close up profile		铝合金 Aluminium Alloy	肌肤黑 Black	5200	XJA297
电动折叠轨道 Electrically folding track		铝合金 Aluminium Alloy	肌肤黑 Black	6000	XJA519
电动折叠轨道扣盖 Electrically folding track end cap		铝合金 Aluminium Alloy	肌肤黑 Black	6000	XJA520

手动自由折叠门系统安装参数

FREE FOLDING DOOR SYSTEM INSTALLATION PARAMETERS



单边折叠 Single-side folding door system

$$\text{小扇宽} = \{\text{门洞宽}-61-(N-1)\times21-30\}\div\{(Nx2)-1\}+30$$

$$\text{小扇上下横长度} = \text{小扇宽}-40$$

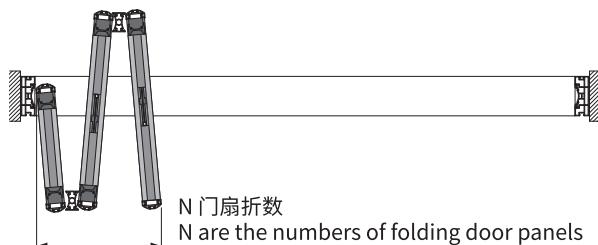
$$\text{大扇宽} = (\text{小扇宽}-30)\times2$$

$$\text{大扇上下横长度} = \text{大扇宽}-40$$

$$\text{Small panel width} = [\text{Door opening width} - 61 - (N-1) \times 21 - 30] \div [(Nx2)-1] + 30$$

$$\text{Length of upper&bottom door frame of small panel} = \text{small panel width}-40$$

$$\text{Big panel width} = (\text{small panel width}-30) \times 2$$

$$\text{Length of upper/bottom door frame of big panel} = \text{big panel width}-40$$


N 门扇折数

N are the numbers of folding door panels

对开折叠 Synchronized folding door system

$$\text{小扇宽} = \{\text{门洞宽}-61-(N+M-2)\times21-74\}\div\{((N+M-1)\times2)+30\}$$

$$\text{大扇宽} = (\text{小扇宽}-30)\times2$$

$$\text{竖框高} = \text{门洞高}-91 \text{ (其中装拉手那扇-65)}$$

$$\text{中转轴} = \text{门洞高}-81$$

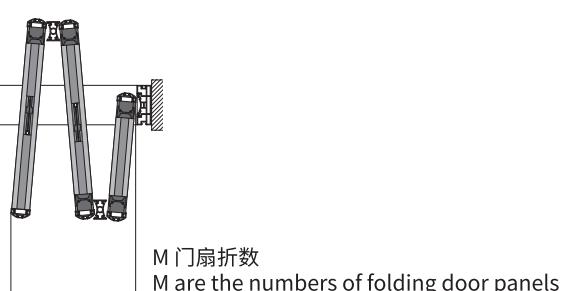
$$\text{Small panel width}=$$

$$\{\text{Door opening width}-61-(N+M-2)\times21-74\}\div\{((N+M-1)\times2)+30\}$$

$$\text{Big panel width} = (\text{small panel width}-30)\times2$$

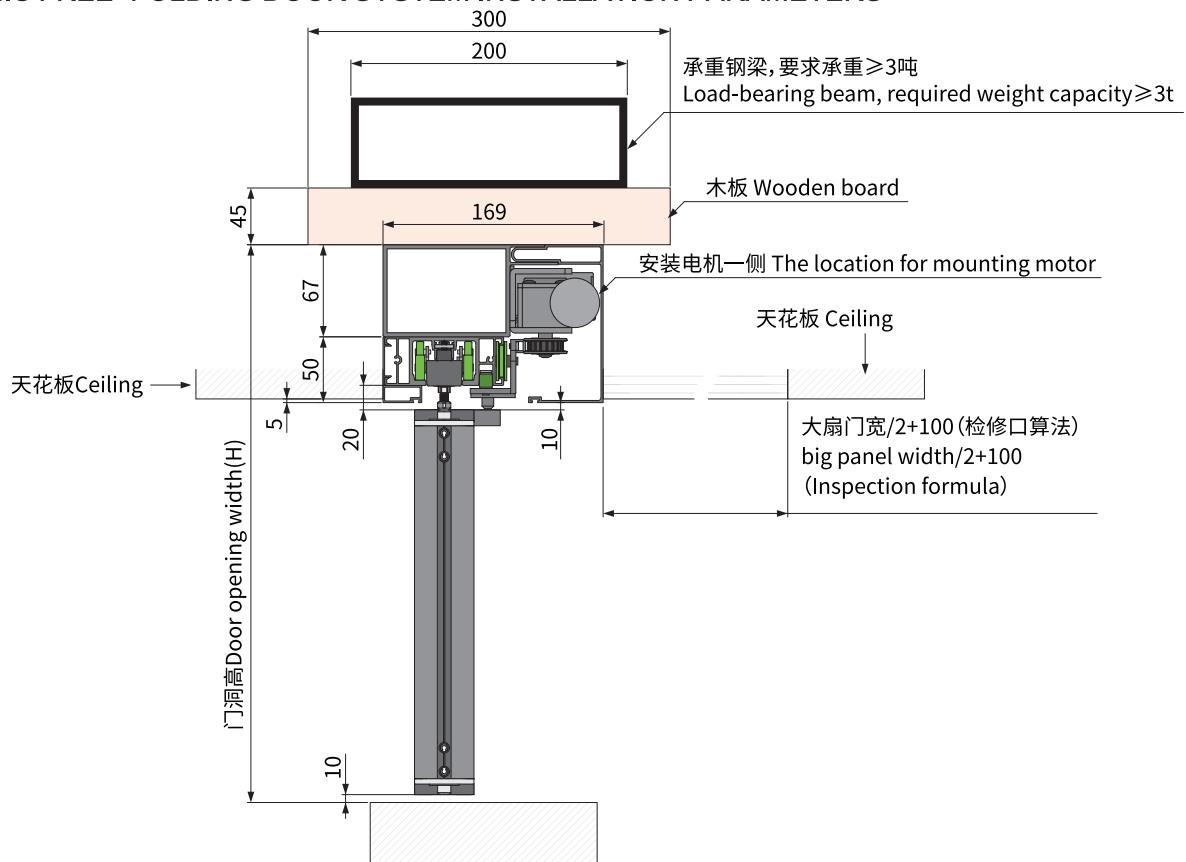
$$\text{Vertical frame height} = \text{Door opening width}-91$$

$$(\text{when the panel with handle-65})$$

$$\text{Middle horizontal frame} = \text{Door opening width}-81$$
N 门扇折数
N are the numbers of folding door panelsM 门扇折数
M are the numbers of folding door panels

电动自由折叠门系统安装参数

ELECTRONIC FREE-FOLDING DOOR SYSTEM INSTALLATION PARAMETERS



单边折叠 Single-side folding door system

$$\text{小扇宽} = \{\text{门洞宽}-61-(N-1)\times21-30\} \div \{(Nx2)-1\}+30$$

$$\text{小扇上下横长度} = \text{小扇宽}-40$$

$$\text{大扇宽} = (\text{小扇宽}-30)\times2$$

$$\text{大扇上下横长度} = \text{大扇宽}-40$$

$$\text{竖框高} = \text{门洞高}-158 \text{ (其中装拉手那扇-132)}$$

$$\text{中转轴} = \text{门洞高}-148$$

$$\text{Small panel width} = \{\text{Door opening width}-61-(N-1)\times21-30\} \div \{(Nx2)-1\}+30$$

$$\text{Length of upper&bottom door frame of small panel} = \text{small panel width}-40$$


$$\text{Big panel width} = (\text{small panel width}-30)\times2$$

$$\text{Length of upper/bottom door frame of big panel} = \text{big panel width}-40$$

$$\text{Vertical frame height} = \text{Door opening width}-158$$

$$\text{(when the panel with handle-132)}$$

$$\text{Middle horizontal frame} = \text{Door opening width}-148$$



对开折叠 Synchronized folding door system

$$\text{小扇宽} = \{\text{门洞宽}-61-(N+M-2)\times21-74\} \div \{((N+M-1)\times2)+30\}$$

$$\text{大扇宽} = (\text{小扇宽}-30)\times2$$

$$\text{竖框高} = \text{门洞高}-158 \text{ (其中装拉手那扇-132)}$$

$$\text{中转轴} = \text{门洞高}-148$$

$$\text{Small panel width} =$$

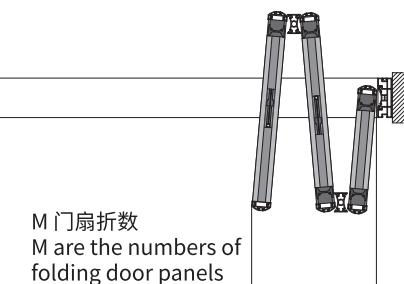
$$\{\text{Door opening width}-61-(N+M-2)\times21-74\} \div \{((N+M-1)\times2)+30\}$$

$$\text{Big panel width} = (\text{small panel width}-30)\times2$$

$$\text{Vertical frame height} = \text{Door opening width}-158$$

$$\text{(when the panel with handle-132)}$$

$$\text{Middle horizontal frame} = \text{Door opening width}-148$$



磁悬浮中空门系统

E-HOLLOWDOOR SYSTEM

产品特点：

- 组合式结构专利设计；
- 无需定制，使用更方便；
- 磁力驱动，柔性接触，无硬摩擦，使用更安全；
- 无机械传动结构,无硬连接，滑动更加轻盈、柔畅；
- 减小轨道空间，精致设计，提高空间利用率；
- 停电情况下滑动依然轻柔。

技术概要：

- 额定电压：200~240V
- 额定功率：80W
- 待机功率：5W
- 开门速度：最低0.065M/S 最高0.26M/S
- 控制方式：微电脑处理控制器
- 冲撞机能：在受阻或冲撞条件下反弹
- 停电时手动开闭力：≤10N
- 门宽：≥750mm

Product Features:


- Combined structure patent design.
- No need custom-made, more easier operation.
- Magnetic drive, soft touch no hard friction, more safety to use.
- No mechanical drive mechanism sliding more soft and smooth.
- Sliding still soft and smooth during the power failure.
- Exquisite design to save the rail space improve the space usage.

Technical Points:

- **Voltage Rating:** 200~240V
- **Power Rating:** 80W
- **Standby Power:** 5W
- **Door Opening Speed:** Min: 0.065M/S , Max: 0.26M/S
- **Control Mode:** Microcomputer processing controller
- **Bounce Function:** Rebound in the conditions of damping or bumping
- **Manual Power Needed when Power Off:** ≤10N
- **Door width:** ≥750mm



磁悬浮中空门系统套装 E-HOLLOWDOOR COMPLETE SET

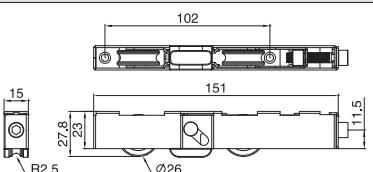
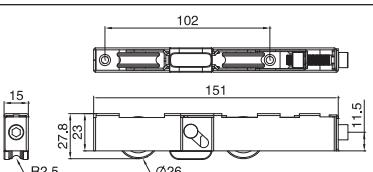
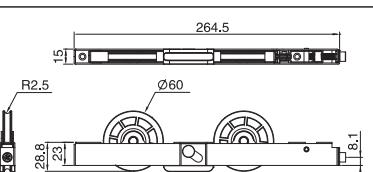
产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤100	1400-2000	641648
		≤100	2000-2700	641656
		≤100	2700-3400	641664
对开系统 Double Systems		≤100	2800-4000	641649
		≤100	4000-5400	641657
		≤100	5400-6800	641665

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-A20000100	1	2
		E88-A27000100		
		E88-A34000100		
上轮 Top Wheel		CJ212319A	2	4
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

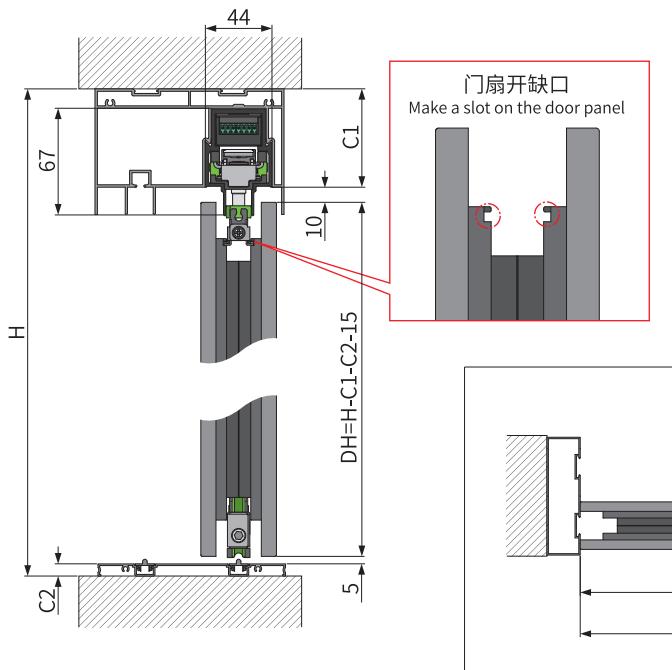
选配 OPTIONAL

配件描述 Fitting Description		单系统 Single System	对开系统 Double Systems
CN21244D 中空2号-1523 Hollow door roller 2-1523	  <p>$\leq 80\text{kg}$</p>	2	4
CN21244B 中空2号-1523 Hollow door roller 2-1523	  <p>$\leq 90\text{kg}$</p>	2	4
CN12285B 中空1号-1523 Hollow door roller 1-1523	  <p>$\leq 100\text{kg}$</p>	2	4

PNZ99154 感应开关 Touchless Switch		TD074A 远距离感应开关 Remote Sensor Switch	
TD167A 微波传感器 Radar Sensor For Automatic Door		TJ118A 情景感应器(明装版) Situation Sensor (Surface Edition)	
TJ118B 情景感应器(暗装版) Situation Sensor (Dark Edition)		TD142 人脸识别门禁 Face Recognition Access Control	
TD141A 无线出门开关 Wireless Exit Switch		TN988A 人脸识别门禁 Face Recognition Access Control	
TD139A 无线门禁及出门开关 Wireless Access Control And Exit Switch		TE061A 遥控C型 Remote control type C	

磁悬浮中空门系统安装参数

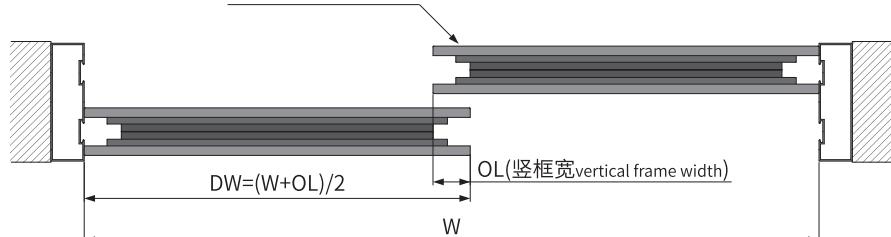
E-HOLLOWDOOR INSTALLATION PARAMETERS



单系统 Single system

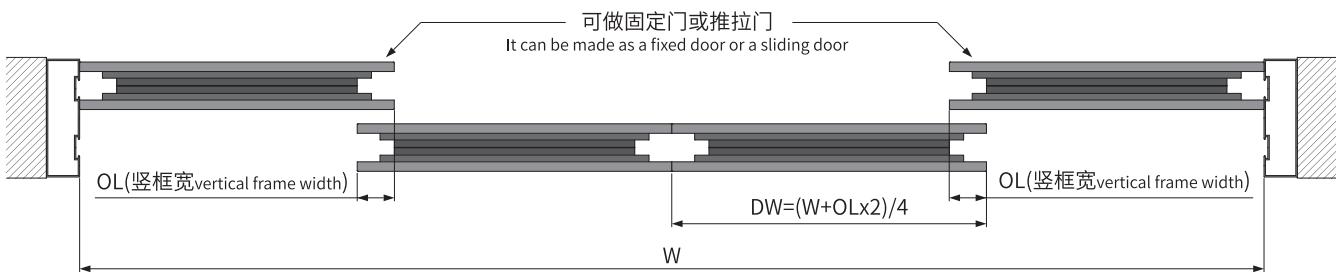
轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000	1400-2000	$DW=(W+OL)/2$
2700	2000-2700	
3400	2700-3400	

可做固定门或推拉门
It can be made as a fixed door or a sliding door



对开系统 Double systems

轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000x2	2800-4000	$DW=(W+OL\times 2)/4$
2700x2	4000-5400	
3400x2	5400-6800	



磁悬浮智能吊滑轮系统

E-SPACE HANGING SLIDING DOOR SYSTEM

产品特点：

- 组合式结构专利设计；
- 无需定制，使用更方便；
- 磁力驱动，柔性接触，无硬摩擦，使用更安全；
- 无机械传动结构,无硬连接，滑动更加轻盈、柔畅；
- 减小轨道空间，精致设计，提高空间利用率；
- 停电情况下滑动依然轻柔。

技术概要：

- 额定电压：200~240V
- 额定功率：80W
- 待机功率：5W
- 开门速度：最低0.065M/S 最高0.26M/S
- 控制方式：微电脑处理控制器
- 冲撞机能：在受阻或冲撞条件下反弹
- 停电时手动开闭力：≤10N
- 门宽：≥750mm

Product Features:

- Combined structure patent design.
- No need custom-made, more easier operation.
- Magnetic drive, soft touch no hard friction, more safety to use.
- No mechanical drive mechanism sliding more soft and smooth.
- Sliding still soft and smooth during the power failure.
- Exquisite design to save the rail space improve the space usage.

Technical Points:

- **Voltage Rating:** 200~240V
- **Power Rating:** 80W
- **Standby Power:** 5W
- **Door Opening Speed:** Min: 0.065M/S , Max: 0.26M/S
- **Control Mode:** Microcomputer processing controller
- **Bounce Function:** Rebound in the conditions of damping or bumping
- **Manual Power Needed when Power Off:** ≤10N
- **Door width:** ≥750mm



磁悬浮智能吊滑轮系统套装 (顶装木门) E-SPACE COMPLETE SET (Ceiling Wood)

产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	1400-2000	641576
		≤120	2000-2700	641587
		≤120	2700-3400	641595
对开系统 Double Systems		≤120	2800-4000	641580
		≤120	4000-5400	641588
		≤120	5400-6800	641596

标准配置

STANDARD CONFIGURATION



配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C20000100	1	2
		E88-C27000100		
		E88-C34000100		
TN497A 木门挂盒组件 Hanging Box Components For Wooden Door	升降挂盒 Adjustable Hanging Plate		TN491A	2
	下定位 Bottom Guider		TN107A	1
	下轨道 Under Track		XNA003 轨道长1800mm	1
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

装饰盖(选配)

DECORATIVE COVER (Optional)


XNA217 装饰盖 Decorative Cover		黑色瓷泳 Black	2000	选择合适长度 Select Suitable Length
		氧化平光 Anodized Silver	2700	
		碱微砂白	3400	

磁悬浮智能吊滑轮系统套装 (顶装玻璃门) E-SPACE COMPLETE SET (Ceiling Glass)

产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	1400-2000	641583
		≤120	2000-2700	641591
		≤120	2700-3400	641602
对开系统 Double Systems		≤120	2800-4000	641584
		≤120	4000-5400	641592
		≤120	5400-6800	641603

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C20000100	1	2
		E88-C27000100		
		E88-C34000100		
TN498A 玻璃挂架组件(打孔) Glass Hanging Bracket Fittings (Slotting)	玻璃挂架4 Glass Clamp 4		TN343A	2
	下定位 Bottom Guider		TN336A	1
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

装饰盖 (选配)

DECORATIVE COVER (Optional)

XNA216 装饰盖 Decorative Cover		黑色瓷泳 Black	2000	选择合适长度 Select Suitable Length
		氧化平光 碱微砂白 Anodized Silver	2700	
			3400	

磁悬浮智能吊滑轮系统套装 (顶装窄边框) E-SPACE COMPLETE SET (Ceiling Slim Frame)

产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	1400-2000	641581
		≤120	2000-2700	641589
		≤120	2700-3400	641599
对开系统 Double Systems		≤120	2800-4000	641582
		≤120	4000-5400	641590
		≤120	5400-6800	641601

标准配置

STANDARD CONFIGURATION

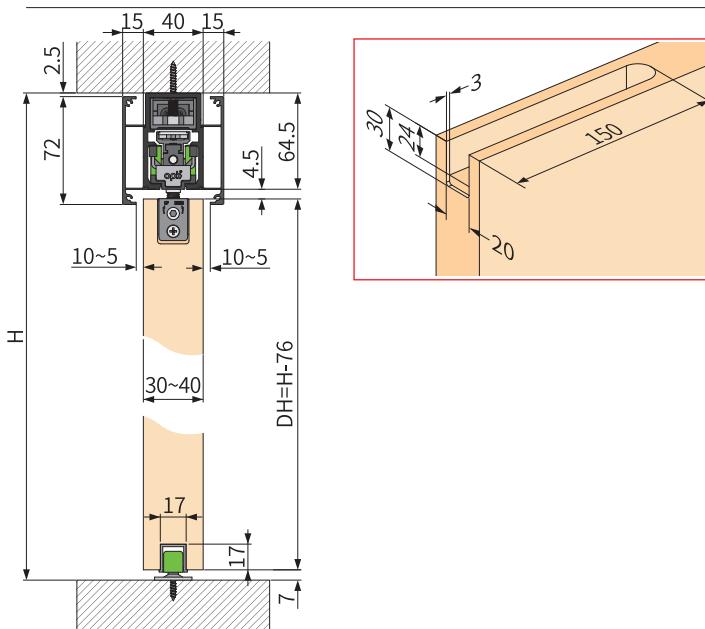
配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C20000100	1	2
		E88-C27000100		
		E88-C34000100		
TN500A 窄边框挂盒组件 Narrow Frame Hanging Box Components	升降挂盒 Adjustable Hanging Plate		TN357A	2
	下定位 Bottom Guider		TN358A	1
	固定件 Fixing Part		TN575A	4
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

装饰盖(选配)

DECORATIVE COVER (Optional)

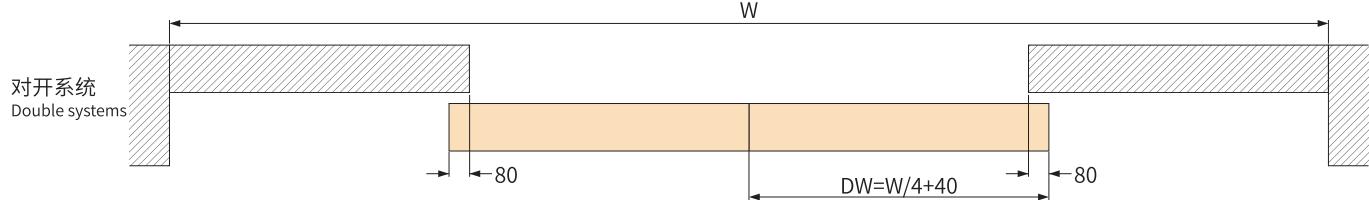
XNA167 装饰盖 Decorative Cover		黑色瓷泳 Black	2000	选择合适长度 Select Suitable Length
		氧化平光 Anodized Silver	2700	
			3400	

磁悬浮智能吊滑轮系统安装参数 (顶装) E-SPACE INSTALLATION PARAMETERS (Ceiling)

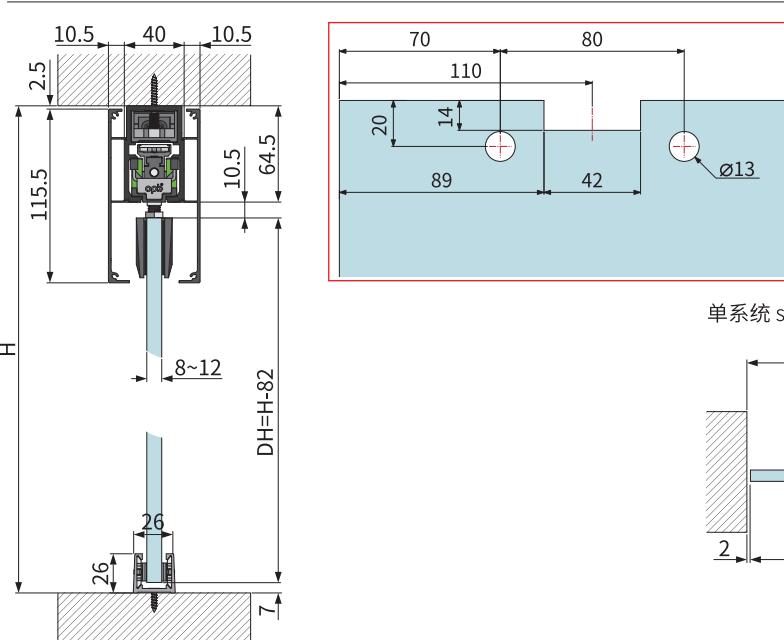
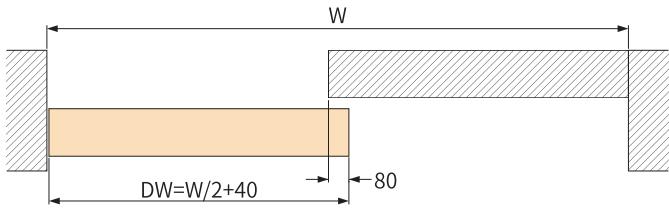


木门 Wood door

轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000	1400-2000	740~1040
2700	2000-2700	1040~1390
3400	2700-3400	1390~1740



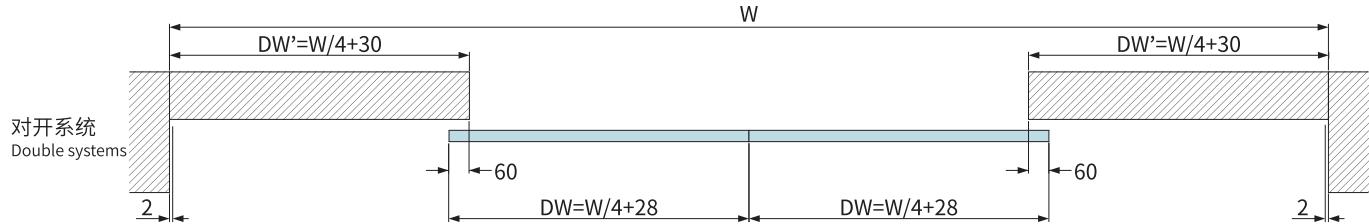
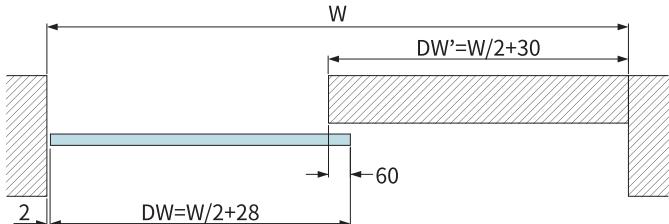
单系统 Single system



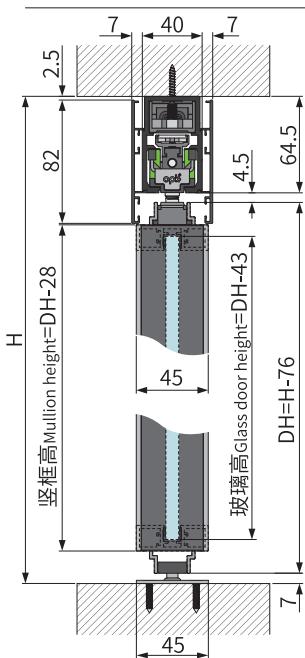
玻璃门4 Glass door 4

轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000	1400-2000	730~1030
2700	2000-2700	1030~1380
3400	2700-3400	1380~1730

单系统 Single system



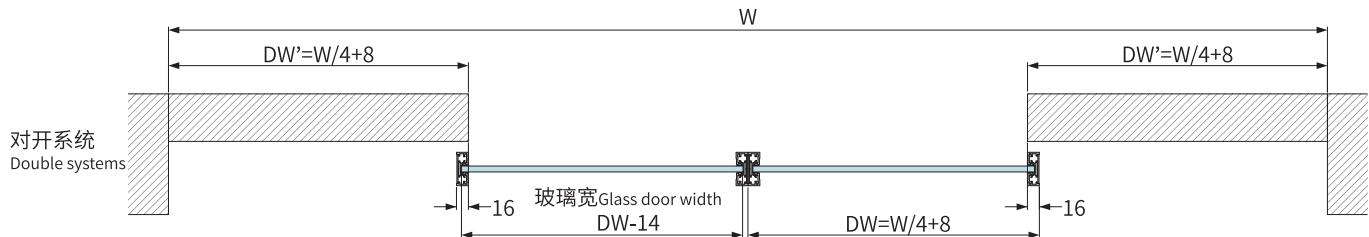
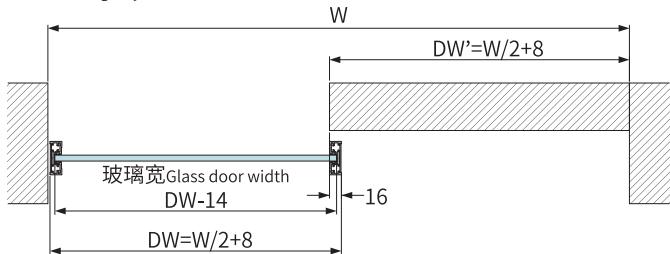
磁悬浮智能吊滑轮系统安装参数 (顶装) E-SPACE INSTALLATION PARAMETERS (Ceiling)





窄边框 Slim Frame

轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000	1400-2000	710~1010
2700	2000-2700	1010~1360
3400	2700-3400	1360~1710

单系统 Single system



磁悬浮智能吊滑轮系统套装 (侧装木门) E-SPACE COMPLETE SET (Wall Mounting Wooden Door)


产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	660~960	650673
		≤120	960~1310	650675
		≤120	1310~1660	650677
对开系统 Double Systems		≤120	1320~1920	650674
		≤120	1920~2620	650676
		≤120	2620~3320	649839

标准配置 STANDARD CONFIGURATION

配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C20000500	1	2
		E88-C27000500		
		E88-C34000500		
TN497A 木门挂盒组件 Hanging Box Components For Wooden Door	升降挂盒 Adjustable Hanging Plate		TN491A	2
	下定位 Bottom Guider		TN107A	1
	下轨道 Under Track	 轨道长1800mm	XNA003	1
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

磁悬浮智能吊滑轮系统套装 (侧装玻璃门)

E-SPACE COMPLETE SET (Wall Mounting Glass Door)



产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	660~960	CA360001-041
		≤120	960~1310	CA360001-043
		≤120	1310~1660	CA360001-045
对开系统 Double Systems		≤120	1320~1920	CA360001-042
		≤120	1920~2620	CA360001-044
		≤120	2620~3320	CA360001-046

标准配置


STANDARD CONFIGURATION

配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C20000500	1	2
		E88-C27000500		
		E88-C34000500		
TN498A 玻璃挂架组件(打孔) Glass Hanging Bracket Fittings (Slotting)	玻璃挂架4 Glass Clamp 4		TN343A	2
	下定位 Bottom Guider		TN336A	1
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

磁悬浮智能吊滑轮系统套装 (侧装窄边框) E-SPACE COMPLETE SET (Wall Mounting Slim Frame)

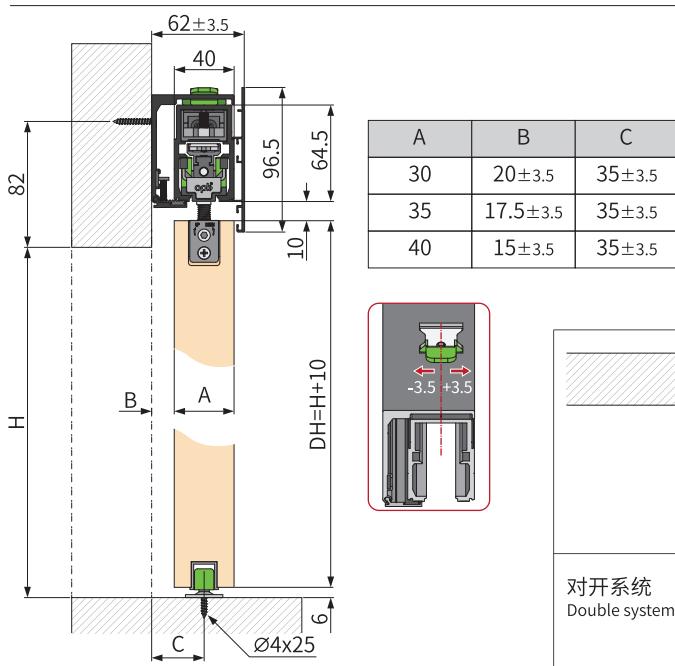
产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	660~960	648094
		≤120	960~1310	648096
		≤120	1310~1660	648098
对开系统 Double Systems		≤120	1320~1920	648095
		≤120	1920~2620	648097
		≤120	2620~3320	648099

标准配置 STANDARD CONFIGURATION

配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C20000500	1	2
		E88-C27000500		
		E88-C34000500		
TN500A 窄边框挂盒组件 Narrow Frame Hanging Box Components	升降挂盒 Adjustable Hanging Plate		TN357A	2
	下定位 Bottom Guider		TN358A	1
	固定件 Fixing Part		TN575A	2
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

磁悬浮智能吊滑轮系统安装参数 (侧装)

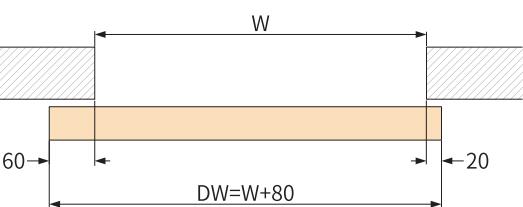
E-SPACE INSTALLATION PARAMETERS (Wall mounting)



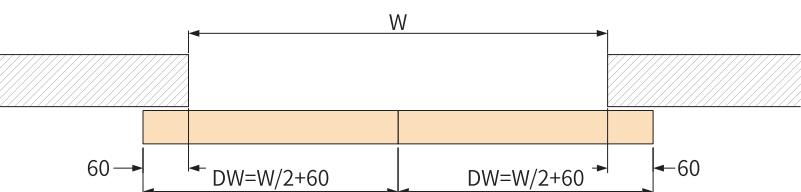
木门 Wood door

单系统 Single system

轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000	660~960	740~1040
2700	960~1310	1040~1390
3400	1310~1660	1390~1740

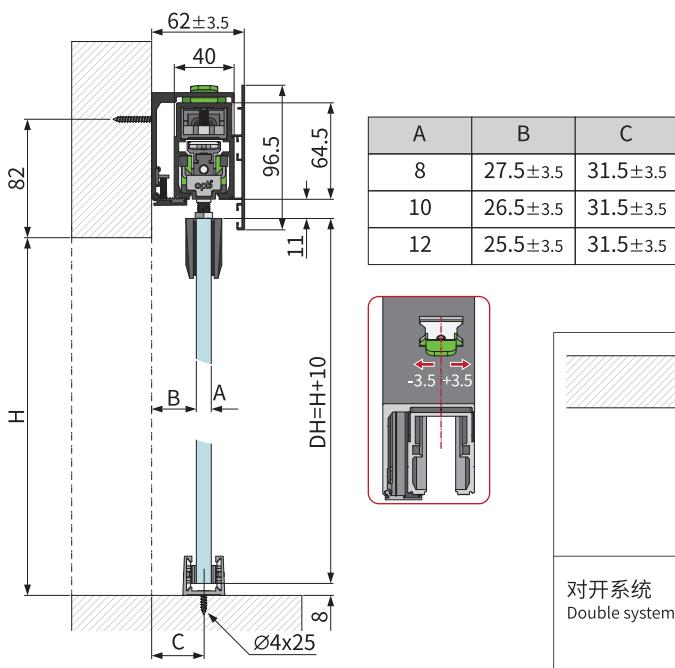


对开系统 Double systems



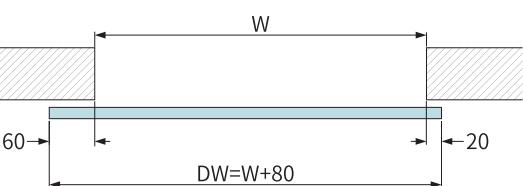
轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000x2	1320~1920	720~1020
2700x2	1920~2620	1020~1370
3400x2	2620~3320	1370~1720

玻璃门4 Glass door 4

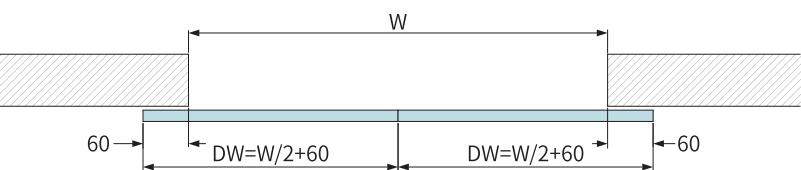


单系统 Single system

轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000	660~960	740~1040
2700	960~1310	1040~1390
3400	1310~1660	1390~1740



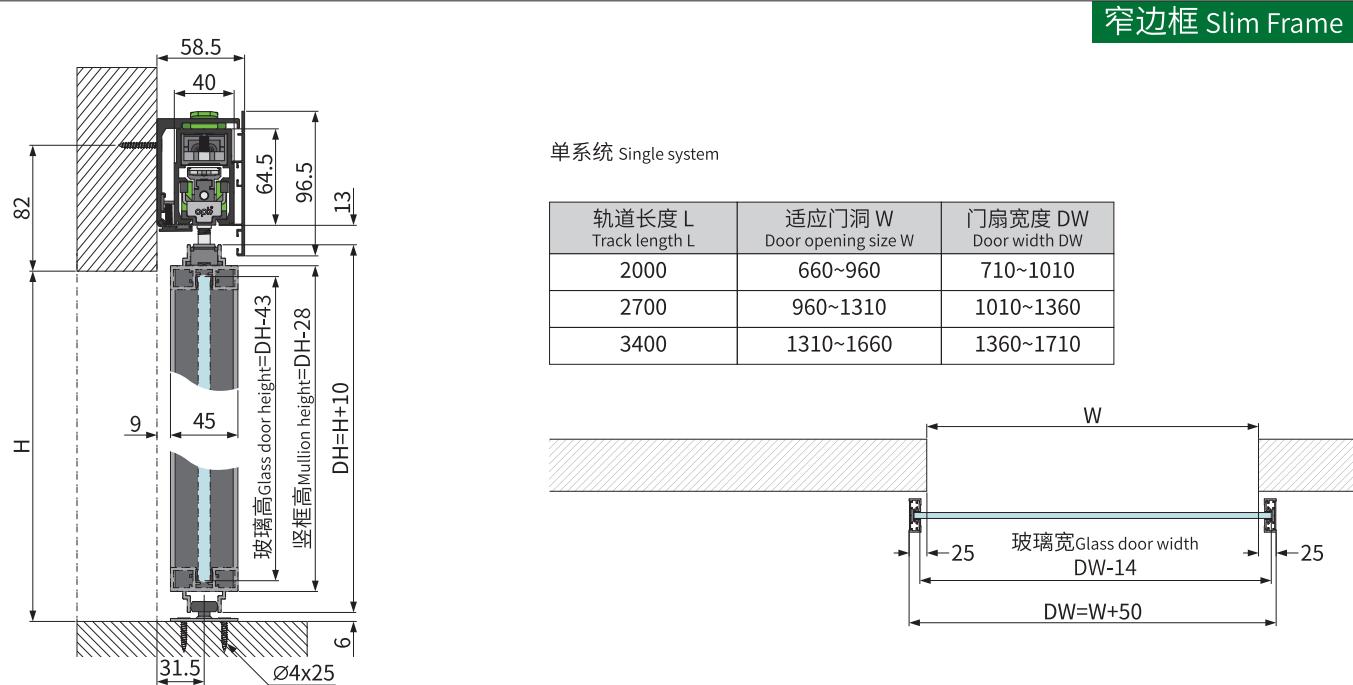
对开系统 Double systems



轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000x2	1320~1920	720~1020
2700x2	1920~2620	1020~1370
3400x2	2620~3320	1370~1720

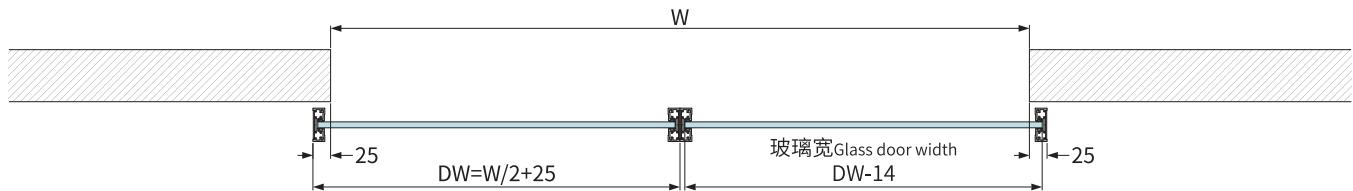
磁悬浮智能吊滑轮系统安装参数 (侧装)

E-SPACE INSTALLATION PARAMETERS (Wall mounting)




对开系统 Double systems

轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2000x2	1320~1920	685~985
2700x2	1920~2620	985~1335
3400x2	2620~3320	1335~1685



磁悬浮智能吊滑轮系统套装 (口袋木门) E-SPACE COMPLETE SET (Wood Pocket Door)


产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	680-980	647978
		≤120	980-1330	647982
		≤120	1330-1680	647986
对开系统 Double Systems		≤120	1360~1960	647979
		≤120	1960~2660	647983
		≤120	2660~3360	647987

标准配置

STANDARD CONFIGURATION

配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C21000300	1	2
		E88-C28000300		
		E88-C35000300		
TN497B 木门挂盒组件 Hanging Box Components For Wooden Door	加长升降挂盒 Lengthened Adjusted Hanging Bracket		TN490F	1
	升降短挂盒 Adjusted Short Hanging Bracket		TN477C	1
	下定位 Bottom Guider		TN571A	1
	下轨道 Under Track	 轨道长1800mm	XJA225	1
	下轨道堵头 Under Track Plug		PNS97065	2
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

磁悬浮智能吊滑轮系统套装 (口袋窄边框)**E-SPACE COMPLETE SET** (Pocket Door Slim Aluminum Frame)

产品描述 Product Description		门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
单系统 Single System		≤120	680-980	647980
		≤120	980-1330	647984
		≤120	1330-1680	647988
对开系统 Double Systems		≤120	1360~1960	647981
		≤120	1960~2660	647985
		≤120	2660~3360	647989

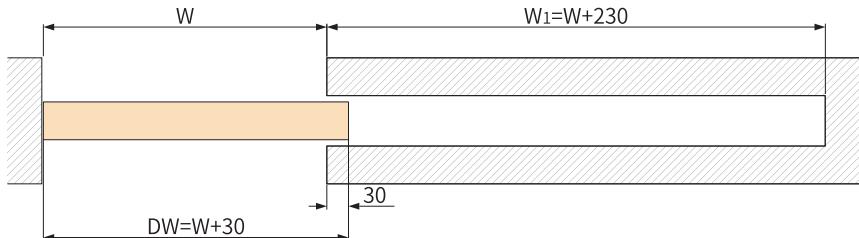
标准配置**STANDARD CONFIGURATION**

配件描述 Fitting Description			单系统 Single System	对开系统 Double Systems
轨道系统 Track System		E88-C21000300	1	2
		E88-C28000300		
		E88-C35000300		
TN500B 窄边框挂盒组件 Narrow Frame Hanging Box Components	升降挂盒 Adjustable Hanging Plate		TN357A	1
	升降短挂盒 Adjusted Short Hanging Bracket		TN597C	1
	下定位 Bottom Guider		TN571B	1
	固定件 Fixing Part		TN575A	1
对开系统通讯线 Double Systems Communication Wire		线长800mm	PJD01300	1
		线长1500mm	PJD01301	
		线长2200mm	PJD01302	

磁悬浮智能吊滑轮系统安装参数 (口袋木门)

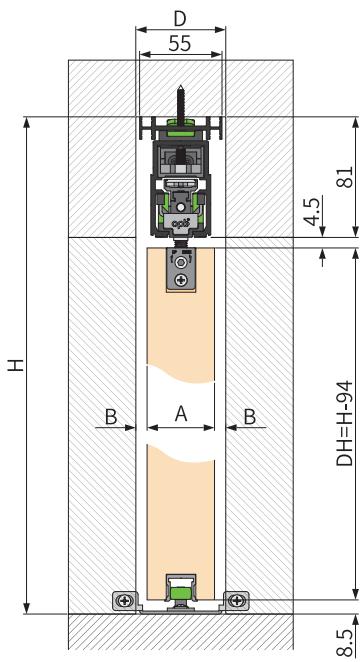
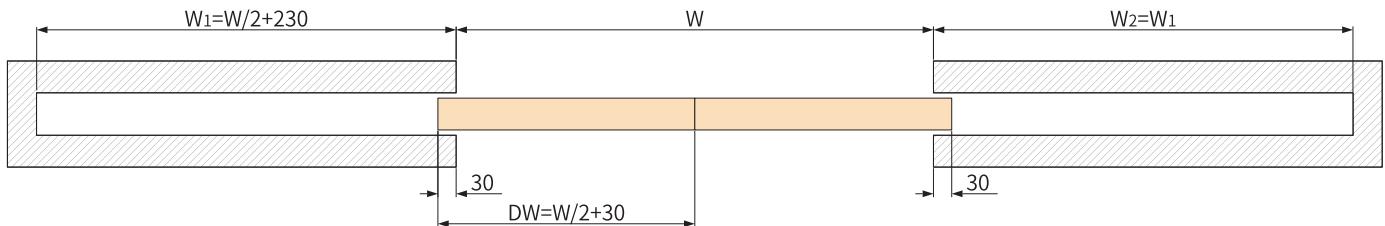
E-SPACE INSTALLATION PARAMETERS (Wood Pocket Door)

单系统 Single system

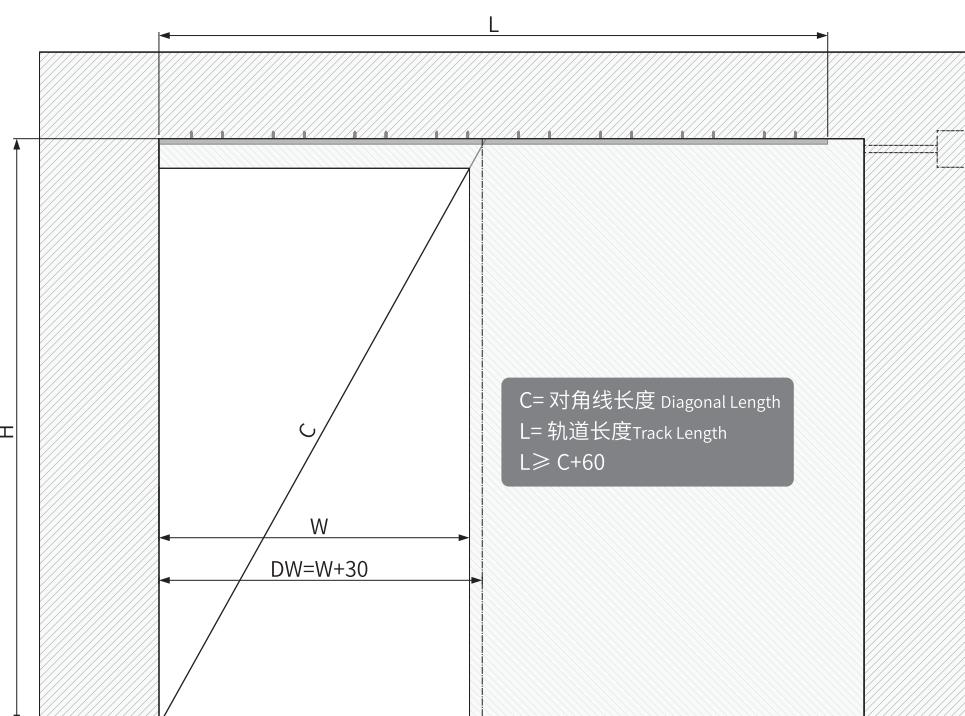


轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2100mm	680~980mm	710~1010mm
2800mm	980~1330mm	1010~1360mm
3500mm	1330~1680mm	1360~1710mm

对开系统 Double systems



A	B	D
35mm	10mm	55mm
40mm	7.5mm	55mm
45mm	7.5mm	60mm



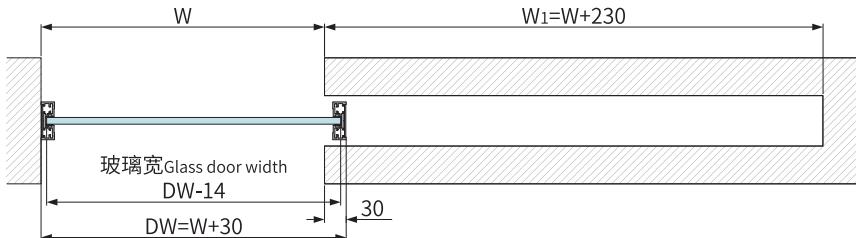
C=对角线长度 Diagonal Length
L=轨道长度 Track Length
L≥C+60

门洞对角线尺寸≥ 轨道长度
The diagonal size of door opening ≥ Track length

磁悬浮智能吊滑轮系统安装参数 (口袋窄边框门)

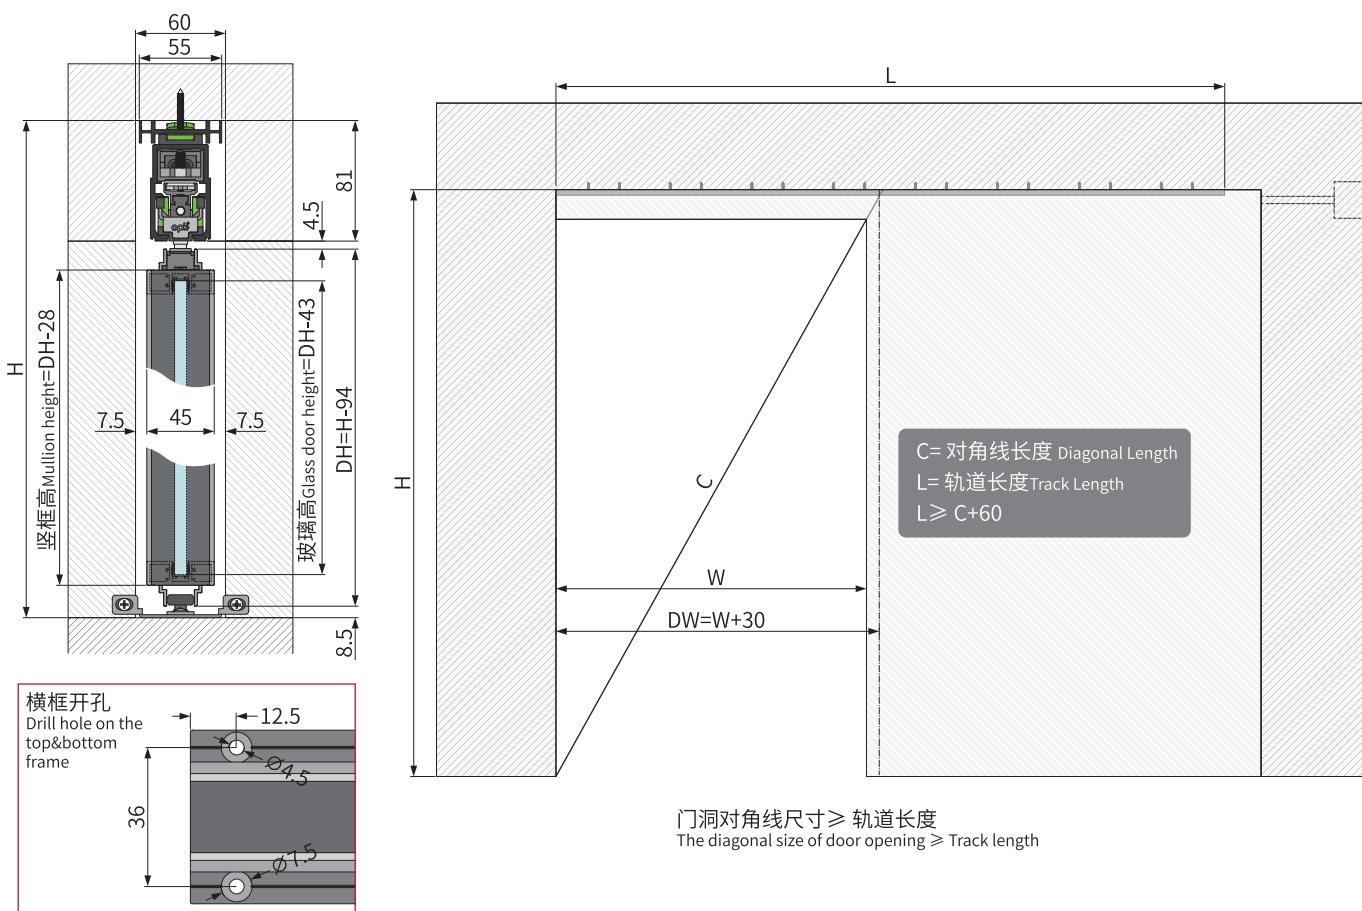
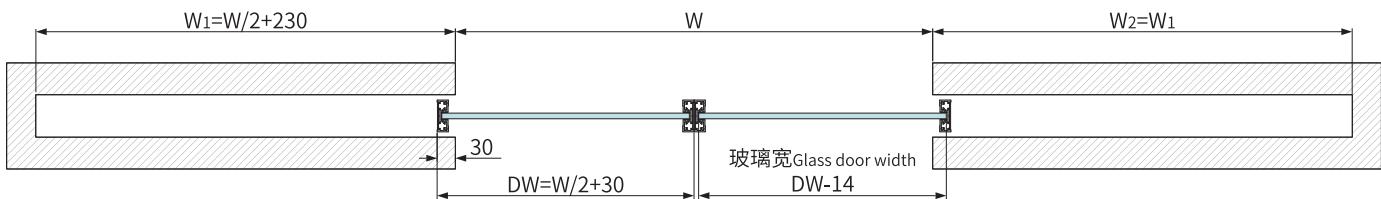
E-SPACE INSTALLATION PARAMETERS (Pocket Door Slim Aluminum Frame)

单系统 Single system



轨道长度 L Track length L	适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2100mm	680~980mm	710~1010mm
2800mm	980~1330mm	1010~1360mm
3500mm	1330~1680mm	1360~1710mm


对开系统 Double systems



磁悬浮三联动套装(窄边框)**E-TIANGONG THREE LINKAGE COMPLETE SET (Slim Aluminum Frame)**


产品描述 Product Description	门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
 2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door	≤80	2300-3000	644269
	≤80	3000-4050	644270
	≤80	4050-5100	644273

标准配置**STANDARD CONFIGURATION**

配件描述 Fitting Description	2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door			
单门走双门轨道系统 single door sliding in double door track system	E88-C30000200		1	
	E88-C40500200			
	E88-C51000200			
可推拉轨道系统 Push-pull track system	E88-C60000200		1	
固定门轨道 Fixed door track	XNA148		1	
TN564A 极窄框联动门组件-1 Very narrow frame linkage door assembly-1	连接下定位 Connected bottom Guider	TN689A		1
	升降挂盒 1 Adjustable Hanging Plate 1	TN517B		1
	升降挂盒 2 Adjustable Hanging Plate 2	TN357D		1
	固定件 Fixing Part	TN575A		2

磁悬浮三联动套装(窄边框)

E-TIANGONG THREE LINKAGE COMPLETE SET (Slim Aluminum Frame)


配件描述 Fitting Description				2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door
TN564B 极窄框联动门组件-2 Very narrow frame linkage door assembly-2	下定位 Bottom Guider	TN602D		1
	钢丝固定件 Steel Wire Fixing Part	TN559A		1
	钢丝连接器 Steel Wire Connector	TN165A		2
	钢丝 Steel Wire	PNQ99001		1
	绕线轮(长) Winding Roller(long)	TN512B		1
	绕线轮(短) Winding Roller(short)	TN513B		1
	固定件 Fixing Part	TN575A		2
	绕线轮装饰盖 Winding Roller Decorative Cover	PNS22086		1
TN563A 极窄框固定门组件-3 Very narrow frame fixed door assembly-3	固定门上定位 Fixed Door Up Guider	TN518C		2
	固定门下定位 Fixed Door Bottom Guider	TN518D		2

选配


OPTIONAL

XNA152 装饰盖 Decorative Cover		氧化磨砂黑 Anodized Black	选择合适长度 Select Suitable Length
PN299130 联动对开系统通信线 Double Systems Communication Wire			

磁悬浮三联动套装(木门)**E-TIANGONG THREE LINKAGE COMPLETE SET (Wooden Door)**

产品描述 Product Description	门重(kg) Door Weight(kg)	适应门洞(mm) Adapt to door holes(mm)	套装型号 Set Model
 2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door	≤80	2300-3000	644274
	≤80	3000-4050	644275
	≤80	4050-5100	644276

标准配置**STANDARD CONFIGURATION**

配件描述 Fitting Description			2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door
单门走双门轨道系统 single door sliding in double door track system	E88-C30000200		1
	E88-C40500200		1
	E88-C51000200		1
可推拉轨道系统 Push-pull track system	E88-C60000200		1
固定门轨道 Fixed door track	XNA148		1
TN564G 木门联动门组件-1 Wooden door linkage door assembly-1	连接下定位 Connected bottom Guider	TN609A	 1
	升降挂盒 1 Adjustable Hanging Plate 1	TN517B	 1
	升降挂盒 2 Adjustable Hanging Plate 2	TN357D	 1
	固定件 Fixing Part	TN575A	 2
	下轨道 Under Track	XNA003	 轨道长1800mm 1
	下轨道 Under Track	XJA257	 轨道长1800mm 1

磁悬浮三联动套装(木门)

E-TIANGONG THREE LINKAGE COMPLETE SET (Wooden Door)

配件描述 Fitting Description				2扇活动门+1扇固定门 2 Movable Door + 1 Fixed Door
TN64H 木门联动门组件-2 Wooden door linkage door assembly-2	下定位 Bottom Guider	TN602E		1
	钢丝固定件 Steel Wire Fixing Part	TN559A		1
	钢丝连接器 Steel Wire Connector	TN165A		2
	钢丝 Steel Wire	PNQ99001		1
	绕线轮(长) Winding Roller(long)	TN512B		1
	绕线轮(短) Winding Roller(short)	TN513B		1
	固定件 Fixing Part	TN575A		2
	绕线轮装饰盖 Winding Roller Decorative Cover	PNS22086		1
	下轨道 Under Track	XNA003	 轨道长1800mm	1
	下轨道 Under Track	XJA257	 轨道长1800mm	1
TN63D 木门固定门组件-3 Wooden door fixed door assembly-3	固定门上定位 Fixed Door Up Guider	TN518C		2
	固定门下定位 Fixed Door Bottom Guider	TN167A		2
	下轨道 Under Track	XJA257	 轨道长1800mm	1

选配

OPTIONAL

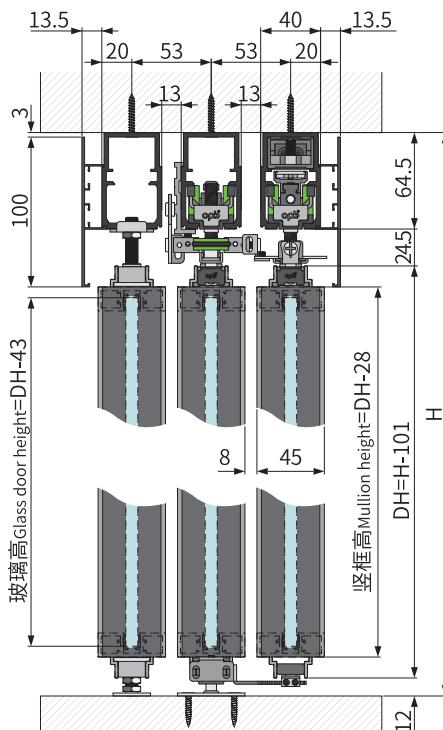
XNA152 装饰盖 Decorative Cover		氧化磨砂黑 Anodized Black	选择合适长度 Select Suitable Length	PN299130 联动对开系统通信线 Double Systems Communication Wire 
-----------------------------------	---	-------------------------	----------------------------------	---

选配 OPTIONAL

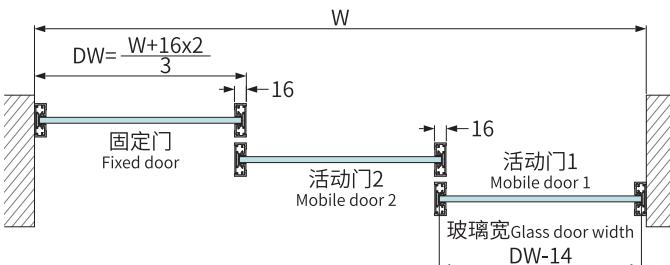
配件描述 Fitting Description		型号 Model
磁吸导向隐形下定位 Invisible Magnetic Bottom Guide		CN212210A
电磁锁 Electromagnetic Lock		线长0.4m
		线长0.75m
		线长1.1m
感应开关 Touchless Switch		PNZ99154
远距离感应开关 Remote Sensor Switch		TD074A
微波传感器 Radar Sensor For Automatic Door		TD167A
情景感应器(明装版) Situation Sensor (Surface Edition)		TJ118A
情景感应器(暗装版) Situation Sensor (Dark Edition)		TJ118B
人脸识别门禁 Face Recognition Access Control		TD142
人脸识别门禁 Face Recognition Access Control		TN988A
无线出门开关 Wireless Exit Switch		TD141A
无线门禁及出门开关 Wireless Access Control And Exit Switch		TD139A
遥控C型 Remote control type C		TE061A

磁悬浮三联动安装参数 (窄边框)

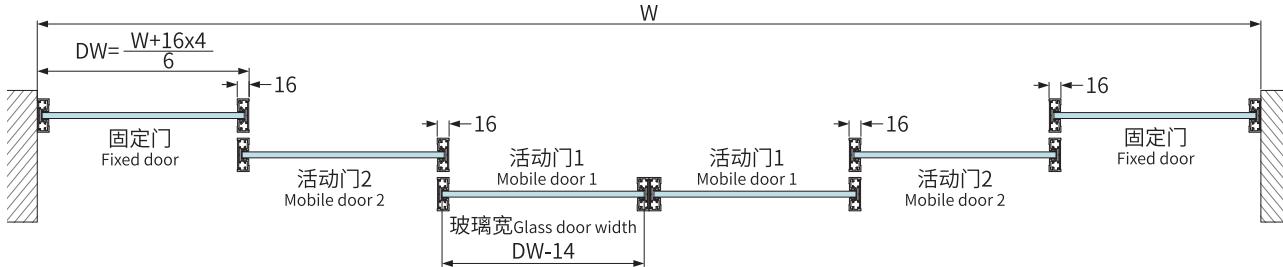
E-TIANGONG INSTALLATION PARAMETERS (Slim Aluminum Frame)




单系统 Single system



对开系统 Double systems

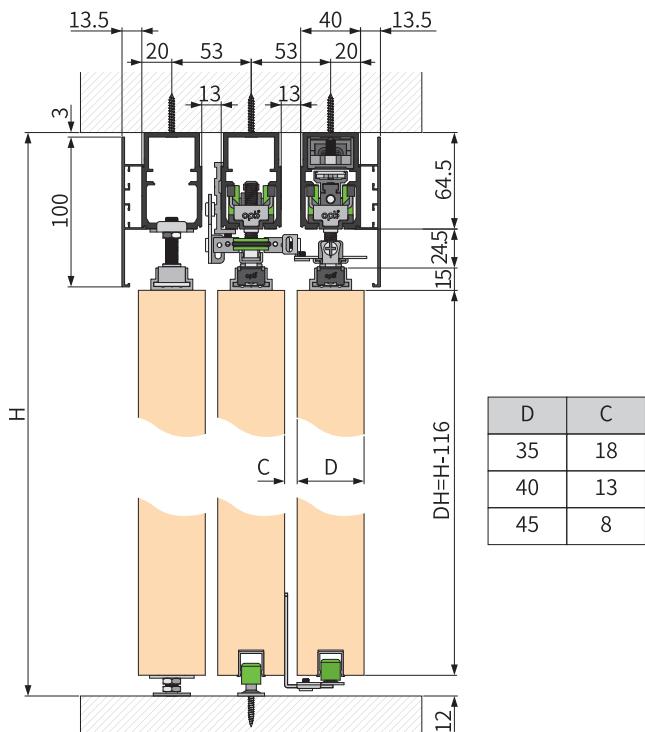


往右关门 Close the door to the right

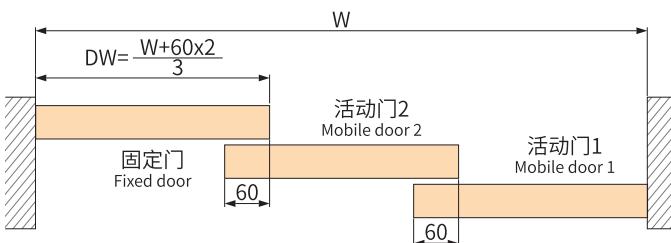
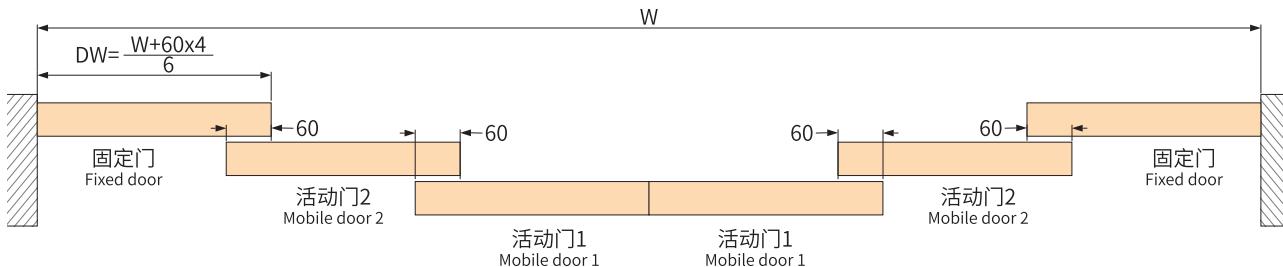
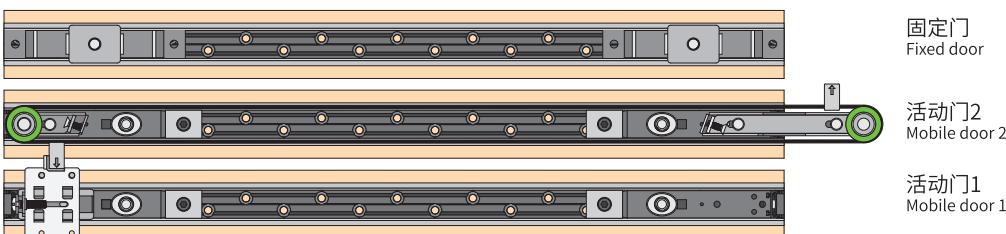
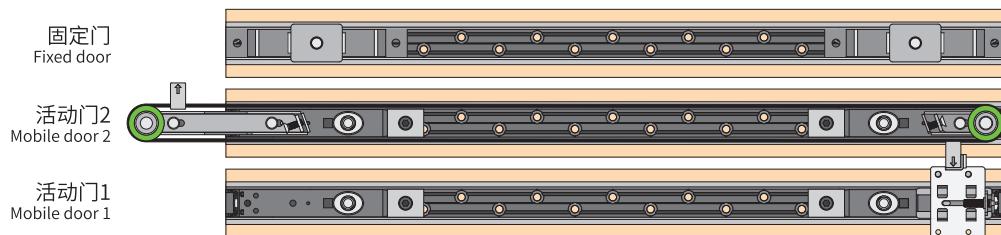
固定门
Fixed door活动门2
Mobile door 2活动门1
Mobile door 1选择配件方向
Choose the direction of the fitting

往左关门 Close the door to the left



磁悬浮三联动安装参数 (木门)**E-TIANGONG INSTALLATION PARAMETERS (Wooden Door)**

适应门洞 W Door opening size W	门扇宽度 DW Door width DW
2300~3000	806~1040
3000~4050	1040~1390
4050~5100	1390~1740

单系统 Single system**对开系统 Double systems****往右关门 Close the door to the right****往左关门 Close the door to the left**



广东欧派克家居智能科技有限公司
OPK SMART HOME TECHNOLOGY CO.,LTD

地址: 广东省中山市小榄镇永宁螺沙瑞和路11号

电话: 400 804 9989

传真: 0760-2227 9177

ADD: NO.11, Ruihe Road, YongningLuosha, Xiaolan
Town, Zhongshan City, GD, China.

TEL: 400 804 9989

FAX: 0760-2227 9177

[Http://www.opike.cc](http://www.opike.cc) E-mail: sales@opk.cc

本资料产品款式、颜色及有关数据仅供参考，印刷时可
能使资料内产品与实物有轻微差别，请以实物为准。

Image shown in this catalog is indicative only . If
there is any inconsistency between the image and
the actual product you receive , the actual product
will govern.



欧派克公众号



欧派克网址